


OCTOBER 1954 · TWO SHILLINGS

Show Review


Wireless World

Radio · Electronics · Television

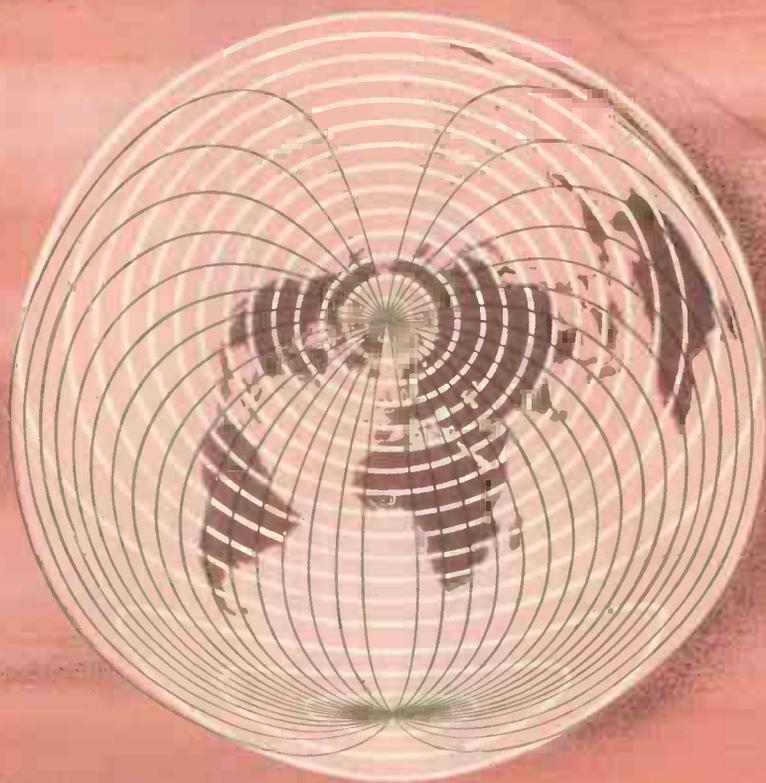

FORTY-FOURTH YEAR OF PUBLICATION

for every type of coil

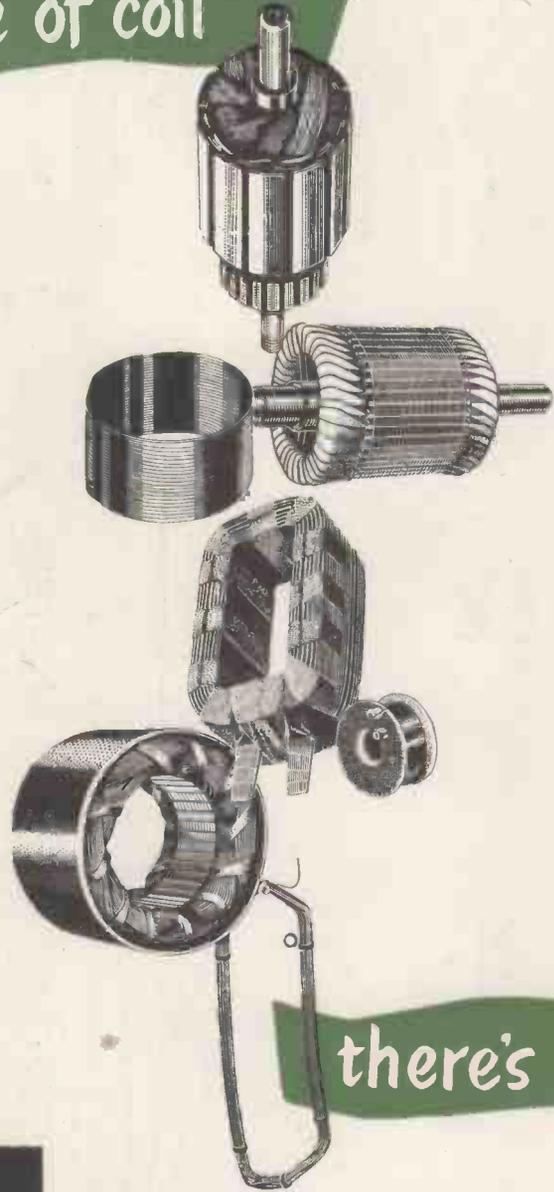

there's a

BICC

WINDING WIRE

USE OUR TECHNICAL ADVISORY SERVICE

If you are faced with a winding problem please ask for assistance; BICC technicians are always willing to give you the benefit of their experience. For most winding wire jobs the Publications listed will provide the data you require. They are available on request.

- No. 266 *Insulated Winding Wires and Strips.*
- No. 296 *"Bicaloc" Winding Wires (Self Bonding).*
- No. 303 *Enamelled Oil Base Winding Wires.*
- No. 322 *"Bicalex" Winding Wires (Synthetic Enamel).*
- No. 328 *"Fifty - Three" Enamelled Winding Wires.*

Wireless World

RADIO, ELECTRONICS,
TELEVISION

44th YEAR OF PUBLICATION

Managing Editor: HUGH S. POCOCK, M.I.E.E.

Editor: H. F. SMITH

OCTOBER 1954

In This Issue

EDITORIAL COMMENT	471
FARNBOROUGH 1954	472
WORLD OF WIRELESS	474
RADIO SHOW REVIEW	478
CARBON-ELEMENT SOLDERING IRON	494
NEW PICKUP ARM	495
REMOTE CONTROL OF RADIO RECEIVERS. By <i>C. E. Tate</i>	496
LETTERS TO THE EDITOR	499
BAND III TELEVISION INTERFERENCE. By <i>F. R. W. Strafford</i>	501
STYLUS IN WONDERLAND. By <i>O. J. Russell</i>	505
MAGNETIC RECORDING. By <i>H. G. M. Spratt</i>	508
H.M.V. TAPE RECORDS	512
RECTIFICATION. By " <i>Cathode Ray</i> "	513
SHORT-WAVE CONDITIONS	517
TRANSISTOR H.T. GENERATOR. By <i>D. L. Johnston</i>	518
FLYWHEEL SYNCHRONIZING—1. By <i>W. T. Cocking</i>	519
AMATEUR TELEVISION TRANSMISSIONS	522
EUROPEAN TELEVISION. By <i>J. Treeby Dickinson</i>	523
MIDGET TELEVISION SET	525
RANDOM RADIATIONS. By " <i>Diallist</i> "	526
UNBIASED. By " <i>Free Grid</i> "	528

PUBLISHED MONTHLY (last Monday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. Telephone: Waterloo 3333 (60 lines). Telegrams: "Ethaworld, Sedist, London." Annual Subscription: Home and Overseas, £1 7s. 0d. U.S.A. \$4.50. Canada \$4.00. BRANCH OFFICES: Birmingham: King Edward House, New Street, 2. Coventry: 8-10, Corporation Street. Glasgow: 26a, Renfield Street. C.2. Manchester: 260 Deansgate, 3.



VALVES, TUBES & CIRCUITS

22. TEN WATT AUDIO AMPLIFIER

In accordance with the Mullard practice of issuing information on valve applications, details have recently been published of a design for a ten watt audio amplifier. The circuit* is of a simple, well-tryed form, and consists basically of three valve stages, with 26db of negative voltage feedback taken from the secondary of the output transformer to the cathode circuit of the first valve. It has been designed primarily for home constructors, is easy to build, and requires only a relatively small outlay on components. By making good use of the advantages possessed by the valves, the circuit performance meets as far as possible the fundamental requirements of a medium power amplifier intended for home entertainment.

On account of the high basic sensitivity of the amplifier circuit, a separate valve pre-amplifier will not be required with certain types of crystal pick-up giving a comparatively large output voltage. The first valve is then preceded by a simple R-C tone control network used to control treble and bass response. The main difference between 78r.p.m. and microgroove recordings has to be taken care of by the appropriate fixed equalisation network placed between the pick-up and tone-control circuit.

The high gain input stage uses the EF86 low hum, low microphony pentode. It is directly coupled to the phase splitter to ensure that the phase shift will remain small at low frequencies. The load resistor is shunted by a C-R series network, thus producing an advance in phase which increases the stability at high frequencies.

The phase splitter employs double triode type ECC83 connected in a cathode coupled circuit which provides for low distortion and facilitates direct coupling to the first valve. There is some sacrifice of available gain using this form of phase splitter, but nevertheless there is sufficient gain in this stage as the ECC83 has the high amplification factor of 100.

The output stage is designed round two EL84 output pentodes operated in self-biased push-pull with separate cathode resistors: the EL84 is the new output pentode with a maximum anode dissipation of 12W. The anodes are supplied directly from the reservoir capacitor, which has been given a large value (50 μ F) for this purpose. R-C smoothing is used throughout the amplifier circuit.

The anode-to-anode loading of the output transformer, R_{a-a} , and the value R_k , of each of the two cathode bias resistors correspond to either 'normal' loading or 'low' loading in the output stage. 'Low' loading ($R_{a-a} = 6000\ \Omega$; $R_k = 437\ \Omega$) has been devised to produce less distortion during the high peaks of power occurring in the reproduc-

tion of speech and music; but 'normal' loading ($R_{a-a} = 8000\ \Omega$; $R_k = 270\ \Omega$) is essential if sine wave testing is to be undertaken up to full output power. Some makes of output transformer, built to give the performance specified for satisfactory operation in this circuit, have primary tapings of 8000 Ω and 6000 Ω .

The recommended rectifier is the octal-based GZ30. The noval-based EZ80 may be used, provided (i) that the amplifier is to remain permanently adjusted to low loading and (ii) that extra current will not be required for a radio feeder unit. These two provisions also decide to what extent, as a measure of economy, a lower rating can be given to the mains transformer.

The brief specification of the circuit is as follows:—

Power Output

Rated output 10W Max. output 12-13W

Total Harmonic Distortion

The total harmonic distortion is less than 0.4%, measured for 10W output with normal loading and sine wave input.

Hum and Noise -73db relative to 10W

Frequency Response ± 0.5 db, 10c/s to 20,000c/s.

Sensitivity

An input of 50mV to the first valve gives 10W output. This output power is produced by an input of 600mV to the tone control circuit.

Treble Control

Continuously variable control of treble from +10db to -10db at 10,000c/s.

Bass Control

Continuously variable control of bass from +11db to -5db at 20c/s.

Power Consumption 60W approx.

** Amplifiers built to this specification were demonstrated with great success at the Radio Show in a programme which included 'classical' and 'modern' music, an organ prelude, and the now well-known recording of "Breaking Glass". Full details of the design are given in the booklet "The Mullard Five Valve Ten Watt High Quality Amplifier Circuit" on sale at radio retailers price 2s. 6d. It contains: complete description of tone control and amplifier circuit; specification and winding details for output transformer; brief specification of mains transformer; performance figures; illustrations showing a suitable layout; equalisation networks; introductory notes on playback equipment; and valve data.*



MULLARD LTD., Technical Service Department, Century House, Shaftesbury Avenue, W.C.2

Wireless World

OCTOBER 1954

VOL. 60 No. 10

Show Afterthoughts

AS our review of the National Radio Exhibition, published in this issue, will show, there has been a minor revolution in television receiver design. At least four basically different methods have been used to meet the forthcoming need for two-band tuning, and the tendency towards uniformity that was becoming evident last year has largely disappeared. The promise of a competitive television service has set a difficult task for designers, who were forced to evolve new sets without a full knowledge of the transmitting system with which they will have to work. But, in spite of all the uncertainty about the future and the sweeping changes that have been introduced, there is little if any sign that the new sets were produced under conditions of uncertainty and stress. In general, mechanical design has improved, although there is greater mechanical complexity, brought about by the addition of tuning for an extra band. Components are more accessible for maintenance and subsidiary controls are more sensibly placed for the convenience of the user.

On the electrical side there are certainly more refinements, most of which are brought about by the more stringent requirements of Band III, as compared with Band I. The r.f. circuitry of the typical receiver has been drastically changed, and the use of automatic gain control on the vision channel has become commonplace.

Reverting to the crucial question of channel selector design, it is as yet quite impossible even to guess as to which of the competing systems will ultimately find favour. The majority of makers clearly favour the 12-channel solution, with either a turret or fixed coils with switches. However, the proposed organization of British television is such that the viewer is not expected to need more than one channel in Band I and two in Band III; it is therefore possible that his wants may be adequately and more economically met by the simpler form of three-channel selector already provided by some designers.

Though the television set designers have embraced wholeheartedly the principle of two-band tuning, makers of aerials have, naturally enough, been rather more coy, as the solution of this particular problem

is dependent to a greater extent on the siting and power of the projected new stations. Enough has been done, however, to show that, when the Band III service starts, viewers will have a wide choice of suitable aerials.

Enthusiasm for the projected v.h.f. sound broadcasting service did not appear to be so great as for two-band television. The comparatively few sets making provision for its reception mostly employed conventional circuitry. Bearing in mind the proposed three-programme method of distribution, there seems much in favour of pre-set tuning with switch selection of programmes. But this arrangement, seen only in one unit, calls for fairly extensive precautions against tuning drift, and might prove too costly for the general run of receivers.

The I.T.A.

HAD the designers of the new season's television receivers and aerials had the advantage of knowing as much as we now know of the Independent Television Authority's plans, their problems would have been rather more clearly defined—but not very much.

At the time of writing there is still a good deal of uncertainty. True, the principle of common sites for I.T.A. and B.B.C. stations has been fully accepted; going even farther, no basic objection has been raised against using the B.B.C. masts. The I.T.A. 7.5-10 kW transmitters, which have already been ordered, may even be housed in the B.B.C. station buildings. But, of course, the effective range of the I.T.A. stations will depend on how the aerials are mounted, and it has been stated that certain technical difficulties have yet to be solved. Readers may remember that *Wireless World*, discussing the advantages of co-siting the competing stations, suggested that Band III aerials might be "interlaced" with the slot aerials on the B.B.C. topmasts. This sharing of stations by competitors is mildly Gilbertian; it would be more rational to commission the B.B.C. to do all the transmission, leaving the I.T.A. to run its own programmes.

Farnborough 1954:

Radio at the S.B.A.C. Show

THE general impression gained from the radio exhibits at this year's flying display and exhibition held at Farnborough by the Society of British Aircraft Constructors was that, in the main, more attention has been given to consolidating existing techniques than seeking new ones. On all sides detailed improvements could be found; entirely new equipments were limited, but some had been introduced to replace gear which had begun to fall behind the requirements of the present time. Conservation of weight and space in airborne equipments is still one of the major causes for replacement of earlier designs.

One new high-power airborne h.f. equipment has been introduced by Marconi. It is designed primarily for pilot operation, with the emphasis on radio telephony. Both c.w. and m.c.w. telegraphy can, however, be employed. Its main feature of interest is that remote selection from either of two positions in the aircraft of any one of 200 crystal-controlled channels is provided. Crystals common to both receiver and transmitter are employed and in most cases the selected crystal frequency is that of the receiver's first local oscillator (the receiver is a double superheterodyne) and mixing its output with that of a fixed oscillator provides the transmitter drive frequency. The equipment is known as the AD307, covers 2 to 24 Mc/s and gives between 100 and 130 W output.

Another example of this type of h.f. airborne equipment is the Standard Telephones STR18C, of which some details were given in our report last year. It provides remote control of 100 channels in the band 2.8 to 18.1 Mc/s and gives 100 W output; again the emphasis is on radio telephony.

H.F. transmitters for ground-to-air communication are generally of from 30 to 100 W output, rising on special occasions to 1 kW. Some of the newest transmitters at the show were all of quite low power; for example, the Mullard SL18, a single-frequency transmitter working in the 1.5- to 10-Mc/s band, gives from 35 to 40 W output, while the Pye h.f. ground station, comprising a PTC931 transmitter and PTC941 receiver, gives 50 W output.

In the high-power class of ground transmitters comes one new model made by Redifon, known as the G143; it allows for remote selection of 10 spot frequencies in the band 2 to 26 Mc/s and gives over 1 kW r.f. output on telegraphy and 800 W on telephony.

Redifon have also introduced a less ambitious communications set than their R50 series. It covers 250 kc/s to 24 Mc/s in six ranges. A gap is left in the tuning band around 570 kc/s for the i.f.


Another new and not too ambitious communications set is the Mullard GFR563, with a coverage of 210 to 540 kc/s and 1.45 to 32 Mc/s in six ranges. The sensitivity is said to be better than $3 \mu\text{V}$ for 10-db signal/noise ratio at 50 mW output with a 30 per cent modulated signal.

An unusual piece of h.f. equipment was shown this year by Plessey. It is for use in front of a single-channel receiver and converts it into a five-channel double-superheterodyne with either switch selection, or remote selection by motor, of five pre-tuned channels in the band 2.7 to 27 Mc/s. Plessey make a number of "front end" couplers of which this PV98 is but one, another is the PV14B permitting the use


of 10 receivers on fixed frequencies from a common aerial without interaction, or of five dual-diversity sets. The same technique has now been extended to enable several v.h.f. receivers to be operated from a common aerial.

V.H.F. receivers in general have not undergone much change, a few new models have appeared, among which is the Burndept BE225 for ground stations. It has 18 valves, including the mains rectifier, with no fewer than 4 i.f. amplifiers (on 4.86 Mc/s). There are two tuned r.f. and three audio stages. It is a single-channel set with a crystal-controlled local oscillator.


Marconi's were showing a new v.h.f. ground station comprising transmitter, receiver, remote-control line equipment and aerial system designed to operate as one efficient electrical, though not physical, unit. This

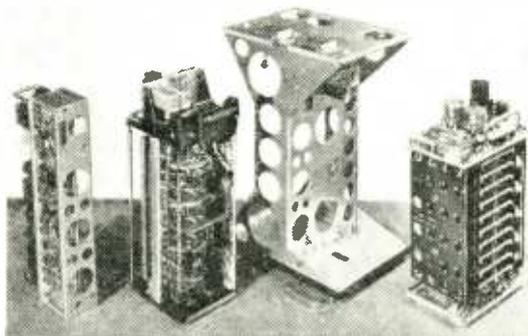


Sub-assemblies forming one of the Marconi AD307 equipment's units.

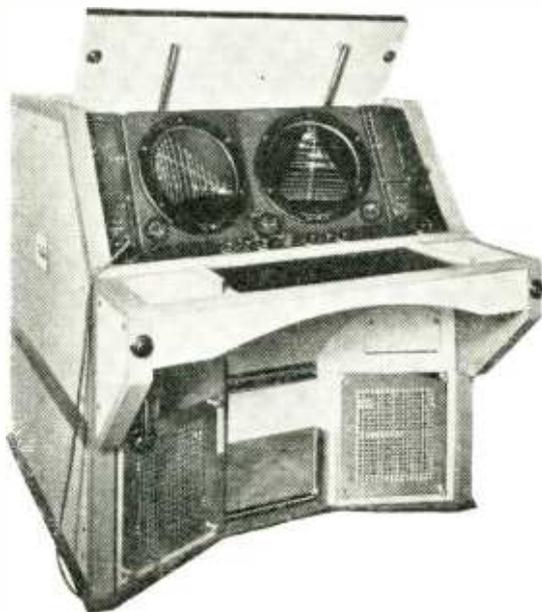

Console display unit of S.T.C. three-dimensional "Precision Approach Radar".

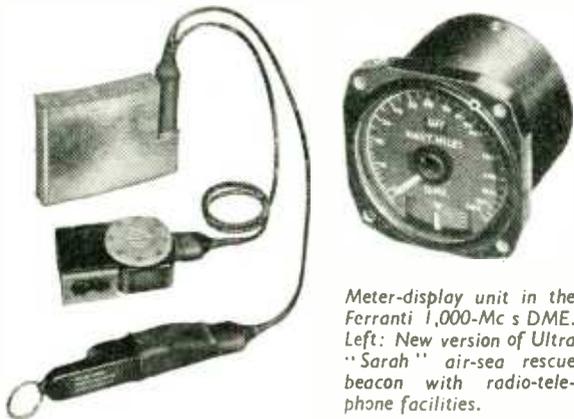

Meter-display unit in the Ferranti 1,000-Mc/s DME. Left: New version of Ultra "Sarah" air-sea rescue beacon with radio-telephone facilities.

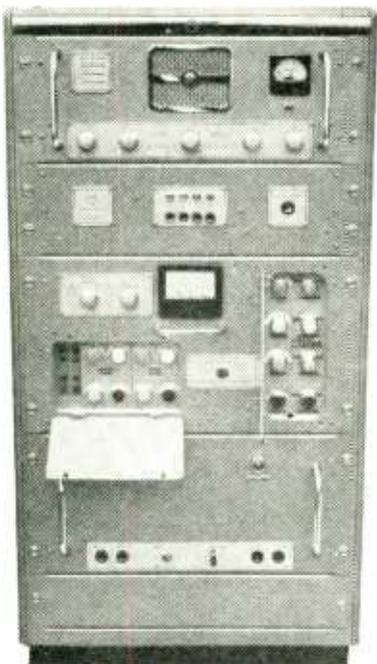

Pye PTC931,941 4-channel h.f. ground transmitter-receiver.

is the AD801/818 equipment with a 50-W transmitter (AD801) working on any single spot frequency in the band 100 to 156 Mc/s. Amplitude modulation is used. The associated receiver is a double superheterodyne with a single crystal-controlled oscillator supplying, by means of its harmonics, both the mixer stages.

Very few changes were seen in airborne v.h.f. radio telephone equipment. One exception, however, is the Standard Telephones STR20, a new set intended for Service aircraft and replacing the STR9 series. It covers 100 to 156 Mc/s and provides 560 channels of 100-kc/s spacing, or 623 of 90-kc/s, and 20 of these are instantly available to the pilot.

The announcement that B.O.A.C. hopes to fit search radar in all forthcoming types of airliners naturally focused attention on the Ekco Airborne Search Radar. No basic changes have been made since it was described in *Wireless World* of December 1950; it will be recalled that it operates on about 3 cm and provides a p.p.i. display in the aircraft of dangerous cloud formations ahead, obstructions in the path of

the aircraft, and it can be used as a navigational aid.

Other airborne nav aids seen at the show included a 200-Mc/s DME (distance measuring equipment) shown by Amalgamated Wireless (Australasia). This is a double-pulse system enabling a wide range of codes to be employed for triggering and identifying ground beacons.

Murphy favour the 200-Mc/s band also for their DME which, when set to the required channel, searches in ranges up to the maximum of 200 nautical miles until the correct responses are received when it locks on the beacon.

Some few years ago Ferranti had a 1,000-Mc/s DME at the S.B.A.C. Show; this year a new, and smaller, version was available. Despite the high frequency a working range of 200 nautical miles also is obtained. A meter display is used.

The ground part of DME is generally a high-power beacon in the region of a kilowatt or so, mostly unattended and often having some kind of telemetering system to a nearby control station. Murphy were showing telemetering equipment of this kind.

Two types of airfield surveillance radar are available for keeping track of aircraft within the operating sphere of an airport. One is primary radar and the other secondary radar, and examples of both were shown and operated at Farnborough this year. The Decca Type 424, a primary radar, was described in *Wireless World* of November 1953, and no changes of any consequence have been made since then. Its range is about 25 miles. Decca were showing this year a new millimetric radar working on 8.7 mm and giving exceptionally good definition over ranges of 10 miles or so.

An example of long-range primary surveillance radar giving an all-round p.p.i. display up to about 60 miles is the Cossor Mark VI Airfield Control Radar. It works in the 10-cm band and uses a 14-ft diameter paraboloidal plastic reflector fed by a battery of small horns. A feature of this equipment is that the permanent echoes which often so clutter the face of the p.p.i. tube that aircraft tracks become difficult to follow can be removed by an attachment described as the MTI (moving target indication). This feature was found also in the Marconi approach control radar. It operates on 500-600 Mc/s, and is for long-range searching.

Secondary surveillance radar can generally cover a larger operational area owing to the fact that the ground transmitter has only to trip an airborne one. The Cossor system, for example, is said to have a range of 150 nautical miles. It does, however, need the aid of an airborne unit, whereas primary radar does not. On the other hand the secondary radar responses can be coded for self-identification.

Before leaving this subject mention must be made of the precision approach radar shown by Standard Telephones which displays three-dimensional information on two c.r.t. indicators. One is the azimuth deviation from a pre-determined approach path and the other glide angle. The ground controller talks the aircraft down by v.h.f. radio telephone. The Ekco "airfield approach aid," which is intended for the smaller aerodromes, is also a talk-down system.

A year or two ago Burndept and Ultra introduced lightweight radio beacons with radio-telephone facilities for air crews forced down in the sea. Both these equipments were shown this year in improved form, the improvements being mainly in such details as waterproofing, convenience of operation, and so on.

WORLD OF WIRELESS

Tape Standards

Amateur TV Interference

Fleming Valve Jubilee

SEMI-CONDUCTOR RESEARCH.—Measuring the characteristics of an experimental transistor under manipulation in a moisture-free box at the new G.E.C. semi-conductor research laboratories at Wembley. The company, in recognition of the revolutionary potentialities of solid-state physics for communications and electrical engineering, has deployed an unusually large scientific force on investigations into fundamental physics of semi-conductor materials.



Tape Sense

DUAL-TRACK recordings on standard $\frac{1}{4}$ -inch magnetic tape can be made in four ways, depending on the direction of travel (as seen when the active side of the tape is away from the observer) and on whether the recording head is near the top or bottom edge of the tape. Basically, there are only two conventions, since a British Standard recording (left-to-right, top track) if turned upside down will play properly on a right-to-left, bottom track machine, and the so-called Continental standard will be met by either right-to-left, top track, or left-to-right bottom track.

The new H.M.V. tape records are made to the British Standard Specification (B.S.1568:1953) and machines which will play them without alteration include the British Ferrograph (Wearite), Grundig Models TK9 and TK819, M.S.S., Reflectograph, Simon and Truvox Mark III U.

Truvox Mark III mechanisms can be converted to the equivalent of the British Standard and should be sent to Truvox, Ltd., Service Dept., 328, Station Road, Harrow, Middlesex. The charge is £5 5s, which includes general reconditioning of the instrument.

The earlier Grundig Models 500L and 700L also require conversion before the H.M.V. tapes can be played on them, and Grundig (Gt. Britain), Ltd., Kidbrooke Park Road, London, S.E.3, will undertake the necessary work for £5 5s. Alternatively a conversion kit can be supplied to the user for £3 3s.

Television Interference

SO FAR amateurs have been held responsible for causing interference with television reception and have had to close down during television transmitting hours despite the fact that in many cases the trouble was due to inadequate selectivity and, to quote the R.S.G.B., "other undesirable features in the design" of some television receivers. As a result of representations by the R.S.G.B., from October 1st the Post Office will continue to expect the amateur to suppress all harmonics outside his authorized bands, but once this has been done, if the wanted signal "is a good one"

and the interference is due to the choice of the i.f. for the complainant's receiver, or to the image response of his receiver, the G.P.O. will allow the amateur to continue operating after an interval of one month from the date on which the cause of the trouble is notified to the complainant by the Post Office.

The Post Office does not feel justified in automatically applying the same arrangement where the interference is proved to be due to the close proximity of the amateur station to the complainant's receiver.

Jubilee of the Valve

THE jubilee of the invention of the thermionic valve by Sir Ambrose Fleming on November 16th, 1904, is being marked by the holding of a conversation in the Electrical Engineering Department of University College, London, where Sir Ambrose was professor of electrical engineering. Exhibits and documents relating to Fleming's work and examples of recent researches will be on view.

Admission to the conversation, which will extend over three days (November 16th to 18th), will be by invitation ticket only. Senior engineers or members of the radio industry wishing to visit the College on one of those days should apply to the Assistant Secretary, University College, Gower Street, London, W.C.1.

As mentioned last month the I.E.E. has arranged a special meeting on November 16th to mark the jubilee. The proceedings will open at 2.30 and lectures on the genesis of the valve and the development of the triode up to 1939 will be given by Prof. G. W. O. Howe and Sir Edward Appleton, and at 5.30—following the tea interval—Dr. J. Thomson will lecture on "Developments in Thermionic Devices since 1939." Tickets for non-members are obtainable from the I.E.E., Savoy Place, London, W.C.2, where the meeting will be held.

37th Edition

AMONG the new features in the *Wireless World* Diary, 1955, is a section dealing with television attenuators and splitting circuits, a table for converting centi-

metre-gramme-second (c.g.s.) units to the rationalized metre-kilogramme-second (m.k.s.) system of units, and measurements for aerials for v.h.f. broadcasting and Band III television. The revised list of valve base connections includes some 500 current types.

In addition to the 79-page reference section, which includes the usual quota of general radio information, the Diary—now in its 37th year of publication—has the normal week-at-an-opening diary pages. It costs 5s 10d (morocco leather), or 4s 1d (rexine).

PERSONALITIES

Sir Gordon Radley, C.B.E., Ph.D.(Eng) B.Sc., who has been engineer-in-chief of the G.P.O. since 1951, has been appointed deputy director general in consequence of the release of **Sir Ben Barnett, K.B.E., C.B.**, from general administrative duties to enable him to devote all his attention to broadcasting work. Sir Ben retains the title of deputy director general. Sir Gordon, who joined the Post Office Engineering Dept. in 1920, has successively been controller of research (1944-49), deputy e.-in-c. (1949-51) and then engineer-in-chief.

Brigadier L. H. Harris, C.B.E., M.Sc., who succeeds Sir Gordon Radley as engineer-in-chief, has been controller of research for the past five years. He joined the engineering dept. in 1922. From 1943-45 he was Chief of Telecommunications, S.H.A.E.F.

G. J. S. Little, C.B.E., G.M., the new controller of research at the Post Office, has been assistant engineer-in-chief since 1947 prior to which he was for two years staff engineer in the Radio Maintenance Branch. He joined the Post Office research section in 1922.

Rear-Admiral Sir Philip Clarke, K.B.E., C.B., D.S.O., director of the Naval Electrical Department, Admiralty, since 1951, is to be the new president of the British Institution of Radio Engineers. He succeeds **W. E. Miller**, editor of *Wireless & Electrical Trader*, who has held the office since 1952. Admiral Clarke, who joined the Navy in 1914, was Director of Manning before assuming his present position.

Dr. J. D. McGez, O.B.E., M.Sc., Ph.D., A.M.I.E.E., the Australian-born television research engineer and senior scientist of the E.M.I. Research Laboratories, which he joined in 1932, has been appointed by London University to the new Chair of Instrument Technology at the Imperial College of Science and Technology. After graduating B.Sc. (maths and physics) from Sydney University, from which he subsequently received his M.Sc. degree, he was awarded a research scholarship to Clare College, Cambridge, and worked in the Cavendish Laboratory under the late Lord Rutherford from 1928 to 1931. Whilst at E.M.I. he has been concerned mainly with the development of television camera tubes.

PUBLICATION DATE

We regret that owing to a temporary re-arrangement of our printing schedule it will be necessary to postpone publication of the November issue of *Wireless World* from October 25th until November 1st.

C. H. Foulkes, M.I.E.E., the new head of the valve division of Standard Telephones and Cables at Dowlish Ford Mills, Ilminster, Somerset, joined the company in 1936 as a laboratory assistant. The Ilminster division is responsible for the development and manufacture of "special valves" and is not concerned with broadcast receiving valves. Throughout the war Mr. Foulkes was at Ilminster engaged on the development of microwave tubes, but he has been concerned in recent years with work on repeater valves (including those for underwater cables) and high-power transmitting valves. He has recently returned from a tour of valve factories in the U.S.A.

C. E. Tate, who contributes an article on remote control in this issue, joined Standard Telephones and Cables in 1936 as a development engineer. After working on telephone circuitry for some time he was concerned with airborne receivers and direction finders. From 1946 to 1949 he was with Central Rediffusion Services, Ltd., in charge of the development of receivers and directional arrays for radio relay services. Since 1949 he has been with Marconi's W.T. Company, and is at present in charge of the Airborne Receiver Development Group.

B. C. Fleming-Williams, B.Sc., has left A. C. Cossor, Ltd., where he was director of research, and has joined Sylvania-Thorn Colour Laboratories, Ltd., as general manager. The company, owned jointly by Sylvania Electric Products, Inc., of the U.S.A., and Thorn Electrical Industries, Ltd., manufacturers of Ferguson domestic radio and television receivers, is engaged on research and development work on colour television—including the design of c.r. tubes. Mr. Fleming-Williams joined Cossors in 1935 and was responsible for the double-beam c.r.t. and, more recently, for the airfield control radar system now in use at London Airport.

H. J. Leak, M.Brit.I.R.E., managing director of the well-known company of manufacturers of sound reproducing equipment bearing his name, is visiting the United States in October and will be at the Audio Fair in New York (October 14th-17th). The Audio Engineering Society of America is conferring its Fellowship on Mr. Leak.

J. S. Clark, joint managing director of A. C. Cossor, Ltd., has been elected vice-chairman of the British Radio Equipment Manufacturers' Association, of which, as



Brigadier L. H. HARRIS



G. J. S. LITTLE



B. C. FLEMING-WILLIAMS



H. J. LEAK

already announced, M. M. Macqueen, manager of the G.E.C. Radio and Television Department, is chairman.

IN BRIEF

Television Licences in the U.K. increased by 45,682 during July bringing the total at the end of the month to 3,456,728. "Sound only" domestic licences totalled 9,779,056 and those for car radio 241,479; the total number of receiving licences being 13,477,263.

Television Trade Tests.—An additional hour of test transmission—from 12 noon to 1 p.m.—daily, except Sundays, is now being radiated from all B.B.C. television stations. The transmissions, which consist of Test Card "C" accompanied by recorded music, are at reduced power so far as the five main stations are concerned, the standby transmitters being used.

Attendances at the Earls Court Radio Show which closed on September 4th, totalled 315,970, some 20,000 more than last year's figure.

Northern Radio Show.—Plans are being made by the Radio Industry Council to hold an exhibition in Manchester next year—probably May 3rd to 14th.

"All seats sold" appeared on the notice boards of the Royal Festival Hall, London, within four days of the commencement of the sale of tickets for the lecture-demonstration on sound reproduction to be given by G. A. Briggs (of Wharfedale) on November 1st. In addition to the 3,400 seats sold the tickets for the 100 or so admitted to stand are also sold.

A number of radio and allied firms are among the 450 exhibiting at the **British Trade Fair**, Baghdad (October 25th-November 8th), and a composite exhibit of domestic radio and television equipment is being staged by the British Radio Equipment Manufacturers' Association. The 500-page bi-lingual (English and Arabic) catalogue has been produced by our publishers for the organizers—British Overseas Fairs Ltd.

The annual **Motor Show** at Olympia from October 20th to 30th, at which a number of car-radio manufacturers will be exhibiting, will be covered by three special issues of *The Autocar*—October 15th, show guide; 22nd, stand-to-stand report; and 29th, technical survey of design trends.



DETECTING PIRATES.—The new G.P.O. television detector vans, like the earlier type described in *Wireless World*, March, 1952, pick up the magnetic induction field set up by the receiver line-scan coils. Location is effected by successively switching the output of the three loops on the van roof to a sensitive receiver tuned to the 2nd harmonic (20.25 kc/s) of the line-scan frequency. The two loops on the left-hand side of the van give direction, while comparison of the output of the rear loops gives "sense".

New buildings for the **Medway College of Technology** at Fort Horsted on the Chatham/Rochester boundary have been brought into use this session. All the laboratories—including some specially equipped for radio and telecommunications courses—are now on one site. The college has a full-time course in electrical engineering (communications) for the London B.Sc., and among the part-time day and evening courses are those for the R.T.E.B. radio and television servicing certificates.

Tape Pals.—For some time there have been two organizations in America, each with an international membership, for the purpose of linking correspondents for the exchange of recorded tapes. One of these—World Tape Pals, P.O. Box 9211, Dallas, Texas—has a membership of some 400, about 50 per cent of them in the U.S.A. and 10 per cent in this country. The other organization is the Voicesspondence Club of 1614 North Mango Avenue, Chicago 39, Ill. There are no membership fees, but correspondents wanting a "tape pal" are asked to send details such as tape speeds, single or double track and direction of travel, and an international reply coupon.

BUSINESS NOTES

The use of magnetic tape as a medium for data recording, and its application to the control of machines and industrial processes, is to be developed by a group of companies under the control of Gas Purification and Chemical Co., Ltd., Palmerston House, Bishopsgate, London, E.C.2. Grundig (Great Britain), Ltd., will contribute their knowledge of recording techniques and other firms collaborating are Smart and Brown (Machine Tools), Ltd., Johnson British Electric, Ltd., and Beeson and Robinson, Ltd. (A general article on industrial uses of tape recording appears on p. 508 of this issue.)

Equipment for the extension of the Automobile Association's mobile radio scheme to four new areas was provided by **Pye, Ltd.** The A.A. now has radio-equipped patrol vehicles in the London, Birmingham, Leeds, Glasgow, Guildford, Newcastle, Manchester, Bristol and Nottingham areas. The last four centres are those recently equipped.

A second contract for the supply of television equipment for the Italian broadcasting organization, Radio Audizione Italiana, has been placed with **Marconi's**, who have already supplied sound and vision transmitters and ancillary gear. The new contract is for two O.B. units, studio equipment and monitoring apparatus.

Giannini, Ltd., has been formed in this country as a subsidiary of G. M. Giannini & Co., Inc., the American instrument and control manufacturers. The new company intends to negotiate licences for the manufacture of equipment—including telemetering systems and radar control gear—to Giannini designs for the British Commonwealth. Enquiries should be addressed to Christopher Dykes at 31, Pembroke Gardens, London, W.8 (Tel.: Western 9493).

Taylor Electrical Instruments, Ltd., the well-known manufacturers of test and measuring equipment, of Slough, Bucks, announce the introduction of three hire purchase schemes which provide for repayments spread over 3, 10 or 15 months.

The equipment for the fleet of new G.P.O. television detector vans, illustrated on this page, was developed from a Post Office experimental model by **G. A. Priecheufried and Associates**, 4, Lammas Park Gardens, London, W.5.

Gramercy Sound Associates, of 175, Fifth Avenue, New York 10, U.S.A., have notified us of their wish to receive details from British manufacturers of tape recorders and high-fidelity reproducing equipment.

W. Bryan Savage, Ltd., have opened their new London office and showroom at 17, Stratton Street, W.1 (Tel.: Grosvenor 1926), to which all sales correspondence should now be addressed.

A Market Digest of opportunities for introducing British high-fidelity sound-reproducing equipment into the U.S.A. has been prepared by the Commercial Department of the British Embassy, Washington. It is available from the Export Services Branch of the Board of Trade, Lacon House, Theobalds Road, London, W.C.1. (Reference ESB/18548/54.)

Thirty-seven vessels—making forty-seven in all—operated by the British Tanker Company are to be fitted with Pye v.h.f. radio-telephone equipment by Rees Mace Marine, Ltd. Shore stations have been set up at the company's terminal ports—Sheerness, Kent, and Aden—and in addition communication can be established with the refinery at Fawley, Hants, and Falmouth, Cornwall.

Corran Works, Ltd., the Northern Ireland subsidiary of Pye, Ltd., is extending its factory space in Larne, Co. Antrim. The increased space will enable production to be doubled, necessitating an increase in staff of 500.

A.B. Metal Products, Ltd., have moved their London office from Berkeley Street, W.1, to larger premises at 17, Stratton Street, W.1. The telephone number is still Grosvenor 5206.

CLUB NEWS

Birmingham.—The meetings of the Slade Radio Society for the last quarter of the year open on October 1st with a talk by R. Lightwood (Philips Electrical) on the applications of electronics in industry. On the 15th J. Hughes, B.Sc. of the G.E.C., will deal with the production, testing and applications of transistors and on the 29th D. W. Morris's subject will be "Single Sideband Transmission and Reception for the Amateur." The society's annual dinner will be held on October 23rd at the Market Hotel. Meetings are held on alternate Fridays at 7.45 at the Church House, High Street, Erdington. Sec.: C. N. Smart, 110, Woolmore Road, Erdington, Birmingham, 23.

Cambridge.—The Cambridge University Wireless Society's first meeting of the new academic year will be held on October 11th at 8.30 in the Cavendish Laboratory. A programme of talks is being arranged for the session. The society possesses a well-equipped workshop and operates a station with the call G6UW. Sec.: D. W. H. Ashton, Queen's College, Cambridge University.

Chester.—While the Army Emergency Reserve (Royal Signals) is in camp at Blacon, Cheshire, they are being invited to the Chester and District Amateur Radio Society (G3GIZ) which meets on Tuesdays at 7.30 at Tarran Hut, Y.M.C.A. Grounds, Chester. Sec.: N. Richardson, 23, St. Mary's Road, Dodleston, Nr. Chester.

Hounslow.—The autumn session of the Hounslow and District Radio Society opened on September 16th with a meeting at Grove Road Junior School, Hounslow. The club meets fortnightly on Thursdays, alternate meetings being devoted to club matters and R.S.G.B. group business. The October meetings are on the 14th and 28th. Sec.: R. J. Parsons, 16, Cypress Avenue, Whitton, Middx.

Kingston-on-Thames.—The Mullard 5/10 amplifier, described in our August issue, will be demonstrated by its designers to members of the Kingston and District Amateur Radio Society at their meeting on October 7th at 7.45 at Penryn House, Penryn Road, Kingston-on-Thames. The club normally meets on alternate Wednesdays. Sec.: R. S. Babbs, 28, Grove Lane, Kingston-on-Thames, Surrey.

Walton-on-Thames.—A. O. Milne (G2MI), president of the R.S.G.B., will open the Amateur Radio Exhibition, at Walton-on-Thames, being organized by the Q.R.P. Society. The exhibition, which will be held in St. Mary's Parish Church Hall, Church Street, on October 30th from 2.30, will include examples of low-power transmitting and receiving equipment, components and demonstrations of radio-controlled models. Admission to the exhibition, which is being supported by some local traders, is 1s. Sec.: J. Whitehead, 92, Rydens Avenue, Walton-on-Thames, Surrey.

BOOKS RECEIVED

Television and Special Tubes Vade-Mecum. Edited by Dr. J. A. Gijsen. International data book on cathode-ray tubes, gas discharge tubes, crystal devices and other valves not included in the complementary "Radio Tube Vade-Mecum." Pp. 244+VI; with diagrams of base connections. P. H. Brans, Antwerp (or from the Modern Book Company, 19-23 Praed Street, London, W.2, price 22s 6d.).

Telecommunications, by A. T. Starr, M.A., Ph.D., M.I.E.E. Text-book of principles and practice of line and radio communication systems written to cover the syllabus for this subject in the London University degree course. Pp. 454+IX; Figs. 381. Price 35s. Sir Isaac Pitman and Sons, Parker Street, Kingsway, London, W.C.2.

The Practical Electrician's Pocket Book, 1955. Edited by Roy C. Norris. Basic data on domestic and industrial appliances, installation and wiring. Pp. 550 with numerous illustrations. Price 5s. Published by *Electrical and Radio Trading*, 189 High Holborn, London, W.C.2.

Television Simply Explained, by R. W. Hallows, M.A., M.I.E.E. Revised second edition of a book describing the working of television for the ordinary viewer. Pp. 196; Figs. 96. Price 10s 6d. Chapman and Hall, 37 Essex Street, London, W.C.2.

Electrical Who's Who, 1954. Brief biographies of leading members of the professional and industrial branches of the electrical industry. Compiled by *Electrical Review*. Pp. 354. Price 21s. Electrical Review Publications, Dorset House, Stamford Street, London, S.E.1.

COMMERCIAL LITERATURE

Junction Transistor for hearing-aids, Type XFT1, in hermetically sealed flat glass bulb measuring only 15mm x 5.3mm x 3.8mm. Gives output of 1-2.5mW and power gain of 27-38db, depending on operating conditions. Preliminary data sheet from Hivac, Stonefield Way, Victoria Road, South Ruislip, Middlesex.

Aerial Multicoupler for 2-30 Mc/s, allowing up to ten receivers to be fed from one or two aerials. Input and output impedances are 75Ω unbalanced. Also a frequency convertor for f.s.k. telegraphy reception which takes stronger of two signals from a diversity pair and converts it to d.c. Leaflets from The Plessey Company, Ilford, Essex.

Wide-range Ohmmeter with 12 linear ranges from 3Ω full scale to 1MΩ full scale and 5 additional ranges for 1-1,000MΩ. Current and voltage ranges covering 0.3mA-300mA and 3-300V. Leaflet from the Clare Instrument Company, Rickmansworth, Herts.

D.C. Microvoltmeter with centre-zero scale of 10μV-0-10μV and ranges of ×1, ×10, ×100 and ×1,000. A novel type of d.c. galvanometer amplifier is used. This and many other instruments included in a new illustrated catalogue from W. G. Pye & Co., Granta Works, Cambridge.

Pallets and Stillages; an illustrated catalogue, giving standard sizes available, from H. & C. Davis & Co., 59 Old Town, Clapham, London, S.W.4.

Pre-set Potentiometers for live-chassis receivers; Type QM with insulated spindle and two-hole fixing and Type QS with live spindle and two lugs for fixing; both in values from 500Ω to 10MΩ linear law. Leaflet from Dubilier Condenser Co., Victoria Road, North Acton, London, W.3.

Marine Radiotelephone with output of 25 watts and range of 250 miles; transmitter frequency 1.6-3.7 Mc/s and receiver 185 kc/s-3.7 Mc/s. Operation is simple and the weight is 46 lb. This and other new marine equipments described briefly in News Letter No. 11 from Redifon, Broomhill Road, London, S.W.18.


Time and Motion Study correspondence course. Brief details on a leaflet from the School of Time and Motion Study, 243 Elgin Avenue, Maida Vale, London, W.9.

Insulating and Protective Tapes of cotton, varnished cambric, rubber, vulcanized bitumen and P.V.C. Catalogue giving sizes and recommended applications from British Insulated Callender's Cables, 21 Bloomsbury Street, London, W.C.1.

Radio Show

This Year's Trend in Vision and Sound
Broadcast Receivers—and Some Highlights

In the following pages the technical staff of "Wireless World" reports on tendencies in design in those branches of radio most fully represented at the National Radio Exhibition. As at last year's Show, technical interest centred on television. A survey of aviation radio equipment shown at the Farnborough Exhibition appears on another page.

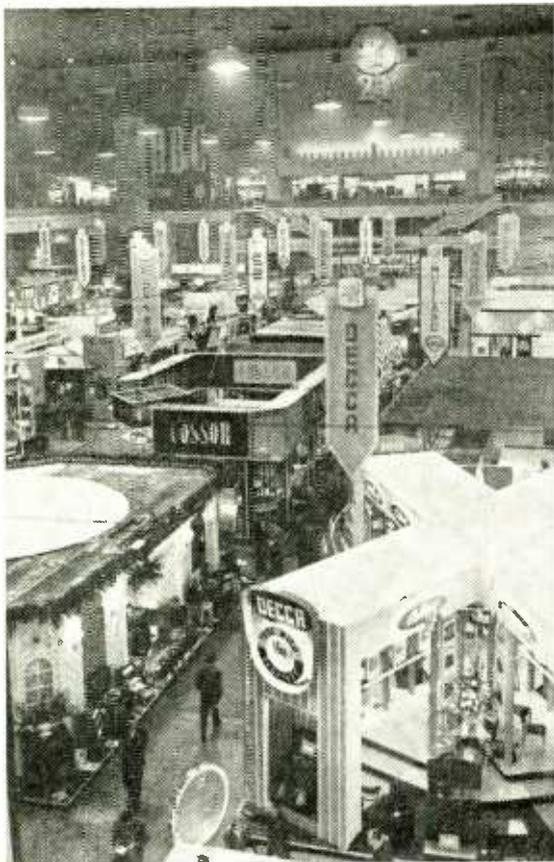

WHILE television receivers still vary a great deal in matters of detail, there is now a strong tendency towards uniformity in their general form. The vast majority of sets now have either a 14-in or a 17-in c.r. tube with magnetic deflection and permanent-magnet focusing; they have flyback e.h.t. and h.t. boost; they are either for a.c./d.c. operation or for a.c. only, but using a.c./d.c. technique; cathode-modulation of the c.r. tube is employed; and on the signal side the sets are superheterodynes.

The general basic trend of development is towards greater uniformity, as it has been for some years, but it is obscured this year by a new requirement, the necessity for providing for reception on Band III as well as on Band I. Designers have thus to cope with a new set of problems and they have by no means all found the same answers.

The Band III has dealt the final blow to the straight r.f. television set, for nothing but the use of the superheterodyne will suffice for frequencies around 200 Mc/s. It has also completely altered the conventional front-end of a television set. It has been usual for some years to employ a single pentode signal-frequency amplifier followed by a frequency changer which has been quite commonly also a pentode operating as a mixer-oscillator. This arrangement is now not at all favoured, except for purely Band I sets, where it is still used. The more stringent requirements of Band III have caused a general change to quite a different circuit. It is now the practice to use a double-triode connected as a cascode stage for the

signal-frequency amplifier and to use a triode-pentode as a frequency changer. The triode section acts as the oscillator and the pentode as the mixer.

A major reason for the adoption of the cascode stage is the reduction of receiver noise which results. This occurs because a triode is inherently a quieter valve than a pentode since it has no partition noise. On Band I, receiver noise is not often a limiting factor, for external noise is usually more important than the noise even of a pentode. On Band III, however, external noise is likely to be less and signals may well be weaker.

Whatever the actual form of the circuit, some method of station selection by a panel control has for the first time become necessary in British television, and there are several schools of thought about the best way of providing it. There are five channels in Band I and eight in Band III and a set must be capable of receiving any one of them. It is not, however, necessary that the user should be able to select any one of the thirteen at a moment's notice. No one will be within range of stations on all channels.

There is no reason to suppose that anyone will require to select more than one channel on Band I and, perhaps, two on Band III, and it may be years before anyone needs more than one on Band III. This has been taken advantage of by many designers and quite a few sets have a panel selector arranged to give an instantaneous choice between two or three channels only, but those two or three can be pre-set to be any required ones. Others feel that it is simpler to provide a selector for the lot, or rather, for twelve out of the thirteen.

The main alternative arrangements are:—

1. 12-channel switch selection using either a turret or fixed coils with wafer switches. This gives five channels on Band I and seven on Band III; a pre-set control enables the seven to be either channels 6-12 or channels 7-13.

2. A basic selector as (1), but provided with coils for one channel in Band I and two in Band III only, the remaining switch positions being blanked off. The arrangement appears to the user to be that of a three-position switch. The argument in favour of the

Review

arrangement is that as no one is expected to be able to receive more than three alternative channels it is wasteful to provide coils for 12 or 13. The coils can easily be changed by the dealer for other channels and with the full switch mechanism provided, additional channels can readily be catered for if the need should arise.

3. Continuous tuning for Bands I and III using separate control knobs for the two bands and a band-change switch. This enables the user to tune to any channel in either band and to have an instantaneous change-over by a switch from any channel in one band to any in the other. Since there are unlikely to be alternative programmes in Band III for some time to come, this would seem to meet all requirements in the reasonably near future. If alternatives in Band III do come, however, it would entail a retuning operation by the user to change the Band III programme.

4. The final arrangement is a set designed for Band I only with special provision for the addition of a converter for Band III. This is intended mainly for use in districts in which it is unlikely that Band III reception will be possible for a long time.

The sets of most makers fall into category 1 and of these probably most have a turret tuner. In the true turret there is framework which can be rotated in steps by a panel control and which carries a clicker mechanism for locating its position precisely at each step. The inductors for each channel, singly or in a group, are mounted on an insulating strip which carries connecting contacts and which is held in the framework by a clip. Usually each aerial circuit coil is held on one strip while the intervalve coil and the oscillator coil, being coupled together, are held on a second strip.

There are thus two detachable coil strips for each channel. This is done to enable a screen to be interposed between them. A set of fixed contact springs presses against the contacts of the coils in use. Rotating the turret framework brings a new set of coils physically and electrically into the place occupied by the previous set.

The circuit diagram of a typical turret tuner is


shown in Fig. 1; this is actually based on the Kolster-Brandes LVT50, but is a little simplified in that some of the decoupling has been omitted. A common aerial feeder and input filter are used for both bands and the signal passes to the coupling coil L_1 in the turret, whence it passes to the input tuned circuit L_2 and thence to the first valve V_1 . Capacitance exists in the valve from the grid to the anode on the one hand and the cathode on the other. These two capacitances form two arms of a bridge connected from anode to cathode, the other two arms being provided by C_1 and C_2 . The tuned circuit L_2 is across the diagonal of the bridge. When C_2 is properly adjusted L_2 is isolated by this bridge connection from the anode circuit. It is a form of neutralized circuit and while it may help in obtaining stability its main function is to minimize oscillator radiation.

The anode of V_1 is connected to the cathode of V_2 via the coil L_3 , which is adjusted to resonate around the upper end of Band III in order to maintain the gain at the highest frequencies. V_1 and V_2 are the two halves of a double triode and L_1 and L_2 are the two coils of one section of the turret. They are screened from the three coils L_4 , L_5 and L_6 which form the second section of the turret and which form the coupling to the mixer V_3 and the oscillator V_4 . The mixer is a conventional pentode with grid-leak bias and grid injection, the intervalve coupling being of a quite normal type comprising L_5 and L_6 .

The oscillator is the modified Colpitts type using the triode section of the triode-pentode V_4 , V_5 . The first part of the i.f. coupling, T_1 , is included in the tuner unit. This tuner is built as a separate unit, including the turret, and is quite compact. It can be mounted in any convenient position to bring the turret control where it is wanted and it need not be particularly near the i.f. amplifier since it is practicable to employ a fairly long screened cable for the i.f. connection.

From the circuit point of view the second group of sets is no different; the omission of some of the coils for some of the channels not being a circuit matter. The third group also differs only a little. If the switch contacts in Fig. 1 are ignored the circuit is still that of the third group on either band, but the coils inductances are adjustable by ganged dust-iron cores or metal slugs for continuous tuning over the band. Two sets of coils with their ganged cores brought out to separate control knobs are provided

Fig. 1. Simplified circuit of turret tuner and front end of Kolster-Brandes LVT50.

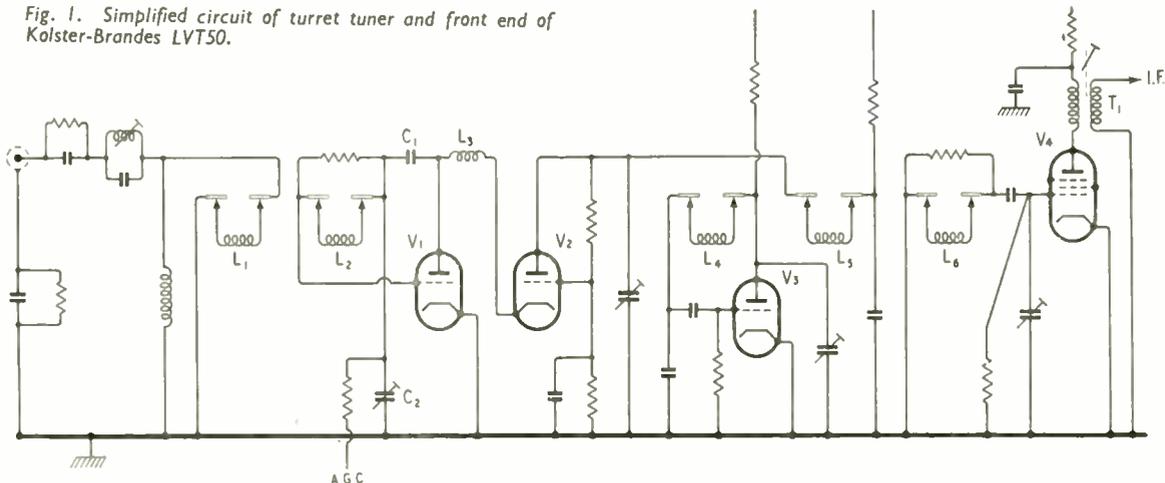

and a set of ganged change-over switches to change from one to the other.

One example of this method of tuning is in the Bush receivers. Here there are other minor circuit differences. Separate aerial feeders are used for the two bands—an 80- Ω coaxial cable for Band I and a 300- Ω twin-wire feeder for Band III, and the capacitance-bridge neutralizing circuit is not used.

In a few sets, notably the G.E.C. range, the tuning system is half-way between the second and third groups. A three-way selector switch is used and there are three sets of coils, one giving continuous tuning over Band I and two similarly covering Band III. The cores of the coils are not ganged and can be pre-set for any Band I and any two Band III stations.

As an alternative to the turret, fixed coils and rotary wafer switches can be used. The basic circuit is unaffected by this and the general arrangement of Fig. 1 still holds. However, it is not then usual to change the coils completely from one channel to another. There is a basic coil for the highest frequency and the switch adds incremental inductance for each step; all the coils are in series and the unwanted ones shorted out by the switch. Pye adopt this method in a neat and compact tuner¹.


One at first sight odd result of the provision for alternative-programme reception is a great increase in the use of a.g.c. The need for this arises because it is unlikely that the two signals will be of the same strength, and it is undesirable for the user to have to make any large adjustment of gain when switching from one station to another. It has been a common practice for years to use a.g.c. in the sound channel, but up to now a.g.c. in the vision channel has been a rare thing.

The attainment of a.g.c. in the vision channel is greatly complicated by the fact that the vision signal does not have a constant mean level. In a sound signal the mean transmitted carrier level is constant and the variations of modulation all take place about this mean level. In the vision signal as transmitted the only constant thing is the black level and the mean value varies with the modulation.


Because of this, if a true a.g.c. system is needed it is necessary to base it upon the black level of the signal, which is present for some 6 μ sec after each line sync pulse and also during the frame flyback period. By a true a.g.c. system is meant one which has a performance strictly analogous to that of the ordinary kind used in sound receivers. It requires that the vision signal be gated at line or frame frequency so that the vision signal is passed to the a.g.c. detector only when the signal is at black level.

This results in a fairly complex circuit and this form is adopted by comparatively few set makers. Pye

¹ "12-Channel Television Tuner," *Wireless World*, April 1954, p. 162.

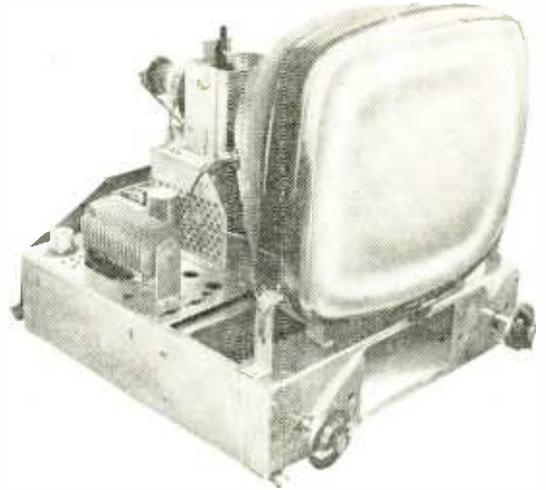

Chassis of English Electric television receiver.

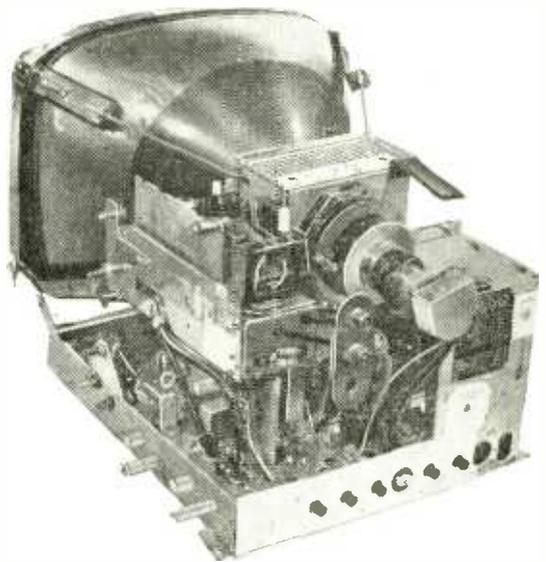

Ultra chassis. The tuner is mounted on the near side so that the controls project through the side of the cabinet.

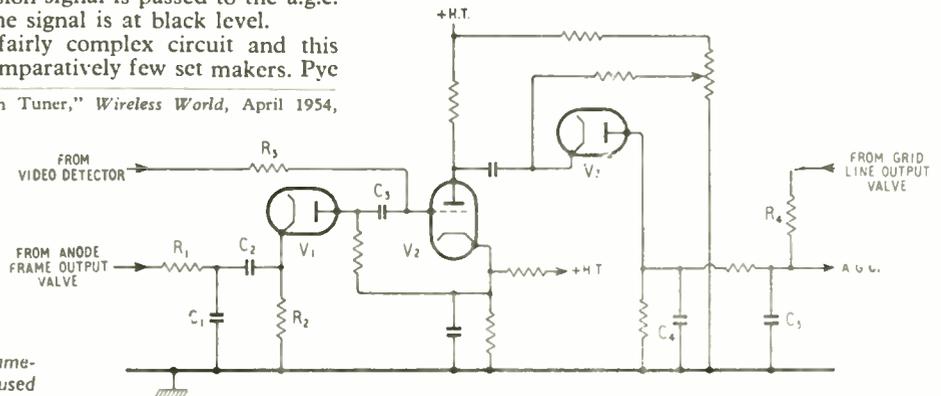


Fig. 2. Arrangement of frame-pulse gated-a.g.c. system used by Ultra.

were one of the first to employ such a gated a.g.c. system² and retain it in their VT4 model. Gating pulses are derived from the line time base and operate on the back porch—the black level after each line sync pulse.

Ultra use quite a different arrangement. It is a gated system, but one gated at frame frequency. The circuit is shown in Fig. 2. Positive-going pulses occur during the frame flyback on the anode of the frame output valve and are fed to the diode V_1 through the RC shaping network $R_1C_1R_2C_2$. This diode is normally conductive and is cut off by these pulses during a part of the frame-flyback period.

The signal from the video detector is applied to the grid of V_2 which is coupled by C_3 to the anode of V_1 . This valve V_2 is biased beyond cut-off. The video signal is positive-going. Normally it is greatly attenuated at the grid of V_2 because the high resistance R_1 and the resistance of V_1 form a potential divider. It then does not operate V_2 .

When a positive pulse cuts off V_1 , however, nearly the full video signal appears on V_2 and since this is during the frame flyback period the video signal comprises only pulses changing from zero to black level. These pulses drive V_2 into conduction and produce negative-going pulses at the anode which make V_3 conduct to charge C_1 negatively to earth. Bias is applied to V_3 by a manual control to form the contrast control.

A minor peculiarity of the circuit is the connection of R_1 to the grid of the line-scan output valve! This, however, is only to obtain a source of negative bias. The output is driven into grid current and its grid consequently has a mean negative potential; R_1 and C_2 filter out the line-frequency components.

In contrast to this frame pulse gated a.g.c. system, Murphy use a line-pulse gated type in the V240A—

a fringe-area model. The arrangement is sketched in Fig. 3. Gating pulses at line frequency are applied to the anode of V_1 through C_1 ; they are positive-going, are derived from the line time base and occur during the back porch of the signal. V_1 acts as a detector of these pulses, anode and cathode functioning as a diode. The current passed by the valve, however, depends on the grid potential and hence upon the magnitude of the video signal during the black signal of the back porch.

The resulting mean anode potential of V_1 is communicated to the grid of V_2 through R_1 and at the same time the gating pulses, reduced in amplitude by C_2 , C_3 are passed to it. V_2 conducts to pass current on the gating pulses to an extent which is dependent on its mean grid potential and, therefore, on the video-signal amplitude. The output pulses of V_2 are thus related to signal strength and are rectified by D_1 to produce the a.g.c. voltage.

In view of the complexity of gated a.g.c. it is not surprising that many designers seek something simpler even if it is theoretically less perfect. English Electric adopt the simplest possible arrangement; the r.f. valve grid return is merely tied to the a.g.c. line of the sound channel. This is a reasonable arrangement when the main purpose of a.g.c. is to take up the variations of signal strength between two more-or-less local stations, because the ratios of the strength of the sound and vision channels will presumably be the same. It would be open to criticism, however, if it were intended to deal with a fading signal, for the sound and vision signals would not necessarily fade in the same way.

The usual course, however, is to adopt a system which, like the conventional sound-channel arrangement, operates on the mean signal level. In the H.M.V. Model 1828, the circuit of Fig. 4 is used.

² "Vision A.G.C." *Wireless World*, April 1953, p. 173.

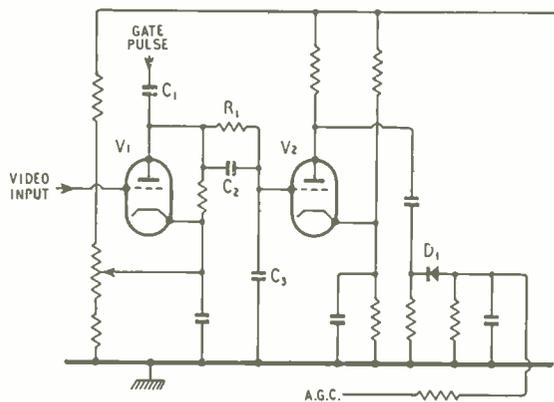


Fig. 3. Murphy line-pulse gated-a.g.c. circuit.


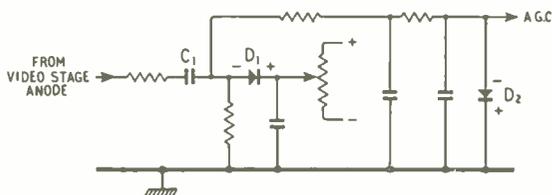


Fig. 4. A.g.c. circuit of H.M.V. fringe-area receiver.

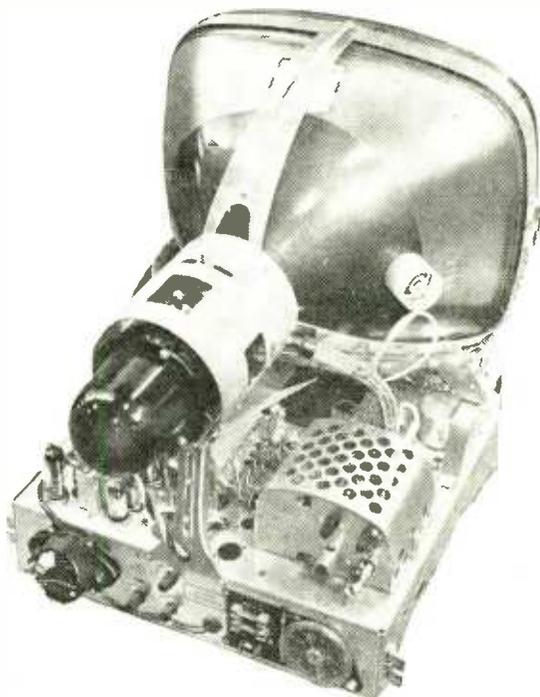

Murphy chassis. Note the thorough screening of the line timebase, the deflector-coils and the inter-connecting leads.

The video signal is applied with positive-going sync pulses to D_1 , which is biased by the manual contrast control. As a result a charge accumulates in C_1 representative of the mean signal level. This is applied with the video signal to the a.g.c. line via the RC filters which remove the video components.

The second diode D_2 is merely to prevent the a.g.c. line from becoming positive. As in another set referred to earlier, the negative voltage for the contrast control is obtained from the grid of the line output valve.

The a.g.c. bias obtained from a system of this type varies appropriately with any change of signal strength and it will readily deal with a fading signal. Its drawback is that it also varies with any changes of modulation which affect the mean brightness of the picture. It thus tends to keep the mean brightness constant whether this varies unintentionally with unwanted changes of signal strength or intentionally for artistic effect in the transmission.

This system is quite widely used in various forms and it is generally considered that its drawback is more than outweighed by its simplicity. Some may not, in fact, consider the maintenance of constant mean brightness a drawback for there seems to be some difference of opinion about the desirability of maintaining a fixed black level in the reproduced picture. The desirability of doing this is no longer taken as axiomatic.

Bush include this type of a.g.c. in the TV43 and do it without using any extra valves or metal rectifiers. A portion of the mean voltage on the sync separator grid is filtered in an RC circuit and fed back to an i.f. grid. The sync separator grid is acting in the usual way as a d.c. restorer and so has a mean negative potential dependent on the signal strength and the modulation. The filters merely remove the video signal. Ekco adopted a similar arrangement last year.³

Flywheel sync is an arrangement which has been gradually creeping into fringe-area sets for several years but, contrary to some expectations, it has made little or no headway in other sets. Its use is still almost entirely confined to fringe-area sets. Murphy use a well-known form in the V240A; the sync pulses are applied to a phase-splitter and thence in push-pull form to a diode phase discriminator to which pulses are applied in parallel from the line timebase. A d.c. amplifier is used between the discriminator and the blocking oscillator and an unusual feature is the use of a non-linear resistance for the anode load of the amplifier. Its purpose is to stabilize the circuit against the effect of mains voltage changes.

A somewhat similar form of circuit is used in the Bush TV33, but a differentiating-cum-push-pull transformer is used in place of the valve phase-splitter.

Pye employ basically the same form of circuit, but it is the sync pulses which are applied in parallel to the diodes of the discriminator and the local pulses which form the push-pull input. A multivibrator type of saw-tooth generator is used and stabilized by a tuned circuit.

The flywheel circuit of the H.M.V. 1828 is quite different in the method of control, although it is of quite a well-known type. A sine-wave oscillator is used in the line timebase and controlled by a reactance valve. The sync pulses and the sine wave are com-

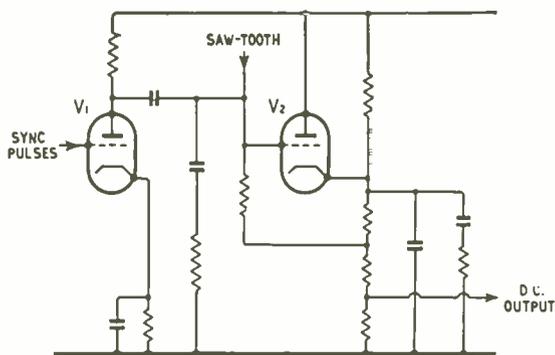


Fig. 5. Kolster-Brandes phase detector for flywheel sync.

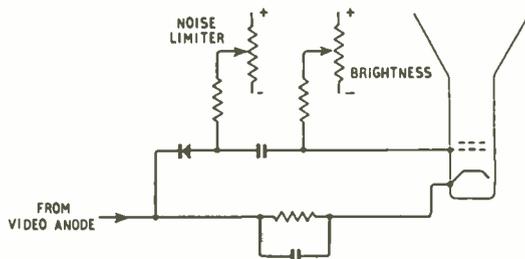


Fig. 6. Noise limiter of Alba TV14.


pared in a balanced phase discriminator, the sine wave being the push-pull signal. The saw-tooth is subsequently derived from the sine wave by limiting and shaping circuits. This receiver is unusual in having a very long time constant in the flywheel circuit; it is, however, intended mainly for the reception of signals as weak as $25 \mu\text{V}$ and an unusually high degree of protection against noise and interference is considered necessary.

Kolster-Brandes use quite a different form of flywheel sync in the LVT50. It is an unbalanced circuit. A triode phase-reverser V_1 , Fig. 5, delivers positive-going sync pulses to a cathode-follower detector V_2 to which is also applied a saw-tooth from the line timebase. The rectified output depends on the relative phase of the two signals and is applied to the blocking-oscillator to control its frequency.

Except in the fringe area sets, the normal method of direct locking is retained in most sets. Little change in methods of sync separation seems to have occurred, nor in timebase technique. Blocking oscillators and multivibrators are both popular for saw-tooth generators. Flyback e.h.t. and h.t. boost are universal in the line timebase, except in the case of projection types, and it is still usual to employ a line-scan auto-transformer with a core of Ferroxcube or other low-loss material. The use of a Ferroxcube-cored inductor partially saturated by a permanent magnet for securing linearity of scan is growing, but some firms still retain the older damped resonant circuit for this purpose.

Representatives of the single-valve line timebase (not counting the efficiency diode or e.h.t. rectifier) are still to be found and Stella have adopted it in the ST8317U. The circuit is a well-known one, the control and screen grids of the output pentode being coupled by a transformer. Cossor, however, use a multivibrative form of

³ "Radio Show Review," *Wireless World*, October 1953, p. 446.

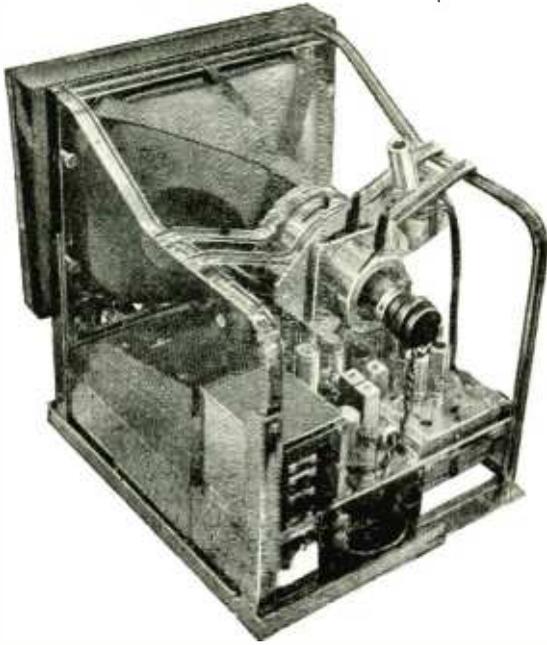

McMichael receiver chassis with shrouded deflector-coil assembly supported by guard rails.

timebase in which the output valve forms one of the multivibrator pair. This, again, is quite a well-known arrangement.

Although the use of an auto-transformer for coupling the output valve to the deflector coils, with an overwind for e.h.t., is still general, a few makers are adopting the so-called direct-drive circuit.⁴ In this the deflector coil is placed directly in the anode circuit of the valve and the energy dissipated within it during flyback is replaced by the transference of energy from a loading coil capacitively coupled to it. The loading coil is made in the form of a transformer and produces the e.h.t. Murphy have adopted this arrangement in all models.

Normal practice, with all the usual variations in matters of detail, is followed in the frame scanning circuits. One new feature which is tied up with the frame timebase is flyback suppression, which is now applied in quite a large number of sets. In fact, if it

has not already become, it is rapidly becoming, a normal part of a television set. It consists in the application of a blackout pulse to the c.r. tube during the frame flyback so that the flyback lines do not show.

Until recently this has not been considered necessary because the sync pulses themselves, which are always applied to the tube with the picture signal, are supposed to provide the necessary blackout. However, the desirability of maintaining the full black level at the tube is a controversial matter and quite a number of set makers deliberately reduce it and maintain that by doing so a better picture is secured.

In most sets the video signal is applied to the cathode of the tube and flyback suppression is effected by applying a negative-going pulse to the grid, although a few people feed a positive-going pulse to the cathode. Alba do this in their TV14 and the suppression circuit is nothing more than a resistance and capacitance in series connected between the anode of the frame-scan output valve and the cathode of the tube. Pye do much the same, but include an RC pulse-shaping circuit. Pilot, in the TV84 and TV87, apply the pulse to the tube grid and obtain it by inserting a resistor in series with the charging capacitor of the timebase. Kolster-Brandes do this also, but develop the pulse by differentiating the saw-tooth across the charging capacitor; Rush do very much the same.

Noise suppressors are invariably fitted and take many varied forms. The commonest is probably the biased diode in shunt with the video output, but Stella use an even simpler scheme. The limiting action is obtained merely by applying a suitable negative bias to the suppressor grid of the video stage. This causes the anode current to saturate at a value dependent on the bias and so to limit the signal.

Alba use a method which is basically as simple as the shunt diode, but which applies the interference to the grid of the tube in the manner of a black spotter. This is shown in Fig. 6. The germanium crystal diode is non-conductive until the signal exceeds the bias voltage. It then conducts and the signal is applied to both grid and cathode and the potential difference between them is kept constant to give a limiting action.


Pye adopt a black-spotter. As shown in Fig. 7 a triode cathode follower is used for the video output and feeds the signal to the cathode of the c.r. tube. It feeds it also to the cathode of a second triode which is biased to be inoperative until the signal exceeds

⁴ "Simple Line-scan Circuit," by W. T. Cocking, M.I.E.E., *Wireless World*, August 1952, p. 305.



Pam Band III convertor chassis.

Fig. 7. Black spotter used in Pye sets.

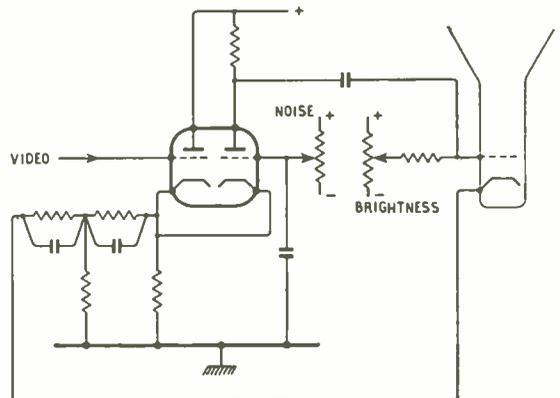

peak white. When it conducts amplified interference voltages appear at the anode in the same phase and are applied to the grid of the tube. Because of the amplification the noise signal on the grid can exceed that on the cathode and so black out the spot.


A trend which started some years ago towards the use of higher intermediate frequencies has been accelerated by the need for Band III reception. Frequencies between 30 and 40 Mc/s are now usual and are about as high as is possible. The precise figures vary from one maker to another. Thus Bush use 34.5 Mc/s for vision and 38 Mc/s for sound. Whereas H.M.V. employ 34 and 37.5 Mc/s. Three stages of amplification in the vision channel and two in the sound are quite common, although quite a number of sets have only two vision i.f. stages. Coupled pairs of circuits are quite widely used in conjunction with trap circuits for sound-channel rejection.

Trap circuits make their appearance in the aerial feeder circuit, too, here mainly to prevent the breakthrough of any signal on the intermediate frequency. The increase of intermediate frequency has made this risk greater since it is now nearer the signal frequency; hence the introduction of trap circuits to counter it.

Contrary to some expectations very few Band III convertors were on view. The technical problems of making a convertor for use with any receiver are considerable, and most of those exhibited were designed for use with specific sets. Ferguson, for example, had four different models for use with different Ferguson sets. One of the few for more or less general use is the Pam. It is self-contained with its own power supply and connects to the aerial feeder socket of the receiver. It is "straight-through" on Band I and a superheterodyne convertor on Band III. The circuit is a little different from the usual in that the input double-triode is not used as a cascade amplifier, but as a cathode-follower feeding an earthed-grid stage; also, the frequency-changer is a double-triode.

As already mentioned, 14-in and 17-in tubes, often rectangular, are now general. The 12-in seems to be on the way out and the 9-in has gone. Grey-tinted tube faces, or safety screens, are also general, so much so that the few white screens look a little odd. The extremely dark screens of a few years ago are less common, however, and a rather pale grey, which one does not always realize to be grey until one sees it alongside a white tube, is usual. A few people, notably Murphy, make the so-called light filter an optional extra.

One very welcome tendency is towards fitting the subsidiary controls at the front instead of at the back of the set, often covered by a hinged panel. This is



Ferguson Band III convertor.

probably a result of the bigger tubes which have made the adjustment of back controls not merely difficult, but quite impossible without a mirror. There is, too, a definite improvement in the standard of workmanship in receivers. Much better mechanical design is evident and, in the main, accessibility has been greatly improved.

One result of the widespread use of larger c.r. tubes has been a decrease in the number of projection sets of the domestic kind. Ferranti retain the system in the 20T4D for a picture of 20-in diagonal and use a push-pull video stage, the signal being applied to both cathode and grid of the c.r. tube. This tube is, as usual, a 2½-in type operating at 25 kV and is used with a Schmidt optical system.

In the main, however, projection is now used for pictures of some 5-ft diagonal, and for this size of picture front projection is general. White-Ibbotson and Nera both demonstrated receivers in this category. Electrically these sets differ little from the more ordinary types. The use of projection does not affect the signal requirements prior to the video stage. Time-base circuits, too, are not much different; they are often basically simpler since less scan power is needed and flyback e.h.t. is not employed. They are, however, complicated in another way by the provision of safety circuits arranged to black out the tube in the event of a timebase failure. E.h.t. comes from an a.f. oscillator and voltage-tripler rectifier.

A newcomer in this field is H.M.V. with a 5-ft front projection picture provided by a 3¼-in tube operating at 28 kV. A feature is that focusing can be achieved without accurately placing the equipment relative to the screen. The screen is aluminium and curved on its longer dimension.


TELEVISION AERIALS AND ACCESSORIES

THE impression was given that most aerial makers have shrewd ideas as to what will be required for alternative programme reception, but are reluctant to come out into the open yet awhile. Apart from one or two firms who had dual-band aerials, most other makers were content to show various types of single-band arrays for Bands I, II and III. Band-II aerials are not included here, but not one single example was found of a combined television and f.m. aerial system.

Some useful purpose was served by showing separate aerials for both television bands, as some viewers will undoubtedly elect to use a separate aerial for Band III when the time arrives rather than disturb the existing one. It was reassuring to those who may have been in some doubt as to the wisdom of mounting the two aerials on one pole as the much shorter elements of the Band III types makes for a smaller and lighter aerial, even if one or more elements are wanted to give a comparable performance.

In general the 200-Mc/s models shown had more elements than the average Band I aerial and this is in keeping with most predictions, which assert that where a 2-element aerial now suffices for Band I a 3- or even 4-element system will most likely be wanted for the new service.

Even when separate aerials are used there is no necessity to run separate feeders to the receiver and a common feeder for at least the greater part of the

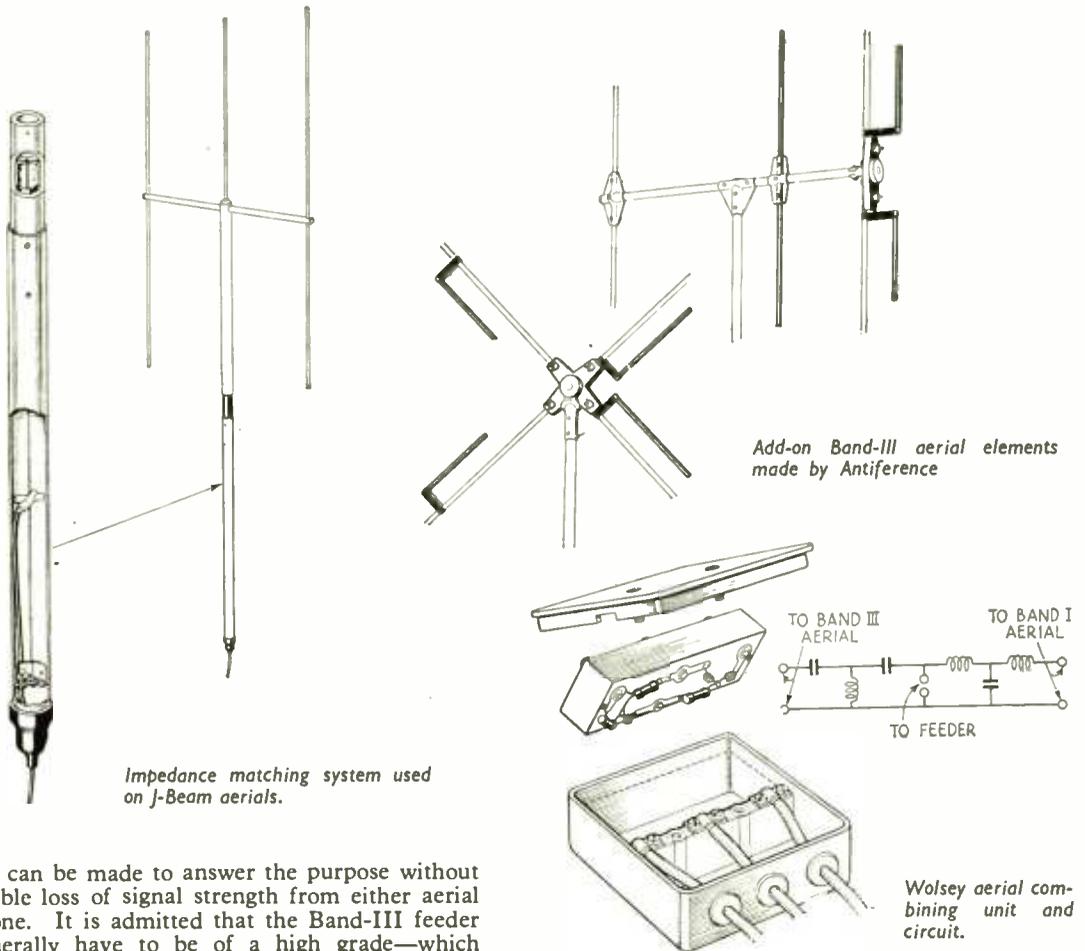

Impedance matching system used on J-Beam aerials.

Add-on Band-III aerial elements made by Antiference

Wolsey aerial combining unit and circuit.

distance can be made to answer the purpose without appreciable loss of signal strength from either aerial used alone. It is admitted that the Band-III feeder will generally have to be of a high grade—which is only another way of saying lower loss—than suffices for Band I, apart from the fringe areas. The Band III fringe area boundary is expected to be much closer to the station than the Band I, hence the general need for higher-gain aerials for this band.

Combining two aerials to work into a single feeder is effected by a small unit introduced by Wolsey, and described as an aerial cross-over unit. It consists of two filters assembled back-to-back and terminating at the common junction in a single coaxial cable outlet to the receiver. The open ends of each filter join respectively to the two aerials by coaxial cable. The unit can be mounted outdoors on the mast supporting the two aerials, in the loft when relatively short runs of cable to each aerial are practicable, or anywhere else that is convenient. No switching is required at the aerial end of the common feeder, as the filters automatically separate the aerials electrically and quite negligible loss is introduced in the process. For example, the insertion loss is never greater than 1 db on Band I and 0.5 db on Band III; this is for a maximum signal rejection of 40 db in both cases.


Some dual aerial systems were, of course, shown. Telerection had two of the models exhibited last year, but which lose nothing in interest by their second appearance, especially as alternative television is now nearer realization. A rather novel approach to the problem is the add-on Band-III aerial elements devised by Antiference. These are short quarter-wave, or thereabouts, rods with right-angled brackets and clips for securing to the elements of existing

Antiference "H" and "X" Band I aerials. It is proposed eventually to embody the novel capacitance method of coupling used on all Antiference aerials for these new attachments.

Antiference say that the add-on elements are not noticeably detrimental to the behaviour of the aerial on Band I and, curiously enough, actually show a gain of some 3 db over a normal 2-element aerial on Band III. Apparently the surplus structure of the larger aerial is reinforcing the signal pick-up on Band III and an increase in gain such as this is just what will be required in many cases to give a comparable performance on both bands.

A rather novel type of aerial was a skeleton slot shown by J-Beam Aerials for use on Band III. Little information is vouchsafed regarding its method of operation, but it is said that with a single reflector, at right angles to the orientation of the slot, a gain of 7 db over a conventional dipole is obtained. It behaves quite differently to a dipole, as was explained in a recent article in *Wireless World*, and shows horizontal polarization characteristics when erected with the slot vertical and *vice versa*.

Another unusual type of television aerial is formed by bending a conventional half-wave dipole into a square with insulators in the two opposite vertical sides (for vertical polarization). A low-impedance feeder is joined across one insulator and the aerial has a heart-shaped response (in the horizontal plane) rather like an "H," "K" or "X."

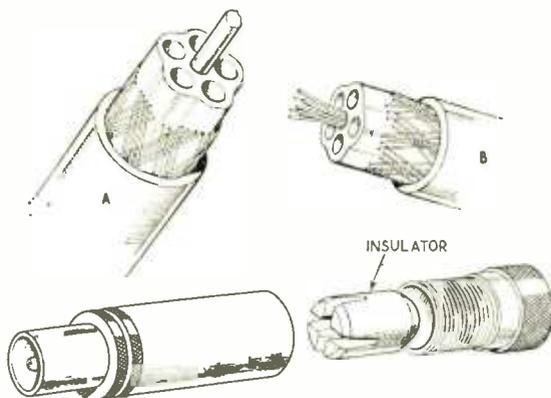


Aerialite semi-air-spaced coaxial cables (enlarged 4-5 times.) A is the "Super" and B the "Standard." Easy-fix plug also shown.

Whether or not the promise of Band III television and Band II f.m. broadcasting has influenced the design of coaxial cables is difficult to say, but the fact remains that Aerialite have evolved a new method of extruding the polyethylene insulation used in small-size v.h.f. aerial cables which provides five longitudinal air-channels and thus reduces the dielectric loss. The interesting feature of these new Aeraxial cables, as they are called, is that the improved characteristics are obtained at no increase in price. There are two types available, a Standard Aeraxial of 0.2 in (approx.) outside diameter and with a flexible centre conductor of 7/0.0076 in copper wires. Its loss per 100 ft is 2.1 db at 45 Mc/s rising to 4.5 db at 200 Mc/s. The Super Aeraxial measures 0.3 in (approx.) overall, has a 0.048-in solid copper centre conductor and the losses are 1.2 db at 45 Mc/s and 2.6 db only at 200 Mc/s. Both are nominally 70 ohms.

Another new aerial accessory is a coaxial plug with simplified cable fixing. It has three main parts only, a body, an insulator and a clamping nut. The centre conductor of the cable has to be soldered in, but heat-resisting insulation is used at this point; the main insulation is polyethylene.

The majority of television aerials—slots now excepted—have the feeder joined in the centre of the main dipole, where the impedance is nominally 70 ohms. However, the addition of parasitic elements and close spacing cause wide changes in the aerial impedance at this point and it can be as low as 10 or 12 ohms. Impedance matching between aerial and feeder is almost always used in television aerials

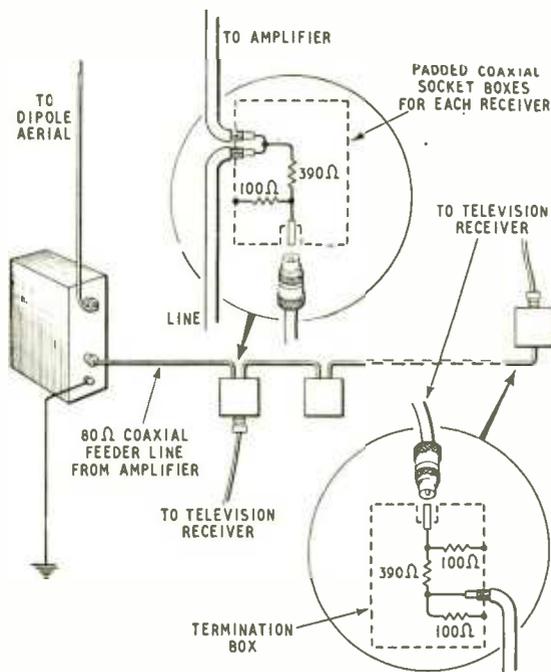

Belling-Lee distribution system for 10 television sets.

although this may not be visible, as in the case of Belling-Lee and some other makes where the matching section is embodied in the cross-arm, or other convenient part. In other makes it is visible, the "delta" match of Telerection, for example, and now in the new Wolsey "Deltex" aerial. Here the "delta" matching unit is neatly tucked away in one of the angles of the "X."

The only known exception to the more general centre-feed method of feeder connection is the end-feed adopted by J-Beam Aerials. It enables the aerial dipole to be made an extension of the mast by interposing an insulator at the base of the aerial, and the feeder (70-ohm coaxial) is run up inside the mast and joins to a quarter-wave matching transformer embodied in the top part. The whole is totally enclosed and weatherproof. It can be used with both vertical and horizontal types of aerial.

The distribution of television from a communal aerial has become quite an important factor to-day. This has for long formed one of the many activities of Belling-Lee, who this year have introduced a new distribution amplifier for feeding up to 10 television receivers. It has an overall gain of 20 db and, in conjunction with special feeder outlet boxes supplies each set with an adequate signal and without interaction between the various sets. It is entirely self-contained and operates from the normal a.c. mains. It is not a mast-head amplifier, although Belling-Lee make one of this kind. The drawing reproduced here shows a typical distribution system with the types of junction and termination boxes employed at each receiver point.

The initial adjustment, and subsequent maintenance of tunable all-band television sets, naturally requires the right kind of signal generator and so it was not unexpected to find new models covering the two television bands; also adaptors to extend the usefulness of existing test sets to Band III.



Cossor Model 1322 dual-band Telecheck.

The extension unit introduced by Cossor, for use with their Telecheck television alignment and pattern generator, takes the place of the internal variable oscillator, and the new unit's output, when mixed with the fixed oscillator in the Telecheck, gives an r.f. output in the range 155 to 225 Mc/s. It can be permanently attached to the Telecheck and provides on Band III all the facilities for alignment, bandwidth and linearity checking given by the main unit on Band I. Another new Cossor television test set is the Telecheck and Marker Generator. This is an elaboration of the ordinary Telecheck and provides carrier frequencies over the bands 10 to 70 and 160 to 220 Mc/s with a wobulator for frequency-modulating the r.f. from 1 to 10 Mc/s and a marker oscillator covering 10 to 22 Mc/s with harmonics up to 220 Mc/s. This is for applying marker pips on the displayed response curve. A separate oscilloscope is used with this set. There is also a built-in crystal-controlled oscillator for accurate calibration of the marker oscillator.

Several firms were showing new dual-band television pattern generators; one, the Radar Model 405, made by Waveforms, provides a pattern of either vertical or horizontal bars, or a combination of both, and one pattern is stepped and graded. In all, five different patterns are provided as well as 30 per cent sine-wave amplitude modulation for adjusting the sound receiver and rejectors. The coverage is 40 to 70 and 180 to 210 Mc/s.

Dual-band television test sets providing checkered patterns are made also by Telequipment and Channel Electronic Industries. The former's set is an extension of the single-range model available hitherto. It covers 40 to 70 and 180 to 210 Mc/s in two ranges, and in addition to providing a variety of patterns for linearity adjustment, enables the receiver's response to be checked in steps of 1.5, 2, 2.5 and 3.0 Mc/s. Internal sine-wave modulation to a depth of 80 per cent is available for sound receiver and rejector adjustments.

SOUND RECEIVERS AND REPRODUCERS


THE announcement of the building programme for the B.B.C.'s new v.h.f. (f.m.) transmitters came at a time when most manufacturers' plans for the new season's sets were well advanced. Consequently the impact of the "alternative service" on the pattern of sound broadcasting has not been as disturbing as some people predicted. True, there were not many set manufacturers who were not showing a cabinet with a dial or switch marked "F.M.", but fewer than a dozen were forthcoming with any information about the interior workings. In general, the structure of the sound receiver market remains much as it was last year, with table models at about £20-£25 as the backbone and self-contained transportables and the moderately priced radio-gramophones in a numerically strong position.

Problems arising from the addition of a v.h.f. range and a frequency discriminator to a receiver, designed to receive also the usual short, medium and long waves, have been reviewed in last month's issue.* Judging by the circuits which have so far passed the


drawing-board stage, the ratio detector seems to be the most favoured type of discriminator. This circuit, when properly balanced, shows a high inherent rejection of amplitude modulation, and no separate limiter stage is required. At the intermediate frequency (of the order of 10 Mc/s) used after the v.h.f. mixer, two stages are necessary, and the heptode section of the medium- and long-wave mixer is pressed into service for the additional i.f. stage. The coupling transformers are connected in series and in most cases no switching is provided for the windings not in use. Most firms are using a double triode as a self-oscillating mixer and r.f. stage. The earthed-grid connection is favoured for the amplifier, and there is plenty of variety in "trick" methods of neutralizing, which are far more complex than the circuit diagram would imply. Stray capacitances are important, and to reduce those which are not wanted, new switch designs are being evolved. A typical example is the strip switch made by Plessey. This is cam operated and can be "cut to length" to bring the contacts close to the relevant parts of the circuit.

An exception to the general run of f.m. circuits is to be found in the Dynatron Type FM1 tuner unit. This has been designed to deliver about half a volt to the pickup terminals of the firm's radio-gramophones, or any high-quality amplifier, and a power pack is available in cases where the main amplifier cannot supply the required l.t. and h.t. There is much to be said for a separate f.m. unit, since the designer is free to choose the best valves and circuit for the purpose. Switched pre-tuned circuits for the Home, Light and Third programmes have been favoured in preference to continuously variable tuning, which can produce unpleasant sounds during the tuning process. Particular attention has been given to frequency stability. In addition to normal precautions against thermal drift, a separate reactance valve is provided to give automatic frequency control in conjunction with a Foster-Seeley detector.

Receivers for normal amplitude-modulated stations show few deviations from long-established practice, so

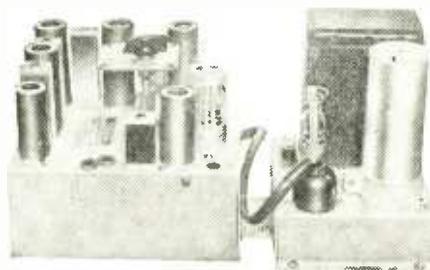

Dynatron FM1 tuner and power supply unit.

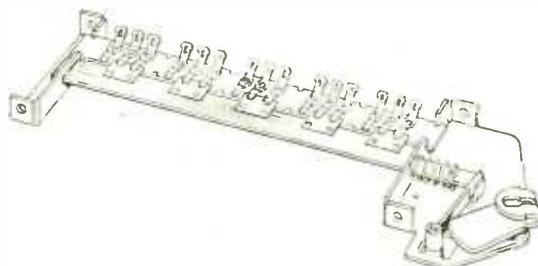

Slide switch designed by Plessey for use in a.m. f.m. receivers.

* "Combination F.M./A.M. Receivers" by G. H. Russell. *Wireless World*, September, 1954, pp. 431-436.


far as their circuits are concerned. There is a tendency to fit more internal aerials for high signal-strength areas, and ferrite rod aerials are more common than last year. At least one receiver, the Champion Model 822 battery portable, makes use of a "printed" circuit to give compactness and light weight. Most innovations are of an exterior rather than an interior nature, and the current vogue for clock tuning dials owes its origin to the combination of a real electric clock with alarm and switch accessories with a broadcast receiver as in the Ekco "Radiotime," the Philips Model 342A and the H.M.V. Model 1127.

Original ideas in cabinet design are still forthcoming, and we select for special commendation the glass-top solution to the problem of scratches and stains in the Trix "Recital" console record player, and the McMichael medium- and long-wave sound receiver (Model TT4) built into a trolley which can be used as a pedestal for a table-model television receiver.

In the field of sound recording and reproduction the event which has provoked the widest comment at the Show is the announcement that H.M.V. are issuing tape records as well as their long-playing and standard disc records. The low background noise, constant linear speed and long duration of these tapes will make a special appeal to high-quality enthusiasts. The tapes can be played on any high-grade dual track instrument, provided it conforms to the British Standard recommendation of tape motion left to right, using the top track with the coating away from the observer. The tape speed is $7\frac{1}{2}$ in/sec and the makers claim that frequencies up to 15 kc/s are recorded at this speed. A console reproducer (Model 3030) making use of a modified "Emicorda" deck has been designed by the Gramophone Company for their new tapes.

A high-quality tape reproducer (Model TR1) has been added to the "Reflectograph" range of instruments made by Rudman, Darlington. The interesting feature of this instrument is its variable speed control (3.75 to 8.5 in/sec) which enables exact musical pitch to be achieved. A response level within ± 4 db from 50 c/s to 14 kc/s is claimed. The "Reflectograph" is used also for scientific and industrial data recording using pulse modulation methods.



The "Ferrotutor" introduced at the Show by the British Ferrograph Recorder Company is designed primarily for language teaching. Suitably spaced phrases are recorded by the teacher on one track and are heard on headphones by the pupil, who replies or repeats the phrases and records them on the second track. The second track can be erased and the exercise repeated. Another application of this instrument is in the preparation of illustrated lectures. A com-

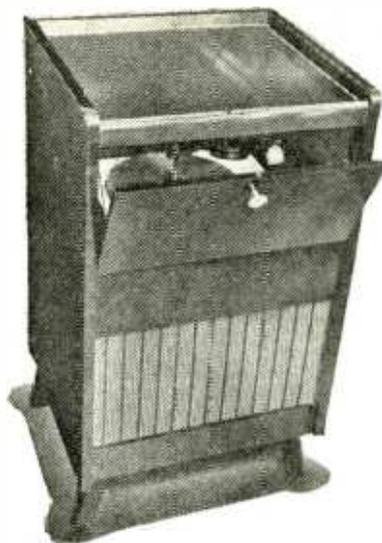


Trix "Recital" record player.




McMichael trolley receiver (Model TT4).

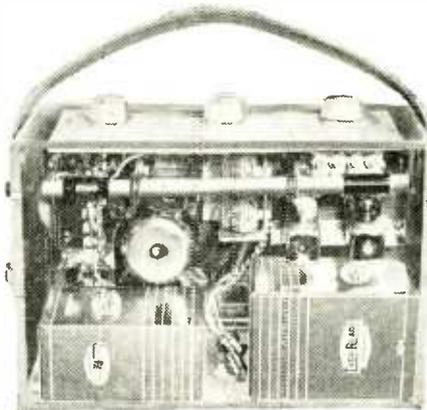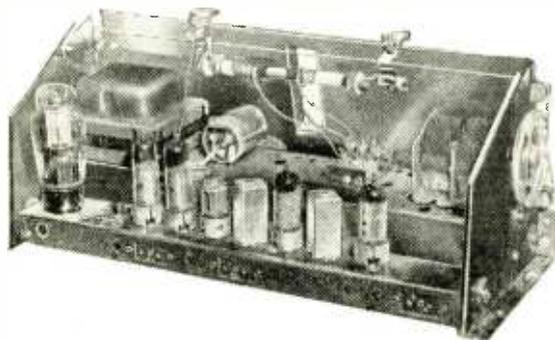

Ferrite rod aerials are used in the R.G.D. "One-Ten" receiver and the Roberts portable.

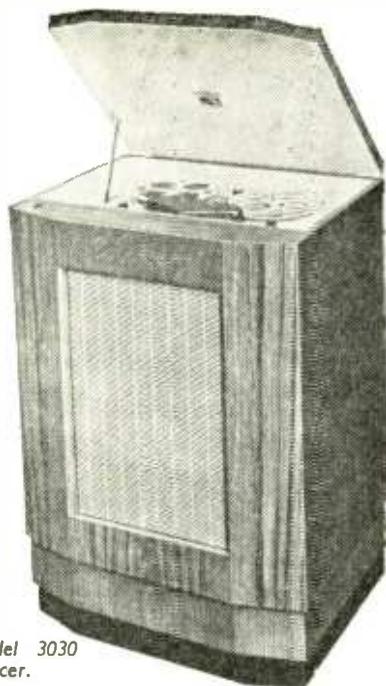

H.M.V. Model 3030
tape reproducer.

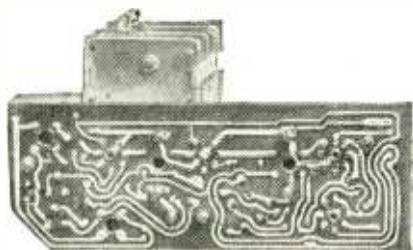

Printed circuit technique used in the Champion Model 822.



Hartley "Tape Riter" with cassette loading.

mentary is recorded on one track, while pulses on the other track are used to operate an automatic film-strip projector and display a sequence of pictures at appropriate intervals.

Tape threading is not a very difficult operation, but it can be time-wasting in an office, and in the "Tape Riter" dictating machine made by Hartley Electromotives it is interesting to find that cassette loading of both supply and take-up spools has been adopted. Other notable features of this machine are the fingertip controls centralized on the microphone barrel, and the fact that the microphone itself can be used as a miniature loudspeaker for low-level playback when normal reproduction from the built-in loudspeaker would be obtrusive.


The weight of magnetic recorders shows signs of a steady downward trend, and some are within reach of meriting the term portable. The "Playtime" recorder made by Tape Recorders (Electronics), Ltd., weighs only 16lb and measures 12½in × 10in × 4½in. It is driven by a single motor with belt drive for the capstan flywheel and take-up spool, the latter through a cork friction clutch. Fast re-wind is effected by engaging a friction wheel with the back of the driving belt. All electrical and mechanical functions are combined in a single "gear lever" control. There is no loudspeaker and power amplifier, and it is intended that the output should be fed to the pickup terminals of a receiving set or gramophone amplifier.

CATHODE-RAY TUBES AND VALVES

IN our Show report last year we predicted a trend towards even larger cathode-ray tubes than the popular 17-in rectangular type and hinted that there would soon be a number of 21-in tubes on the market. This has now been borne out by the evidence of this year's exhibition, where some half a dozen manufacturers were showing new tubes of this size. In alphabetical order they were the Brimar C21HM, the Ediswan CRM211 and CRM212, the English Electric T909, the Ferranti TR21/21, a G.E.C. development model and the Mullard MW33-21. All these are rectangular glass tubes except the English Electric T909, which is a circular metal-cone type like an earlier 21-in tube, the E.M.I. type 4/13.

The metal-cone types are necessarily circular because of the method of manufacture, and consequently they take up more space in the cabinet than the rectangular types for a given size of picture. On the other hand they have the advantage of being only about 60% of the weight of equivalent glass tubes. Moreover, the construction of the English Electric metal tubes makes possible the reconditioning service which this firm has been running for some time.

As a rule the new 21-in tubes have deflection angles of about 70° and are therefore known as "wide-angle" tubes. It seems, however, that this will soon become an archaic expression, as "miniature" valves is already becoming, for there is a definite trend towards even wider deflection angles of about 90°. It was started last year by G.E.C. with a 12-in tube (again on show) and was continued this year by two of the new 21-in tubes, the Ediswan CRM212 and the Ferranti TR21/21. On these large tubes there is a very great

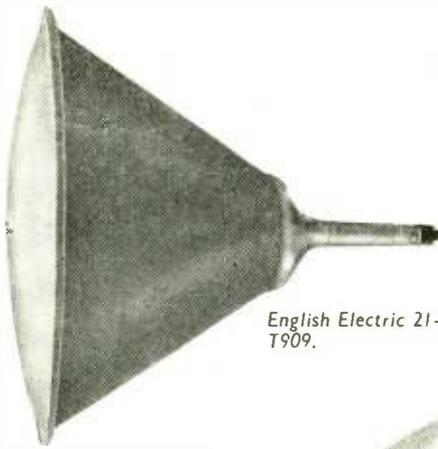

English Electric 21-in metal tube T909.




E.M.I. 3 1/2-in projection tube, type 3 17.



Ferranti 21-in rectangular tube TR21, 21



Mullard QV06-20 beam tetrode.

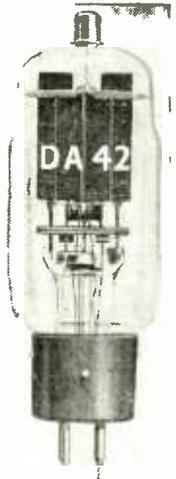

Osram DA42 triode power valve.

need for the new "wider angle" in order to reduce their considerable length (normally close on 2ft). The increase from 70° to 90° actually gives a saving in length of about 3-4 inches.

The operating characteristics of the 21-in tube are fairly well typified by the Brimar C21HM. With a final anode voltage of 16 kV and 300 V on the first anode, the modulating voltage required for beam current modulation of up to 150 μA is 30 volts peak-to-peak. The grid voltage limits for beam cut-off are -33 to -77 volts.

It is clear, however, that manufacturers are not going to stop at 21-in tubes. Last year Cathodeon were showing a 27-in tube and now Ediswan have produced one of this size, the CRM271. It is a rectangular type with a tinted glass face plate and gives a picture size of 24in x 18 1/2in. Here again the firm have used the new 90° deflection angle and the length of the tube is just over 23 inches. The heater requires 12.6 V, 0.3 A and the final anode voltage is 16 kV.

With such large tubes as these the picture size becomes comparable with that of projection television. Moreover the directly-viewed pictures are generally a good deal brighter. Perhaps in recognition of this fact, a new projection tube has made its appearance giving a much brighter picture than is normally obtainable. This is the E.M.I. Type 3/17 and the greater light output is obtained by increasing the area of the screen and raising the e.h.t. voltage to about 28 kV. The screen diameter is actually 3 1/2in, compared with the 2 1/2in of the existing projection tubes. A triode gun is used and the screen is aluminized. The maximum beam current is about 300 μA and the heater rating is 4-V, 1 A.

Another interesting development is the use of electrostatic focusing in cathode-ray tubes. It was first

announced by Brimar last year and now they have another tube incorporating it, the C17JM. This is a 17-in rectangular tube with 70° (diagonal) deflection angle and a final anode voltage of 14 kV. The focusing action is achieved by an extra cylindrical electrode which is interposed at a gap in the long final anode cylinder. The control voltage applied to this is normally at about cathode potential but can be varied anywhere between -64 V and +350 V to obtain correct focusing. The first anode voltage is 300 V.

Whether electrostatic focusing will become popular or not is open to question. Although it avoids the need for external focusing arrangements it also makes the tube electrode structure more difficult to align in manufacture and consequently more expensive. There are signs, however, that other firms besides Brimar are actively interested and before long there may be more tubes of this type on the market.

Since the first spate of valves for Band III television tuners at the beginning of the year there have been no new types in this category. Brimar, Ediswan, Mullard and Osram all have their versions of the well-known cascode r.f. amplifier and triode-pentode frequency changer combination.

Most manufacturers, too, are building up ranges of valves for a.m./f.m. receivers, partly from existing types and partly by the introduction of new types. Among the latest of the new types are the Osram X719 triode-heptode frequency changer and the W719 variable-mu r.f. pentode, which has the high slope of 6 mA/V. Both valves are on the B9A base and have 6.3 V, 0.3 A heaters. In the Mullard range are the v.h.f. double triode ECC85, a triple-diode-triode EABC80 for use in ratio detectors, a versatile triode heptode ECH81 and a variable-mu r.f. pentode EF85.

Among new audio valves is the Osram N709 output pentode which is used in the output stage of the "912" high quality amplifier. It has an anode dissipation of 12 W and a maximum output of 17 W is possible from a push-pull pair. Another new power valve just introduced by this firm is the DA42 triode, which is intended for class B operation and will give an audio output of 175 W per pair.

A power valve with a very wide range of possible applications is the Mullard QV06-20 beam tetrode which has an anode dissipation of 20 watts. It will

operate at full ratings at any frequency up to 60 Mc/s and at reduced ratings up to 175 Mc/s. A single QV06-20 in class C operation will deliver 69 watts at 60 Mc/s, while at audio frequencies a pair in push-pull, class AB₁, will give 120 watts. The slope is 7 mA/V.

Sub-miniature and special-quality valves are used more in military equipment than in domestic apparatus, but they are, none the less, now on the market for those who want them. The latest range of special-quality valves comes from Mullard, who have equivalent types to their well-known EB91, ECC91, EC91 and EF95. This firm have also produced a range of sub-miniatures which includes some rather interesting developments. The directly-heated triode DC70, for example, which is capable of operating efficiently at 500 Mc/s, giving an output of 450 mW as an oscillator. For the lower frequency of 200 Mc/s a sub-miniature battery pentode, DL73, is available, having an output of over 1 watt as a class C amplifier. Indirectly-heated sub-miniatures are also included with performances at least as good as comparable miniature types. Type EF72, for instance, has characteristics similar to the EF95 (6AK5) low-noise pentode, but has the lower heater consumption of 6.3 V, 0.15 A.

Many of these sub-miniatures are of the 10-mm diameter round type, the length ranging from about one to two inches. A group of smaller valves, the flat sub-miniatures, has also been developed. These are 1.25-V filament types on the B5A base, and are similar in size to hearing-aid valves. Some of these are provided with metallized bulbs for screening purposes, the metallizing being connected to the negative filament lead. The flat sub-miniatures have bulbs about 8.5mm wide and 6mm deep, the bulb length being of the order of 1½ in. A typical example is the DF62, an r.f. amplifying pentode for use in receiver input stages at frequencies up to 200 Mc/s. Flat versions of some of the 10-mm receiving valves have also been developed. They include a straight r.f. pentode, a variable- μ r.f. pentode, and a low power audio output valve, all with 25-mA filaments.

An even smaller valve, a 5-mm round sub-miniature on the B5B base, is the EA76 indirectly-heated diode. With a length of just over an inch, it is comparable in size with a germanium diode. Other valves in this sub-miniature range are a high-voltage rectifier, a tetrode thyatron, a voltage stabilizer, two low-consumption electrometer valves, and several low-power u.h.f. amplifier and oscillator valves.


OTHER EXHIBITS

DEVELOPMENTS in test gear are generally a reflection of what is going on in the rest of the radio world and this year, of course, the theme was Band II f.m. and Band III television. A new signal generator which covered both of these was shown by Avo. It has a frequency range of 5 Mc/s to 225 Mc/s which is divided into five bands. Four of these give an output which can be amplitude modulated by a sine wave or square wave of 1,000 c/s, while the fifth provides signals in the band 80-100 Mc/s which can be frequency-modulated by a 1,000-c/s sine wave. The carrier deviation on the f.m. band is ± 40 kc/s and the output of the instrument is 100 mV.

The new signal generator shown by Taylor, model

67A, also covers the Band III television frequencies. The frequency range is 100 kc/s to 120 Mc/s on fundamentals and this is divided into six bands, while on the top band the use of second harmonics brings the coverage up to 240 Mc/s. Modulation of approximately 30 per cent is provided by a 400-c/s audio oscillator, and a ladder type attenuator gives a total attenuation of 120 db. It is claimed that careful r.f. screening has kept the direct radiation down to the level of minimum output.

Interest in Band III techniques has rather tended to over-shadow developments in the less spectacular field of closed-circuit industrial television. Here the trend has been towards lighter and more compact equipment. Both Pye and Marconi were showing new models with miniature cameras measuring only about 5in x 5in x 11in and weighing only a few pounds. They both use small photo-conductive pick-up tubes of about 1-in diameter and the scanning standards can be either 525 lines or 625 lines. The video signal is used to modulate an r.f. carrier which can be tuned to any frequency between about 52 and 84 Mc/s and gives an output of 0.1 V. Pye also have a model designed for the British 405-line standards with an r.f. output tunable over the B.B.C. channels. In both makes of equipment there are three units altogether, camera, control unit and monitor, the transmitting circuitry being housed partly in the camera and partly in the control unit. In the Marconi equipment,

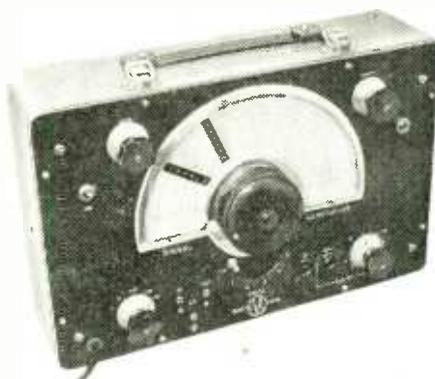

Avo signal generator for Band III and f.m.



Marconi miniature camera for industrial television.

for example, the camera contains the video amplifier, the sync and vision waveform mixer, a sync clipper and the r.f. oscillator, while the control unit houses the deflection circuits and sync and blanking pulse generators.

Another interesting example of miniaturization in television was an experimental line time-base oscillator using an OC51 point transistor. It was shown on the Television Society stand by C. H. Banthorpe and in size it only occupies a 2-inch cube. The time-base functions on the negative resistance characteristic of the point transistor and is intended to be used in a flywheel sync circuit. Control of frequency is effected by varying the h.t. supply.

Transistor circuits generally are characterized not only by their small physical size but by their low operating voltages. Component manufacturers are now realizing that the low voltage feature can be utilized to achieve an even greater degree of miniaturization in the parts surrounding the transistor. As an example, T.C.C. were showing some miniature capacitors for transistor circuits with exceptionally large capacitances for their size. Measuring only $\frac{1}{2}$ in long by $\frac{1}{8}$ in diameter they gave $2\mu\text{F}$ at 8-V working, $4\mu\text{F}$ at 4-V and $6\mu\text{F}$ at 1.5-V. This firm has recently branched out into the printed circuit business and they were showing an experimental three-valve sound receiver based on this technique. It was interesting to compare the printed circuit with the wired prototype which was also on show (see picture).

Printed circuits are, of course, only one of the modern methods of "prefabricated" construction now being developed. Another method represented at the Show was the so-called "unit construction" with standard plug-in sub-assemblies which can easily be replaced when they go wrong. This was to be seen in a new v.h.f. pack-set for radiotelephony shown on the Army stand (see picture). The set has six channels in which to work and each channel is controlled by an overtone crystal. The carrier wave is frequency modulated, and here a saving in valves is achieved by the use of a "ferric reactor," a small transformer-like device with one winding energized by the a.f. output and the other shunted across part of the r.f. tuned circuit. Altogether the set weighs only $9\frac{1}{2}$ lb including batteries.

Miniaturization, it seems, is a process that is not going to stop at any particular point. It is no exaggeration to say that microscopes will soon be needed in large quantities in the radio industry for looking at components. Magnifying glasses are already being used. A case in point at the Show was an array of tiny magnetic cores, each having a diameter of less

than one tenth of an inch. Composed of a new material called Ferroxcube D1, they formed the basic elements of a magnetic matrix storage system for electronic digital computers. It was built by Mullard's and is similar in principle to the R.C.A. "Myriabit" storage matrix which has already been described in *Wireless World*.^{*} The device consists of a network of 32 horizontal wires and 32 vertical wires, and at each intersection the wires pass through one of the miniature cores. There are 1,024 intersections and cores altogether, so the device is capable of storing that number of binary digits.



To feed information into any one core, a current pulse of half the amplitude needed to saturate the ring is passed into each of the two wires which intersect at that point. At this one core the total current is sufficient to saturate the Ferroxcube, but any other core on each wire receives only half the saturation current and because of the rectangular hysteresis loop of the material its magnetic state is sensibly unchanged. In the magnetized core the state of positive remanence represents the binary digit "1" while the state of negative remanence signifies the presence of the digit "0."

To "read out" the information stored in any one core a negative current pulse is applied to each of the wires intersecting at that point. If the core is in a state of negative remanence, negligible change of state can occur. If, however, the ring is in a state of positive remanence (i.e., it carries the digit "1"), the arrival of two simultaneous negative pulses is sufficient to switch it suddenly from positive remanence to negative remanence. When this happens a large and sudden change of flux occurs in the core. This change of flux is sufficient to induce a voltage pulse in a third wire which is threaded through all the cores in the matrix. This is the "read out" wire, and it plays no other part in the operation of the matrix.


In the Mullard matrix, as distinct from the R.C.A., a fourth wire is incorporated. This makes possible a common addressing system when a number of the matrices are used as a parallel operated store.

Another interesting computing device using a network of cores and threaded wires—but for a different purpose—was the noughts-and-crosses machine shown by the National Physical Laboratory. This


^{*} "Storage Systems" *Wireless World*, August, 1954

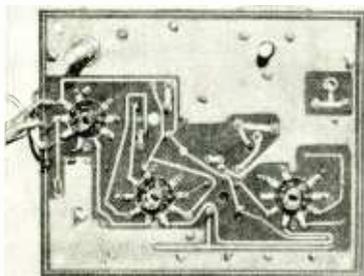

Printed circuit by T.C.C. (left) with wired prototype (right).

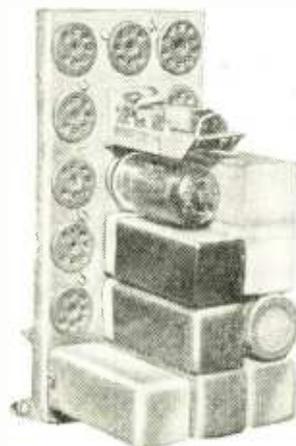

Unit construction in Army pack-set.

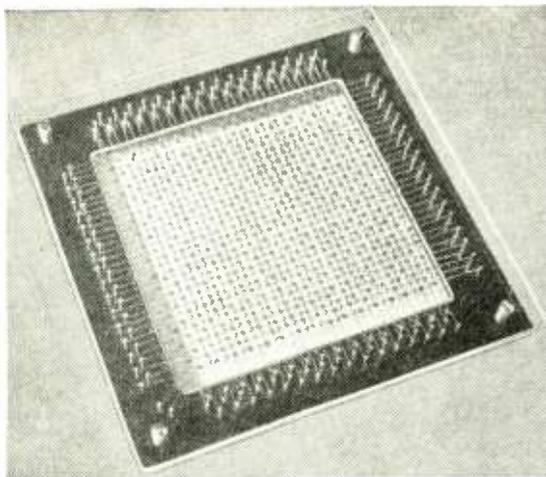

Mullard magnetic matrix "memory."

computer, designed by D. W. Davies, plays a game of noughts-and-crosses with a human opponent and never loses. The human player makes a move by pressing a button corresponding to the chosen square on a display board and a lighted X appears in this square. The machine then automatically makes a reply move and causes a 0 to appear in another square.

In order to do this, the machine has to "try" the situation on the display board against a great number of possible situations (for which the appropriate reply moves have already been worked out) and this is done by the so-called "coil maze." For each of the nine squares on the board there are three Ferroxcube cores, one for X, another for 0 and the third for Blank. All the 27 cores have energizing windings which are fed from a 20-kc/s oscillator, but in each square one of the three is shorted out, either X or 0 or Blank, according to the situation there. Thus there is a pattern of non-energized cores corresponding to the pattern of Xs, 0s and Blanks on the board.

To detect this pattern, wires are threaded through the cores in various different configurations (157 of them altogether) and their ends are taken to an electronic null-detector. Thus, when a particular wire has no voltage induced in it, clearly it must be threaded through a pattern of cores which are all shorted out and non-energized—and this pattern represents the situation on the display board. All the other wires, of course, have voltages induced in them. The null-detector is arranged to work sequentially through the whole set of wires by means of a uni-selector, and when it comes to a non-energized wire it gives an output signal.

The noughts-and-crosses machine was one of the special Electronic Exhibits arranged at the Show. Another interesting exhibit in this section, shown by the International Radio-Controlled Models Society, was a display of equipment representing the various methods of radio control. One of the more elaborate systems worked on the well-known principle of transmitting various audio tones for the different control functions, but the receiving equipment was somewhat unusual. Instead of using ordinary filters or tuned circuits to sort out the received audio frequencies it had regenerative filters using valve circuits with positive feedback. Each filter is, in fact, an oscillator

tuned to the required frequency but not quite in a state of oscillation. A very sharp response is obtained when the appropriate frequency is received, and the system has the advantage that it does not attenuate the a.f. signal in the same way as a conventional filter.

The complete receiving equipment comprises a super-regenerative tuned-line receiver working on 465 Mc/s, two stages of audio amplification (one with negative feedback), a six-channel filter of the type described and six trigger circuits which are controlled by the outputs of the filter. The a.f. range covered by the six filters is roughly 3.8-4.2 kc/s.

Radio Laboratory Handbook

"EXPERIMENTING is a good deal less light-hearted than it used to be," says M. G. Scroggie, somewhat wistfully, in his preface to the sixth edition of this well-known book. He points out how things have changed since 1938, when the first edition came out, but hopes that the new edition which has been almost completely re-written to keep in step with modern developments, has not become so grave as to disappoint those readers who liked the original style.

A glance through the pages shows that it has not. The book has been greatly enlarged and presented in a new format but still retains its eminent readability. In fact, it is likely to be useful to workers in other fields besides radio where electronic techniques are used, for it does not assume a great knowledge of radio and particular attention is given to the general principles of experimentation and interpretation of results.

After describing the layout and furnishing of an up-to-date laboratory, the book goes on to fundamental principles of measurement; sources of power and signals; indicating instruments; standards; bridges; choice and care of equipment; measuring circuit parameters, signals and equipment characteristics; a chapter on v.h.f.; then "dealing with results." Finally a large section of 65 pages is devoted to useful reference material. Altogether there are 436 pages and 299 illustrations.

"Radio Laboratory Handbook," sixth edition, by M. G. Scroggie, B.Sc., M.I.E.E., is available from booksellers, price 25s, or direct from our Publishers at 26s 3d, including postage.

Standardizing L.S. Measurements

IT is now generally acknowledged that, in the present state of the art, objective measurements cannot completely describe the performance of a loudspeaker, but that they are useful in identifying the grosser faults and in determining sensitivity and efficiency.

To ensure that results obtained in different laboratories can be compared, it is essential that they should be made under the same conditions, and in British Standard 2498: 1954 recommendations are made for methods of measuring performance and expressing the results. For instance, a standard baffle 6ft square is recommended, with the aperture 8-in off centre in one direction and 4-in off centre in another at right angles. The microphone distance should be not less than 3ft.

When listening in a small room, the mean spherical response is more relevant than the response at one point on the axis, and a formula is given from which the mean spherical response can be calculated from measurements taken at specified angles from the axis. In plotting curves it is recommended that the length of one decade on a horizontal logarithmic scale of frequency shall equal the height of 40db on a linear vertical scale.

Other measurements discussed in this Standard, which

is obtainable, price 3s from the British Standards Institution, 2 Park Street, London, W.1, are non-linearity distortion, efficiency, power-handling capacity and transient response.


Carbon-element Soldering Iron

A NEW type of soldering iron now coming on to the British market has the unusual feature of a carbon element instead of the more conventional wire element. It is particularly suitable for intermittent soldering operations at the test bench and for use on miniaturized equipment, where a very localized heat is required to avoid burning adjacent components. At rest the iron is switched off. When it is picked up to make a joint, a switch ring is pushed forward by the thumb and this causes a high current to pass through the element which brings the bit to soldering temperature in about 6 seconds. When the iron is put down again the switch, of course, is automatically released and the current is turned off.


Because of the rapid heating of the iron from cold and the smallness of the bit the heat is very localized at the tip. The shaft does not have time to become heated. In fact, there is very little storage of heat in the bit, as in conventional soldering irons, and it merely serves to conduct the heat from the element straight into the work. Moreover, because the element can be brought to a very high temperature (white hot if necessary), the iron, small as it is, can be used for soldering on chassis or other large pieces of metal. Even though the work conducts the heat away very rapidly the transference of heat from the element to the work is even more rapid and the required soldering temperature is soon reached. For the same reason the iron can also be used for silver soldering, where a temperature of about 600-700°C is needed.

The iron is normally fed by a 4-volt step-down transformer from the mains, but it can also be worked directly from a car battery. It will operate at any voltage between 2.5 V and 6.3 V and the effect of different voltages on the heating-up time can be seen in the graph. The current drain at 4 V is approximately 30 A.

Made by Scope Laboratories of Melbourne, Australia,

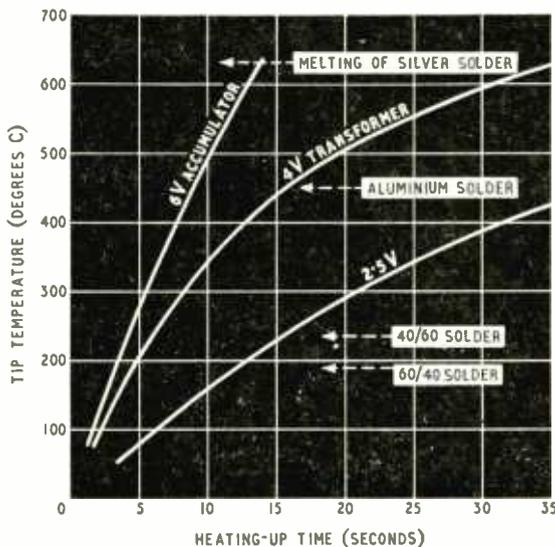

The effect of different voltages on the heating-up time.

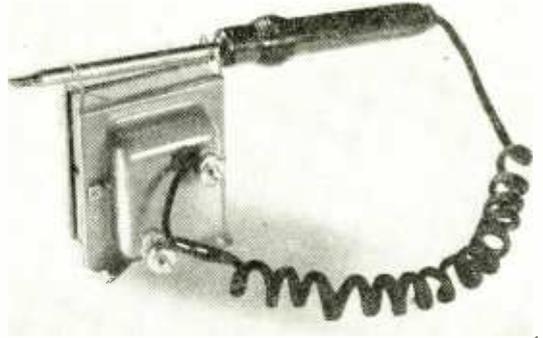

The iron on a rest fixed to the transformer

the iron is now available from the Industrial Equipment Division of Enthoven Solders, Ltd., of 89, Upper Thames Street, London, E.C.4, who are the sole distributors in Britain. The iron itself costs 39s 6d, while the transformer is 31s 6d. Spare carbon elements can be obtained for 1s and new bits for 10½d.

FURTHER EDUCATION

IN our last issue (p. 438) we tabulated details of the courses in radio and allied subjects provided at further education establishments in England. We have now obtained similar details for Scottish and Welsh establishments and these are tabulated below. The letters F, P and E indicate full-time, part-time day, and evening courses, respectively, in telecommunications (col. A), radio theory, electronics, transmission, radar, and marine wireless (B), radio servicing (C) and television servicing (D).

	A	B	C	D
SCOTLAND				
Aberdeenshire				
Aberdeen Central F.E.C.	E			
Aberdeen Trades College (Evening) F.E.C.		E		
Angus				
Dundee T.C.	E	E	P	P
Dumfriesshire				
Dumfries High School F.E.C.		E		
Fifeshire				
Cupar, Bell-Baxter F.E.C.	E			
Lanarkshire				
Burnbank School of Engineering	P E		P E	P E
Coatbridge T.C.		E E E E		
Glasgow, Allan Glen's School			E	E
Glasgow, Royal T.C.		E E		
Midlothian				
Edinburgh Heriot-Watt College	F E	E		
Leith Technical and Commercial Institute			E	E
Leith Nautical College		F		
Renfrewshire				
Greenock Technical School			E	
Greenock, Watt Memorial School		F D		
Paisley T.C.				
Stirlingshire				
Falkirk High School F.E.C.		E E		
Stirling High School F.E.C.	E	E E		
WALES				
Caernarvonshire				
Caernarvon & Anglesey Senior T.I.	P E			
Cardiganshire				
Aberystwyth C.F.E.	P			
Denbighshire				
Colwyn Bay Tech. E.I.		E		
Wrexham Denbighshire T.C.			E	
Glamorganshire				
Cardiff, C.T. & Commerce	P E	E E E E		
Rhondda T.I.		E		
Swansea T.C.		E		
Treforest, Glamorgan T.C.		E		
Monmouthshire				
Newport T.C.	E		E	

F.E.C. Further Education Centre; C.T. College of Technology; T.C. Technical College; T.I. Technical Institute; E.I. Evening Institute; C.F.E. College of Further Education.

New Pickup Arm

NOVEL DESIGN GIVING GREATLY REDUCED TRACKING ERRORS


THE lateral-cut gramophone record is produced by a cutter head moving on guides along a radius of the disc, and ideally a similar mechanism should be used for the reproducing pickup to avoid distortions arising from tracking errors. In practice a true radial mechanism is expensive to produce if it is to have friction losses sufficiently low to enable microgroove records to be traced without groove jumping.

A cranked arm, properly designed, is the conventional method of reducing tracking error, but as the accompanying curve (d) shows, errors of 3 deg to 4 deg are unavoidable with arms of reasonable length (8 inches is the average).

Such errors are very considerably reduced by a new design of arm, produced by Burne-Jones & Company, Ltd., 309-317, Borough High Street, London, S.E.1, in which two arms of different length form a link motion which keeps the head aligned very closely to the ideal tangential setting, irrespective of the radius of the groove. The geometry is difficult to visualize, but the accompanying "ghost" photograph gives some idea what happens as the pickup traverses the disc.

To check the alignment, we have drawn the mechanism on a large scale and measured the errors, which amount to less than \pm one degree on a 12-inch record. In the course of plotting, two interesting facts emerged: (1) the distribution of error is extremely sensitive to the positioning of the tone arm pedestal; (2) provided that the pedestal is repositioned to compensate for change of overall length of the arm, the tracking error is unaffected by changes of length overhang of the stylus in front of the pickup socket. One of the first things we discovered was that the template originally supplied with the arm,

and giving a fixed distance between record centre and pedestal centre, could give correct tracking for only one size of head, and that any deviation from this size would introduce errors which obscured

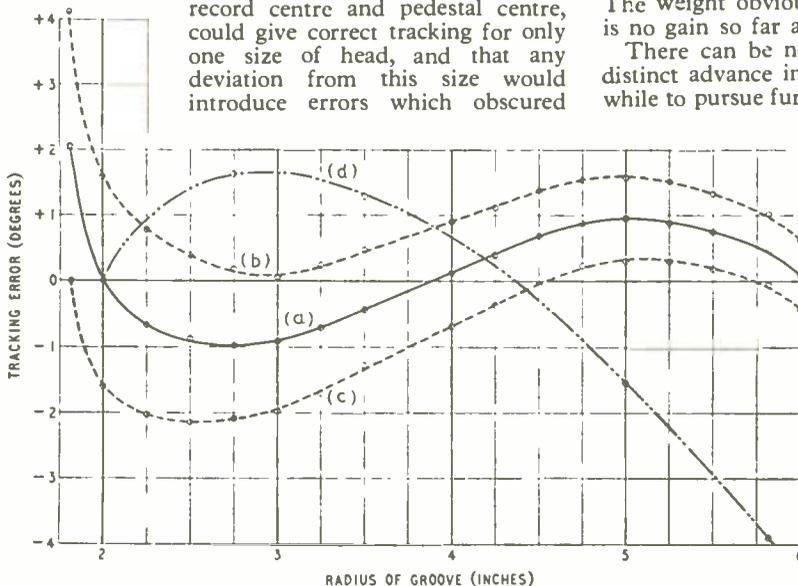

Composite photograph of the BJ arm in three positions.

the inherent excellence of the arm itself. By using a modified centring method the curve (a) was produced and could be repeated for any size of pickup. As an experiment an error of $\pm 3\frac{1}{2}$ millimetres was introduced in the positioning of the pedestal and the effect on the tracking error is shown by curves (b) and (c). We understand that a new template is being issued which will avoid any possibility of error from this cause.

The mechanical construction and workmanship of the arm is in keeping with the tracking accuracy achieved. It has good torsional rigidity and the hardened steel pivots should stand up to continued use without need for adjustment. The counterweight does not move horizontally with the arm and forces due to "swinger" records are consequently reduced. The weight obviously must move vertically, so there is no gain so far as warped discs are concerned.

There can be no doubt that the BJ arm marks a distinct advance in design, which will make it worth while to pursue further the reduction of tracing distortion (as distinct from tracking distortion) by the use of styli of other than spherical shape.

Curves showing angular deviation of virtual radii, produced by the pickup head, from true radii to the point of contact with the record groove, at different distances from the centre of the record. (a) Optimum setting of BJ arm for any pickup; (b) and (c) effect of moving arm bodily 3.5 mm on either side of the best position; (d) error curve of optimum conventional bent arm of same length (8 inches); arm angle 23°, stylus overhang 0.54 inch.

Remote Control of Radio Receivers

BY C. E. TATE,*

A.M.I.E.E.

Servo Tuning Control Operating Over a Single P.O. Line

A RADIO receiver is often required to be operated from a remote point, either from the point of view of situating the receiver where the aerial is in an interference-free area, which may be remote from civilization, or it may be that aerials cannot be erected at the spot where it is desired to operate. In such cases a remote control is needed and economy in the number of wires used between the receiver and controller is essential in order that the cost may be kept down.

The system to be described is capable of operation over a single pair of wires independent of earth. The wires may be several miles in length.

The system has been designed for use with standard Post Office telephone circuits and consequently the fairly stringent requirements imposed by the G.P.O. for equipment attached to their circuits had to be met. The maximum d.c. voltage that can be connected to a P.O. line is 50 volts, and the direct current passed down the line must not exceed 15 mA. The maximum audio-frequency signal transmitted must not exceed 5 mW, and tones of frequency below 250 c/s or above 3,000 c/s cannot be used. The balance of the line to earth must be maintained. For the purpose of this control system a "physical pair" is necessary, therefore any repeaters have to be bypassed to maintain the d.c. path.

Other considerations in the design of this equipment were that the tuning of a receiver had to be controlled from a remote point with such facility that a c.w. signal could be tuned and held when using a narrow-band note filter. Obviously no interruption of the receiver signal could be tolerated whilst performing any function of the remote control equipment. As other receiving equipment might be used in the same station as the receiver being remotely controlled, the

* Marconi's Wireless Telegraph Company.

remote control system must not cause any radio interference.

It was also required that the signal from the tuned receiver should pass along the pair of lines used for control.

In a system of this kind indication must be provided at the remote end of the position of the receiver tuning scale, and it was arranged that temporary disconnection or reversal of the line should not upset the correctness of this indication or derange the apparatus in any of its functions. Reversal of the line has no effect, and the equipment returns to its previous setting immediately after any disconnection. The equipment at the remote end was designed to be as simple as practicable, so that if necessary an operator could have several controllers available on his desk.

The upper limit of resistance of the lines over which the equipment would function was set at 1,000 Ω ; this corresponds for underground routes in a city such as London to a distance of about seven loop-miles assuming some 50 per cent of 10-lb cable and 50 per cent of 20-lb cable. For overhead routes, junction circuits are usually run in 70-lb cable, which in cadmium copper would give 30 loop-miles for 1,000 Ω ; ordinary subscribers' circuits run in 40-lb cable would give about 20 loop miles.

Ability to switch the receiver on and off was not required for the particular application described, but this facility could easily be incorporated as will be shown later.

In the course of the development several methods of tuning the receiver were investigated, such as systems employing relay switching or two-way d.c. keying, operated in conjunction with step-by-step mechanisms or synchronous motors with magnetic clutches. All of these systems suffer from undesirable

"bang-bang" characteristics which can be mitigated somewhat by providing two speeds on the motors and changing to the slower speed for final tuning, but are not entirely eliminated. Another trouble was the difficulty of overcoming the effects of line disconnection or reversal, and of making sure that the remote and main tuning scales remained in step. The method finally selected was a zero-seeking servo arrangement.

The basic circuit of the system adopted is a Wheatstone bridge, with two arms variable, one of the variable arms being carried to the remote point along the line. This system is shown schematically in Fig.

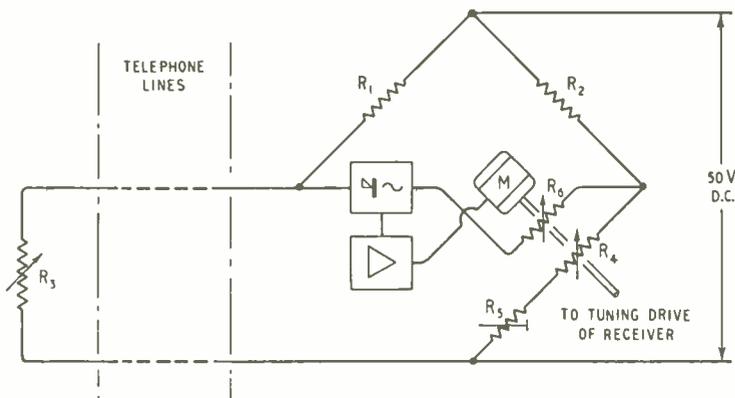


Fig. 1. Basic bridge circuit with remote resistance control.

1. The resetting by the operator of the distant resistance R_1 causes an error current in the detector arm of the bridge and the servo motor M readjusts R_1 to restore a balance. The limits imposed by the P.O. regulations determine the resistance chosen for the arms of the bridge. On the one hand the d.c. voltage applied to the line must not exceed 50 volts, therefore the maximum voltage is chosen as this gives the best sensitivity, also the current taken along the line must not exceed 15 mA and this, of course, fixes the minimum values of the bridge arms R_1 and R_2 . The minimum value is employed in order to obtain maximum power in the detector arm. A preset fixed resistance R_3 is incorporated to compensate for the resistance of the line.

As the bridge proportions are varied by the adjustment of the resistances R_3 and R_1 , the error current for a given difference in resistance, which corresponds to a given angular displacement of the two sliders, is changed. This condition, if allowed to persist, would render the design of the servo loop difficult as it would tend to produce either a sluggish response at the least sensitive end, or, if the gain were adjusted to give sufficient setting accuracy at this end, instability and hunting would occur at the most sensitive end. A compensating resistance R_4 was therefore incorporated, which is controlled by the motor to render the error current for a given displacement substantially constant for small angles for any value of R_3 and R_1 . This correction could have been made more simply if the resistance law of R_3 and R_1 could have been made logarithmic, but since the high resolution required entailed the use of ten-turn helical potentiometers, which are available only with a linear resistance law, this was not possible. Associated with these resistors were similar gear trains at the main and remote stations, but that at the main station had an extra train of gears reducing from a light, low-inertia, high-speed motor, down to the control resistance R_1 and then down to a shaft having a 270° sweep coupled to the receiver tuning dial. The sensitivity compensating resistor R_4 was also coupled to this shaft. At the remote end the control resistance R_3 was rotated by hand, but a similar gear train drove a replica of the receiver scale. In order to pass the signal along the line this d.c. circuit was introduced and extracted at the centre point of balanced line transformers, bypassing the signal with condensers (Fig. 2).

The problem remaining to be solved to complete the tuning arrangements was that of interpreting the error signal and causing it to operate the servo motor.

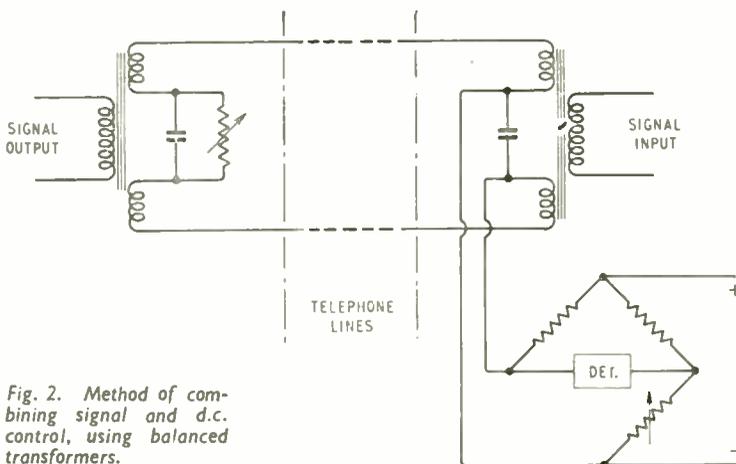


Fig. 2. Method of combining signal and d.c. control, using balanced transformers.

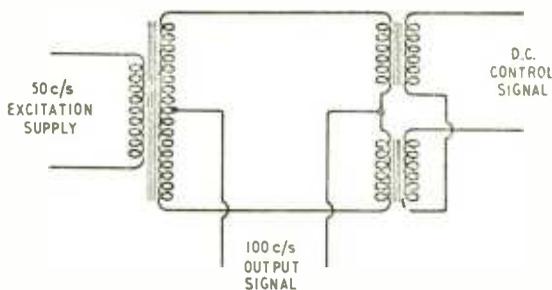


Fig. 3. Basic circuit of second-harmonic magnetic modulator.

The type of motor chosen was a very small two-phase induction motor developed for the Admiralty as a compass repeater. This motor had desirable characteristics in that it was designed for a low armature moment of inertia, and had a high-resistance rotor to give high starting torque. Being an induction motor it has no brushes and would consequently be eminently reliable. It would drive the gear train at full speed with a driving power on the control phase of about 3 watts, and would creep in on as little as 0.2 watts. Reversal of the phase of the supply to the control winding relative to the reference phase causes reversal of the motor armature.

The tuning requirements, which were stringent as a c.w. signal had to be tuned on a 300-c/s wide note filter, made it essential that there should be no over-swing, little backlash and negligible time delay in following any tuning adjustment made at the remote end. There should be no zero drift, as this would cause the signal to be detuned by the servo on its own accord. The detector had to be capable of driving the motor from an error signal of about $10 \mu\text{A}$ in an impedance of about 200Ω .

A symmetrical valve d.c. amplifier with high zero stability, followed by a push-pull stage gating an a.c. voltage did not look inviting. The obvious choice would be a push-pull magnetic amplifier with a.c. output, except for the drawback of time delay. A magnetic amplifier of the necessary gain working at 50 c/s would have a time constant of some seconds—far too long for the job. The answer was a blend of both techniques—a second-harmonic magnetic modulator and a valve amplifier.

Second-harmonic magnetic modulators have a centre stability of a very high order and are very symmetrical. Providing the d.c. path is blocked in the output circuits so that no self-excitation occurs, the time delay is negligible.

The second-harmonic type magnetic modulator is a device which produces a sinusoidal output at twice the excitation frequency fed to it, the phase of the output voltage being dependent on the sign of the direct current fed to the control winding. The output voltage is also proportional to the current flowing in the control winding. The mechanism of operation has been described by F. C. Williams.¹

¹ F. C. Williams and S. W. Noble. "The Fundamental Limitations of the Second-harmonic Type of Magnetic Modulator as Applied to the Amplification of Small D.C. Signals" *Proc.I.E.E.* Part II August, 1950.

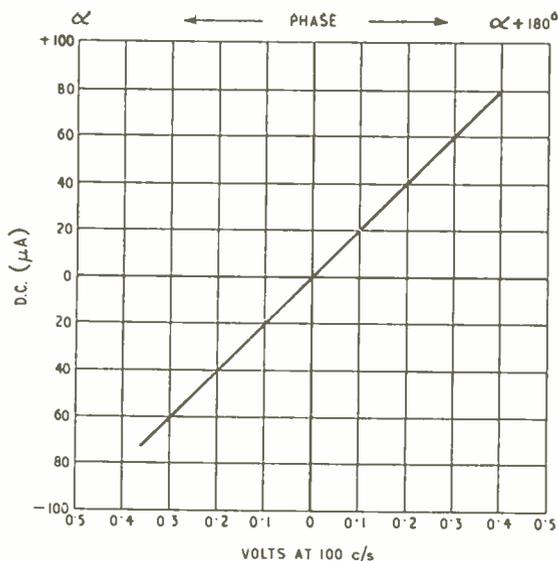


Fig. 4. Output characteristic of magnetic modulator.

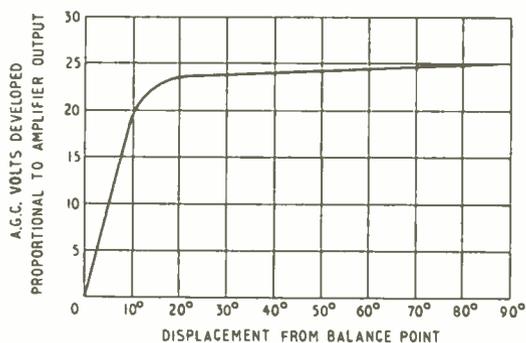


Fig. 5. Automatic gain control characteristic.

One advantage of the device is that it does not require saturation of the iron in order to function, a slight non-linearity being sufficient to produce an output. As a consequence a good output waveform can be obtained.

The modulator used in this equipment consisted of a stack of standard Type 496 Mumetal laminations which carried three windings, a d.c. control winding on the centre leg, and balanced a.c. windings on the outer legs. The a.c. windings are phased so that their fluxes oppose each other in the centre leg, and no volts are induced into the control winding. The circuit is shown schematically in Fig. 3, and the characteristic in Fig. 4

The valve amplifier used was a resistance-coupled amplifier having three stages, and its output was fed to the control phase of the servo motor. It was arranged to have a phase delay such that its output was in quadrature with the reference phase of the motor. The reference phase of the motor was excited by the 100-c/s ripple voltage from a full-wave rectifier supplying the d.c. power to the Wheatstone bridge.

A servo system of this kind, where the error from the desired position of the controlled element is used to correct the position of that element, is known as a closed-loop, position-control servo, and various specialized techniques are necessary to prevent over-

shoot or hunting. This hunting is caused by the inertia of the controlled element and the consequent storage of energy in it when it is in motion. The orthodox ways² to stabilize such a system are either to feed back, negatively, signals derived from the speed of motion of the controlled element—either plain “velocity feedback” or its differential “acceleration feedback”—or to insert in the feedback loop “phase advance” or “integrating” networks which operate only over a limited range of speeds.

The complication involved in producing such a refined servo was not really warranted in this case, and hunting was prevented by the use of a special a.g.c. system. In order to allow a.g.c. to be used the signal arriving at the driving motor must be at a maximum steady value for large errors, but proportional to displacement for small errors. (See Fig. 5.) This is achieved in this design by arranging that the first stage in the amplifier chain acts as a limiter. The a.g.c. then functions in the following manner.

Assume that one control resistance is displaced 90° from the other. The motor will be receiving full driving power and the amplifier gain will be clamped down by some 20 volts of a.g.c. As the motor runs in, the rate of change of signal fed to it is small, and the a.g.c. line is able to discharge slowly and maintain the motor running at substantially full speed. However, when the motor arrives at a point about 10° from home, the signal becomes proportional to displacement, and no longer is the a.g.c. system able to discharge at a sufficient rate to keep the output up and the motor running at full speed, so the motor slows to a speed which enables the a.g.c. line to open up the gain sufficiently fast to feed it. The motor finally comes to rest with the a.g.c. fully discharged and the amplifier at full gain giving the motor the benefit of all the amplification available to obtain the final accuracy of “run-in.” The time constant of the a.g.c. system can be matched to the motor inertia by correct proportioning so that the motor runs in towards zero with a steady deceleration and no overshoot.

The volume control of the receiver was achieved at the far end of the line by a potentiometer. This was simple and had the advantage that as the line always carried full signal, the signal-to-noise value of the line was maintained at its best value. Signals below 1 milliwatt along P.O. lines are not recommended, owing to their susceptibility to interference.

The scale repeat-back was automatically achieved by the zero-seeking characteristic of the tuning control system, the only requirement being to compensate for the line resistance at mid-scale by adjustment of R_a until the reading coincided.

On-off switching of the receiver was not provided on this equipment, but this could be achieved relatively simply by providing a limit switch at one end of the tuning scale. If this end were that corresponding to the highest control resistance, this could be interlocked with a warning system in the following way. Suppose a receiver was intended to be on service, and the line became disconnected through some fault, the control unit would immediately run to the end of the scale corresponding to the highest resistance, seeking to balance the bridge, and switch off the receiver. This would give a warning at the main station that something was amiss, and appropriate action could be taken.

² Chestnut and Mayer. “Servo Mechanisms and Regulating System Design” (Chapman and Hall).

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents


"Skeleton Slot Aerial"

I FOUND H. B. Dent's article (your August issue) very interesting and would like to add the following comments:

One way of overcoming the asymmetry in the polar diagram measurement is to bring the feeder in at a null point and carry it up the side of the slot as I have shown at (a) in my diagram, the braid being in contact with the aerial surface all the way. This automatically takes care of the balance-to-unbalance condition and prevents radiation from the outer of the feeder. There would be a serious impedance mismatch, of course, but this would not matter if one is only interested in checking the shape of the polar diagram. Possibly a neater way of doing it would be to make the slot out of tubing and thread the feeder round inside it.

To obtain a good match, an arrangement similar to that shown at (b) can now be used. The slot is divided vertically by a rod which is supported at the ends of the slot on stand-off insulators. The spacing, d , must be found by trial and error but for a 75-ohm feeder it would be somewhere between $\frac{1}{8}$ and $\frac{1}{4}$ of the slot width. The spacing and length of the rod should be adjusted alternately for best results. Once the correct measurements have been found a similar aerial can be built for any frequency by simply scaling all the dimensions up or down in the ratio of the wavelengths¹, though it is always advisable to leave a small margin for final adjustment. The theory of this method of feeding slot aerials is described in detail in a paper by Monteath.²

The use of rod reflectors to modify the radiation pattern

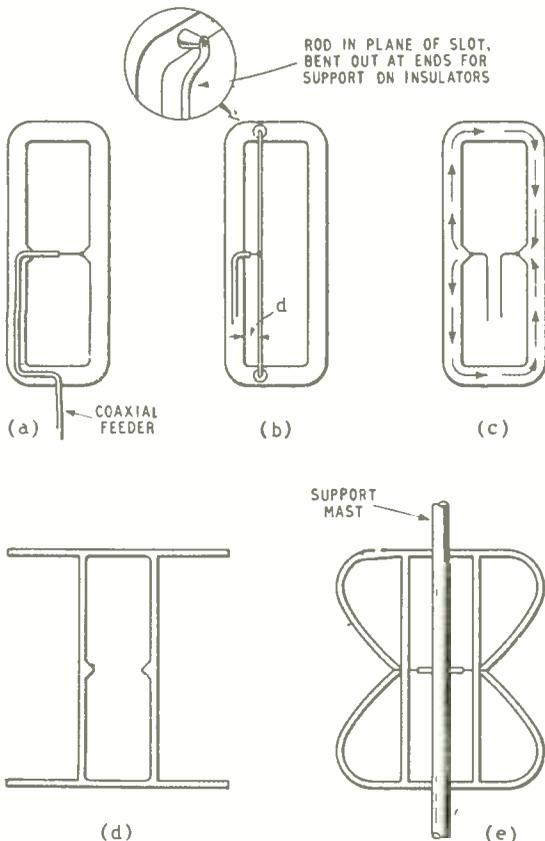

of a slot aerial is not a new idea and is, incidentally, the subject of a B.B.C. patent application (No. 19736/51). I should imagine that the single reflector illustrated by Mr. Dent achieves gain in the horizontal plane at the expense of the vertical polar diagram and that it would be better to use two rods, stacked half a wavelength apart and approximately level with the ends of the slot.

Mr. Dent mentions the similarity in polar diagrams between the slot and two dipoles. This can be explained by considering the disposition of the various currents: Diagram (c) shows the current paths on a skeleton slot aerial. Along the edges of the slot the currents are in opposite phase and the effect is the same as that on a twin-wire transmission line which does not radiate. It is the currents passing round the ends of the slot that do the radiating and these are distributed in space much the same as they would be on two dipoles spaced half a wavelength apart and fed in the same phase. In fact, we have only to grow a pair of arms at each end of the slot (see (d)) and we have got that very thing—two dipoles fed in phase by a slight variation of the well-known Y-match! Since these arms evidently do not contribute much to the radiation (though they will affect the impedance) it does not matter very much what we do with them. Let us, then, stretch them a little and bend to the shape I have shown at (e). Now, add a support mast in the neutral plane down the centre of the slot and the result bears a tolerable resemblance to a pair of RCA "Batwing" elements.

It would seem, therefore, that Mr. Dent's skeleton slot, a pair of dipoles and the batwing aerial all work on very much the same principle.

Banstead, Surrey.

T. R. BOYS.

¹ "The Use of Scale Models in the Development of Broad-casting Aerials," by T. R. Boys, *I.E.E. Students' Quarterly Journal*, Vol. 23, No. 90, December 1952.

² "Wide-Band Folded-Slot Aerials," by G. D. Monteath, *Proc. I.E.E.*, Pt. III, Vol. 97, No. 50, December 1950.

"Why Lines?"

WITH my new Lissajous-figure television receiver I get rather a queer effect. Whereas in the old days I used to get a ghost image from a local gasometer $\frac{1}{2}$ -inch to the right of the main image, the new atomic power station which has supplanted it gives quite a different effect on my Lissajous-scanned set.

Now, I get two ghost images, one just under $\frac{1}{2}$ -inch to the left and another the same distance to the right. They are greatly expanded in size as compared with the original (real) image and towards the edges of the picture the ghost images are very distorted and I find myself more intent on watching them than the real picture.

The picture also appears very "fuzzy," possibly due to other minor spurious images which used not to show up under the old Marconi-E.M.I. system in use back in '54.

My dealer tells me it's because of the supersonic vibrations set up by our space travel vehicles. Do you agree?
B. H.

IT would appear that the great difficulty of the sinusoidal scanning methods described by F. P. Hughes (your August issue) would in fact be synchronization, though he says it would be so easy. Obviously, even slight relative phase shifts would give a good deal of distortion. Absolute synchronization would be essential and no relative phase shifts in the sync or amplifier channels would be permissible. This is far from being as easy as it looks; even injection does not often give zero phase angle. Furthermore, lack of sync would give a ghastly

mosaic instead of mere picture shift as at present. And what about adjustment?

Maidenhead, Berks.

F. V. BALE.

Ignition and Television Interference

MAY I add a few lines to the remarks of Arthur Lindon (your August, 1954, issue) concerning interference both with and caused by television receivers? I, too, have noticed "Diallist's" suggestions for dealing with owners of unsuppressed car engines, but cannot call to mind that he has any views on dealing with what from the Post Office analysis of faults due to interference (published by *Wireless World* some months ago) seems to be a much more widespread nuisance; i.e., radiation from television timebases.

Unlike ignition interference, the latter is continuous. So far, it would seem that the owner of offending apparatus is under no obligation to remedy the trouble. An acquaintance of mine suffered (as did his neighbours) from a whistle of such strength that reception on 1500 metres was impossible. The offending set was located by the G.P.O., who said they could do nothing since the owner was unwilling to go to any expense. My friend and his neighbours, on G.P.O. advice, therefore put in screened aerial leads and moved their sets about in their rooms with the result that, though they can now receive intelligible signals, reception is still most unsatisfactory.

There is one thing that puzzles me. The G.P.O. say they have no powers of compulsion over owners of offending television receivers since the laws governing interference suppression do not apply. Surely, where a television set owner refuses to take the necessary steps, the licence should be withdrawn, for clearly stated on the back of it, among the "conditions," is the clear proviso that the licensed apparatus shall not be used in such a manner as to cause interference.

Sheffield, 8.

J. PLATTS.

ARTHUR Lindon's letter in your August issue suggests the Post Office lacks the authority to stop radiation of interference from television receivers. But, on reading my recently renewed broadcast receiving licence, I see that Condition No. 3 lays down that "The apparatus shall be so maintained and used that it does not cause interference" Radiating television receivers presumably infringe this condition.

Far be it from me to suggest that the G.P.O. should exercise a little dictatorship, but could not the radiation nuisance be stopped by the enforcement of the above clause by the exercise of clause 6, which states that "The apparatus shall cease to be used at any time on the demand of a duly authorized officer of the G.P.O.?" Seriously, though, if Mr. Lindon is troubled by a whistle on 200 kc/s, I suggest that he invokes the aid of the G.P.O. whom I have found most helpful in interference suppression.

Leigh-on-Sea, Essex.

G. O. THACKER.

"Inexpensive 10-Watt Amplifier"

IN the brief description of this amplifier appearing on p. 398 of your August issue there is a statement which might be misleading if taken at its face value: "The first stage is the low-noise EF86, which is *direct-coupled* to a Schmitt-type cathode-coupled phase splitter (ECC83), thus reducing phase shift at low frequencies."

The coupling between these two stages is not direct in the proper meaning of the term, since the 0.1- μ F coupling condenser is just as much in series with the 1-M Ω grid leak when placed below the grid leak as it would be in the normal position, and the input to the phase splitter, which is taken across the grid leak, falls off to nothing at zero frequency as usual. If there is reduced phase shift at

low frequencies, therefore, it is because of the circuit values chosen and not because of any direct coupling.

While on the subject of push-pull "quality" amplifiers, I should like to express my surprise and regret at the obstinate refusal (almost the world over) to adopt the tertiary-feedback-winding system (P. J. Baxandall, *Wireless World*, Jan., 1948). Instead of using this elegant and excellent arrangement, which requires an output transformer of quite moderate complexity, designers strain themselves to get an output transformer of fantastically low leakage inductance, and even then they have an amplifier which goes unstable if connected to a capacitive load (e.g., a long speaker lead).

Malvern, Worcs.

E. F. GOOD.

[We have referred the question of coupling to the designers of the Mullard amplifier, who reply as follows:—

"At very low frequencies there is some inherent phase unbalance between the two halves of the Schmitt phase splitter; this is dependent upon the time constant of the coupling to the grid of the second triode (R₈, C₇).

"A further phase shift occurs in the coupling network from the anode of the previous stage to the input grid of the phase splitter valve. It is this phase shift which is reduced by means of the d.c. connection, the input to the phase splitter being taken across R₈ and C₇ in series and not across R₈ on its own." Ed.]

Vector Diagram Conventions

IN response to my request for criticisms of my system of vector diagrams, David Morris cites (in the September issue) the rigidity of the tie-up between circuit diagram and vector diagram. While I agree that this feature of the system does mean that the shape of the diagram for (say) a series circuit depends on the order in which the components are connected, which in theory may not always be important, I cannot believe that this alone could be an adequate ground for rejecting the system altogether. For one thing, the relative potentials of the components *do* depend on their positions in the circuit, and a great advantage of my system is that all these potentials are always clearly shown in the one diagram.

But let us disregard this, and the other advantages of the system, and consider the example cited by Mr. Morris against it. In order to illustrate the results of varying each of three circuit impedances in turn, he prefers to draw three separate vector diagrams. Yet two of the loci he desires can at least equally well be developed from my single diagram, and the third can in practice also be visualized quite clearly. Not only is there a saving of the effort of drawing the diagrams, but the whole study is much clearer if undertaken with a single diagram, representing the single circuit. If the attention is distributed over three different diagrams, in which the vectors occupy different positions, this clarity is lost, and it is easy to become confused. I would certainly not attempt to justify these diagrams, and therefore the need to redraw my circuit diagram to match each does not arise.


"CATHODE RAY."

AMPLIFIER CIRCUITS


Two Corrections

In the circuit of the Mullard 10-watt amplifier (p. 398, August issue) a 33-k Ω resistor should be inserted in the h.t. line immediately to the left of the 1.2-k Ω smoothing resistor and its junction with the 30- μ F capacitor.

Similarly, in the G.E.C. "912" amplifier (p.430, September issue) a 10-k Ω resistor should be inserted in the h.t. line immediately to the left of the connection to the centre tap of the output transformer primary.

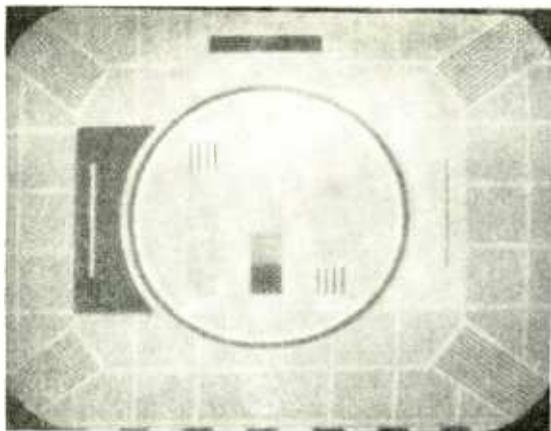

Band III Television Interference

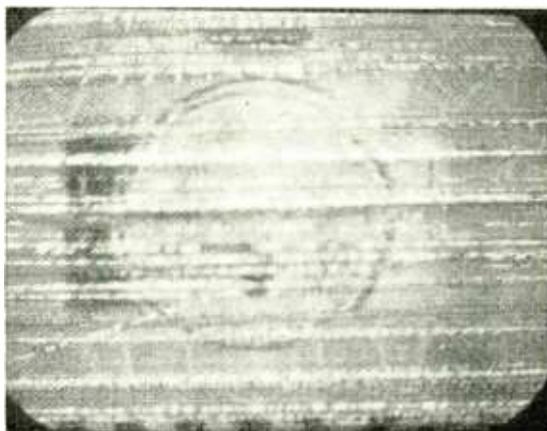

Interference from "suppressed" electric shaver on television Bands I and III is compared in these photographs. Top left shows test card C on Band I and above on Band III.

Some Tentative Observations and Suggestions for its Suppression

By F. R. W. STRAFFORD, M.I.E.E.*

THE present trend of sound and vision broadcasting towards the higher frequencies raises interesting problems concerning man-made interference, its effects upon reception, and the means for abating it.

This transition from medium and long waves to v.h.f. is accompanied by great changes in the mechanism of interference propagation, and the techniques of suppression, now well established, seem to be no longer generally applicable.

It is not very difficult to understand why this should be so. Interference of the type discussed in this article is mainly the result of an abrupt fluctuation, or a continuous series of such fluctuations, of an electric current.

The simple process of switching an electric lamp on or off is an example of the former, while the superimposed rhythmic ripple from a commutator motor is an example of the latter. A succession of discrete fluctuations, such as is radiated from a car ignition system, is generally referred to as impulsive interference, while the continuous fluctuations from commutator motors is described as smooth interference.

All abrupt fluctuations of electric current may be analysed into a spectrum of individual sine-waves whose amplitude and frequency distribution are determined by the amplitude/time characteristic of the originating fluctuation. This is all very well known and need not be treated in detail, except to remind the reader that the more abrupt the fluctuation, the wider its inherent frequency spectrum will be.

There are other sources of interference which generate a single frequency (monochromatic interference). Typically these include harmonic radiation from c.w. transmitters, oscillator radiation from television receivers, and electron oscillations from certain types of lamps.

Because the frequency distribution of interference is

determined by the nature of the initiating disturbance, it is reasonable to expect that certain types of offending appliances at medium and low broadcasting frequencies will be relatively innocuous in the TV frequency spectrum. Likewise, the reverse may occur.

This speculation is fully justified when one examines the interference records compiled by the Radio Branch of the G.P.O., to whom the author is indebted for permission to quote.

Table I is a part-extract from the latest monthly Post Office statistics purposely high-lighting the effect discussed.

From the TV viewpoint the interference from cer-

TABLE I

Type of appliance	Number of complaints about each source.	
	M.W. and L.W. Sound Broadcasting	TV Broadcasting
Fluorescent tubes ..	135	25
Filament-type lamps ..	10	211
Neon signs	37	124
Radiation from TV time-base circuits ..	595	2
Hair dryers	52	532
Sewing machines ..	159	841
Vacuum cleaners ..	93	237
Ignition systems of petrol engines ..	4	114

* Belling and Lee. Ltd.

tain types of lighting, vehicle ignition, and domestic appliances using small commutator motors, is seriously predominant.

The interference from lamps is a form of Barkhausen-Kurtz oscillation which was recently described by "Cathode Ray."¹ Suppression of this form of disturbance does not appear to be an economical possibility; the fault should be removed by the lamp designers.

The problem of interference from neon signs, which would also appear to be on the increase, has yet to be investigated. If the radiation turns out (as the author would expect) to emanate from the envelope of the sign, in which the gas discharge takes place, then it may be necessary to introduce some shielding by means of a metallic gauze or something which will not greatly impair the illumination efficiency of the sign.

It is possible that lamp interference may be less on Band III, but more work is required to be certain of this.

On the other hand, ignition interference looks as if it possesses the qualities of the many-headed Hydra. Although the radiated intensity falls off somewhat through Band II (f.m. broadcasting) and Band III, the decrease is insufficient to warrant the omission of suppressors and, what is worse, the simple resistor suppressor recommended for use in the distributor lead (and of great assistance in protecting Band I TV from interference) appears to have only a small effect on Band III. Indeed, it appears that additional resistors mounted at the sparking-plug terminals will be essential to bring the average interference level on Band III down to what was considered acceptable on Band I. In fact, it is likely that further resistors at each outlet connection from the distributor may be essential for stubborn cases, which, in the case of a four-cylinder engine, involves nine individual suppressors!

Presumably, this loss of suppression is due to the by-passing action of the self-capacitance of the resistor, and some new design approach to the problem is an urgent requirement.

Domestic appliances using fractional-horsepower commutator motors are the most serious household offenders, and yet most amenable to control if owners would not use them during TV broadcasting hours. Perhaps this is too much to expect from a race which dislikes regimentation, so that the fundamental problem of suppression must be solved.

In treating this problem it is desirable to examine, in closer detail, the mechanism of the propagation of interference from a small commutator motor. The irregularities of current, due to the commutating action of the motor, give rise to a wide r.f. spectrum and the currents may be circulated in the symmetric or asymmetric mode, usually both. The division of current into these modes (Fig. 1) is simply a matter of electrical balance and unbalance.

If perfect balance could be achieved by design the circulation mode would be confined to the symmetrical and little or no suppression would be required at TV frequencies. This point will be discussed in greater detail later.

Fig. 2 shows, in full line, the circuit of a split-field series-wound motor, and one commutator winding. The interfering potentials are generated in series with the brushes B, B₁ at the point in the circuit marked X, X₁. The dotted capacitors attempt to give a general,

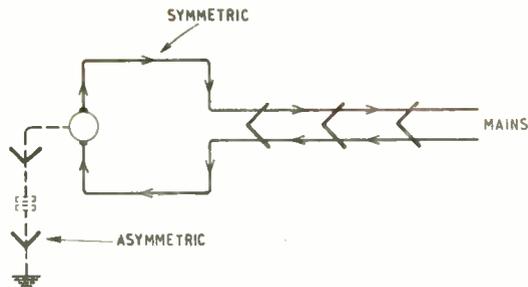


Fig. 1. Symmetric and asymmetric interfering currents.

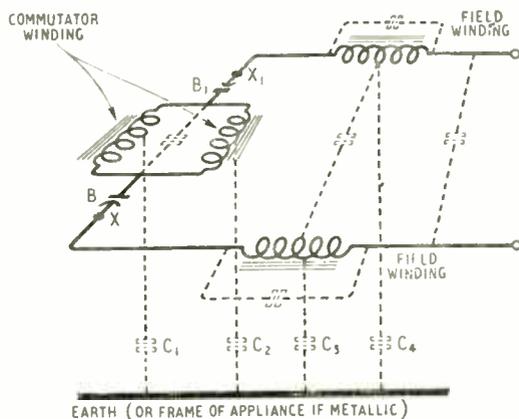


Fig. 2. Greatly simplified r.f. circuit of series-wound motor showing distributed capacities.

but very over-simplified, picture of their distribution. If C₁, C₂, C₃ and C₄, that is, all the distributed capacities to earth, or to the motor frame, were zero the interfering current would be confined to the machine circuit and would result in the symmetric mode of propagation. This mode is easily removed from the mains at broadcast frequencies for it is only necessary to place a capacitor across the motor terminals to confine the interfering currents to the motor circuit, Fig. 3(a).

Of course, this is wishful thinking, but it might be possible, by design, to construct a machine such that the distribution of capacitance resulted in zero current flowing to frame, or earth, just as one can introduce circuits into r.f. bridges to achieve similar effects.

At the present time the suppression engineer must attempt to limit this flow of current by other means and this involves raising the circuit impedance over the r.f. spectrum involved. This can only be achieved by series-connected inductors Fig. 3(b). In order to secure maximum attenuation of the asymmetric current over a restricted band of frequencies (say TV) it is desirable to design each inductor so that its self-capacitance resonates with its inductance, thereby providing the high parallel impedance resulting from such a technique. It has been found that production of dust-cored r.f. self-resonant chokes requires that a large proportion need adjustment on test to bring the resonance at mid (TV band) frequency. If this is not done considerable suppression efficiency is lost.

Recapitulating, it can be seen that the symmetrical

¹ Wireless World, May 1954.

mode may be confined to the machine by a shunt capacitance, and the asymmetrical mode *limited* by the use of series inductors, preferably self-resonated.

At this stage the mode of propagation of the interference into the receiver must be discussed because certain factors, insignificant at the medium- and long-wave broadcast frequencies, become *predominant* in the TV spectrum.

At broadcast frequencies the symmetric interference is propagated along the mains wiring and is not very seriously attenuated thereby. The layout of mains wiring is such that, at r.f., some unbalance will occur primarily at junction, switching, and fusing points, and the asymmetric component thus created will radiate an electric field which will induce interfering e.m.f.'s into the receiving aerial. All this may be removed by the simple expedient of shunting a capacitor across the motor terminals (Fig. 3a).

An entirely different state of affairs exists at TV frequencies. The motor is, physically, not negligibly smaller than the wavelength, and possesses a degree of radiation resistance previously quite negligible at the lower broadcast frequencies. Hence, confining the current to the motor circuit by means of a shunt capacitance can *intensify* it and, if one considers the equivalent circuit of the motor to be in the form of a loop aerial, considerable radiation will take place unless the motor is efficiently screened and earthed, and this latter is most difficult to achieve at TV frequencies, even in the laboratory.

Also, at TV frequencies a capacitor shunted across

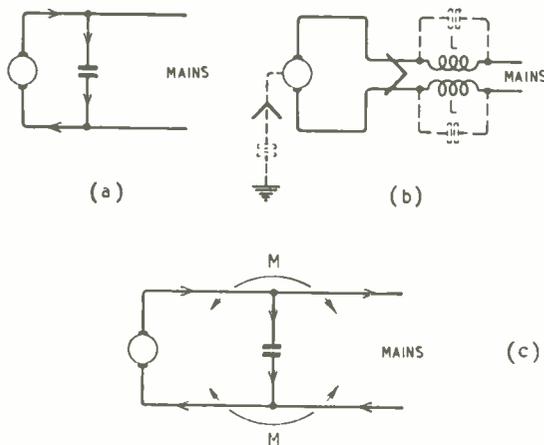


Fig. 3. (a) A capacitor shunted across the motor terminals confines most of the interference to the motor circuit. (b) A pair of inductors limits the magnitude of asymmetric interfering currents. (c) Interfering currents may by-pass the capacitor due to mutual inductance between connecting wires.

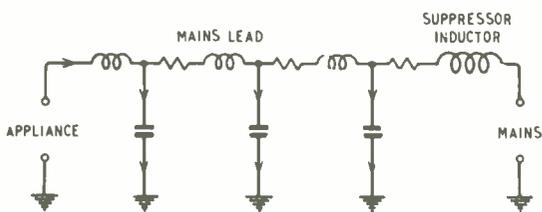


Fig. 4. Equivalent circuit of mains lead from the asymmetric viewpoint.

the motor terminals may not completely confine the symmetrical current to the motor circuit. The mutual inductance, M , of the connecting leads positioned immediately on either side of the capacitor junction (Fig. 3c) permits current to be generated in the mains leads. But because of the greater attenuation losses of the mains wiring at these frequencies the interfering radiations due to unbalance may be quite small compared with the direct radiation from the motor.

On the other hand, unless steps are taken to remove the asymmetric component from the mains wiring by means of series inductors (Fig. 3b) considerable radiation will result.

On Band I, TV interference may be reduced considerably by connecting a pair of self-resonant inductors in the mains connections to the motor. It has been found that these may be connected several inches from the brush terminals without impairing seriously the degree of suppression. This enables the user to purchase a suppressor and connect it in series with the mains lead to the appliance without disembowelling it.

Experiments indicate that this procedure cannot be used on Band III. The radiation resistance of the vital few inches of flex between motor and suppressor becomes sufficiently high to permit of a high level of radiation to occur before the inductors can limit the asymmetric component.

At first sight this seems difficult to understand, since the high impedance of the inductor should be the determining factor wherever it may be connected along the mains lead. But the distributed properties of the lead must not be forgotten. Fig. 4 depicts this, from which it is clear that asymmetric current can circulate, thereby radiating an interfering field, before being attenuated by the inductors.

It will be noted that the equivalent circuit depicts only one lead of the mains pair. This is because the pair can be regarded as connected in parallel at all points from the asymmetric viewpoint; that is, the current is divided equally between each wire and travels in the same direction with the same phase.

It is concluded therefore that useful suppression of interference on Band III requires that high-impedance (self-resonant) inductors be fitted as close to the motor brushes as possible within the appliance.

The unsuppressed asymmetric level of interference at the terminals of four typical portable domestic machines has been measured at a frequency in Bands I and III and is given in Table 2.

Generally, the terminal e.m.f. is lower on Band III than on Band I—very considerably so in one case (34 db), but this, unfortunately, does not necessarily mean a reduction of radiated electric field, for this

TABLE 2

Machine	55 Mc/s db above 1 μ V	180 Mc/s db above 1 μ V	Difference db
Sewing; 3-core ..	66	60	6
Hair dryer; 3-core	92	77	15
Hair dryer; 2-core	90	56	34
Small a.c. / d.c. motor; 3-core ..	82	66	16

is what ultimately generates the interference at the receiver input. These radiation fields are proportional to current *intensity* and *radiation resistance*, so that while the generated e.m.f.'s may be smaller in magnitude the resultant fields may be greater on Band III than on Band I if circuit impedance is lower and/or radiation resistance is higher.

In addition, it has been pointed out that suppression becomes physically more difficult as the frequency is raised, and no doubt limits will be reached, perhaps on Bands IV and V, where the known suppression techniques can no longer be applied.

Everything seems to point to the desirability of reducing interference at the design stage of the motor, and to do this a greater knowledge of its equivalent circuit and impedance values is necessary.

During the course of experiment it was found that a motor with square-section brushes carefully "bedded in" to the commutator curvature generated much lower interference than a similar motor with circular-section brushes. Changing them over immediately proved the importance of using "bedded in" brushes. Another significant point is that the number of commutator segments is important, the fewer the segments the greater the interference. This is pre-

sumably due to the increase in the amplitude of the superimposed voltage irregularities as the number of segments is decreased.

Finally, as an example of the failure of Band I suppression measures on Band III the photographs in the heading of this article are presented. The appliance concerned is an electric shaver in which very compactly designed and carefully disposed suppressor elements were built into it. It was obvious that careful consideration had been given to suppression at the design stage. Nevertheless, while almost perfect suppression had been achieved on Band I, as the photograph shows, it was unhappily, only too obvious how ineffective this has become on Band III due, presumably, to the increased radiation resistance of the appliance which, incidentally, was not totally enclosed in a metallic shield. The receiver had its gain adjusted on each band so that the test card was reproduced at the same white level. Band III transmission was obtained by single frequency-conversion of the existing Band I service.

In conclusion it is regretted that this article has a strong negative outlook. A great deal of work, a lot of it by motor designers, will be necessary before a further contribution on a happier note can be made.

OCTOBER MEETINGS

Institution of Electrical Engineers

Radio Section.—Address by C. W. Oatley, M.A., M.Sc. (chairman), on October 13th.

Discussion on "Whether Compatibility is Necessary for a Colour Television System in Great Britain" opened by E. P. Wethey on October 25th.

Both the above meetings will be held at 5.30 at Savoy Place, London, W.C.2.

Cambridge Radio Group.—Address by G. E. Middleton, M.A., (group chairman) at 6.0 on October 12th at the Cambridgeshire Technical College, Collier Road, Cambridge.

Mersey and North Wales Centre.—"The Experimental Synthesis of Speech" by W. Lawrence, B.A., at 6.30 on October 18th at the Liverpool Royal Institution, Colquitt Street, Liverpool.

North-Eastern Radio & Measurements Group.—Address by D. H. Thomas, M.Sc.Tech. (group chairman), at 6.15 on October 4th at King's College, Newcastle-upon-Tyne, 1.

North-Western Radio Group.—"The Measurement of the Small Signal Characteristics of Transistors" by E. H. Cooke-Yarborough, M.A., C. D. Florida and J. H. Stephen, Ph.D., "A Versatile Transistor Circuit" by E. H. Cooke-Yarborough, M.A., and "The Transistor Regenerative Amplifier as a Computer Element" by G. B. B. Chaplin, M.Sc., at 6.45 on October 20th at the Engineers' Club, Albert Square, Manchester.

Northern Ireland Centre.—"Recent Telecommunications Developments in Northern Ireland" by Major P. L. Barker, B.Sc., (chairman) at 6.30 on October 12th at the Engineering Department, Queen's University, Belfast.

South Midland Radio Group.—"The Birmingham-Manchester-Holme Moss Television Cable System" by R. J. Halsey, B.Sc., and H. Williams at 6.0 on October 25th at the James Watt Memorial Institute, Birmingham.

Southern Centre.—"Recent Trends in Loudspeaker Design" by Major A. E. Falkus at 6.30 on October 29th at the South Dorset Technical College, Weymouth.

Reading District.—"The Future of Electronics in Industry" by E. R. Davies at 7.15 on October 18th at the George Hotel, King Street, Reading.

British Institution of Radio Engineers

London Section.—Annual general meeting at 6.0 followed by address of the president, Rear Admiral Sir

Philip Clarke, K.B.E., at 7.0 on October 27th at the London School of Hygiene and Tropical Medicine, Keppel Street, Gower Street, London, W.C.1.

South Wales Section.—Annual general meeting at 6.30 followed by "The Design of Switching Circuits" by Professor Emerys Williams, Ph.D., (University College, Cardiff), on October 6th at the Cardiff College of Technology, Cathays Park, Cardiff.

Merseyside Section.—"The Cyclotron" by M. J. Moore at 7.0 on October 7th at the University, Liverpool.

North Eastern Section.—"Radio Production" by H. G. Wood, M.A., B.Sc., (British Productivity Council) at 6.0 on October 13th at Neville Hall, Westgate Road, Newcastle-upon-Tyne.

British Sound Recording Association

Manchester Centre.—"Design of a Recording System" by H. G. Bennetts at 7.30 on October 11th at the Engineers' Club, Albert Square, Manchester.

South-Western Centre.—"Towards Perfection in Electro-Acoustic Reproduction" by D. M. Chave (Lowther Manufacturing) at 7.30 on October 20th at Callard's Café, Torquay. (Joint meeting with Institute of Practical Radio Engineers.)

Television Society

London.—"The 'Roving Eye' O.B. Unit" by T. Worswick, M.Sc., and G. Larkby (B.B.C.) at 7.0 on October 8th at the Cinematograph Exhibitors' Association, 164, Shaftesbury Avenue, London, W.C.2.

"An Unconventional Television Wire Distribution System" by E. J. Gargini (E.M.I.) at 7.0 on October 28th at the C.E.A., 164, Shaftesbury Avenue, London, W.C.2.

Radio Society of Great Britain

London.—"Transistors and Crystal Valves in Radio" by B. R. Bettridge (G.E.C.) at 6.30 on October 22nd at the I.E.E., Savoy Place, London, W.C.2.

British Kinematograph Society

Film Production Division.—"New Studio Techniques at Highbury" by T. C. Macnamara, W. D. Kemp, B.Sc., A. M. Spooner, Ph.D., B.Sc., B. R. Greenhead and N. Q. Lawrence, at 7.30 on October 20th at the Gaumont-British Theatre, Film House, Wardour Street, London, W.1.

Stylus in Wonderland

An Excursion into the Realms of "High-Fidelity" Disc Recording

By O. J. RUSSELL, B.Sc.(Hons.), A.Inst.P

THE Irishism has it that "all improvements are for the worse," a sentiment not without philosophical undertones. Progress in the art of sound recording has certainly made improvements to recordings, but these "improvements" may often make matters worse in other directions. The price of progress often seems to consist in the creation of fresh problems.

Part of these new problems have been created by the striving for the utmost in so-called "high-fidelity" recordings. While it is easy to equate wide frequency range with "high-fidelity," this is only part of the story. Transient response appears to be the most important factor in the recognition of instruments. The characteristic sound of an instrument, it would appear,¹ is determined by its "keying characteristic," that is the attack or build-up of a note under the impact of a step impulse from the executant. The exact relative amplitudes of the various harmonics is obviously less important in the recognition of instruments. This would seem to follow from the fact that various instruments can be identified even when reproduced on indifferent equipment. Certainly the majority of popular priced receivers and radio-gramophones make very limited approaches to the professed ideals of the high-fidelity purists. In this connection it must also be acknowledged that there is considerable evidence for the contention that a genuine binaural or a stereophonic sound system of limited frequency response is more pleasing and satisfactory than a single wide-range monaural system.²

The goal of a wide frequency response has very definitely been tackled by the record manufacturers. The pre-war recording limit of some 8,000 c/s has been extended to 15,000 or even 20,000 c/s. The provision of recording extending into the supersonic region may assist in the correct rendition of transients. However, as the atmospheric absorption at these frequencies may vary by several db depending on climatic conditions, either an air-conditioned listening room or

a top corrector geared to a barometer seems a necessary part of the reproducing system.

The seeker after "high" fidelity, or even "medium" fidelity reproduction is now faced with a bewildering variety of recording curves. It was always necessary to monkey with the recording characteristic even in the earliest days of electrical recording. A constant-velocity characteristic in the bass region is impracticable, as the large excursions in the groove modulation would necessitate wide groove spacings in order to prevent grooves cutting into one another. Wide groove spacing would result in a very short playing time; a 12-inch, 78-r.p.m. record would have a possible playing time of less than a minute with an unattenuated bass characteristic. Accordingly, the recording characteristic of Fig. 1 was all the pre-war "hi-fi" addict had to worry over. The bass attenuation could be corrected by a single RC coupling network based upon the turnover frequency f_0 .

Such a recording characteristic presented no difficulties at all, especially as high-pressure espionage methods were not needed to discover the characteristic actually employed. In fact the E.M.I. group of companies still employs such a recording curve for 78 r.p.m. discs. Despite this, no serious difficulty in the reproduction of frequencies up to 20,000 c/s from E.M.I. recordings is evident.³

The "improvers" have been engaged in a jolly game of recording characteristics. Originally a mild degree of top boost had obvious advantages. Thus by boosting the recorded top level, and reproducing with an equal amount of top cut, the reproduced level would be flat. In the process, needle scratch would be reduced by the reproducing top-cut circuit. Result an improvement in signal-to-noise ratio by an amount roughly equal to half the total top boost. An idea probably inspired by the use of top boost in f.m. broadcasting techniques. The use of a mild degree of top boost gives an overall recording curve somewhat

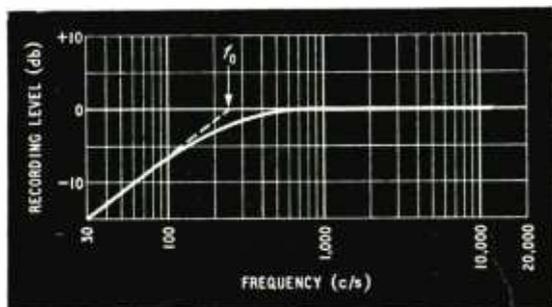


Fig. 1. Recording characteristic representative of pre-war practice. Bass amplitude is restricted to permit of reasonable groove spacing.

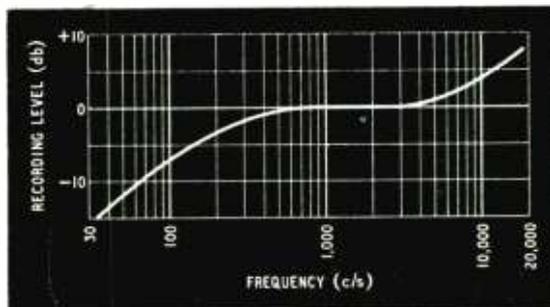


Fig. 2. A moderate degree of top lift in the recording characteristic gives an improvement in the reproduced signal-to-noise ratio.

like Fig. 2, which might be termed the Decca "ffrr" type of recording characteristic.

The extremist technical elements in some quarters were not satisfied with mildness however. First, top boost was accentuated even more, to "improve" signal-to-noise ratio still further. Secondly, bass cut was applied with a much higher cutoff frequency, say 800 c/s instead of 250 c/s, so that bass cutting started much earlier than in the older recordings. The end product is the recording curve of Fig. 3, which has virtually no straightline portion at all. This may be termed typical U.S.A. and l.p. type of characteristic. Such a characteristic is essential for long-playing recordings, as the extreme bass cutting reduces groove modulation to an extent permitting much closer than normal spacing of grooves. Also the use of top boost assists in the reduction of surface noise, despite the 10 db lower overall recording level necessary on l.p. recordings as compared with 78 r.p.m. recordings. Moreover, the standard one-mil (0.001 inch) stylus radius used for l.p. reproduction enables the top frequencies to be successfully traced despite the top boosting.

High-frequency Distortion

Many American firms use virtually the same characteristic for standard 78 r.p.m. records. This with the object of reducing surface noise, and also for the purpose of recording at a higher overall level. The extreme degree of bass cutting does permit of either closer groove spacing, or of a higher overall recording level. Unfortunately this means that the recorded top amplitudes may reach excessive values. Tracing with conventional pickups and styli becomes difficult. Although "harmonic distortion" may be slight, and in fact harmonic distortion of a 10,000-c/s fundamental would be unnoticed, *difference tones* of an unfortunate audibility may easily be produced by a non-linear pickup reproducing two supersonic frequencies. To quote an example "... no large increase in distortion occurs in reproducing the 16-db pre-emphasised continuous spectrum ... yet the addition of a few prominent tones to this spectrum in the region above 2,000 c/s will result in intolerable distortion."⁴

Accordingly a "double think" has occurred on the advisability of a full 16 db of boost at 10 kc/s (N.A.B. recording standard) or even extending to 20 db boost at 15 kc/s ("Orthacoustic" recording standard). Some American firms have reduced the degree of top boost to a modest 12 db at 10 kc/s (Victor). No one at the moment in the U.S.A. appears to use less than this degree of top boost. Accordingly Fig. 4 represents two possible limits for American recordings, both l.p. and 78 r.p.m. A compromise playback curve is capable of effectively reproducing most American recordings to within a couple of db or so. The dotted line in Fig. 4 shows the inverse of this curve, which, together with the circuit of Fig. 5, was proposed by the Audio Engineering Society of America.⁵ It will be seen that this gives a very small error in reproducing either type of curve.

In the purist world several more switched playback curves are needed, but in practice the use of a flexible tone control circuit in the main amplifier enables any slight differences to be corrected. In fact there is a tendency to provide three types of 78 r.p.m. characteristic to cover the E.M.I. curve (Fig. 1), and the "ffrr" type of curve (Fig. 2), with an American 78 and an l.p. position. However, the fashionable equaliz-

ing pre-amplifiers are even subdividing l.p. characteristics into various categories. There is clearly a limit to this process, as otherwise the equalizing pre-amplifier will require a minor reference work to accompany it.

The situation also is not helped by the appearance of a number of new companies which often specialize in American and foreign recordings generally. In my innocence I had assumed that these records were processed here from tapes. Apparently this is seldom the case, and the pressings are generally made from masters sent from the country concerned. Although in some cases records of English artists are also made here and processed from the tapes. Thus one company, it would seem, may issue recordings with a range of characteristics depending on circumstances. One company frankly admitted that it did not know what characteristic was in use for its U.S.A. pressings, although British recordings were of the Fig. 2 type of curve.

In other cases dark rumours circulate the "hi-fi" bazaars that the actual recording curve is vastly different from the published curve. Indeed, one obtains the impression that sometimes the characteristic is regarded as a top-secret commercial possession, and that publication would be detrimental to the company.

The existence of heavily "top-boosted" recordings which have also an extreme degree of bass cutting is hardly an academic issue. Reproduced on average equipment without equalization the result is most shrill and unnatural. A considerable number of "playing desks" for 3-speed reproduction are available. These desks are in many cases fitted with pickups capable of a quite high standard of reproduction, which only accentuates the lack of bass and the preponderance of top. One looks in vain for any equalizing control. By adding approximately 2s 6d worth of R and C to the output of a popular playing desk, I was able to prove to the amazed owner that something approaching "high fidelity" was possible, and that the irritating "thinness" of the l.p. discs and U.S.A. type 78 r.p.m. discs could be transformed into a well-balanced reproduction with adequate bass and unobtrusive treble. Considering that these playing desks are not cheap, and that l.p. discs cost some 30s or so, the additional cost of some form of simple equalizing circuit is small. Certainly the public at large can notice the difference, even when playing into a cheap broadcast receiver, for

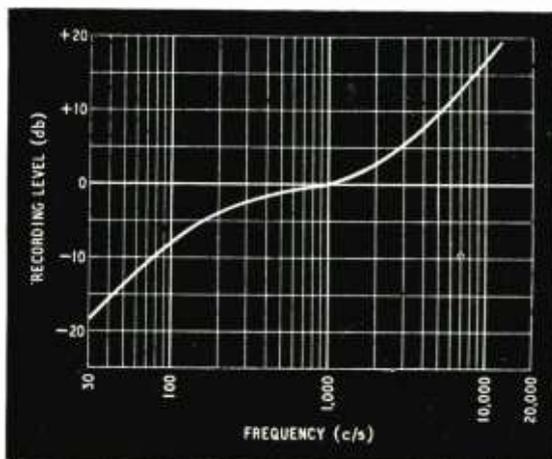


Fig. 3. Frequency distortion when carried to extreme limits introduces some unexpected problems.

an additional 20 db of unbalance between top and treble cannot be eradicated even with a very indifferent reproducer.

It is quite possible that designers feel quite unable to cater for all the recording characteristics now unleashed on the public. However, for the general market some attempt at equalizing seems desirable, if only to produce a noise that can be listened to in reasonable comfort. The "hi-fi" addict is in a less happy position. It seems that in many cases he can not be certain which characteristic is employed even by a single company. Moreover, even where a single characteristic is nominally in use, it now appears that this is not an infallible guide. Electronic designers in their innocence may label the equalizer switch position for a specific recording. This may in fact be an undue confidence in the stability of a recording curve. It would appear in many cases that the recording engineer has a considerable latitude in this respect. Thus the exact bass turnover frequency may be adjusted "to suit the music," which I gather means that when playing time and groove modulation conflict, the bass turnover is adjusted to suit. Moreover the question of amplitude limiting and volume compression is a singularly difficult one to track down. We are assured that this is standard practice in recording, but the only definite evidence I have is a statement from one company that in their case limiting or compression is never used.

Tape "Masters"

The universal use of tape recording methods has raised many new objections. This mainly from high-brow reviewers who object to classical recordings being bisected at precisely the worst possible point . . . artistically speaking. It would also appear that recording level, noise level and even recording characteristics may abruptly change due to a "tape join." The spotting of "tape joins" is an essential accomplishment of the first-class record reviewer. In this connection also, a peculiar situation has arisen in connection with l.p. records which contain dubbings from early 78 r.p.m. records. Almost always the reviewer is at pains to emphasize the superior quality of the l.p. dubbing as compared with the 78-r.p.m. originals. While this is certainly a possibility in cases where both records were made from an original tape master, it is difficult to see how this can happen in the cases where a 78 r.p.m. pressing was used to make the l.p. version.

All this progress, therefore, has brought us to the stage where top boost is employed to improve record signal-to-noise ratio. This, however, at the risk of tracing difficulties, and unpleasant distortion effects, which may be avoided by refraining from excessive boost. Despite this English recordings (including the E.M.I. group with no top boost) are quoted as having some 5 db lower noise level than U.S.A. recordings, when reproduced with a flat frequency response.⁵ The purchaser of a record, even if aware that equalizing is necessary, cannot be certain in many cases what equalizing is needed. To complicate the issue, more than one time constant may be needed in both bass and treble to correct for the actual characteristic used. Also, a record player made by one firm may give balanced reproduction of its rivals records, while giving a screechy, unbalanced reproduction of its manufacturer's own records.

While the need for some regularization of this situation has been long apparent, agreement over recording

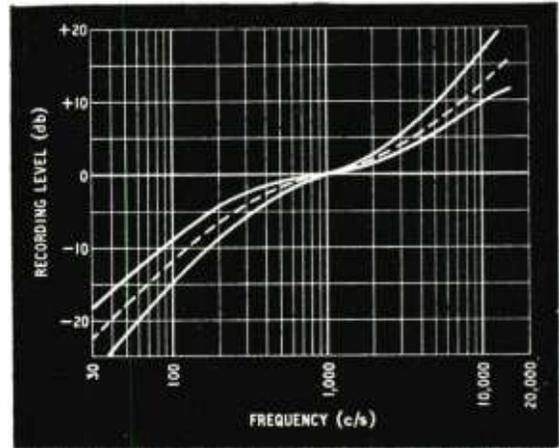


Fig. 4. The two full-line curves represent the variation found in current American practice. Good compensation within these limits is given by the circuit of Fig. 5. The compensation would be exact for the dotted characteristic.




Fig. 5. Correction circuit (see reference 5) that will cope with most American recordings both 78 r.p.m. and l.p.

standards seems as elusive as international political agreement. Recent American attempts to define a single standard American recording specification have only been able to reduce recording characteristics to a total of four. Including, say, E.M.I. and Decca "firr" characteristics, it seems that a minimum of six equalizing curves, and possible eight to cater for l.p. idiosyncrasies, should be available at the control board of a modern "hi-fi" radiogram. Armed also with flexible bass and treble tone controls together with rumble attenuators, dynamic scratch filters, steep-cutting surface noise eliminators, and fast-gating "pop" noise slicers, the musically inclined listener has every chance of extracting entertainment from a record. That is if he can stop worrying about stylus wear and whether the makers have automatically corrected for the inner groove tracing loss, or whether the servo-tracking top booster should be cut in. Recent press comments to the effect that "the record is nearly over before concert room balance is achieved" have more than a trace of truth.⁶ Moreover, critics' comments on orchestral balance, "thinness" of string reproduction and such-like matters, have been in some cases merely due to the use of incorrect equalizing. While the august pages of *The Gramophone* seem free from this error, it is difficult to see how it can be avoided when several characteristics may be employed on differing records from the same maker.

It seems evident that prejudice in British circles against U.S.A. recordings is largely due to the need for more extreme equalizing on U.S.A. recordings. Conversely, much favourable American comment on British recordings in the immediate post-war period is explained. The ordinary listener was unable to

keep abreast of the complexity of recording characteristics. Thus, reproduced with little or no equalizing, British recordings would sound full and balanced, compared with the U.S.A. records on which top boosting had been applied with enthusiasm. This compares with the situation here, where some record players make little or no provision for equalizing, so that those records employing a Fig. 3 characteristic sound thin and devoid of real bass.

Despite the fact that the public are unlikely to demand equalizing networks on their record players, there can be little doubt that they will strongly prefer correct equalizing. They can hardly be expected to demand something they do not know exists. The first disc player manufacturer who backs up the provision of equalizing with adequate press publicity will no doubt reap some adequate return for his enterprise.

Some of these facts are somewhat surprising, and, indeed, alarming, to those simple souls who require to reproduce a gramophone record with reasonable fidelity. Some half-dozen equalizer networks is the minimum requirement, assuming that minor discrepancies may be accommodated by use of a wide-range tone control unit. However, some measure of standardization to reduce the many varied recording characteristics now in use seems long overdue. Per-

haps when this is finally achieved, the gramophone industry could consider a few more "improvements." One suggested improvement is the issue of standard 78-r.p.m. pressings optionally in noiseless plastic. A further suggestion is the issue of "extended play" 45-r.p.m. records, pressed on 10-inch discs. This would obviate the very real risk of high intermodulation components on the inner grooves of the present 7-inch 45-r.p.m. "extended play" records. It would seem too much to ask, of course, that the recording characteristic be indicated on the record label itself.

REFERENCES

- ¹ Powell, T., "Phase Bandwidth." *Audio Engineering*, June, 1949, p. 6.
- ² Hilliard, J. K., "Audio Quality—Intermodulation Tests." *Electronics*, April, 1946, p. 218.
- ³ Mitchell, B. E. G., "Commercial Disc Recording and Processing." (I.E.E. Lecture Reprint available from E.M.I., Ltd., Hayes, Middx.)
- ⁴ Lewis, W. D., & Hunt, F. V., "Theory of Tracing Distortion in Record Reproduction." *J. Acoust. Soc. Amer.* 12, 3 (Jan., 1941), p. 348.
- ⁵ *Audio Engineering*, Jan., 1951, p. 22.
- ⁶ "Radio Designer's Handbook." Iliffe & Sons Ltd., pp. 704-705.
- ⁷ Bird, K., "Hi-Fi in the Home." *The Observer*, Jan. 31st, 1954.

Magnetic Recording

For Purposes Other Than Entertainment

By H. G. M. SPRATT, B.Sc., M.I.E.E.

THE main advantages of magnetic recording are sufficiently well known to require no more than enumeration: (1) wide frequency band, (2) high dynamic range, (3) low noise level and (4) capability of re-use after erasure. These good qualities were early appreciated and exploited for the purposes of entertainment. There are, however, a number of other less obvious advantages which can be classed together under the heading "mechanical adaptability," and these have extended the use of magnetic recording into fields which other recording processes cannot readily enter. Because the significance of these secondary features is not immediately obvious, a brief survey of them would seem a logical introduction to a study of the various applications they have made possible.

In the first place, it is quite easy to effect multiple-track recording on standard $\frac{1}{2}$ -in-wide tape and the width can, if desired, be extended up to several inches. It is easy to provide reels of tape in lengths up to 5,000ft—longer if the machine is designed to take them—and it is easy to run lengths of 1,200ft or more continuously as closed loops. As an alternative, the recording material can be supplied and used in the form of rectangular sheets instead of tape. Furthermore, if the standard base is insufficiently robust, a thicker

material such as 0.005in cellulose tri-acetate can be substituted. This is standard cine-film base which can be slit to 16mm or 35mm, with or without the normal perforations added, and either fully or stripe coated. Finally, if all these varieties of base fail to satisfy, the magnetic coating can be applied to solid metal in the form of a drum or disc, by dipping or spraying. This last technique ensures full dimensional stability at the highest practicable running speeds, and this in turn permits the use of non-contact heads since a constant separation between head and coating surface is guaranteed while the high speed ensures a reasonable playback voltage. The use of rotating drums or discs also facilitates synchronizing.

Turning to consider some of the applications, we will start with the more obvious, and those least removed from conventional operation. Under this heading comes the "talking book for the blind," an equipment using a few hundred feet of $\frac{1}{2}$ -in-wide tape on which 24 tracks are recorded. A cassette houses the loaded and unloaded spools and when this is placed in position in the machine, the tape is wound from one spool to the other. At the end of each run the cassette is turned over and the head shifted to register with the next track. Thus one reel of tape, running at a speed

which starts at $3\frac{1}{2}$ in/sec and finishes at $7\frac{1}{2}$ in/sec along any one track, can provide some twelve hours of playing time with clear-quality speech.

Another long-playing application of considerable importance is airport monitoring. For some time now it has been considered essential to preserve a continuous record of the conversation and instructions passing between control tower and aircraft in anticipation of possible mishaps and subsequent courts of enquiry, and this requirement is easily met by long-playing magnetic recorders. The tape speed is about $3\frac{1}{2}$ in/sec and multi-track operation is employed, one track logging the time. By using reels of about 4,000ft, four hours of unbroken recording is obtained. The recorders operate in pairs and the stand-by unit is automatically switched into operation just before the tape on the working unit has run out.

The office dictating machine, when constructed along conventional lines, is likewise not far removed from the domestic recorder. It usually employs 600ft or smaller reels of tape and runs at a slow speed. Easy control of run-back is important and a common feature is a foot-switch for "inching." Dictating machines are, however, not all of a pattern and one equipment ("Dictorel") employs a rectangular sheet of magnetically coated material provided with registering eyelets, and this sheet is wound round a rotating drum so that a helical track is recorded as the head traverses from one edge to the other.

One valuable time-saving device, known to be practicable, does not appear to have been incorporated in dictating machines so far, probably owing to cost. This is the use of a rotating multiple playback head combined with fast recording and slow reproducing speeds. With normal equipment a message recorded at a fast dictation speed may naturally enough prove impossible on playback to take down without frequent stops. If, in an attempt to ease matters, the playback speed is halved, the reproduction may be well nigh unintelligible owing to the drop in pitch. A method of overcoming this difficulty is to provide three or four playback heads mounted symmetrically round a rotating turret and connected to a commutator so that each is switched in and out of circuit in turn. The playback speed is halved but the turret rotates in opposition to the tape movement so that the relative speed of tape and heads is the same as the original recording speed and the pitch remains unchanged. With careful design no particularly disturbing effects appear to arise through the commutation.

Sound Reinforcement

A further step away from the conventional is the employment of magnetic recording for special acoustical purposes⁷. For a start it goes without saying that, with its facilities for multi-track operation, magnetic recording is ideally suitable for stereophony⁸ and binaural working. Successful trials have been carried out of both these techniques and no more remains to be said. Another variant of multi-track operation, however, is aimed at improving sound distribution in large buildings, and has been successfully applied in the case of St. Paul's cathedral¹. With a normal type of public-address system in buildings of this size, the time delay between the sound arriving direct from the source and that from the local reinforcing loudspeakers is sufficiently long to mar intelligibility seriously and to obscure the true direction of the source. This trouble has been overcome by intro-

during specific amounts of delay into the individual loudspeaker lines, the maximum being applied to those farthest from the pulpit. The equipment used (Pamphonic) employs a rotating disc around the edge of which an annulus of magnetic material is laid down. Around the periphery, also are located a recording head, a number of pickup heads appropriately spaced, and finally an erase head. The recording head is fed from the microphone at the source, the playback heads are located so as to introduce in each case the requisite amount of delay for the particular bank of loudspeakers served, and the erase head clears the tape just before it reaches the recording head again.

A rather similar principle is involved in the generation of artificial reverberation⁵ to meet the needs of broadcast and recording studios. The building of special reverberation rooms is obviously expensive while the provision of movable damping panels and the like is cumbersome and not particularly cheap. If, however, a magnetic recording is made in a reasonably damped room and then played back through two or more reproducing heads mounted one behind the other and feeding into a common amplifier, any reverberation effect can be simulated. The "reverberation time" is controlled by the distances between the heads and the reverberation frequency characteristic by attenuators and filters in the pick-up output circuits.

Data Recording

In laboratory experiments, data recording, telemetering and the like, magnetic recording can assist in a variety of ways. One simple but powerful aid in the laboratory is the facility for making a verbal recording on tape during the course of an experiment, calling out meter readings and the time at which they are taken, adding a running commentary and, incidentally, leaving the hands free all the time. On the other hand, when recording of data is required, a departure from conventional technique is often found necessary.⁶ The normal amplitude modulation of the tape is seldom satisfactory owing to the small but ever-present variation of sensitivity, and the complete loss of any d.c. component. These difficulties can be overcome by employing a frequency-modulated carrier, provided the transport system has been designed to give outstandingly good speed constancy. As alternatives, most of the pulse-modulation systems are equally applicable.

There are at least three systems which rely upon special designs of head to meet the requirements of data recording. In the first method⁷ a mixture of transverse and perpendicular recording is employed to ensure accurate reproduction of square waves and d.c. components. The pick-up head is provided with two additional windings, one of which is fed with h.f. current saturating part of the iron circuit every half-cycle and causing the reluctance to vary cyclically while the other is fed with a constant d.c. polarizing current.

The second method is called "boundary-displacement recording."⁸ Here, in the absence of signals, the whole width of the tape is magnetized to saturation except for a straight narrow strip running down the centre, on opposite sides of which the magnetization is of opposite polarity. When signals are applied, the strip moves towards one side or the other in accordance with the signal waveform. The effect is produced by means of a special composite recording head which incorporates a permanent magnet and a soft-

iron circuit on which the signal coil is wound. The pick-up head is conventional. Good amplitude linearity and high sensitivity are claimed for this system, but not d.c. working.

In the third method, the recording head is conventional while the playback head has a miniature cathode-ray tube inserted in its iron circuit.⁹ This tube has a split target, and deflection of the beam due to flux variation alters the potentials of the two halves differentially. This potential difference constitutes the input voltage to the playback amplifier. It is generally higher than the average head output, but a more important feature is the fact that it is proportional to flux and not rate of change of flux. Hence the d.c. component is preserved and the low-frequency response is flat; the h.f. response is, however, less than with a conventional magnetic head.

Whatever the system employed, it should always be borne in mind that, when analysing very low-frequency waveforms, it is usually advantageous to record them at a low speed and play them back into the analysing instrument at a much higher tone. Provided the increase in speed is sufficiently great, this procedure will shift the frequencies into a range where they can be handled by normal analysers. Mention of analysers calls to mind noise measurement, for which magnetic recording is naturally suitable. This is particularly the case where subjective effects are of importance, as in road vehicles,¹⁰ and binaural recording can be introduced with advantage.

Medical Applications

In medicine use has been found for magnetic recording by psychiatrists in both diagnosis and treatment. In diagnosis, the advantages of possessing complete records of consultations for subsequent study at leisure are fairly obvious. As regards treatment, the same equipment can be used to repeat conditioning messages to a patient during sleep by means of a receiver placed under the pillow.

The uses and potential uses of magnetic recording in education are far reaching. They can, however, be covered in a few sentences since standard equipment is generally employed. Voice training, speech improvement and speech therapy can all derive appreciable benefits. Educational films can be dubbed with running commentaries in any language if magnetic stripes have been provided, while if the film has a composite half-photo, half-magnetic stripe two languages can be recorded. Finally, a technique has been developed for language teaching (Magnograph). A twin-track equipment is employed and on one track a "master" record in the particular language is laid down while the other is used by the student for practising. The equipment is so designed that he can erase his own track but not the master.

In the field of advertising the long endless loop comes into its own since it can be employed to provide a sound commentary for unattended displays. In much the same way tape recording can be used with film-strip projection (Magnograph). When the sound commentary on a particular frame being displayed is completed, a warning signal from the tape instructs the operator to change to the next frame. It is, of course, possible to arrange for the warning signals to operate relays which shift the film strip automatically and this has been successfully tried out.

While the endless loop has a number of uses in communications, one only need be mentioned here,

namely its application to speech secrecy. A simple method of achieving some degree of secrecy is to record the message on tape, transmit it at a greatly increased speed and finally reconvert it to normal speed after reception, again by means of magnetic recording. A more elaborate and effective procedure is to record the message on a loop, pick it up on several playback heads spaced at intervals behind the recording head and pass the outputs through different band-pass filters to a common amplifier. A reverse process at the receiving end enables the message to be reconstituted. Such a message is virtually impossible to decode without knowledge of the number of pick-up heads, their order and relative "delays," the pass bands of the filters and the particular head with which each is associated.

Whilst on the subject of communications, an equipment designed to answer the telephone in the subscriber's absence should be mentioned. On the arrival of a call, the equipment switches itself on, indicates that the called subscriber is away and invites the caller to leave a message. Any such message is recorded on tape and at the end of a predetermined period of silence the machine switches itself off.

An entirely different technique which can reasonably be associated with communications is "Ferromagnetic" or magnetic printing.¹¹ A photographic negative of the information to be copied is scanned by a photocell in a normal facsimile equipment which is provided with a second drum to accommodate a sheet of magnetic material. Signals from the photocell are passed to a recording head which is simultaneously scanning the magnetic sheet. If this sheet is subsequently dipped in a suspension of ferro-magnetic particles, the attractive forces will cause a visible image to be built up which can then be transferred by contact pressure to a blank sheet of paper.

In the field of electronic computing the magnetically-coated drum seems to be firmly established as an information store of intermediate access time.^{12, 13} So far, electrolytic nickel appears to be favoured for the drum coating, but the normal iron oxide used for tape should be equally satisfactory if properly applied. Such a drum, 11½ in in diameter, will accommodate 64 tracks in an axial length of 2 in and 2,880 pulse intervals per track, although it is believed that this latter number could be doubled. Furthermore, one track can be utilized for maintaining synchronous running of the drum. This track has a number of equidistant pulses recorded around it which on playback are compared in a discriminator with the output from a crystal oscillator of appropriate frequency. Uncontrolled, the drum would run too fast, but the discriminator supplies a varying d.c. to braking coils mounted round one end face and so maintains synchronous running. In the particular equipment described non-contact heads, separated 0.001 in from the coating surface, are employed.

Machine Control

The last application to be described which comes strictly within the scope of this article is the recording and copying of irregular shapes, an industrial process of importance in the manufacture of certain cams and the mass production of shoe soles, etc.¹⁴ Because of the inconstancy of tape sensitivity, amplitude modulation is rejected in favour of a form of pulse modulation. The master shape is rotated and a feeler following the profile drives a differential capacitor

which controls the pulse-width/space ratio of a multi-vibrator. The pulses are recorded on tape at saturation level and on replay they appear as spikes which are used to drive another multivibrator. This second multivibrator controls a servomotor which drives the reproducing mechanism.

Up to this point it is felt that the exclusion of the entertainment field, as expressed in the title, has been strictly observed. However, because of the wider prospects envisaged for the future, it would be remiss to conclude without brief reference to a new development which so far comes under the heading of entertainment, namely, recording of colour-television signals. The system in question uses $\frac{1}{2}$ in-wide tape running at 30ft/sec and five channels are recorded, three for video, one for the sound sub-carrier, and the fifth for synchronizing. As the response extends up to 30 Mc/s it would now appear possible to record and reproduce wavelengths as short as 1/10,000in on magnetic tape. This is an outstanding advance in the "state of the art" and is likely to extend the already wide fields of magnetic recording.

REFERENCES

¹ "Long-Playing Magnetic Tape," *Wireless World*, January, 1954, p. 32.
² Hémarquinquer, P.: "Les Multiples Applications de l'Enregistrement Magnetique," *Radio Française*, June, 1950, No. 6, p. 8.
³ Aisberg, E.: "Improved Stereophony," *Wireless World*, September, 1950, p. 327.

⁴ "Speech Reinforcement in St. Paul's Cathedral," *Wireless World*, February and March, 1952, p. 12.
⁵ Fidelman, D.: "Synthetic Reverberation," *Radio & Television News* (Supplement to *Radio & Television News*), November, 1950, 15, p. 3A.
⁶ Molyneux, L.: "Recording Low-Frequency Phenomena on Magnetic Tape," *Electronic Engineering*, March, 1952, 24, p. 130.
⁷ Schurch, E. C., and Schleif, F. R.: "A Magnetic Oscillograph for Power System Analysis," *Electrical Engineering* (New York), November, 1951, 70, p. 993.
⁸ Daniels, H. L.: "Boundary-Displacement Magnetic Recording," *Electronics*, April, 1952, 25, p. 116.
⁹ Skellett, A. M., Leveridge, L. E., and Gratian, J. W.: "Electron-Beam Head for Magnetic Tape Playback," *Electronics*, October, 1953, 26, p. 168.
¹⁰ Bristow, J. R.: "Electronics in Automobile Engineering Research," *Electronic Engineering*, April, 1952, 24, p. 189.
¹¹ Atkinson, R. B., and Ellis, S. G.: "Ferromagnetism," *Journal of the Franklin Institute*, November, 1951, 252, p. 373.
¹² Williams, F. C., and West, J. C.: "The Position Synchronization of a Rotating Drum," *Journal I.E.E.*, 1951, 98, Part II, p. 29.
¹³ Williams, F. C., Kilburn, T., and Thomas, G. E.: "Universal High-Speed Digital Computers. A Magnetic Store," *Journal I.E.E.*, 1952, 99, Part II, p. 94.
¹⁴ Perron, R. R.: "Shape Recording with Ratio-Modulated Tape," *Electronics*, November, 1950, 23, p. 104.
¹⁵ Olson, H. F., Houghton, W. D., Morgan, A. R., Zenel, J., Artzt, M., Woodward, J. G., and Fischer, J. T.: "A System for Recording and Reproducing Television Signals," *R.C.A. Review*, March, 1954, 15, p. 3.



BICYCLE RADIO

The Faras bicycle receiver and batteries. No space is wasted, as the enlarged interior view on the left shows. The tuning indicator is in front of the loudspeaker.



A BICYCLE radio set in the shape of a headlamp measuring 6x3 in and known as the "Faras" receiver is now available in this country. It is of German origin.

The receiver is a 5-stage, 4-valve superheterodyne, and compressing it, complete with a moving-coil loudspeaker, into such a small volume is no mean achievement, especially as everything is very accessible when the chassis is removed from its case. Miniature, not sub-miniature, valves and parts are used and the circuit consists of a frequency changer, i.f. amplifier, germanium crystal detector, a.f. amplifier and output valve. A neon tuning indicator, a.g.c. and negative feedback are included.

Separate h.t. (67.5 V) and l.t. (1½ V) batteries are carried in a small plastic satchel, which can be strapped either to the bicycle crossbar or saddle, whichever is the more convenient. Current consumption is reasonable and if the

set is used with discretion the h.t. battery should give several months' service, but the l.t. (two U2 size in parallel) will need replacing more frequently.

A removable telescopic aerial, measuring 7½ in closed and 30 in fully extended, suffices to give satisfactory reception almost anywhere; some eight to ten stations were received at adequate loudspeaker strength in the heart of London, so in the quieter lanes of the countryside, and especially on high ground, even more may be expected in daylight and considerably more after dark.

The set is single waveband only, with the choice of short or medium waves. It is easily detached from the bicycle and can be used as a portable either in the house or on picnics. It is obtainable from G. I. Developments, 48, Moorgate, London, E.C.1, and costs £11 plus £4 2s 6d U.K. purchase tax. The weight is 3½ lb complete.

H.M.V. TAPE RECORDS

Some Details of Recording Materials and Methods

THE decision to issue tape recordings of famous artists and orchestras under contract to the Gramophone Company has finally disposed of dark prophecies that the vested interest in discs would prove an insurmountable obstacle to the exploitation of what is inherently a superior technical method of sound reproduction. Readers of this journal do not need to be reminded of the fact that reduced linear groove speed near the centre of a record, often combined with an orchestral climax, causes an increase in tracing distortion; that stylus wear must be watched—unless one can afford a diamond—and that recent improvements in surface noise have served to emphasize the irregular and to some people more irritating “plops” arising from dust attracted by the electrostatic charges to which the new record materials are prone.

Tape, on the other hand, is not without its drawbacks, and the delay in issuing tape recordings has been caused primarily by the search for a really stable, non-curling base material which is not affected by moisture and can be relied upon to have a shelf life comparable with that of the disc record. It is considered that the unplasticized p.v.c. base now used by E.M.I. will meet this requirement. In addition, it is treated to minimize the electrostatic charges which attract dust, and great care is taken to ensure completely uniform dispersion of the oxide particles in the coating. The tapes which will be sold to the public are in fact of exactly the same grade as those used for the master recordings in the studio.

The equipment used for duplicating the tapes is also of the same quality as that used for making masters—the Type BTR2 professional recorder. Bat-

teries of these machines, running at the adopted speed of $7\frac{1}{2}$ in/sec, are fed from the master tape which is run at either 30 or 15 in/sec. There is no appreciable loss of quality in transcription and the frequencies recorded on the $7\frac{1}{2}$ in/sec tape go up to 15 kc/s.

Recordings are of the twin-track type and are made to be played from left to right on the upper track when the active side of the tape is away from the observer. Tape leaders are printed so that when the reel is turned so that the title can be read, it is ready for placing on the machine. A white leader tape indicates the beginning of the first half-track and a red of the second. Dimensions of the recorded tracks are given in Fig. 1. It is recommended that the width of the playback head should be less than that of the track, to avoid noise arising from possible blemishes on the edge of the tape. The reels are supplied on spools conforming to B.S. 2478:1954 and are self-supporting with 45 mils clearance from the inside faces of the flanges on each side. To ensure tight spooling a tension of 80 to 90 grams is recommended.

Playback Characteristic

Tapes are recorded on the assumption that they will be played back on equipment conforming to the C.C.I.R. reproducing characteristic specified for programme interchange in broadcasting organizations. This states that with an “ideal” head (one having a short gap, long arc of tape contact and negligible losses) the associated amplifier should have a response curve equivalent to that of a series combination of resistance and capacitance with a time constant of $100\ \mu\text{sec}$. The response is shown in Fig. 2, and any deficiencies in the playback head or amplifier should be compensated to fit this curve.

The tape coating is of the high-coercivity type and should not show any sign of print-through between turns when stored at normal room temperatures. It is not likely to be accidentally erased by stray fields of lesser magnitude than those experienced, say, within a few inches of a loudspeaker magnet.

We have had an opportunity of hearing some of the first recordings and can endorse the claims for high quality and unobtrusive background noise. Good equipment is necessary to realize the full potentialities of these tapes and this is more costly than that required for reproduction from discs. Both systems are likely to enjoy peaceful co-existence for many years to come, and the choice for the individual is a matter for his own sense of values.




Fig. 1. Dimensions of dual track and recommended width and siting of playback head.

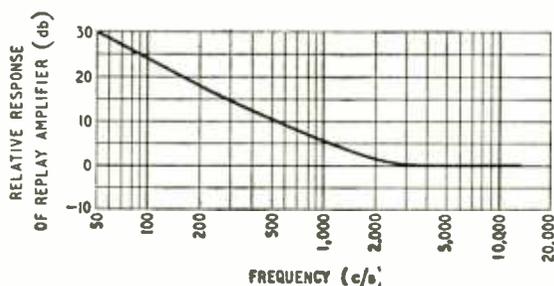


Fig. 2. Recommended playback characteristic for use with H.M.V. tape recordings.

“Combination F.M./A.M. Receivers”

A CORRECTION


In the circuit of Fig. 5 on page 435 in our September (1954) issue the markings of the switch joined to the grid of the triode section in the ECH81 were unfortunately transposed. The upper fixed contact should be marked B and the lower one V.

RECTIFICATION

By "CATHODE RAY"

Interpreting Meter Readings in a Simple Circuit

AS I have remarked before, it is astonishing how much a rectifier complicates the simplest circuit. It does this even if the rectifier is theoretically ideal—without any "bottom bend" or curved characteristic. One would hardly think that such a perfect rectifier, consisting of zero resistance to current in one direction and infinite resistance to current in the other direction (a simple on-off switch, in fact) would inevitably make the action of everything connected



The subject of this article—the simplest possible rectifier circuit.

with it much more involved. Without the rectifier, Fig. 1 is as simple as the village idiot; but plus rectifier it possesses unsuspected complexities of character. However, I don't propose to go into any subtleties or finer points just now; this is going to be for anyone just starting on rectifiers, and especially the measuring and reckoning of currents and voltages in connection therewith.

When measuring d.c. one uses a d.c. meter, or a universal meter switched to "D.C." And correspondingly for a.c. A rectifier is usually introduced to the novice as a thing for converting a.c. to d.c. So he might very well suppose that all he had to do was to use a.c. meters at the input side and d.c. meters at the output. But there is a good deal more to it than that!

Fig. 1, of course, is absolutely the simplest possible rectifier circuit, classified officially as a single-phase half-wave rectifier with resistance load and no smoothing. Just to reduce even this to its simplest terms, let us assume that the rectifier is of the perfect on-off theoretical type just mentioned, and the a.c. generator has a pure sine waveform. Fig. 2(a) is a picture of one of its cycles. One is enough, because the others are all the same. " E_{max} " is the usual symbol for the peak e.m.f.

The ordinary moving-coil meter, as used for d.c., moves one way for positive and the opposite way for negative. If the current through it is changing very rapidly, the inertia of the coil and pointer prevents it from following those changes. If you connect it to a 50-c/s a.c. supply, the most you are likely to see is a slight vibration of the pointer. At higher frequencies even this wouldn't be noticeable; the pointer would stay practically motionless at zero. This kind of meter, thanks to the inertia of its moving parts, settles down at average or mean value of the current. And the mean value of any whole cycle of a.c. is always zero; the negative half-cycle just counterbalances the positive half.

The action of the rectifier in Fig. 1 is very simple indeed (we think!) because it just lets all the positive half-cycles through unaffected and stops the negative halves completely. The waveform across R_L , corresponding to the cycle we have been looking at in Fig. 2(a), is therefore as at (b). Supposing we connect a moving-coil voltmeter across R_L , what do we expect it to read? When it was connected direct across the generator it read nothing, because for every push it got one way it almost immediately got an exactly equal push the other way. Now it gets a push one way during half the cycle, which tends to make it read that way, and during the next half-cycle it gets no push at all, which tends to make it read nothing. Evidently it will read the average between the push and the no-push, which (since they occupy equal periods of time) will be half the reading that would be given by a continuous succession of pushes, such as would be obtained from a full-wave rectifier (of which more anon). Moreover, each push itself is not all the same amount of push, but begins gradually, works up to a maximum, and then tails off gradually. So we do not expect the voltmeter to read even half E_{max} , but only half the average or mean voltage during the positive half cycle.

Now if Fig. 2(b) were a section across a wall of sand, and we wanted to find the average height of the wall, we would probably re-shape the sand until it was level from back to front, as in Fig. 3, and reckon its new constant height as the average of the old varying height. If we did the thing carefully we would find it to be just under 64% of the previous peak. The same thing can be done less messily by drawing a

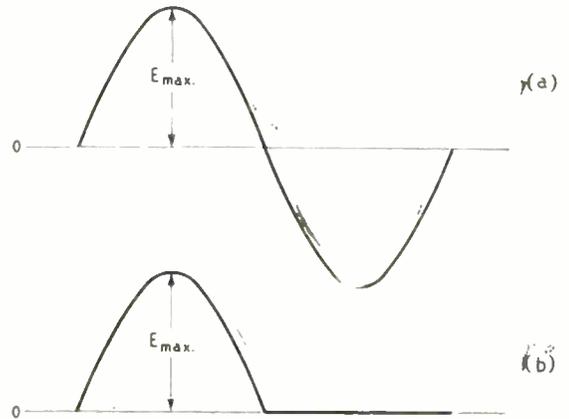


Fig. 2. The voltage waveform (a) delivered by the generator, and (b) appearing across the load resistance, R_L . (b) is just the first half-cycle of (a), followed by no voltage for the next half-cycle.




Fig. 3. The mean or average of the half-wave (dotted) is the same as that of the flat-topped half-wave having the same area under it.

sine wave on paper and then measuring the area enclosed by the half cycle. The height of a rectangle of equal area and width is the average height of the half-cycle. But in much less time than it takes to draw the curve accurately and measure the area under it, anyone with a little knowledge of the integral calculus can show that the mean value of half a sine wave is $2/\pi$ or 0.6366 times its peak value (in this case E_{max}). The average of half a cycle over the time of a whole cycle is of course half this, $1/\pi$, or 0.3183 E_{max} .

Next, what does an a.c. voltmeter read across the generator? If we actually try it, using a number of voltmeters of different types but all of guaranteed accuracy, they will all read the same. But that simple and satisfactory result conceals a complication that may mislead us badly in certain circumstances. However, before getting on to that, we will be quite right in expecting that they will not read E_{max} , seeing that except instantaneously twice per cycle the actual voltage is less. We might, if we were new to this, expect the voltmeters to read the mean voltage (reckoning negative the same as positive), that is to say 0.637 E_{max} . There we would be wrong. Why?

The most likely sort of a.c. voltmeter would be the type incorporated in universal multi-range meters. These are really moving-coil meters adapted for a.c. with the aid of rectifiers. Above about 20 or 30 volts these rectifiers are very nearly as good as perfect. They are full-wave rectifiers, so the second half-cycle is not blank as in Fig. 2(b) but is the same as the first. So the pointer is deflected to the same place on the scale as it would be if the same instrument without the rectifier were connected to a direct voltage equal to 0.637 E_{max} . Why, then, does it not read 0.637 E_{max} ?

The reason is that when, say, a d.c. voltmeter on its 250-volt range is switched over to the 250 volts a.c. range, the switch does more than just bring in a full-wave rectifier. It actually alters the meter so as to make it read about 11% higher when a given voltage is applied. In other words, the instrument no longer reads the correct mean value of the half-cycles. Again, why?

Harmless Deception?

Well, obviously, if the real value of an alternating current was its mean value, then it would have no value at all. As we have seen, the mean of a whole cycle is nil. Negative cancels positive. We know that it is not necessary to use a rectifier in order to make our a.c. supply yield light, heat or power. So clearly the effective value of a.c. is something different from its mean value. Even before we come on to a.c. at all we learn that the heat or power given by electricity is proportional to the *square* of the current. Watts are equal to amps times volts, and more amps need more volts, so watts are proportional to amps-squared or volts-squared. Now the square of a negative number is the same as the square of the same number positive, so the effective value of the negative half-cycle is the same as the positive half. To find the power of a whole cycle we must first square all the instantaneous voltages in Fig. 2(a). That gives the curve shown in Fig. 4. We know the peak value straight off; it is E_{max}^2 of course. It turns out that the shape of the wave is exactly the same as that of a sine wave of twice the frequency, but raised so as to be all above the zero line.* And because a sine wave is symmetrical above and below its horizontal base (shown dotted), the mean

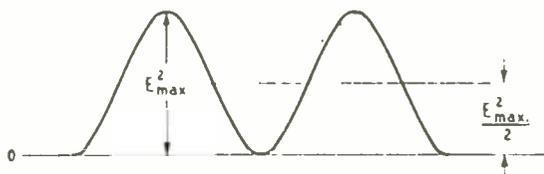


Fig. 4. When instantaneous voltages in Fig. 2(a) are squared, this is the result.

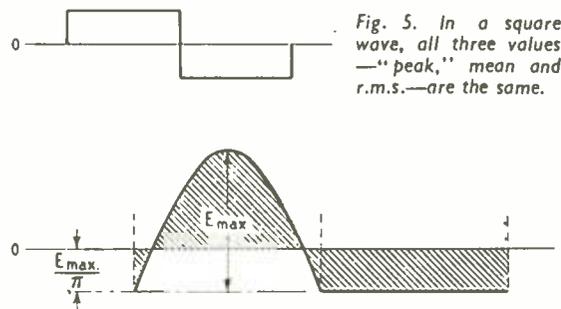


Fig. 5. In a square wave, all three values—"peak," mean and r.m.s.—are the same.

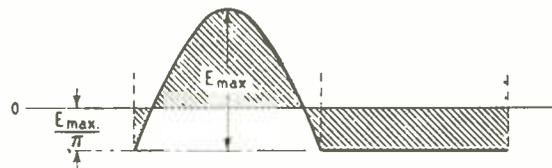


Fig. 6. When the d.c. component has been taken from Fig. 2(b), this is what is left.

height of this curve is half the peaks, namely half E_{max}^2 . And because power is proportional to voltage-squared, voltage is proportional to the square root of power. So our effective voltage is $\sqrt{(E_{max}^2/2)}$, or $E_{max}/\sqrt{2}$, or 0.707 E_{max} . For reasons that the above process makes obvious, another (and commoner) name for effective value is root-mean-square (r.m.s.) value. For sine waveforms, at least, it is 0.707/0.637, or 1.11 times, or 11% more than the half-cycle mean value. That is why the rectifier type of a.c. meter, which if exactly the same as a d.c. meter with the addition of a rectifier would read low, has to be internally altered to compensate for this.

Since the r.m.s. value is the one that indicates how much heat or power we are getting, it is the one normally used. So it is denoted by a plain capital letter, E, V, or I, as distinct from E_{max} and E_{av} , the peak and mean values. When our 230-volt d.c. supply is changed over to a.c., its voltage is made so that its r.m.s. value is 230, because that raises our heaters, etc., to the same temperature as the d.c., notwithstanding that the peak value delivered is $\sqrt{2} \times 230 = 325V$.

Our rectifier meter, then, by means of internal jiggery-pokery, is made to read something that is contrary to its true nature, namely r.m.s. values. This deception is quite harmless so long as the instrument is being used to measure voltages or currents of sine waveform, for which the r.m.s./mean ratio is 1.11. But if the waveform is different, this ratio is in general different, and then there is a discrepancy between what the meter has been made to look as if it were doing and what it really is doing. What it is doing is reading 1.11 E_{av} of the full-wave-rectified voltage. To take an obvious example, suppose the meter were used on a square-wave supply, Fig. 5. Here E_{max} , E, and E_{av} are all equal. So the meter would read 11% high, and that is quite a serious error. But nothing like as bad as it would be on some waveforms, as we shall see.

How about other types of a.c. voltmeter? Valve

*Trigonometricians will know this, because $\sin^2 x = (1 - \cos 2x)$.

voltmeters are rectifier voltmeters, but their rectification is not so simple, so we shall leave them till later. Electrostatic voltmeters are true voltmeters (for they are deflected by voltage, not by current passed through a high resistance by a voltage) and they are square-law instruments—the deflection is proportional to the square of the voltage, so they need no rectification and they naturally read r.m.s. values on any waveform. So would voltmeters depending on heating action, but although thermojunction meters are sometimes used for measuring current they are rarely used for voltage, because they are relatively insensitive, and easily burn out.

Just to complete this first stage of the inquiry, what would these various a.c. voltmeters make of the rectified output, Fig. 2(b)? Any true r.m.s. voltmeter would of course read the r.m.s. value of that waveform. Now it was obvious (wasn't it?) that the *mean* value of that waveform is half the mean value of two working half-cycles. So perhaps you have already jumped to the conclusion that its r.m.s. value is half the r.m.s. value of two half-cycles, so that the voltmeter will read $E/2$, or $0.353 E_{m.r.s.}$. If so, better go through the whole process. As Fig. 4 shows, the mean voltage-squared for the first half-cycle is $E_{max}^2/2$; for the second, nil; and for the whole cycle it must be the average of these two, namely, $E_{m.r.s.}^2/4$. Now take the square root of this to find the voltage— $E_{m.r.s.}/\sqrt{4} = E_{m.r.s.}/2$, or $0.5 E_{m.r.s.}$ or $E/\sqrt{2}$, = 0.707E. Not 0.500E. Is that a surprise?

More Surprises

Well, here perhaps is another. Fig 2(b) is not a proper alternating voltage; it doesn't alternate. It is really a mixture of a.v. of awkward waveform and a direct voltage. An a.c. voltmeter would be quite within its rights if it had a transformer or capacitor coupling, which (whether incorporated in the instrument or inserted between it and R_L in Fig. 1) would block the d.c., and what the meter would get would be as in Fig. 6. This is purely alternating, which means that the shaded area below the zero line is equal to that above the line. It looks rather a tricky job on paper to set the line so as to make this so. The d.c.-blocking device does it automatically, of course. But it is quite easy to calculate. We know that the mean value of the rectified voltage (Fig. 2(b)) is $E_{m.r.s.}/\pi = 0.318E_{m.r.s.}$. That is to say, as a direct voltage it is equivalent to a steady voltage equal to $0.318E_{m.r.s.}$ throughout the cycle. So if we subtract this d.v. from Fig. 2(b) we get Fig. 6 in which the whole waveform has been "pushed down" so that it begins $0.318 E_{m.r.s.}$ below the horizontal base line. The fact that this downward shift represents the mean value of Fig. 2(b) means that the area under the half-wave in Fig. 2(b) is equal to the area of the rectangle in Fig. 6, $0.318E_{m.r.s.}$ high and one whole cycle wide. If we subtract the white part of this rectangle from both, we are left with the fact that the shaded area above the line is equal to the shaded areas below the line, which agrees with our requirement that Fig. 6 must represent a purely alternating voltage. Its r.m.s. value can be calculated, for we have just found the r.m.s. value of Fig. 2(b)—the a.v. plus the d.v. It is $E_{m.r.s.}/2$. And the r.m.s. value of pure d.v. is of course the same thing as the only value it can have, in this case E_{max}/π . To get the r.m.s. value of the a.v. alone we cannot just subtract; we must first square them, then subtract, then take the square root of the result.

Filling in the values, we have as the **required** r.m.s. value of the a.v. alone (Fig. 6) $\sqrt{(E_{m.r.s.}/2)^2 - (E_{m.r.s.}/\pi)^2} = 0.385 E_{m.r.s.}$ or $0.545E$. So that is another voltage reading we can get from our simple Fig. 1!

But it isn't all. Our rectifier voltmeter, being scaled to read 1.11 times mean values, would, if connected in place of the true r.m.s. voltmeter straight across or instead of R_L , read $1.11 \times 0.318E_{m.r.s.} = 0.354E_{m.r.s.} = E/2$. If connected via the blocking capacitor it would read 1.11 times twice the mean value either half-cycle in Fig. 6. This is a little more difficult to calculate; I make it $1.11 \times 0.496E = 0.551E$. So inserting the capacitor in series actually increases the reading on this type of instrument, though it considerably reduces it on the square-law type!

We shall be losing count of all this if we don't collect the results together. The table shows the readings in terms of E (the r.m.s. value of the generator e.m.f.), assuming the rectifier is perfect, the generator has a sine waveform and no resistance, the blocking capacitor has negligible impedance, and the rectifier meter reads 1.11 times mean values.

Type of voltmeter	Across E	Directly across R_L	Across R_L via blocking capacitor
D.C.	0	0.450E	0
Rectifier a.v.	E	0.500E	0.551E
Square-law a.v.	E	0.707E	0.545E

Even though this list lacks the still different readings given by most valve voltmeters, it has quite a variety! It should make one a little careful about voltmeter readings in even the simplest rectifier circuit. And if the waveform of E were *not* sine, most of them would be different; the only reading that could be relied upon to remain correct (apart from the two zeros) would be the square-law voltmeter across E . That is one of the only two readings that are important for most purposes. The other is the one taken with the d.c. voltmeter across R_L , and, since we normally want the mean value, the fact that with impure waveforms it is unlikely to be exactly 0.450E is of little account. If the same instrument is used with rectifier for a.c., then the ratio 0.450 should hold good for all waveforms, though the indicated E would not always be the true E .

Rectifier Ratings

So far we have considered the voltage across the generator and across the load, but not the voltage across the rectifier. During the first half-cycle the resistance of the perfect rectifier is nil, so there can be no voltage across it; during the second it is infinity so the full generator voltage comes across it. The waveform is therefore the same as Fig. 2(b)—though of course shifted along half-a-cycle—and there is no new information to add to the table. The one important thing about the voltage across the rectifier is its peak value, which is referred to in rectifier data sheets as the *peak inverse voltage*, and which must not be allowed to exceed the maximum specified. If a sine waveform can be safely assumed, it is $1.414E$, but if the waveform is liable to be peaky it is advisable to measure it, using a peak voltmeter or cathode-ray tube.

In doing so, make sure that what is measured is the full peak voltage from zero, not the peak from the a.v.-only base-line in Fig. 6.

So much for voltages. How about current readings? Well, at least there can be only one current at a time in a series circuit like Fig. 1, so it makes no difference where it is measured, and the only complication that can arise is the kind of meter used and which values count. The current has the same waveform as the voltage across R_L , namely Fig. 2(b). As regards the load side, we are chiefly interested in how much d.c. this current makes. In other words, its mean value. That is what is read, simply and conveniently, by a d.c. moving-coil ammeter or milliammeter. Whether it is the raw Fig. 2(b) or has been more or less smoothed out makes no difference. (But we shall see later that this last statement must in practice be qualified.)

An Old Trap

On the generator side, if we stick rigidly to our Fig. 1, with its theoretical resistanceless generator, the current question will be of no interest at all. But if we become a little more practical we must admit that between a nearly resistanceless generator (the mains) and our rectifier and load there is likely to be a transformer, and that even if its resistance is not large enough to have a significant effect on all the preceding calculations we must take account of the current in designing or choosing the transformer. The mean value has only an incidental interest, as a possible complicating factor in the design of the transformer owing to its polarizing effect on the core. The chief questions are the amount of power to design the transformer to give, and the gauge of wire needed to avoid overheating of its windings.

The heating is proportional to current-squared, so unless we have a true r.m.s. current meter (which is unlikely) we ought to know how to calculate it from the mean value we have read on the d.c. meter. In this simple case it is very easy. Since the current is proportional to the voltage across R_L , the middle column of the voltage table supplies the needed ratio. It shows that the ratio of r.m.s. to mean value is $0.707/0.450 = 1.57$. The heating effect is therefore 1.57^2 , or nearly $2\frac{1}{2}$, times as great as it would have appeared if we had fallen into an old trap and used the d.c. reading. For example, if the resistance of the transformer secondary were 50Ω and the d.c. reading were $0.2A$, the heating power in that winding would not be $0.2^2 \times 50 = 2$ watts, but $(1.57 \times 0.2)^2 \times 50 =$ nearly 5 watts.

The disadvantage of getting at it indirectly like this from the d.c. reading is that it can only be relied upon if the supply has a sine waveform. We shall see (if we

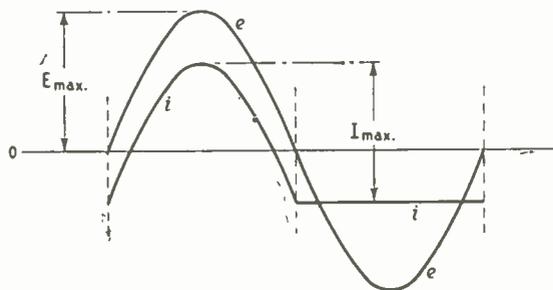


Fig. 7. Instantaneous voltage and current waveforms in the primary winding of a transformer feeding the Fig. 1 circuit.

get that far) that with some common types of rectifier circuit a pure supply waveform does not prevent the r.m.s./mean ratio rising far above 1.57. But sufficient unto the day is the evil thereof.

If we assume that the same basis of calculation will do for the primary winding too, we shall err on the safe side, but we shall err. For, as we observed before, the Fig. 2(b) waveform is not alternating, and a transformer cannot transform d.c. So the current waveform in the primary necessarily lacks the d.c. component, and its waveform is therefore as in Fig. 6. The r.m.s. value of this, as shown by the table, is $0.545/0.707 = 0.77$ times that of the same current in the secondary, so the heating effect is only $0.77^2 =$ about 0.6 times as much. It looks as if it would be a waste of copper to use the gauge that would be needed for the same current plus d.c.

I don't know what you are thinking, but might you be getting a little worried by this? I confess I was for a while, at the thought that there is more power in the secondary than the primary. Where does the d.c. power come from, if the primary winding supplies only the a.c. power? Try answering that one before reading on! Well, of course it would be impossible to get more power out of the secondary than is being put into the primary. Yet the r.m.s. current-squared in the secondary, assuming an ideal 1:1 transformer, is nearly 70% greater than in the primary!

The Balance of Power

But spare yourself dreams of perpetual motion and the downfall of the Law of Conservation of Energy. The root of the fallacy is that one is so used to power being reckoned as proportional to current-squared. The power dissipated in a resistance R undoubtedly is I^2R , but we have perhaps been forgetting about R . The power is proportional to I^2 only when R is constant and in this circuit it conspicuously isn't. It varies between R_L and infinity in every cycle. So the only sound basis is to reckon power as the mean value of current \times voltage over a whole cycle. In the secondary circuit this is quite easy, because during the current-passing half-cycle the conditions are the same as if the rectifier were not there, and during the remaining half-cycle there is no current so no power. So the mean power is half of what it would be if the rectifier were shorted; namely, half of I^2R_L . Or, using the table, the r.m.s. voltage over the whole cycle is $0.707E$ and the r.m.s. current is $0.707E/R_L$, so the power (since both have the same waveform and are in phase) is $0.707^2 E^2/R_L = \frac{1}{2} E^2/R_L$, which is the same result. In the primary it is not nearly so easy, because the voltage and current waveforms are as shown in Fig. 7, and it looks a tricky job multiplying these together at every point and taking the average of the result. I have not even attempted it, but if you do and find that the answer does *not* equal half EI be sure to let me know!

By assuming an ideal transformer, we have left out of account the magnetizing current, which, although nearly 90° out of phase, does in practice somewhat increase the primary current.

It is possible that you spotted an apparent anomaly in the balance of power even before we got on to transformers. It was when I had mentioned that the mean values of the output (current and voltage) are the same whether they come as delivered, in the rough, or after having been smoothed out by a filter. But the

power depends on r.m.s. values, and is less after it has been smoothed. To be precise, it is $(0.45/0.707)^2 =$ about 0.4 times as much—less than half. Assuming for the sake of argument that the low-pass filter is free from resistance, so cannot itself get rid of any power, where does the missing 60% go? It cannot be used up in the rectifier, because that too is perfect. The answer is rather complicated, because it depends on the type of filter, and especially on whether capacitance or inductance comes first, starting at the rectifier end. Suffice to say that whatever type is used it knocks our simple assumptions for six; the waveforms are completely different and all our calculations fall down. If you like, you can think of the alternating power as being returned to depôt by the filter. Although the load impedance to the d.c. is still R_L as before, the impedance to the a.c. is either very much lower or higher. In practice, then, a filter radically alters the type of rectifier circuit, and the foregoing results don't apply.

The Current Passing

There remains to be considered the current passing through the rectifier. Here we must not neglect the peak value, because that is one of the limiting factors in any rectifier. We have already discovered that the mean value of the Fig. 2(b) waveform is $1/\pi$ times the peak value, so, as the current waveform is the same, its peak value is π times the reading of the d.c. meter. And that is quite a lot bigger. Again, a sine input is assumed; with other waveforms the ratio might be higher still. The other current figure usually quoted for rectifiers is the mean value. That, I think, is chiefly a matter of convenience—the fact that it is what commonly-available meters read, and is the significant figure for the output. But it is the r.m.s. value that the rectifier itself is more likely to be conscious of. Presumably the fact that it is greater than the mean value is allowed for by the rectifier manufacturers in their catalogues. The fact that the amount greater depends on the supply waveform is difficult to allow for. Presumably they either allow for the worst probable waveform, or hope that sine waves will prevail.

For the sake of completeness I suppose we ought to go into what happens when we try to measure the r.m.s. current with a rectifier type of a.c. meter. Our voltage table shows that, given a sine-wave supply, its reading on the primary side of the transformer (third-column figures) is, neglecting magnetizing current, reasonably correct; theoretically, 1% high. On the secondary side it is badly out—nearly 30% low. It would be silly to try to do it this way; much better to measure the mean value with the d.c. meter and multiply by 1.57—or a bit more to allow for odd supply wave-forms.

We have come to the end, and have had time for only the really trivial Fig. 1—and not even all about that! When I look at the serried ranks of other and much more difficult rectifier circuits waiting in the queue, an endless vista of continuations of this article opens up before me. Appalled by this sight, I conclude that on the somewhat extensive foundations that have just been laid it will be possible (by another sudden change of metaphor) to quicken our pace. If the principles of this simple circuit can be assumed to be understood, then the difficulties of the others may be more apparent than real. I hope so, anyway.

Better Technical Writing

WHEN the Radio Industry Council's plan for making monetary awards to technical authors was formally inaugurated two years ago, Sir Ernest Gowers, author of "Plain Words," expressed the hope that, out of "this stimulating and interesting enterprise" would come, not only an increased spread of knowledge, but development of the capacity among scientific and technical workers to express themselves in terms which the reader can readily understand.

Writing recently about the awards to heads of firms and research establishments, Vice-Admiral Dorling, Director of the R.I.C., said "The last two years indicate that the scheme is, to a heartening extent, attaining its objective" [of encouraging the writing of articles reporting technical radio-electronic progress in Great Britain].

A leaflet setting out the details of the awards scheme is now available from the R.I.C. (59, Russell Square, London, W.C.1). It is in the form of a small poster suitable for display on staff notice boards; the aim is that the scheme may be publicized as widely as possible among those doing work providing material and inspiration for writing technical articles.


Up to six premiums of 25 guineas each are awarded each year to the authors of articles printed in the public Press. Awards for 1954 will be made at the end of the year, and the R.I.C. invite entries from editors and authors before December 31.

Short-wave Conditions

Predictions for October

THE full-line curves given here indicate the highest frequencies likely to be usable at any time of the day or night for reliable communications over four long-distance paths from this country during October.

Broken-line curves give the highest frequencies that will sustain a partial service throughout the same period.

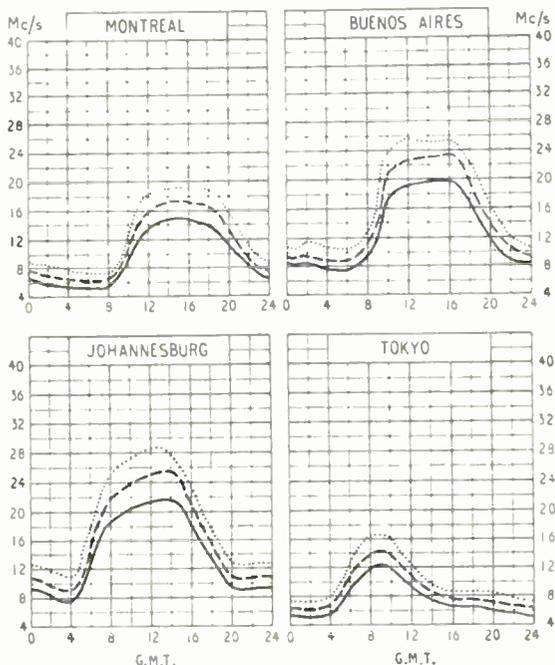


- FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE ON ALL UNDISTURBED DAYS
- - - PREDICTED AVERAGE MAXIMUM USABLE FREQUENCY
- FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE FOR 25% OF THE TOTAL TIME

TRANSISTOR H.T. GENERATOR

Replacement Unit for Hearing Aid H.T.
Batteries

By D. L. JOHNSTON*

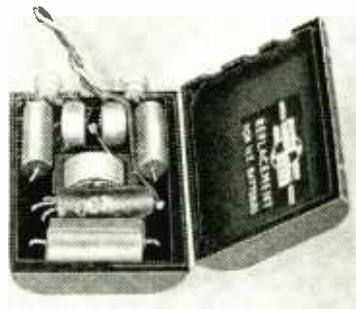

Open view of transistor h.t. generator — the interior is normally filled with potting resin.

JUNCTION transistors are very suitable for h.t. generators of the oscillator-rectifier type. Because of their low impedance they can be employed to generate low and medium h.t. voltages from a single dry cell supply, and the conversion efficiency can be as high as 60 per cent, which is unattainable at low powers with small valves or vibrators. For miniature portable equipment this is important, as single cells are a more compact and cheaper source of power than h.t. batteries, and have a longer shelf life.


At present the only transistors available in this country have a low rating of power dissipation (about 5 milliwatts), but this has proved adequate for circuits to replace the high-tension supply in hearing aids¹ and other "pocketable" instruments such as radiation monitors and test instruments. Work on these lines has proceeded independently in the U.S.A. and details of this have just been published.² Readers will also remember the design for a transistorized megohmmeter in the March, 1954, issue of *Wireless World*.

Transistors rated at over one watt are now available, at a rather high price, in the U.S.A., and with these larger and higher-voltage h.t. supplies will be possible. A television set or a transmitter with h.t. derived from one or two flash-lamp batteries will be quite practicable.

It may puzzle readers why transistors should be used to generate h.t. voltages for valve circuits instead of using transistors throughout. The explanation is that transistors are low-impedance devices and somewhat noisier than valves, and are not necessarily better than valves in all applications. For example, a pocket valve-voltmeter using miniature valves will have a much higher impedance than one with transistors, although a transistor h.t. generator can readily be employed to enable the instrument to work from a dry cell.

An interesting form of the transistor h.t. generator has been designed for the conversion of existing hearing aids to eliminate the h.t. battery. The whole generator circuit is contained in a case measuring $1\frac{1}{4}$ in \times $1\frac{1}{2}$ in \times $\frac{1}{2}$ in and interchangeable with the h.t. battery it replaces.

The transistor oscillator functions in the earthed emitter mode and feedback is obtained by tapping the inductance which also constitutes the primary of the step-up transformer. Two germanium diode recti-

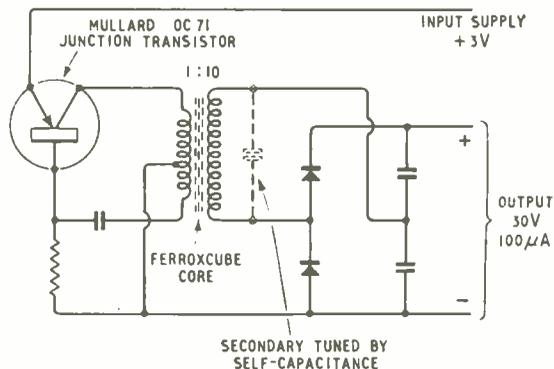

Circuit of h.t. generator to replace battery in a hearing aid.

fiers are arranged in a voltage-doubler circuit, giving an output of 0.1 mA at 30 V.

This particular unit provides over 30 volts at 100 microamps from either a 1.5- or 3-volt supply, at an efficiency of up to 60 per cent. The circuit described by Pearlman employs a voltage quadrupler and a 50:1 transformer, and provides 700 volts at $6\mu\text{A}$, with an efficiency of 42 per cent.

SUB-MINIATURIZATION TECHNIQUES

A RECEIVER unit for the 190 to 550-kc/s band, using 12 valves, with a front panel $1\frac{1}{4}$ in \times $5\frac{1}{4}$ in and a total volume of only 55 cubic inches, is described in an American National Bureau of Standards publication, recently issued. The set is designed to plug into a recess in an aircraft instrument panel, and to operate with 26V h.t. from the main aircraft d.c. supply.

Special components, such as silvered glass capacitors, a gain control with step contacts etched on a $\frac{1}{2}$ in diameter glass cylinder $\frac{1}{4}$ in long, have been developed and are illustrated and described. One of the most interesting features is the method of tuning the r.f. coils to follow a linear frequency law by means of ferrite cores actuated by screw threads with non-uniform pitch. Methods of cutting these threads on a production basis are described in detail. Exact tracking of the oscillator is effected by adjustable cam plates, and a method of temperature compensation by mounting the cam adjusting screws in bimetallic strips is proposed.

Copies of the report, NBS Circular 545, are obtainable from the Government Printing Office, Washington, D.C., the price being 50 cents (plus one-third to cover postage).

* Fortiphone, Ltd.

¹ Patents applied for. Fortiphone, Ltd.

² Pearlman, A. R., "Transistor Power Supply for Geiger Counters." *Electronics*, August, 1954, p. 144.

Flywheel Synchronizing

1.—Basic Principles

By W. T. COCKING, M.I.E.E.

NOISE and interference can affect a television picture not only by producing a visible pattern upon it but also by upsetting the synchronizing. The usual British practice is to synchronize the line time-base directly from the line sync pulses in the received signal. With this direct-locking system, each scanning line is supposed to be controlled directly by a sync pulse, but there is the possibility that noise or interference may produce spurious pulses which may trip the time-base incorrectly.


It is found in practice that noise has the effect of producing slightly irregular synchronizing. The effect is as if the timing of the sync pulses varied in a random manner and the scanning lines move sideways relative to one another in a random fashion. The amount of the displacement is usually quite small, but it makes the vertical edges in the picture ragged and the sides of the raster itself also become ragged.

The effect of interference is usually somewhat different. The commonest kind is ignition interference, and it is often of much greater intensity than noise and it occurs less frequently. The usual visible effect is, therefore, of perhaps one line only, or perhaps a few adjacent lines of one frame, being displaced sideways relatively to the others. The displacement may be much more than is usual with noise. The effect is commonly known as line tearing.

Line jitter, due to noise, and line tearing, due to ignition interference, can be almost completely overcome by the use of flywheel synchronizing. This derives its name from the fact that it imparts a kind of flywheel effect to the time-base which enables it to run correctly for a short time even in the absence of sync pulses. Synchronizing is effected, not line by line directly from the sync pulses, but on an average basis by the cumulative effect of many sync pulses.

This sounds an ideal system which it would be advantageous to adopt forthwith in all television receivers, and it is a fact that its use is now universal in the U.S.A. The American television system has different characteristics from ours, however, and what is suitable, desirable, or even necessary for it may not be for ours. Flywheel sync is, in fact, a good deal more complex than the ordinary method of direct locking. It may involve the use of several more valves, it complicates the circuitry considerably and it usually entails the use of a more stable saw-tooth generator.

Fig. 1. Envelope of typical television in its r.f. or i.f. condition. The signal ceases during the sync pulses.



This not only results in a more expensive receiver but it also increases the possibility of defects arising and may make maintenance more difficult.

It is, therefore, undesirable to adopt flywheel synchronizing unless it affords a worth-while improvement. It has obviously been found worth while in the U.S.A., but that does not mean that it is necessarily so here under our different conditions. It is advisable, therefore, to examine the whole question of line synchronizing in some detail.

It is first of all necessary to be clear about the way in which noise and interference can affect matters. Noise and interference produce voltages in the r.f. and i.f. circuits of the receiver which can exist only with frequencies within the pass-band of the receiver. The rate of change of amplitude of any such voltage is limited by the bandwidth of the receiver and at the output it cannot possibly be any greater than is permitted by that bandwidth.

Effect of Noise and Interference

The receiver bandwidth is never greater than is necessary to handle the television signal and so it follows that the rate of change of amplitude of the receiver output on noise or interference cannot exceed the maximum rate of change of the television signal itself. This is quite different from the conditions in the sound channel, where the bandwidth is often ten times that needed by the signal. One is there accustomed to regarding interference as producing large spikes on a relatively slowly changing signal. This condition only exists in the vision channel when the interference happens to occur while the vision signal is changing only slowly. As far as synchronizing is concerned, it is the leading edges of the pulses which are important and on these the signal is changing at its maximum rate and interference or noise cannot produce an output changing any faster.

In the British television system, positive modulation is used, which means that the r.f. envelope has the form shown in Fig. 1 and the sync pulses correspond to a cessation of the signal. Any noise or interference which occurs during a sync pulse comes through the receiver unaltered to produce an output where there should be no output. It is possible, therefore, for a sync pulse to be obliterated by noise or interference.

Anything which occurs elsewhere has an effect which depends on its phase relative to that of the signal. It is possible for noise and interference to produce spurious pulses in the sync range of amplitudes at any time but it is not very probable that they will do so. They can be produced only by the noise or interference cancelling the signal which exists at that time; to do this, it must have the same amplitude and be in antiphase. The chances of this are rather remote.

However, if the two are of nearly the same amplitude and nearly of opposite phase, the cancellation, although not complete, may bring the output into the

sync range of amplitudes and so may provide a spurious sync pulse.

In general, however, interference and noise will much more often add to the vision signal to increase the total amplitude than it will cancel it. This reasoning is borne out by visual examination of a picture which is suffering from interference. It is visible far more often as white spots than as black, and the cancellation effect would produce black spots.




Fig. 2. A typical video waveform is shown here. The sync separator acts as a slicer to pass only amplitudes which pass between the slicing limits indicated by dotted lines.

Conditions are just the opposite with the negative modulation of the U.S.A. and some continental countries. The sync pulses then correspond to 100 per cent modulation and will be comparatively rarely cancelled by noise or interference, but noise or interference occurring at any other time can readily produce spurious pulses in the sync region. The probability of noise and interference affecting the synchronizing is thus much greater with negative modulation than with positive.

After detection and subsequent amplification, the video signal is applied to the sync separator. This is normally adjusted to act as a double limiter or slicer. The waveform is as shown in Fig. 2 in which the bounds of the slicer are indicated by dotted lines. Only signal levels between these lines are passed.

Effect of Noise on Direct Locking

Where noise or other interference is of small amplitude it cannot affect the output of the slicer during the sync pulse, for it is not great enough to bring it above the lower limit. Neither can it affect the output between the pulses for, even if it is by chance in anti-phase with the signal, it is not strong enough to bring the combined signal level below the upper slicing limit.

The only times when such noise or interference can affect the output of the slicer are at the beginning and end of the sync pulse. If it is in the right phase, anything occurring immediately before the sync pulse reaches the upper limit of the slicer at the start of the pulse, or immediately after it has passed the upper limit at the end of the pulse, can cause a premature crossing of the slicing region on the one hand or a delayed crossing on the other.

Noise or interference occurring during the crossing of the slicing region, or immediately after it at the start of the pulse, or immediately before it at the end, can delay the crossing on the one hand or make it premature on the other.

With the normal direct system of locking, the sync pulses are differentiated before being applied to the time-base and it is only the leading edges that are used. When interference or noise is small, therefore, it is only that occurring in the immediate vicinity of

One may expect, therefore, that the major effect of noise and interference on synchronizing will occur through that part of it which coincides with the sync pulses, and that any occurring away from these pulses will be relatively trivial.

the leading edge that can have any effect at all upon the synchronizing. The total time of transition of the leading edge of the pulse applied to the separator is of the order of 0.25 μ sec. It is only noise or interference which exists over a particular period of about 0.25- μ sec duration in each 100 μ sec that can affect the synchronizing. The result is that when noise and interference are small the effect on synchronizing is very small indeed.

This is the normal condition of reception within the service area. Noise is usually quite unimportant. Ignition interference depends very much upon the precise location of the receiver and is sometimes serious and sometimes negligible. Probably, on the average, it causes a small amount of line tearing, but not to a degree which viewers find troublesome.

As the signal weakens, the effects of noise and interference increase. Eventually, they may at any time break into the slicing region to cause spurious pulses which may affect the synchronizing. As already explained, anything which occurs between sync pulses demands a rather special phase and amplitude relation to the signal to be able to produce such a spurious pulse. Such a pulse can, therefore, only occur rather rarely and, even if it does, it will not necessarily affect the time-base. The amplitude cannot exceed that of a normal sync pulse and the normal time-base is inherently insensitive to such pulses unless they occur within, roughly, the last third of the scan.

The sensitivity of a time-base to a triggering pulse normally depends on the instantaneous amplitude of the saw-tooth at the moment when it is applied. There is a certain threshold level below which it has no effect at all. In normal operation, this threshold level is adjusted to occur at about two-thirds of the scan so that the time-base is not triggered by the half-line pulses which occur during the frame flyback. If this is not done, the line time-base is tripped by these pulses at half-line intervals and the extreme top of the picture is displaced sideways by a small amount.

With normal direct locking, therefore, there is a great deal of inherent protection against noise and interference. Anything occurring during the remaining third can affect the synchronizing only under certain special phase and amplitude relationships with the signal, so that its effect is unlikely to be very serious. The only time when the apparatus is wide open to interference and noise is during and immediately after the leading edge of the sync pulse.

The time for which this possibility exists is a small fraction of the line time and it is because of this that ignition interference does not usually have a great effect upon the synchronizing. Noise has a much greater effect, because it is more continuously distributed in time.

In spite of the inherent protection against a great deal of noise and interference, as the signal gets weaker the protection gets insufficient and there is no doubt that in fringe areas something more is wanted. The inherent protection which exists is due, in essence, to a form of time selection which amounts to a crude system of gating. It would be possible to improve this quite a bit, but hardly to an extent which would justify the complication.

An alternative to time selection is frequency selection and this is at the basis of all forms of flywheel sync. The line sync pulses have a duration of 10 μ sec and are repetitive at a frequency of 10.125 kc/s.

The waveform can, therefore, be built up from a series of harmonic sine waves of 10.125 kc/s fundamental frequency having particular amplitude and phase relations. The phase of the fundamental bears a specific relation to the timing of the sync pulses and therefore contains all the information necessary to effect synchronizing.

If the sync pulses are passed through a very sharply tuned circuit resonant at their recurrence frequency, this circuit will select the fundamental sine-wave component to the exclusion of the harmonics. It will produce a sine-wave output which, for a given circuit, will bear a fixed phase relation to the input pulses. Only the components of noise and interference lying within the bandwidth of this filter circuit will be passed and, as the sync signal has become a pure sine-wave of no bandwidth, there is no limit to the selectivity that can be used. Hence, noise and interference can be reduced as much as we want by making the selectivity high enough.

In order to control the time-base, some particular feature of the sine wave is selected as a reference point and new sync pulses are generated to coincide with it. The instants at which the sine wave passes through zero are convenient ones, for instance, for the wave can be squared and differentiated to produce new pulses.

This arrangement takes the form shown in Fig. 3. The pulses from the sync separator are applied to the frequency-selective filter to produce a substantially pure sine-wave output. This is passed through a phase-shifter to produce about 90° change of phase, then to the squarer and thence to the differentiator. The waveforms are sketched in Fig. 4.

The phase shifter is necessary because the output pulses must coincide with the sync pulses if the picture is to be properly placed on the raster, but the peak of the sine wave corresponds to the sync pulse and the output pulses are derived from the zero points on the sine wave.

The arrangement of Fig. 3 does not demand a great deal of apparatus. A single high-Q tuned circuit driven by a pentode valve can be used for the filter and another pentode can act as a squarer. The rest of the apparatus is built up mainly of simple RC networks.

Looked at from another point of view, the tuned circuit is shock excited by a sync pulse and rings at its natural frequency. This, perhaps, makes the flywheel action more evident.

Practical Difficulties

Certain difficulties arise in practice, some of which demand a high-Q circuit to overcome them and others a low-Q circuit! The half-line pulses which occur during the frame-pulse period form a disturbance which seriously affects the operation unless the Q is fairly high. It has been shown that the Q should be greater than 30 for this disturbance to be small.* The effect is to produce a line displacement at the top of the picture and is not unlike that obtained with direct locking when the sync-pulse amplitude is too great. The effect is not of major importance for, at the expense of some complication, it is possible to remove the half-line pulses from the wave applied to the tuned circuit.

A more serious difficulty arises from the fact that the 10.125-kc/s frequency of the sync pulses is only a nominal figure and the actual frequency may vary over a range of about 4%. This is because the frequency is tied to that of the supply mains. If the frequency changes, the tuned circuit is no longer in resonance and there is a phase shift between the output sine wave and the input sync pulses. The local pulses produced from the sine wave, which control the time-base, then do not occur at the same times as the sync pulses. The picture remains in synchronism but becomes displaced on the raster. Flyback may start before the sync pulse so that the right-hand side is cut off, or it may start after the sync pulse so that a black edge appears on the right and the left-hand side may be cut off.

This effect requires the use of a low-Q circuit to minimize it, but it seems hardly practicable to avoid fitting a panel tuning control for the tuned circuit so that it can always be brought to resonance by bringing the picture to its proper position.

This effect of the picture moving on the raster with variations in frequency or circuit "constants" is characteristic of all kinds of flywheel sync systems, although to quite a small degree in some.

There is another effect which is common to all and this is a distortion of the shape of the picture if the selectivity is made too great. Normally, in

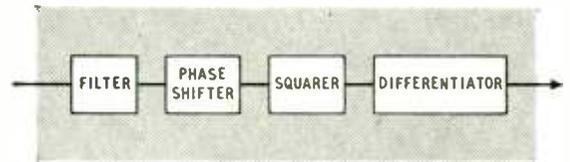


Fig. 3. Block diagram of one form of flywheel sync system. The waveforms are shown in Fig. 4.

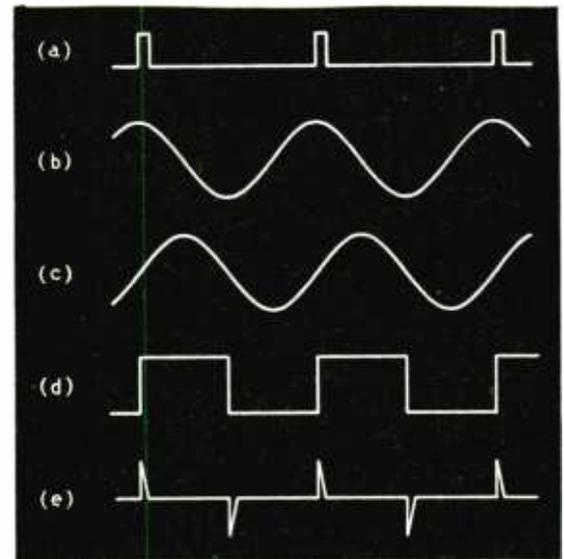


Fig. 4. Waveforms in the circuit of Fig. 3. The input sync pulses are shown at (a) and the output of the filter at (b). The phase-shifter and the squarer produce the changes indicated at (c) and (d) and the final differentiation produces the new sync pulses (e).

* "Flywheel Synchronization of Saw-Tooth Generators," by P. A. Neeteson (Clever Hume).

television, the direct-locking system is used both for the time-bases in the transmitting cameras and for the time-bases of the receivers. If the sync pulses do not recur quite regularly, therefore, there is no very dreadful effect; both are controlled line by line by the same pulses.

When flywheel sync is used at the receiver, however, conditions are very different, for the receiver circuit will be constrained by the flywheel system to run more regularly than the transmitting circuit. The result is that although the edges of the *raster* will be quite uniform the picture will be irregularly displaced upon it.

Flywheel sync, therefore, demands a much higher standard of perfection in the transmitted sync pulses than will suffice for direct locking. To avoid this form of distortion, it is necessary to make the selective circuit of low-enough Q for it to follow any variations of the pulses. In other words, if the sync pulses do not occur quite regularly, they have a phase modulation on them and the selective circuit must have a bandwidth large enough to pass this modulation.

Exactly the same kind of effect occurs with all kinds of flywheel-sync circuit even if, because of differences of circuit, the language used to describe it is different. A distorted picture results if the bandwidth is too small to pass any variations in the

transmitted pulses (flywheel effect too great) and this limits the amount of noise and interference reduction that is obtainable. There must be a compromise between picture distortion on the one hand and line jitter and tearing on the other.

The use of too narrow a band-width results in the sides of the picture being somewhat bowed which suggests that the sync pulses have a slight phase modulation at frame frequency. This is especially the case when the transmission is an outside broadcast. The bowing is not too large and, for fringe-area reception, is probably greatly preferable to line jitter and tearing, especially as it will disappear with improvements at the transmitting end. For local reception, however, where jitter is absent and tearing rare, it makes the use of flywheel sync disadvantageous.

Because of this effect, many practical flywheel circuits embody a compromise bandwidth which does not give the full noise reduction possible but which gives a picture free from bowing.

It should be made clear at this stage that the form of flywheel circuit referred to here and illustrated in Fig. 3 is hardly ever used in practice. Practical circuits are invariably of the negative-feedback type and are virtually servo systems. They do, however, still depend upon frequency selectivity, although this is obtained in a different way.

(To be continued)

AMATEUR TELEVISION TRANSMISSIONS



Picture received from amateur station at a distance of 31 miles. Some frame height distortion is present.

EAVESDROPPING on the amateurs has always been a pleasant diversion for those who tire of the more official broadcast programmes. The scope of this pastime has now been greatly increased by the possibility of "looking-in," as well as "listening-in," as more and more amateur television stations come on the air—though, of course, it requires a convertor in addition to the ordinary television set. Some of the pictures being transmitted are exceptionally good, and on the left is an example of what might be picked up. This image (from a "live" programme) was transmitted on 436 Mc/s by G2WJ/T of Dunmow, Essex, using an image iconoscope camera. The standards were 200 lines, 50 pictures per second, with sequential scanning. It was received at Abbots Langley, Herts, at a distance of 31 miles, by G3GDR, using a 70-cm convertor and an ordinary 10-in commercial television receiver, and this photograph was taken from the screen of the set. Similar pictures can be received anywhere within 35 miles of Dunmow.

For those who have the necessary equipment for viewing but are not sure whether there is a transmitter in their district, we give below a list of amateur stations in current operation.

Location	Call Sign	Vision frequency (Mc's)	Vision power (W)	Sound frequency (Mc's)	Standards (lines)
Dunmow . .	G2WJ/T	436	20	145.2	200 sequential
S. London	G3CTS/T	427	—	423.5	405 interlaced
Upminster	G3FNL/T	445	25	—	405 interlaced
Plymouth	G5ZT/T	427	3	—	200 sequential
Sunderland	G3BLV/T	—	20	—	405 interlaced
Baldock	G2DUS/T	427	3	—	200 sequential
Belfast . .	G13FWF T	437.75	40	1.8 band	405 interlaced
St. Albans	G3JVO, T	445.5	10	—	200 sequential
Leicester . .	G3BAY/T	—	—	—	—
<i>Under construction :</i>					
Blyth . .	G3ACK	426	50	422.5	405 interlaced
Chelmsford	G3CVO	438.2	6	145.1	405 interlaced


Operating times are not known except that G2WJ/T is normally on the air at 6.30 p.m. on Saturdays. The figures given are likely to change without notice.

European Television

Lessons Learnt from the International Relays

By J. TREEBY DICKINSON *

Aerial installations on the summit of the Chasseral, in Switzerland, which provided the international links to Hornisgrunde (Germany) and to Milan, via Jungfrauoch and Monte-Generoso, the vision and supervisory speech links from the various programme sources in Switzerland and the main link with the two Swiss transmitters.

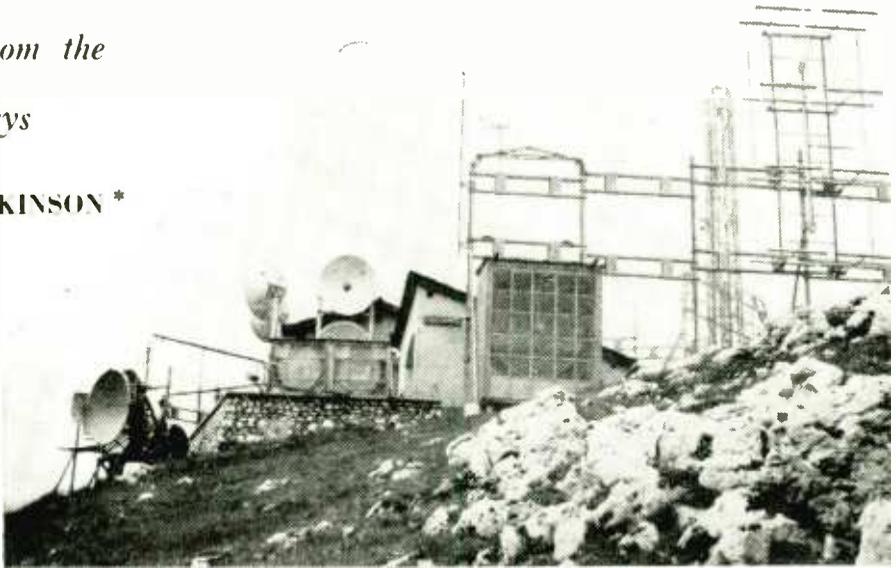

IT is now possible to look back on the series of international television relays which took place during June and July with sufficient detachment to justify an appraisal of their value. Moreover, as it has now been possible to make a preliminary, but necessarily rather superficial examination of the large quantity of technical data gathered during the six weeks that the tests and programme exchanges lasted, we can enumerate some of the lessons we have learnt as a result of the operation.

Perhaps, however, we should first recall that eight countries—Belgium, Denmark, France, the German Federal Republic, Italy, the Netherlands, Switzerland and the United Kingdom—participated in this experiment and that programmes originated by one country were simultaneously broadcast in all the countries. In order to make this possible, the individual national television networks were temporarily linked together by various means—usually by transportable microwave-relay equipment of the kind used for relaying television outside-broadcast signals from the point of origin to some convenient point on the permanent network. In many cases the equipment actually used for the international links was in fact material temporarily diverted from outside broadcasting for this purpose.

It will be recalled also that three standards are used by the participating countries—405, 625 and 819 lines. The consequent necessity of converting the signals from one system to another at two points in every relay, with an inevitable loss of quality, was commonly supposed to be one of the most important potential causes of failure. Indeed, the network was originally planned so that two standards-convertors would never have to be connected in tandem, that is to say, the original signal would be delivered to the input of each of the two convertors—it was never to be converted first to one standard and the con-

verted signal passed on for further conversion to the third standard. It was the engineers' anxiety on this account and equally because of the lack of reserve equipment over most of the temporary links that caused them to insist on the experimental nature of the operation. Incidentally, the results of the preliminary tests did little to dispel that anxiety.

Apart from the test period, however, when continuous difficulty was experienced due to the last-minute installation of essential equipment, the standards-convertors behaved very well indeed. Except for momentary periods of maladjustment, no serious deterioration of the quality of the pictures can be attributed to the convertors. In this respect, at any rate, the plurality of television standards in Europe is little more than an inconvenience, and is not the menace it was once considered. In point of fact, the reliability of the links proved to be the greatest source of worry. Whenever the links worked the technical quality was usually acceptable, but, before the coming series of programmes of a similar nature can be undertaken, considerable attention is having to be given to the reliability of the interconnections.

What, then, we may ask, was the reason for the unreliability of the temporary links? To some extent it was certainly due to the temporary nature of some installations. Far more often than one would have expected, failures were provoked by excessive fluctuations of the mains supply voltage or even by complete supply failure. Often this was due to the inaccessible sites of the relay stations, involving either long temporary supply cables or continual operation from petrol-electric generating sets which were not intended for use over long periods. The weather was also very unfavourable and there were several failures attributed to rain, wind and lightning. On the other hand, at least one breakdown was caused by the overheating of a relay installation through the sun

* European Broadcasting Union.

shining on the metal enclosure in which it was housed. Not only were the mains responsible for complete failures, there was a lack of consistency of performance due largely to the mains fluctuations.

In a preliminary note concerning these programme exchanges* we described the test signals which had been standardized for use immediately before each transmission. They were a long square pulse of one line length, varying in amplitude from picture black to white level (Test Signal A), one or more narrow pulses (Test Signal B) and a "saw-tooth" rising from picture black to white level during the period of a line (Test Signal C). The third was, however, found to be the most informative but the original testing schedule was not ideal, because when a long network was set up, adjustments made to improve the performance of an early link had repercussions all the way along the line. For this reason the schedule of tests just prior to transmission was lengthened and the period allotted to each test-signal was divided into two, adjustments being made during the first half and measurements during the second. It may be mentioned here that at a meeting in Paris immediately after the exchanges it was agreed to modify the test-schedule for future relays and increase the time of the pre-transmission test-period to 2¼ hours. A standardized resolution and gradation pattern is to be devised by the European Broadcasting Union and a special test film incorporating patterns and scenes designed to indicate the commoner shortcomings of transmission, will be prepared.

The agreed tolerances on the transmission characteristics were found in practice to be very suitable. In particular, it was noted that good resolution was obtained when the rise-time for a square wavefront was 0.3µsec or less. When this figure was exceeded, impaired definition was observed and the Paris meeting agreed that, in future large-scale relays, a rise-time of 0.1µsec over each individual section of the network—a section being from one national control centre to the next—should be aimed at, so that the overall figure for the whole network might be expected to be less than 0.3µsec.

Permanent European TV Centre ?

This brings us to the question of the general supervision of the whole network which was the responsibility of the International Co-ordination Centre at Lille set up by the Radiodiffusion-Télévision Française, who accepted responsibility for a very large percentage of its staffing and running costs. At Lille there were two independent units, one concerned with the presentation of the programmes and the other—the Technical Co-ordination Centre—with the technical supervision of the network. It quickly became apparent to the author and Stéphane Mallein of R.T.F., who shared the responsibility for the operation of the Technical Co-ordination Centre, that its functions would be rather different and more comprehensive than had been originally supposed. In fact, its tasks fell into two separate categories. First, the operational control of the network as a whole, involving decisions relating to routing, test schedules, switching procedure and the like, and secondly, the actual checking of the technical quality of transmission over the network at any given instant. The first-mentioned responsibility was, of course, the intended task of the Technical Centre and it was carried out

* *Wireless World*, July, 1954, p. 319 et seq.

effectively. For the second, however, the technical equipment at the centre was inadequate and the geographical position of Lille made it impossible to monitor effectively many of the programmes. Where the programme originated at a distant point in the network the magnitude of the accumulated distortion was apparent at Lille. The centre was able to measure the transmission characteristics and, if any parameter was out of tolerance, ask for measurements to be made at each national centre in turn back towards the origin until the defective section was identified. This could not, of course, be done when the programme originated in France or a country near Lille.

When this problem was discussed at the Paris "post mortem" meeting, it was decided that, for future relays involving a large number of countries, it may be desirable to dissociate the two functions. The actual co-ordination of programmes would be done from any reasonably central place having good telephone and teleprinter communications with all the national centres, whereas the responsibility of monitoring the technical quality of transmission will have to be delegated to one or more of the national centres for each particular relay. The Paris meeting decided to invite the Administrative Council of the E.B.U. to consider the establishment of a permanent European Television Co-ordination Centre.

Future Plans

Although in the foregoing we have inevitably stressed the difficulties encountered and the shortcomings of the network, it must nevertheless be said that from the point of view of the ordinary viewer the continental exchanges were very successful. However, viewers were doubtless prepared to accept, or even expected, a certain amount of distortion during the June-July period, as it was widely known that the operation was a "first attempt" and indeed some surprise was expressed that there was only one major breakdown in vision. Something better technically—and perhaps it is not out of place to add: something better from the programme point of view—will have to be offered next time. The Programme Committee of the E.B.U. has already planned a season of shared programmes continuing from now until New Year's Day, but there is little time to set up new relay routes with more permanent installations. Moreover several of the relay stations used during the June-July exchanges were sited in high and exposed positions which would be quite impracticable under winter conditions.

Another difficulty encountered by the engineers operating the network was in describing to one another over the supervisory telephone circuits the technical quality of the pictures and the characteristics of oscilloscope displays. It is clear that even in countries nominally speaking the same language there are important differences in the technical terminology, especially regarding television waveforms and picture faults. In an attempt to make it easier for the supervisory engineers to describe quickly their observations, the E.B.U. is at present considering how best to standardize the terminology, in French and English, the two official languages of the Union, and the feasibility of introducing a numerical code to indicate the severity of certain effects. Final decisions on all these matters will have to be taken at the E.B.U. meetings which are now being held in London.

Midget Television Set


"IS it a model of a television set or just a very small television set?" This was the subtle problem which seemed to worry the authorities at the *Model Engineer* exhibition this year when they considered L. G. White's latest essay in miniaturization. One felt they would have been more sure of themselves had it not been actually a *working* receiver. Be that as it may, the significant thing to a radio technician was that, although the set as a whole was scaled down, its components were the same size as those in ordinary television receivers. The avoidance of spurious feed-back and instability in such a closely packed chassis must have been a real headache to the designer.

The actual dimensions of the set are 7in x 6in x 4in, excluding the rear projecting portion of the cathode-ray tube. A picture of approximately 1½in x 1½in is displayed on an ECR30 instrument c.r. tube, and in addition to the television sound the Home, Light and Third programmes on medium waves can be received. The receiver is a "straight" t.r.f. type and it uses 13 miniature valves and two germanium diodes. There are four stages of r.f. amplification for the vision signal (the first two being common to sound) and the germanium crystal detector is followed by one stage of video amplification and then the c.r. tube. The overall bandwidth to the tube is 1.5 Mc/s. In the sound channel the crystal detector is followed by two a.f. amplifying valves, and the first of these can be switched into a regenerative detector circuit to give reception on medium waves.

Sync separation is provided by a thermionic diode. The time-base generators, line and frame, each consist of a double-triode multivibrator and a double-triode paraphase output stage. Multivibrators are used in preference to blocking oscillators because they only require one double valve whereas the blocking oscillator needs a valve plus a transformer and therefore takes up more space.

For the power supply, a.c./d.c. technique is used. The valve heaters are all in series and are fed from the mains through a resistance line cord. High tension is obtained from a valve rectifier and several RC smoothing stages, while e.h.t. for the c.r. tube (1.5 kV) is produced in the same unit by a series of voltage doublers. A small shielded transformer supplies the heater voltage for the tube.

A special demonstration of the set was arranged for *Wireless World* and, in spite of severe interference in the building, very good pictures were obtained. The aerial used was nothing more than two pieces of flex arranged as a half-wave dipole and suspended from a window curtain-rail.

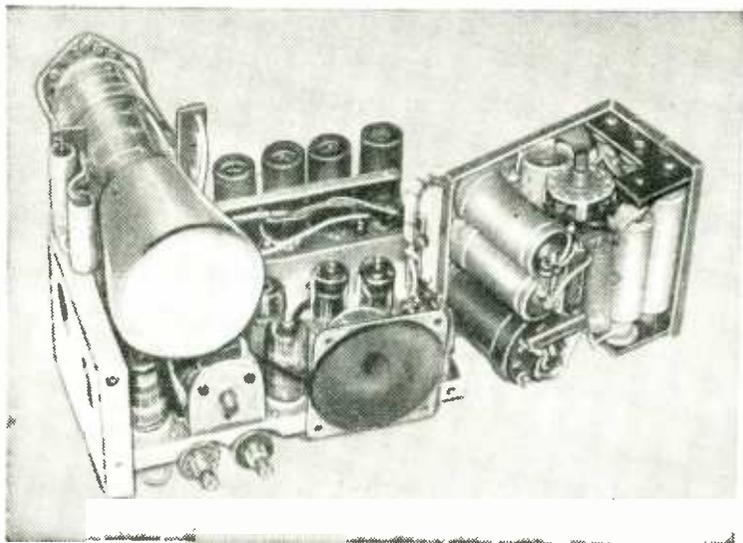

Chassis of the receiver (approx. quarter size), showing how the power unit (right) can be detached to give access to the rest of the circuit.

Progress in SOUND

TRIX equipment maintains a long-established tradition of progressive design and high-grade workmanship. There are standard units for every requirement, each a masterly expression of sound-reproduction technique. For large or small installations, our catalogue and expert advice are freely at your disposal.



The **NEW** TRIXONIC
Home Music Amplifier

MODEL T.41

This latest, most striking addition to the TRIX range combines fidelity of reproduction with surprising economy, and simplicity of operation. Bass and Treble tone controls and mains switch are fitted to an attractive independent control panel. High and low gain inputs are incorporated for use with all types of pick-up. For the critical enthusiast this is an ideal amplifier of remarkable value.

LIST PRICE £16 10 0

TRIX

The TRIX ELECTRICAL
COMPANY LTD.

1-5 MAPLE PLACE, TOTTENHAM
COURT ROAD, LONDON, W.1.

Telephone: MUSeum 5817

Telegrams and Cables:

TRIXADIO, WESDO, LONDON.

RANDOM RADIATIONS

By "DIALLIST"

Not So Hot

PREVIEW day at the Radio Show is intended primarily for V.I.P.s and overseas visitors, a large proportion of whom are potential buyers of our products. Some manufacturers must have forgotten this, or they'd have taken more trouble about the adjustment of their receivers displayed on August 24th in "Television Avenue"; or was it the fault of the signal being piped round the show? Considering how good our 405-line pictures can be, it was not a little galling to hear foreign visitors telling one another how much better things are with 625 or 819 lines. Among the more glaring of the faults that I noticed were these: bad ringing; sound-on-vision; poor linearity; r.f. interference (due, presumably, to the "alternative" signal); too much contrast—there was more than one negative picture; brightness so far advanced that the frame flyback lines were showing; frame jitter; line tearing; incorrect focusing . . . and quite a few others. Set after set was giving a travesty of the performance of which it was capable. I hope things were better from the opening day onwards.* I don't know, for I hadn't the heart to visit "Television Avenue" again. The fashionable TV receiver this year is unquestionably that with a 17-inch c.r.t. I shall probably call down a storm of criticism on my devoted head when I say that in my considered opinion a tube of that size is too big for 405 lines, unless you have spot-wobble, or spot-astigmatism. Well, I'll risk it, for that's what I hold quite firmly.

What's the Hurry?

THOSE whose job it was to answer enquiries and give explanations at the stands of receiver and aerial manufacturers at the Radio Show must have grown a little tired of the endless stream of questions about reception of the alternative television programme. The man in the street (even if the said street is that of a back-of-beyond village) is possessed of the idea that wonderful alternative programmes, receivable everywhere, are just around the corner: if he doesn't take immediate

steps to acquire a 13-channel receiver and the appropriate aerial outfit, he'll find himself badly left. It is difficult to persuade him that it's likely to be a long time before the first of these transmissions becomes available, and even then only in three areas. To meet this insistent demand manufacturers have been more or less forced to produce 13-channel receivers. But I was glad to see that many of them have also 5-channel receivers at lower prices. These take the line—and I'm sure it's the right one—that there's no sense in paying for facilities to receive the other eight unless and until you know that you can get one of them. When the alternative programme comes your way a neat and inexpensive adaptor is at once available.

A.G.C. and the Local Station

THE local-station medium-wave receiver that I've installed in the lower compartment of my console television set has evoked quite a few criticisms. J. L. Osbourne, the designer, in his letter published in the September issue stoutly maintains that I erred in eliminating a.g.c.,

on the grounds that even if the local stations don't fade (they don't) it is unlikely that all will put a signal of the same amplitude into my aerial. Actually, there is a considerable difference in the three signal-strengths: the Home is the biggest, the Third rather smaller and the Light the smallest. But as the signal level doesn't vary, except when one or other of them is transmitting with reduced power, I can't see that the inclusion of a.g.c. is warranted. What I have done is to gang up the 3-position potential divided (used as volume control) with the 3-position station-selector switch. This may be all wrong in the eyes of the purists; but, believe me, it works.

Ah Me!

My great regret is that I made up the local-station receiver for use with the a.f. output stages of the television set before the announcement was made that all three programmes would shortly be available on v.h.f. with frequency modulation. Though not a few people spend time and money on trying to obtain high-fidelity reproduction from medium-wave transmissions, there isn't much point in so doing, for no set can (or at any rate should) reproduce what isn't there. I'll admit, though, that you can make the m.w. broadcasts sound a whole lot better than they do when reproduced by the ordinary domestic receiver. I suppose that I'll now have to start thinking out



"WIRELESS WORLD" PUBLICATIONS

	Net Price	By Post
RADIO LABORATORY HANDBOOK. M. G. Scroggie, B.Sc., M.I.E.E. 6th Edition	25/-	26/3
RADIO VALVE DATA. 4th Edition Compiled by the Staff of "Wireless World"	3/6	3/10
SHORT-WAVE RADIO AND THE IONOSPHERE. T. W. Bennington, Engineering Division, B.B.C. Second Edition.	10/6	10/10
SUPERHETERODYNE TELEVISION UNIT. Second Edition.	2/6	2/8
INTRODUCTION TO VALVES. R. W. Hallows, M.A. (Cantab.), M.I.E.E., and H. K. Milward, B.Sc. (Lond.), A.M.I.E.E.	8/6	8/10
WIRELESS WORLD TELEVISION RECEIVER MODEL II: Complete constructional details with notes on modernizing the original design	3/6	3/9
RADIO INTERFERENCE SUPPRESSION as Applied to Radio and Television Reception. G. L. Stephens, A.M.I.E.E.	10/6	10/11
SOUND RECORDING AND REPRODUCTION. A B.B.C. Engineering Training Manual. J. W. Godfrey and S. W. Amos, B.Sc. (Hons.), A.M.I.E.E.	30/-	30/8
ADVANCED THEORY OF WAVEGUIDES. L. Lewin	30/-	30/7
FOUNDATIONS OF WIRELESS. M. G. Scroggie, B.Sc., M.I.E.E. 5th Edition	12/6	13/-
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 3rd Edition	18/-	18/8

A complete list of books is available on application.
Obtainable from all leading booksellers or from

ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1.

* Better, but still room for improvement.
—Ed.

(unless one of W.W.'s brainy contributors saves me the trouble) a 3-station frequency-modulation receiver to replace the present medium-wave outfit in the lower compartment of the TV set.

Pigeon Flutter

A FRIEND of mine has a peculiar television problem. A near neighbour of his has a large flock of pigeons, which decide every now and then to rise in a body and to conduct a series of aerobatics. He finds that they cause very much the same kind of picture flutter as that normally associated with the passing of an aeroplane. I don't see any reason to doubt him: birds, particularly when flying in tight formation (as pigeons do), can be almost as effective reflectors of metre-wave radio transmissions as aeroplanes. This was brought out in the early days of the war when the first tentative proximity fuzes for A.A. shells were under trial on the south-east coast. Many premature bursts occurred and it was some time before it was realized that these were due to wave-reflections from seagulls! Is one justified in reporting to the overworked anti-interference department of the G.P.O. the spoiling of TV pictures by pigeon flutter?

CITY & GUILDS EXAMINATIONS


THE examiners of the City & Guilds of London Institute have, from time to time, drawn attention to the weakness in mathematics displayed by many of the candidates sitting for the telecommunication engineering examinations, especially those unable to attend courses of instruction at a technical college. The institute has, therefore, adopted a recommendation that there should be a pass in both Mathematics I (introduced this year) and II for the award of the intermediate certificate in telecommunication engineering.

In the City & Guilds regulations and syllabuses covering telecommunications and electrical subjects for 1954-55 it is pointed out that the M.K.S. system of units will eventually be used exclusively in the question papers but during the transition questions will be framed in both M.K.S. and c.g.s. units and answers using either system will be admissible.

Next year's examinations in telecommunications principles will be held from May 4th to 10th, in mathematics for telecommunications from May 17th to 19th, and in radio from May 9th to 16th. The written examinations for the R.T.E.B. certificate for radio servicing will be held on May 3rd and 5th and the practical test on May 14th. Those for the television servicing certificate will be on May 9th and 11th (written) and 18th (practical). The Radio Amateurs' Examination is fixed for May 6th.

PRECISE AND ACCURATE FINGER-TIP CONTROL WITH BULGIN CONTROL KNOBS

A SMALL SELECTION FROM A VAST RANGE

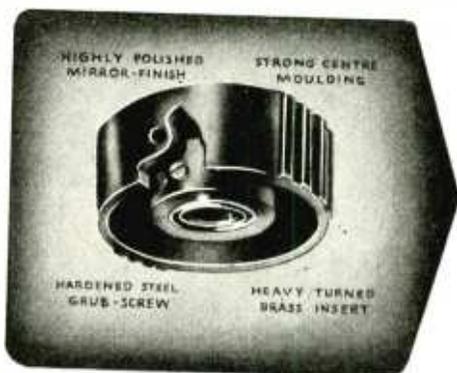

HEAVY-BRASS INSERT HIGH-GLOSS MIRROR-FINISH

The Bulgin range of attractively designed and highly-polished control knobs is extensive. Manufactured in the finest grade thermosetting plastic, they are designed to allow firm 'grip' for accurate control. Fitted with hardened and well sunken 4 B.A. grub-screws which are accurately threaded in the Heavy-Brass insert (a unique Bulgin feature), designed to allow the grub-screw to be firmly and positively tightened without danger of fracturing the moulding. Normal standard colour for these control knobs is black, but colours may be obtained to quantity orders.

Colours available in the Bakelite range: RED, CREAM, GREEN, BLUE, BROWN, BLACK.

★ SEND FOR FREE
FULLY ILLUSTRATED LEAFLET
REF. CK WW

WIDE RANGE OF STYLES AND SIZES

BULGIN

THE CHOICE OF CRITICS



Manufacturers of Radio and Electronic Components

A. F. BULGIN & CO. LTD., BYE-PASS RD., BARKING, ESSEX

Telephone: RIPPleway 3474 (5 lines)





On-the-Record Interviews

IT IS reported by a correspondent in *World's Press News* that during an off-the-record interview with a V.I.P. an enterprising journalist had a tiny tape recorder concealed in his pocket, so that the interview became very much an on-the-record one. I should very much like to have details of this vest-pocket tape recorder as the smallest one I could find at this year's Radio Show weighed 14½ lb and was of considerable bulk as one would expect. There is, I am told, one weighing only 12 lb, but it is far from pocketable.

I use a very different method when I wish to put an off-the-record interview on the record, and my apparatus really is of pocket size. What I do is to leave the recording apparatus, which is coupled to a microwave receiver in my car, parked outside or very near to the building where I am to interview my victim. Since the required radio range between the car and myself will be but a few yards I have only to use a fly-weight and fly-power transmitter.

I do not descend to the subterfuge of concealing my transmitter in my pocket. It is disguised as a hearing aid and the wire running up to my ear is the aerial. I start the tape motor before leaving the car but I am hoping in future to start and stop it as necessary by a simple radio-telearchic method which has been suggested to me by the Sarah sea-rescue apparatus which was demonstrated at this year's show. Sarah seemed to combine speech and pulse technique very successfully and with its 16 watt power has a range of very many miles.

Doll's House T.V.

VERY FEW of the reports on the Radio Show made more than a passing reference to what I regarded as one of the most interesting items in the exhibition—a working model of a doll's house television receiver.

UNBIASED

Now I am not suggesting that there is likely to be any great demand for doll's house television sets *per se*, but immediately I saw the set I realized that it was the exact thing I wanted to fasten on the arm of my easy chair to give me personal viewing. In a couple of years' time these small personal television receivers will be a necessity in every home in order to avoid family dissension as to whether the B.B.C. or I.T.A. programme should be viewed.

It would, however, be necessary, to provide a connection for headphones if two members of a family wished to stay in the same room while receiving different programmes. Incidentally, I deplore the lack of a headphone connection in today's sound-only personal portables.

The Electronic Typist

IN A RECENT science review published by *The Times* there was an announcement by a well-known firm of electronic engineers of an impending development which, in my opinion, is fraught with very grave social consequences. From this firm's very guarded statement, I gather that its electronologists—*le mot juste*, I think—have in the laboratory stage an automatic typewriter which will one day sweep out of our offices what I once heard a misogynist call "female typing facilities."

Now I don't know exactly what sort of a machine this firm's engineers are striving to create but it is probably similar to one which I have often thought of introducing myself; namely, a machine to convert the spoken word into typescript without the necessity of any time-wasting and tea-consuming females. The reason why I have held my hand is solely that I realize the serious social consequences which such a machine would introduce into office life.

Maybe the directors of the firm responsible for this device are all rather young and have no recollection of the crude barbarities and coarse profanities which were commonplace in offices before the coming of the typewriter and the civilizing influence of its female operators.

I can only say that I, for one, shall not be prepared to install an "electronic typist" until it can fulfil all the functions, humanizing as well as utilitarian, which our existing flesh and blood ones and their predecessors have fulfilled since their introduction in the latter days of Queen Victoria when, as my grandfather has told me, they had a sobering effect on all male members of his staff.

By FREE GRID

Panhellenic Plurals

I WAS interested in the letter of D. J. Bataimis of Athens in the September issue. His plea that we should use the correct stem "iont-" when forming ionogenic (or more correctly iontogenic) words means uprooting many precedents. Faraday who very aptly coined the word *ion* in 1839, gave us *ions* for the plural, while in the issue of *Nature* for October 9th, 1890, a writer used the adjective *ionic*; maybe some of you know of a still earlier reference.

But we must not forget that when we threw overboard the expressions "condensers," "resistances," etc., we created a good precedent for jettisoning precedents. Let us, therefore, go further than the suggestion of Mr. Bataimis and speak of *ionta* instead of *ions* and let us use "-tra" for the plural of the great and growing "-tron" family. A hybrid Latin-Greek word like *positron* requires more radical treatment but can easily be turned into "theton" or "thetatron." But surely this job of standardizing words is one for some body like the International Organization for Standardization?

Talking of hybrid words reminds me of television. I wonder if Mr. Bataimis can suggest a satisfactory substitute for this euphonious and universally accepted bit of jungle jargon? What, I wonder, is the word used in Athens today? Could it be *ηλεκτρον*? Perish the thought!

Mitres and Scalpels

IT IS very gratifying when suggestions appearing in these columns are promptly taken up by those in high places. I am glad to see that the Archbishop of Canterbury agrees with some of my views in the July issue when I pleaded for a similar degree of aid to be given to the deaf as is given to the blind to help them enjoy the B.B.C. programmes.

The Archbishop wants special TV programmes for the deaf, but I cannot help feeling that a better idea for those too afflicted to use headphones would be for explanatory captions to be shown on a small c.r.t. at the side of the main one. This would need extra ether space but not a very wide band, and, of course, the captions to Band I programmes need not be radiated in that band.

Those charged with the cure of our bodies, as well as those ordained and consecrated to the cure of souls, are also thinking along the same lines as myself. I see that a hospital in Bristol has adopted the closed-circuit home-grown programme system which I advocated last February.

ALL-ROUND DEPENDABILITY

UNIVERSAL BRIDGE

VALVE CHARACTERISTIC METER

ELECTRONIC TESTMETER

ELECTRONIC TEST UNIT

WIDE RANGE SIGNAL GENERATOR

THE D.C. MINOR

HEAVY DUTY METER

UNIVERSAL MINOR

UNIVERSAL METER




Precision ELECTRICAL MEASURING INSTRUMENTS

Dependability is an essential quality in any good electrical testing instrument. Absolute dependability is the outcome of good design, suitability for purpose, and a high standard of accuracy. These indispensable factors are exemplified in all "Avo" Instruments, which are also noteworthy for their compact portability and robust construction. You can depend on "Avo." When choosing instruments, consult our complete catalogue, a copy of which may be had free on application

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
WINDER HOUSE DOUGLAS STREET LONDON S.W.1

Telephone: VICTORIA 3404-9



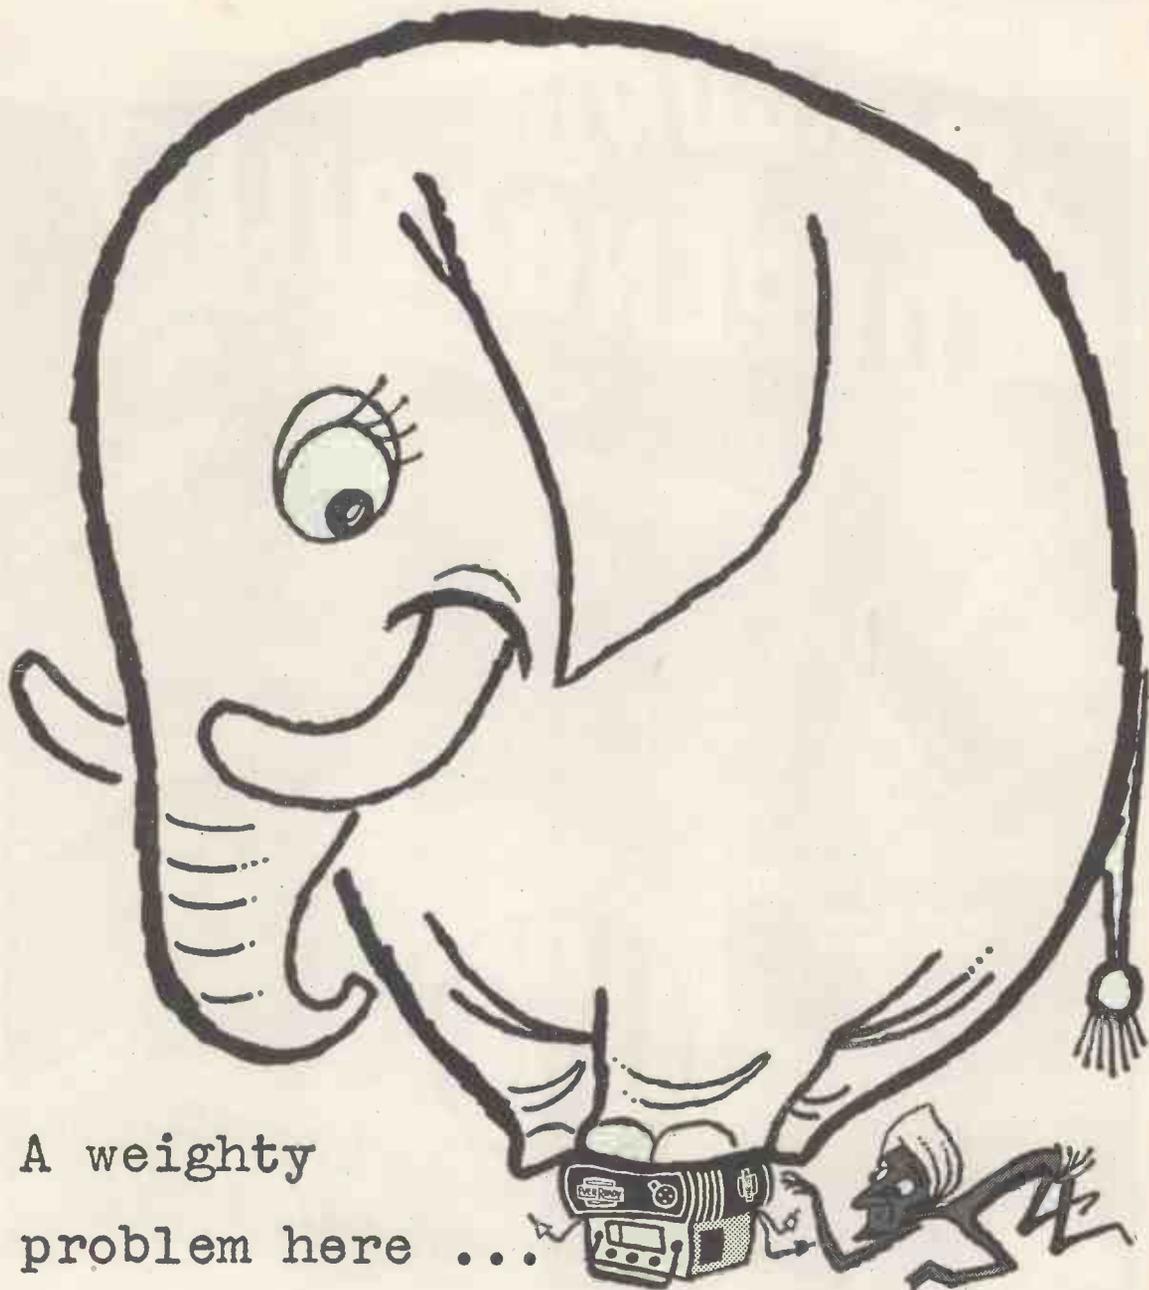

A weighty
problem here ...

The portable had everything—except sufficient room to take the battery. Brute force was no solution. Only specially designed batteries could save the set. Designers of battery radio sets should note this dilemma. Time, effort (and money) are wasted if you prepare a design and then find you haven't left room for the battery. Naturally, Ever Ready can make up special units but it's so much simpler to call us in early so that your set is designed, if possible, to take one of our many standard batteries.



DRY BATTERIES FOR RADIOS

* If you have a design problem involving dry batteries, get in touch with us at Hercules Place, Holloway, London, N.7. Telephone: ARChway 3030.


Thyratrons for Industrial Electronics

**MOTOR CONTROL · D.C. INVERSION · RELAY OPERATION
RESISTANCE WELDING · REGULATED D.C. SUPPLIES**

More and more applications in industrial electronics are being based upon the thyatron. This type of valve—long established as superior to a vast number of mechanical devices—is being applied to new industrial tasks almost daily.

Mullard, manufacturers of the United Kingdom's most comprehensive range of thyratrons, are making a major contribution to progress with low cost valves of tested sturdiness and long life characteristics.

These thyratrons range from subminiature types less than one-and-a-half inches in length to large valves with mean anode currents of over six amperes—in fact, the range includes thyratrons for almost every known application in industrial electronics. Designers of new devices and users of existing equipment are invited to write to the address below for further information and assistance.

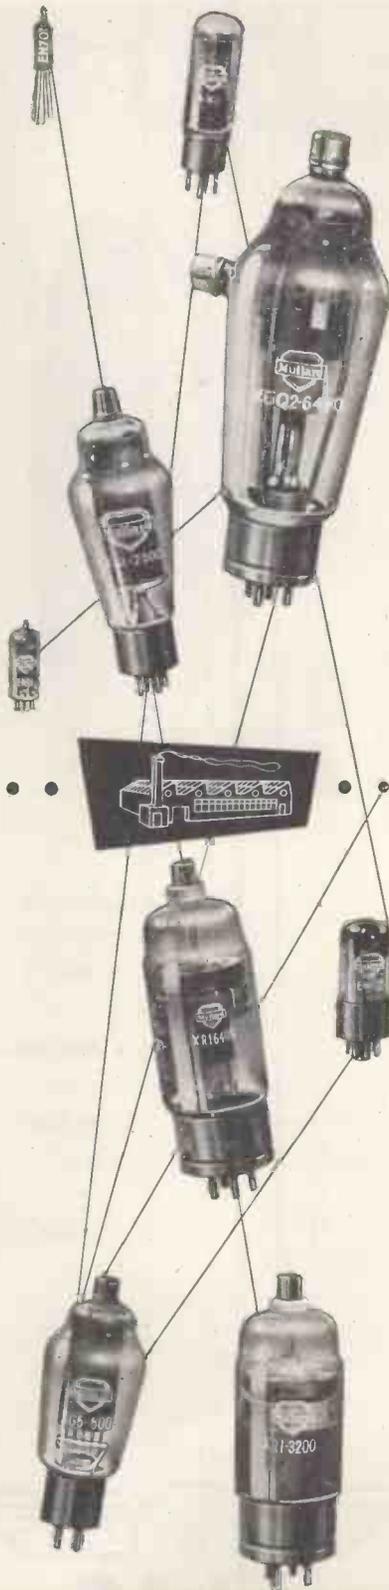

INERT-GAS-FILLED

- may be operated over a wide range of ambient temperature
- short heating-up time
- any mounting position
- suitable for both fixed and mobile equipments

MERCURY-VAPOUR


- low initial cost
- extremely long life

Mullard Type No.	American Type No.	CV Type No.	Max. Mean I_a (A)
ANI	—	CV1128	0.3
EN32	—	CV2253	0.3
EN70	5643	CV474	0.02
EN91	2D21	CV797	0.1
XR1-3200	5544	CV2210	3.2
XR1-6400	5545	CV2215	6.4
XG1-2500	*57/5559	—	2.5
XG5-500	*17/5557	—	0.5
XGQ2-6400	*105	—	6.4

**Type No. usually prefixed by manufacturer's initials*

MULLARD LIMITED, COMMUNICATIONS & INDUSTRIAL VALVE DEPARTMENT,
CENTURY HOUSE, SHAFESBURY AVENUE, LONDON, W.C.2.

ELAC closed field...

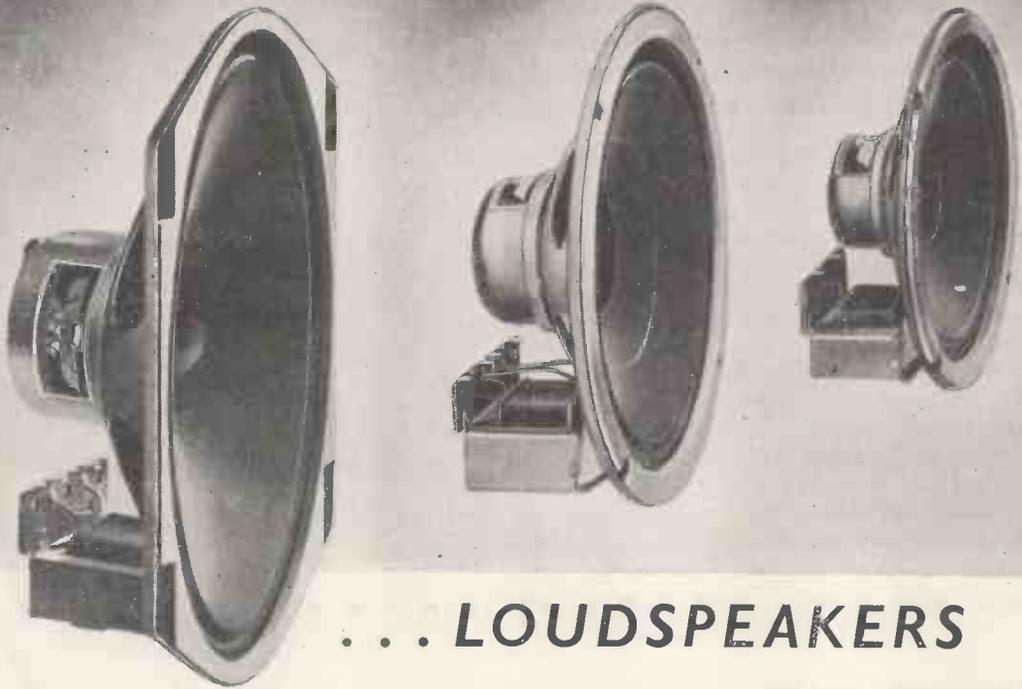

...LOUDSPEAKERS

These loudspeakers have been designed to provide minimum magnetic interference together with high acoustic efficiency. ELAC Elliptical and round loudspeakers are used in most of the leading Television and Radio receivers.


PRICES INCLUDING P.T. FOR LOUDSPEAKERS LESS TRANSFORMER.

7" x 4" Elliptical	Flux 6,500 Gauss	19/10	6½" PM. 6G	Flux 6,500 Gauss	19/10
3½" PM. 3G	Flux 6,500 Gauss	17/2	8" PM. 8D	Flux 7,500 Gauss	26/5
5" PM. 5G	Flux 6,500 Gauss	18/6	10" PM. 10D	Flux 7,500 Gauss	31/8



ELECTRO ACOUSTIC INDUSTRIES LTD.

Stamford Works, Broad Lane, Tottenham, N.15

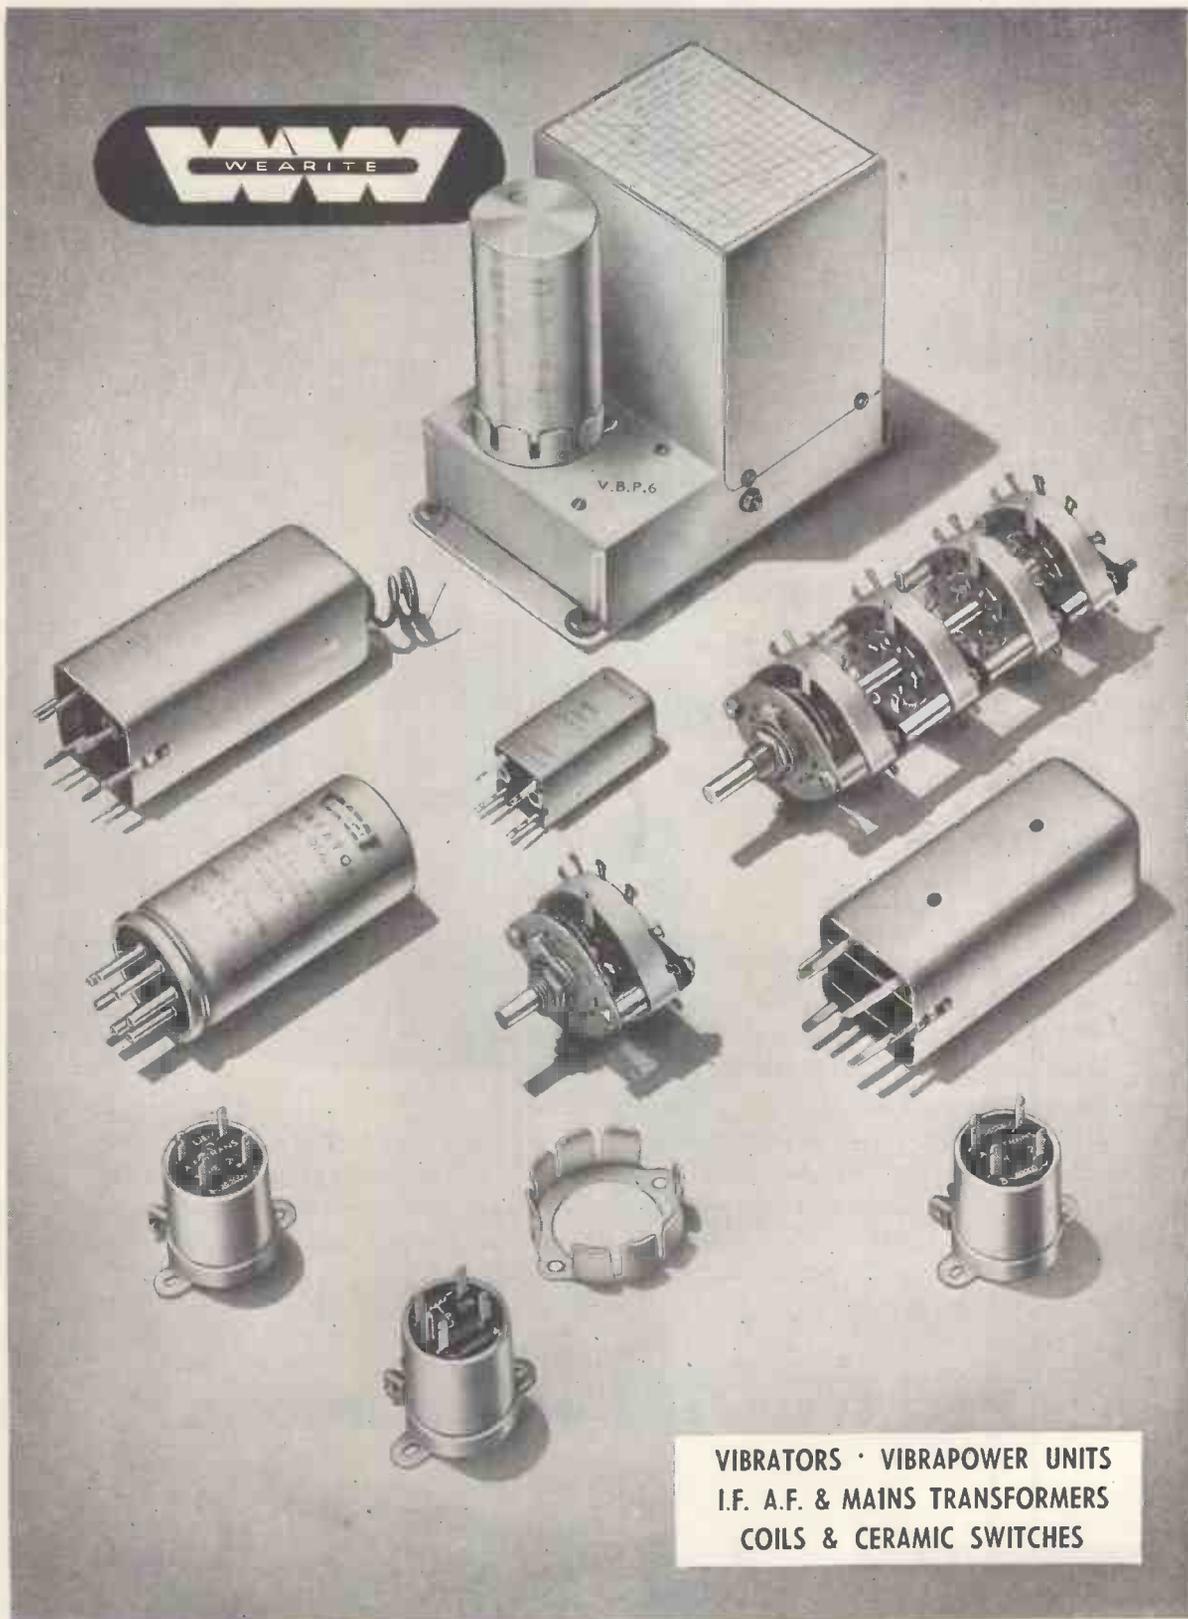

VIBRATORS · VIBRAPOWER UNITS
I.F. A.F. & MAINS TRANSFORMERS
COILS & CERAMIC SWITCHES


WRIGHT & WE A I R E L T D

131 SLOANE STREET · LONDON · SW1 · Telephone: SLOane 2214/5



Marconi
R.F. Test Set
Type TF 890A

**A Combined Signal
 Generator, Frequency
 Meter, Power Meter
 and Spectrum Analyser
 for Microwave
 Measurements**

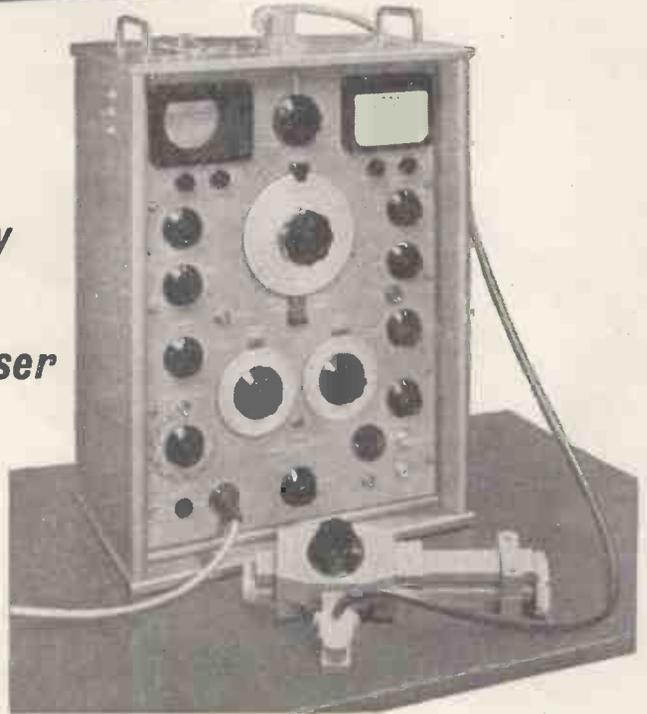

This new Marconi Test Set is for use in the frequency range 9000 to 9680 Mc/s. Output from the signal generator section can be c.w., or either pulse or sawtooth frequency modulated, and its level can be varied from +6 to -115 dB relative to 1 mW. The measurement range of the power meter is from +47 to -10 dB relative to 1 mW. The sensitivity of the spectrum analyser section is sufficient to allow its use with transmitter mean powers as low as 1 watt. The waveguide coupling components supplied with the Test Set include a switched two-way directional coupler for measuring v.s.w.r.

MARCONI INSTRUMENTS

SIGNAL GENERATORS • BRIDGES • VALVE VOLTMETERS • Q METERS • WAVEMETERS
 FREQUENCY STANDARDS • WAVE ANALYSERS • BEAT FREQUENCY OSCILLATORS

MARCONI INSTRUMENTS LIMITED • ST. ALBANS • HERTS • Telephone: St. Albans 6160/9

Midland Office: 19 The Parade, Leamington Spa

Northern Office: 30 Albion Street, Kingston-upon-Hull

Export Office: Marconi House, Strand, London, W.C. 2

PROFIT...

BY EXPERIENCE

Type numbers in the Mullard system of valve type nomenclature are a form of shorthand giving brief technical details of each valve type. For instance, the Mullard EF91 is a miniature R.F. pentode with a heater rating of 6.3V. This, of course, is vital information, which indicates the sort of function the valve will perform. It is primarily intended for use as a R.F. amplifier or mixer valve in television receivers.

But just as vital as knowing what a valve will do, is knowing how long it will do it efficiently. The name Mullard before the type number means that the valve is the result of Mullard advanced quantity production techniques and extremely stringent quality control—the secrets behind the remarkable dependability of Mullard MASTER Valves.

*there is over 30 years' experience
behind the Mullard EF 91*



PROFIT BY THE EXPERIENCE OF THIS SERVICE ENGINEER

Mr. J. Haskell of the Radio & Television Department of Messrs. Jordan's Garage, Ltd., Godalming, says:—

"It is not by mere chance that we use Mullard replacements. It is because our long experience in radio has proved that Mullard valves are consistently reliable and efficient—saving us time and trouble and ensuring the continued satisfaction of our customers."

Mullard

THE MASTER VALVE


BLACKBURN MITCHAM LYTHAM-ST. ANNES WHYTELEAF
FLEETWOOD GILLINGHAM HOVE WADDON RAWTENSTALL



MULLARD LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2

And NOW—a range of 'CERAMICAPS' for your

LAB Storage Unit!

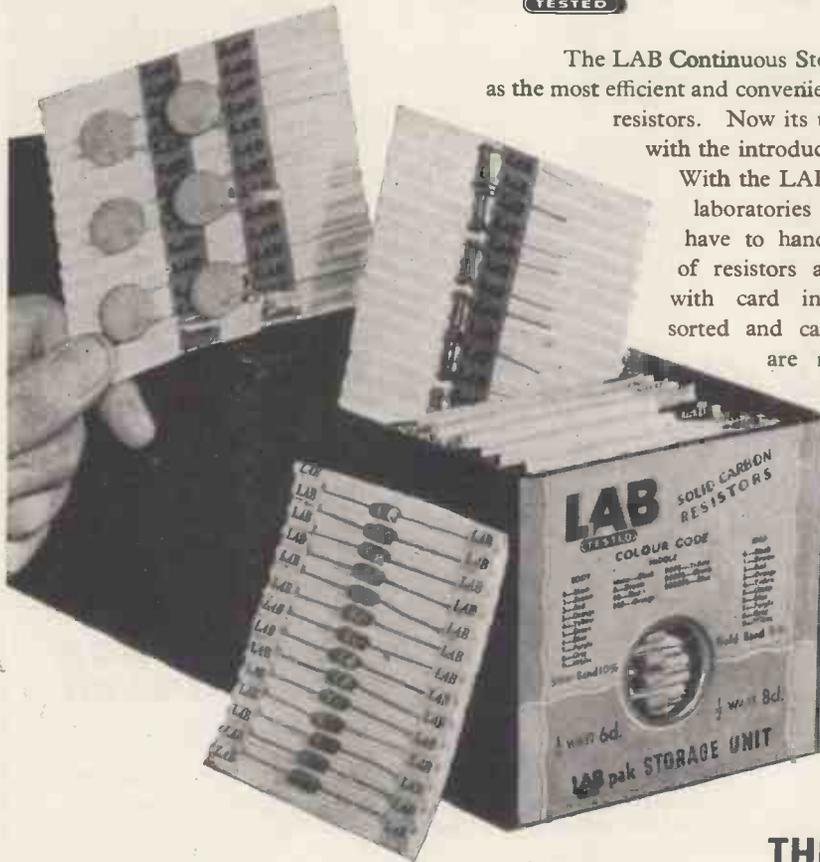

The LAB Continuous Storage Unit is widely acknowledged as the most efficient and convenient method of storing and selecting resistors. Now its usefulness is still further extended with the introduction of LAB pak'd 'Ceramicaps'.

With the LAB Unit, research and experimental laboratories and small production groups have to hand immediately, a complete range of resistors and 'Ceramicaps', easily selected with card index simplicity from some 700 sorted and carded components. Empty cards are merely replaced with full ones from stock.

The LAB unit is supplied FREE with initial purchase to your specification. Standard assortments available. Each LAB Unit can be used to store one type of component exclusively, or quantities of the complete range of resistors and 'Ceramicaps'. Full details and illustrated list will be sent on application.

THE LAB CONTINUOUS STORAGE UNIT

- ★ Continuous Storage for Resistors and 'Ceramicaps'
- ★ Values separately carded
- ★ Finger-tip Selection

RESISTORS					
Ref.	Type	Loading	Max. Volts	Range	Dimensions
T	½ watt	½ watt	250	10 ohms to 10 megohms	¾" x ½"
R	½ watt	1 watt	500	10 ohms to 10 megohms	¾" x ¾"
Tolerance available ±20%, 10%, 5%					
HIGH STABILITY RESISTORS					
HS3	½ watt	½ watt	750	1 ohm to 500 megohms	1.1" x 0.1"
Tolerance available ±5%, 2%, 1%					
WIREWOUND RESISTORS					
5 ohms to 100K ohms — 5-10 watts					
'CERAMICAPS'					
Tubulars 3-470 pf		Tolerances ±2%, 10% Hi-K			
500-5000 pf					

The Lab Continuous Storage Units are available from your normal source of supply, but more detailed information can be obtained from

THE RADIO RESISTOR COMPANY LTD
50 ABBEY GARDENS · LONDON · N.W.8 · Telephone: Malda Vale 5522

Track Assembly

Moulded with

'Araldite'

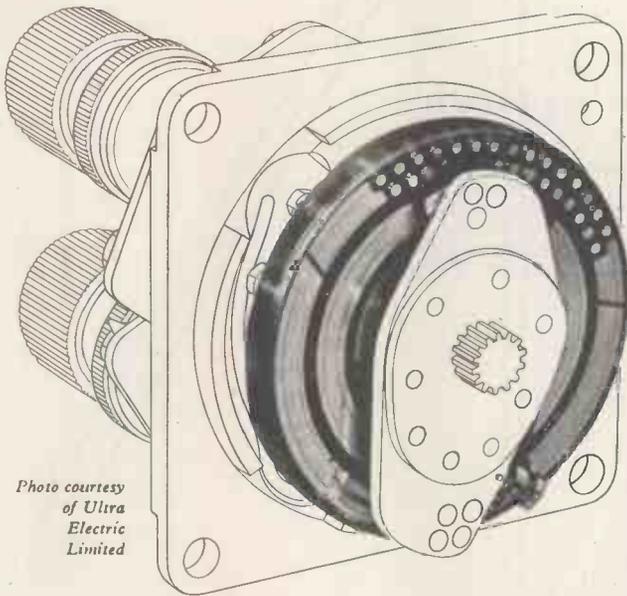


Photo courtesy
of Ultra
Electric
Limited

This selector unit (part of the Ultra Jet Pipe Temperature Control System) controls the temperature of the exhaust gases of a turbo-jet aero-engine.

The resistance elements and track segments are moulded in 'Araldite' Casting Resin B, simplifying assembly and sealing the elements against climatic changes and ensuring mechanical stability.

This is another example of the versatility of 'Araldite' epoxy casting resins which combine exceptionally low shrinkage on setting with resistance to high temperatures, humidity and corrosive agents. 'Araldite' epoxies are facilitating production in many industries—most notably in the potting and sealing of components for radio, electronics and electrical engineering generally.

THESE ARE THE NEW EPOXIES!

'Araldite' (regd.) epoxy resins are obtainable in the following forms:—

- Hot and cold setting adhesives for metals and most other materials in common use
- Casting resins for the electrical, mechanical and chemical engineering industries
- Surface coating resins for the paint industry and for the protection of metal surfaces

Full details will be sent gladly on request.

'Araldite'

epoxy casting resins

Aero Research Limited


DUXFORD, CAMBRIDGE. Telephone: Sawston 187 A Ciba Company

⊗ 264-75 A

**TRANSFORMER
PROBLEMS WE
HAVE SOLVED.**

**B. B. C. WENVOE
TELEVISION TRANSMITTER**

At Wenvoe (as also at Kirk o' Shotts) Gresham Transformers were specified for both the sound and vision transmitters to meet the demand for utmost reliability and efficiency. The Gresham Transformer unit supplying power to the sound transmitter consists of 25 transformers and chokes compactly assembled in one tank to give E.H.T., Filament, Peak Wave, Grid Control and Smoothing.

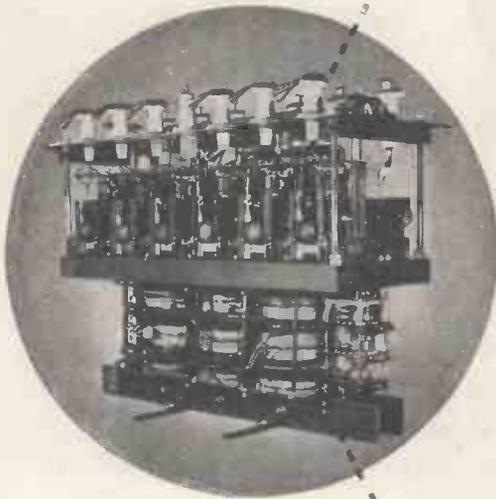

Gresham Transformers Ltd. are Specialist Designers and Manufacturers who have progressively established and sustained a reputation for producing the most reliable transformers in Britain. Ranging in size from miniature electronic types to power distribution transformers up to 1500 kVA, 33000V their products are in constant demand in the fields of Radio, Electronics, Industry and Power Supply.

To Every Transformer Problem, There is a GRESHAM Answer

HANWORTH **GRESHAM** MIDDLESEX
TRANSFORMERS LTD

TWICKENHAM ROAD, HANWORTH, MIDDLESEX.


FELtham 2271-4

ADVANCE COMPONENTS LTD., MARLOWE ROAD, WALTHAMSTOW, LONDON, E.17

Telephone: LARkswood 4366/7/8

Modern in conception, design and performance, the E.2., with its exceptionally wide range, not only fulfils to-day's needs of radio and television, but anticipates the requirements of tomorrow. More than ordinary care has been used in screening and filtering. As a result, stray field is less than $3\mu V.$ at 100 Mc/s.

- Frequency accuracy of $\pm 1\%$ extends over the whole range.
- Output voltage $1\mu V.$ to 100mv. and approx. 1v. at full R.F. Socket.
- Internal modulation; external modulation to 80%
- A.F. Output variable 0-50v. at 400c/s.
- Size $13'' \times 10\frac{1}{2}'' \times 8''.$ ● Weight $17\frac{1}{2}$ lbs.

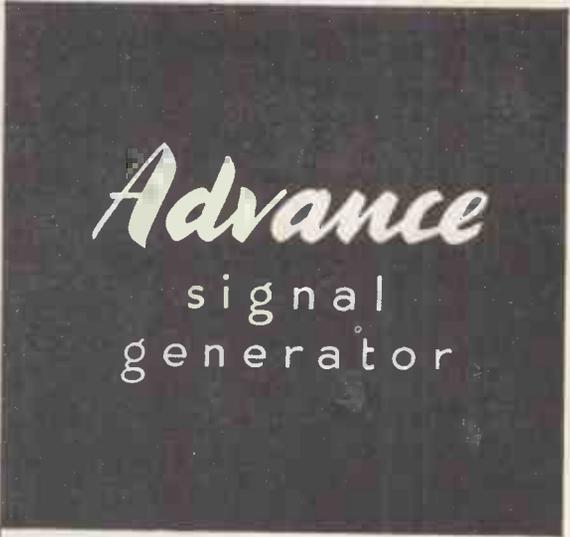


ADVANCE TYPE E2

100 Kc/s - 100 Mc/s ON

FUNDAMENTALS

LIST PRICE £28.0.0
IN U.K.

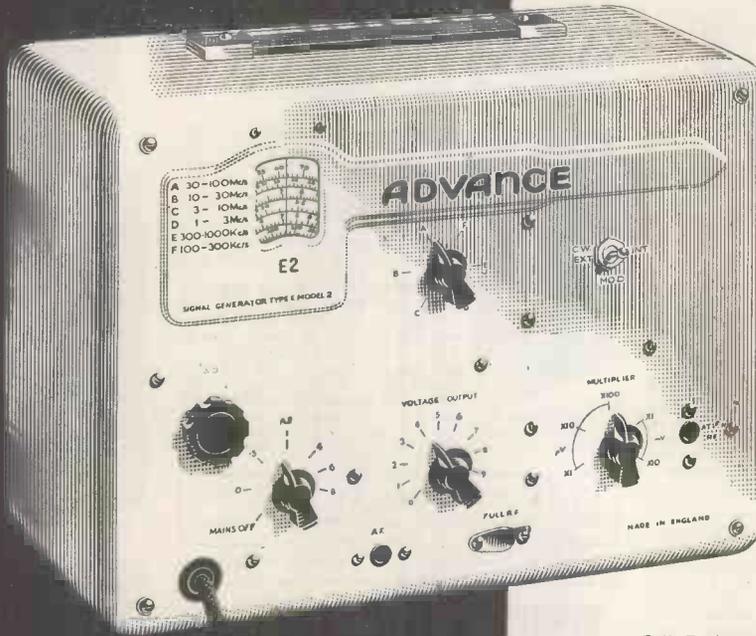

Full Technical Details available in Folder W/14

REAL HIGH FIDELITY at modest cost . . .

• Manufacturer-to-Consumer policy saves you one-third cost ! !

We are now specialising in the supply of units for making up high-fidelity Radio and Record-reproducing Equipments for use in the Home, small Halls, Schools and Gramophone Societies and single items for replacing in existing equipments and radiograms.

Our Chief Engineer, who is operating a Technical

Guidance Service, is available daily, including Saturdays, from 10 a.m. to 6 p.m., or will deal with enquiries by return of post. Our new illustrated Catalogue and Supplement will be a great boon to those desiring high quality equipment for modest expenditure. Send two 2½d. stamps for your copy now. It may well save you pounds.



No. 1

No. 1 "SYMPHONY" AMPLIFIER is a 3-channel 5-watt Gram/Radio Amplifier with astonishingly flexible tone control. You can lift the treble, the bass, or—and here is the unique feature—the middle frequencies to suit your own ear characteristics and the record or radio programme being heard. It is thus possible to arrange the frequency-response of the amplifier to a curve equal and opposite to the resultant curve of the other items in the chain so that what finally registers in the brain is as per original. This flexibility of control is far more important than mere nominal linear response of the amplifier, as the pick-up, speaker, etc., are not linear. Independent Scratch-Cut is also fitted and special negative-feedback circuit employed. The Amplifier can accommodate a wide variety of records from old 78's to new L.P.'s. Input is for all types of pick-up of 0.2v. output or more and there is full provision (and power) for Radio Tuner. It is available, to match 2/3 or 15 ohms speakers. Price: 10 gns. (carriage 5/-). Fitted in Portable Steel Cabinets, 35/- extra.



No. 2

No. 2 "SYMPHONY" AMPLIFIER as No. 1 but with 10-watt Push-pull triode output and triodes throughout. Wooden mains and output transformers and choke. Full provision and power for Tuner. Output tapped 3, 7.5 and 15 ohms. Competes with the most expensive amplifiers on the market yet costs only 15 gns. (carriage 5/-). Fitted in portable Steel Cabinet 2 gns. extra.



"SYMPHONY" AMPLIFIERS with REMOTE CONTROL. Both the above model Amplifiers are available with all controls on a separate Control Panel with up to 4 feet flexible cable which simply plugs into the amplifier. Enables the Amplifier proper to be sat in the bottom of a cabinet whilst the controls are mounted conveniently higher up. Extra cost 2 gns.

"STUDIO SYMPHONY" AMPLIFIERS, Models 1 and 2, new models specially designed to get the maximum out of the revolutionary new Collaro Studio pick-ups and heads type "P." Specification as per our Standard Symphony models but with high-gain, low-noise, built-in Pre-amplifier stage with separate switched correctors for Std. and L.P. Third position on switch provides input matching for Acos and similar output pick-ups. These remarkable new models thus provide all the facilities and matching of our Standard Symphony Amplifiers PLUS the specialised Collaro matchings. Send for copy of "The Gramophone" review of these instruments. Price: No. 1, 12 gns.; No. 2, 17 gns. Carriage 5/-.

CURRENT GARRARD PRODUCTS AVAILABLE FOR IMMEDIATE DELIVERY FROM STOCK AT PRESENT.

3-SPEED GRAM UNIT MODEL "T" with new type turnover pickup head, £10/12/8, post 2/6.

MODEL TA as above, but with plug-in turnover head, £10/16/-, or with two separate high fidelity Acos HGP35 heads, £12/15/6. Unit less heads, £8/11/-, post 2/6. Heads, 42/3 each, post 1/-.

MODEL TB as above, but with long pickup arm. Less heads, £8/11/-, post 2/6.

Heads to fit this unit: Decca XMS, 55/-, Decca Crystal, 35/-, Garrard Standard Magnetic, 25/-, miniature magnetic low impedance, 25/-, miniature magnetic high impedance, 35/- . Post on heads 1/- . Unit can be supplied with any combination of above heads and is carefully adjusted for stylus pressure on despatch.

RC110 NEW MODEL AUTO-CHANGER with new type turnover head, £13/19/6, carriage 5/-.

MODEL RC75M, less heads, £15/4/6, with new turnover head, £17/9/6, with two separate Acos HGP35 heads, £19/9/-, carriage 5/-.

RC80M, less heads, £17/11/7, with new turnover head, £19/6/7, with two XMS heads, £22/11/6, with Garrard head for miniature fibres for Standard, and Decca crystal for LP, £20/12/-, carriage 5/-.

COLLARO latest model AC3/544 3-SPEED GRAM UNIT, with new "STUDIO" Pickup type "O" or "P" £10/6/1, post 2/6.

COLLARO latest model 3RC531 AUTO-CHANGER. We are pleased to say that after most careful and rigorous trial, we can highly recommend these latest improved Auto-Changers by Collaro. The standard of engineering is of the highest and in addition to being very easy and quick and foolproof in operation, they are fitted with the revolutionary high-fidelity plug-in "STUDIO" Pickup heads of which the Type "O" is matched to radio sets and medium-gain amplifiers and the Type "P" is designed for high-gain amplifiers. The Type "P" is exactly matched to our new model Studio Symphony Amplifiers. The price complete with either type pickup head is £15/3/- . The 3RC532 as above, but mixes 10-inch and 12-inch records, costs £17/10/-, carriage 5/- . Delivery from stock. Illustrated leaflet 2½d.

TRANSCRIPTION MOTORS IN STOCK.

COLLARO MODEL 2000, less pickup, £13/9/6.

COLLARO 2010 with pickup complete on unit plate, £18/4/9.

CONNOISSEUR, £21/17/3.



GOODMANS CORNER CABINETS (left) for the AXIOM 150 Model 2 manufactured by us to Messrs. Goodmans' measurements. Height, 44in. Price: complete kit in plain board with felt, 8 gns. Price ready built, 10 gns. Finished in figured walnut, 16 gns. Other veneers to order. Carriage extra according to area.

"SYMPHONY" BASS REFLEX CABINET KITS. 30in. high, consist of fully-cut ¾in. thick, heavy, inert, non-resonant patent acoustic board, deflector plate, felt, all screws, etc., and full instructions. 8in. speaker model, 85/-; 10in. speaker model, 97/6; 12in. speaker model, £95/7/6.

The design is the final result of extensive research in our own laboratory and is your safeguard of optimum acoustic results. Carriage 7/6. Ready built, 10/6 extra.

HIRE PURCHASE FACILITIES

NOW AVAILABLE on orders of £15 or over.

Send one-third deposit with order, balance over 6 or 12 monthly instalments. State which required.

NORTHERN RADIO SERVICES

11 & 16 KINGS COLLEGE RD., ADELAIDE RD.,

LONDON, N.W.3. Phone: PR11mrose 8314

Tubes: Swiss Cottage and Chalk Farm.

Buses: 2, 13, 31, 113, 187.



REGD. DESIGN

"SYMPHONY" BASS REFLEX CABINETS, fully finished in figured walnut, oak or mahogany to our own design and to match our Console Amplifier Cabinet, enabling the housing of a whole equipment in a two piece suite, cost: 12in. speaker model, £11/10/-; 10in., £11; 8in., £10/10/- . Carriage according to area. The 10in. model is ideal for the WB HF 1012 (see "The Gramophone" review March).



CONSOLE AMPLIFIER CABINETS (above), 33in. high, lift-up lid with piano hinge, take Tape Deck, Gram Unit or Auto-changer, Amplifier, Pre-amplifier, and Radio Feeder Unit, finished medium walnut veneer. De Luxe version, 10 gns. carriage according to area. Other veneers 10/- extra.



Now—far ahead of its time—Great new 10KW Short Wave Transmitter!

32 new, special features that won't be matched for years —
now available in new RCA BHF-10A Broadcast Transmitter!



Front view of BHF-10A transmitter reveals handsome, functional design. Requires only 33 sq. ft. of floor space.

Puts the BROADCASTER far ahead!

The new BHF-10A has sufficient power to cover large service areas; quick frequency change, to increase usefulness; unsurpassed reliability, for unbroken service. The opportunities for commercial stations to increase revenue are *built in!*

Puts the ENGINEER far ahead!

Here are just a few advantages for the *engineer*: easy maintenance, through use of a limited number of high-gain tubes. *Air cooling*. Simplest tuning. Electronically protected circuits—and full power for zonal broadcasting in 90, 75 and 60 metre bands, and international broadcasting over a frequency range of 3.2 — 26.1 mc.

These are just a few of 32 special features of this RCA transmitter that ushers in a new era of radio — proud achievement of RCA's 30 years of broadcast pioneering. Write today for booklet giving complete specifications!

Puts the INVESTOR far ahead!

Years-ahead engineering makes the new RCA 10KW transmitter an exceptionally sound investment. Installation costs are low, for this self-contained transmitter can be installed in existing buildings without alteration. Maintenance has been simplified—and routine operation can be handled by non-technical personnel!



Rear view, power output section showing PA tuning and output coupling unit.



RCA INTERNATIONAL DIVISION

RADIO CORPORATION of AMERICA

RCA BUILDING

30 ROCKEFELLER PLAZA, NEW YORK, N.Y., U.S.A.

TMKS. ®

BRITISH TAPE RECORDER'S SUCCESS IN 20th CENTURY-FOX FILM



Zulus listen attentively whilst Mr. D. H. Geerds plays back African music recorded on the Celsonic Tape Recorder.

Only Celsonic Recorders give these advantages at the same price!

1. Studio quality performance at prices the amateur can afford.
2. At one session it will record 3,280 ft. of tape full track or 6,560 ft. half track.
3. Longer play-back times: 85 minutes uninterrupted for music or 170 minutes for speech only. These times are doubled on half track.
4. Superimposing device incorporated and synchronising unit can be supplied to link up tape to film.

Write for details:—

EXCEL SOUND SERVICES LTD

CELSONIC WORKS, GARFIELD AVENUE, BRADFORD 8, YORKSHIRE. Tel: Bradford 45027.

RECORDINGS OF ZULULAND

Celsonic equipment was used exclusively to record African music and sound effects for the 20th CENTURY-FOX Cinemascope Production **"UNTAMED"**

The Studios report:—

"The Sound was excellent at both 7½ inches and 15 inches per second."

CELSONIC

A NEW-PRINCIPLE A-C AUTOMATIC VOLTAGE STABILISER



We can supply from stock all types of American tubes, condensers, valves, potentiometers, etc.

We have now had released to us by a Government Department the design of our "A.C. Mains Regulator, Automatic, Step, Mark II", and are therefore manufacturing this unit for general sale. It ideally fills the need for a cheap, small and light Stabiliser. Although it measures only 8½ in. x 4½ in. x 5 in., weighs as little as 11 lbs., and costs only £24 net, it has a performance fully equal to any similarly rated Automatic Stabiliser of the resonated, saturated core type, without any of the disadvantages.

ASR-1150 has a pure output waveform, is unaffected by changes in mains frequency, and works equally well from no-load to full load, which is 1150 VA. It has a stabilised output at 230V unless otherwise ordered.

Many other Automatic Voltage Stabilisers are now manufactured by us, and all are available for immediate delivery. In some cases the constancy of output is as high as 0.15%. Models are available from 200 VA to 30 kVA, single phase. 3-Phase Stabilisers are also available. Prices are *extremely* competitive.

The NEW "ASR-1150" costs only £24 net

Complete information is obtainable from:

CLAUDE LYONS LTD., STABILISER DIVISION,
QUEEN'S HOUSE, 180-182 TOTTENHAM COURT ROAD, LONDON, W.1
(Telephone MUSEum 3025-6 Ext. 13)

MEMO: If you are interested in infinitely-variable Transformers, do not forget the almost indispensable "VARIAC" (Reg'd. Trademark). Models are available from 170VA to 21kVA. Our Catalogue V-549 (3rd Edition) tells the whole story, and will gladly be mailed free and post free, on request.

PRICE REDUCTION

12E1 BEAM TETRODE

NOW **£2** LIST



Increased demand for the Ediswan Mazda 12E1 Beam Tetrode has enabled us to step up production and thereby offer a reduced list price.

The 12E1 has the unusually high maximum cathode current rating of 300mA with a screen voltage of 150V. Mutual conductance is 14mA/Volt. It is, therefore, very suitable as a series or shunt valve in stabilised power packs. It also finds application in electronic control and other circuits.

RATING

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	1.6
Maximum Anode Voltage (volts)	$V_a(\max)$	800
Maximum Screen Voltage (volts)	$V_{g2}(\max)$	300
Maximum Control Grid Voltage	$V_{g1}(\max)$	100
Maximum Voltage between g_1 and g_2 (volts)	V_{g1-g2}	400
Mutual Conductance (mA/V)	S_m	14
Inner μ	$\mu_{g1, g2}$	5.3
Maximum Anode Dissipation (watts)	P_a	35
Maximum Screen Dissipation (watts)	P_{g2}	5.0
Maximum Cathode Current (mA)	$I_k(\max)$	300
Maximum Potential Heater/Cathode (volts DC)	$V_{h-k}(\max)^{\dagger}$	300

* Taken at $V_a = V_{g2} = 150V, I_a = 200 \text{ mA}$.

† Provided the cathode is positive

All maximum ratings are Absolute values not Design Centres.

Reduced prices also
for

19H4 to **£5.0.0**

19H5 to **£8.0.0**

Full technical information
available on request

EDISWAN

MAZDA

RADIO DIVISION • THE EDISON SWAN ELECTRIC COMPANY LIMITED
155 Charing Cross Road, London, W.C.2. Telephone: Gerrard 8660. Telegrams: Ediswan, Westcent, London
Member of the A.E.I. Group of Companies.

the

Taylor

new series

TAYLOR T.V. OSCILLATOR MODEL 92A

This robust Sweep Oscillator is designed for rapid alignment of T.V. Receivers.

Frequency Range 0-250 mc/s

Frequency Deviation ± 1.5 — ± 15 mc/s

Output 100 mv— 50μ V

Price £27.0.0 Retail



TAYLOR R.C. OSCILLATOR MODEL 191A

This R.C. Oscillator of wide range and good stability and accuracy is intended for general service and laboratory work

Frequency 10 c/s—100 Kc/s

Frequency Accuracy $\pm 2\%$

Output Sine or square wave

Attenuator 80 db

Impedance 600 ohms

Price £30.0.0 Retail



TAYLOR ELECTRICAL INSTRUMENTS LTD.
MONTROSE AVENUE, SLOUGH, ENGLAND


Telephone: SLOUGH 21381/3 Cables: Taylins Slough

Write for catalogue illustrating full
range of Taylor Test Gear



Hi Fi HIGH FIDELITY

Amplifier

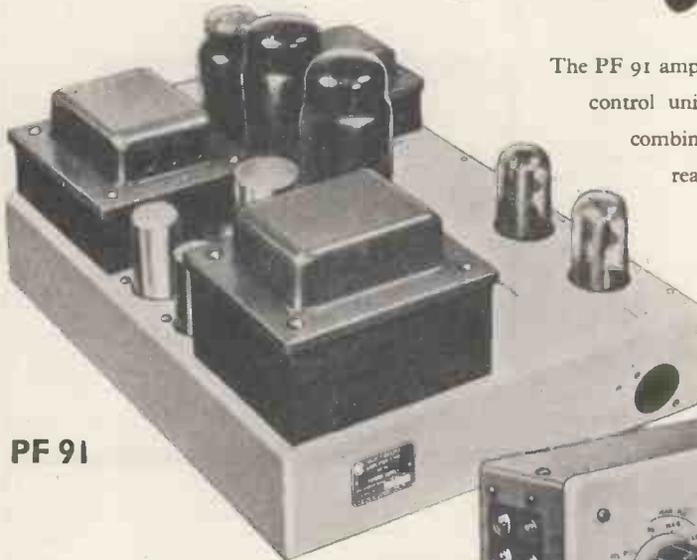

PF 91

The PF 91 amplifier, with the PF 91A remote control unit, is a versatile and practical combination for those who demand realism in sound reproduction from record players, tape recorders, microphones or radio tuners.



PF 91A


OUTSTANDING FEATURES

- ★ Built to proved mechanical and electrical engineering standards and suitable for continuous use even under tropical conditions.
- ★ Frequency range substantially flat over entire audible range of 20-20,000 cycles per second, up to 12 watts output.
- ★ Excellent oscillatory transient response because of balanced response characteristic from 2 cycles per second to 160,000 cycles per second.
- ★ Low noise level.
- ★ High damping factor.
- ★ Very low harmonic and intermodulation distortion.

MODEL PF 91
28 GNS
MODEL PF 91A
12 GNS

4ft. extension cable available free of charge

The new approach to Microwave Testing

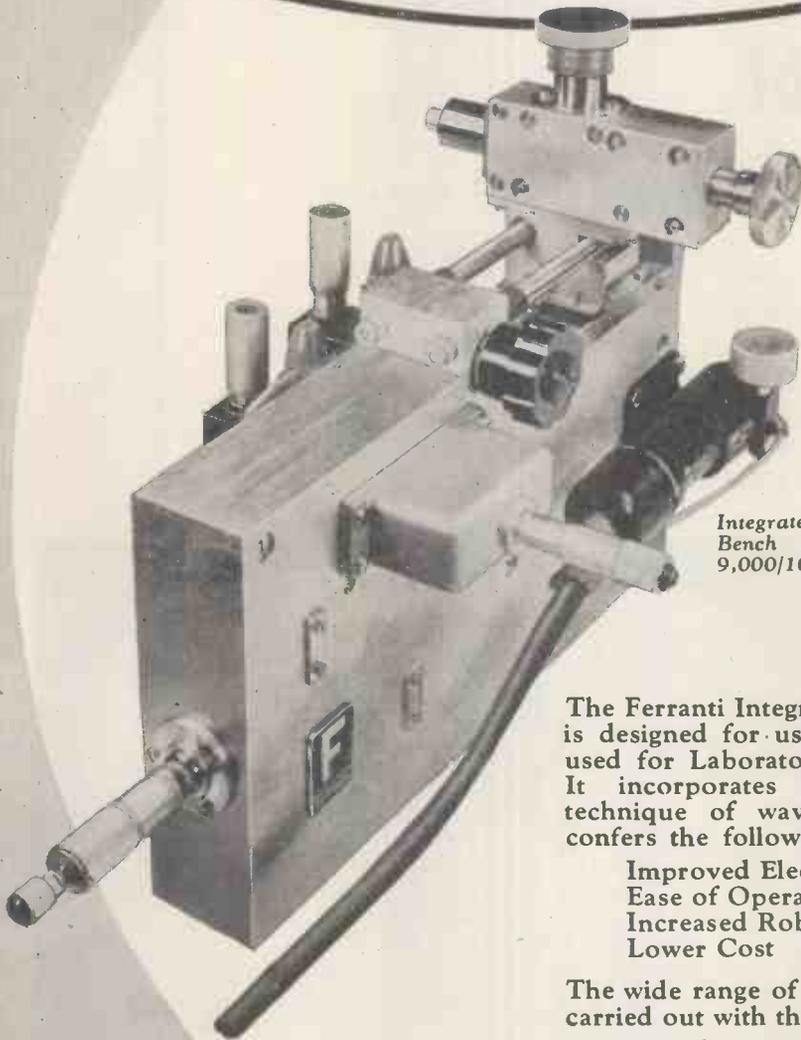

*Integrated Microwave Test
Bench Frequency Range
9,000/10,000 Mc/s.*

The Ferranti Integrated Microwave Test Bench is designed for use in the 3 cm. band and is used for Laboratory and Production Testing. It incorporates the 'MILLED BLOCK' technique of waveguide manufacture which confers the following outstanding advantages:

- Improved Electrical Characteristics
- Ease of Operation
- Increased Robustness
- Lower Cost


The wide range of standard tests which can be carried out with the equipment includes

- Impedance Measurement
- Voltage Standing Wave Ratio Measurement
- Attenuation Measurement
- Insertion Loss Measurement



FERRANTI LTD · CREWE TOLL · FERRY ROAD · EDINBURGH 5

London Office: KERN HOUSE, 36 KINGSWAY, W.C.2


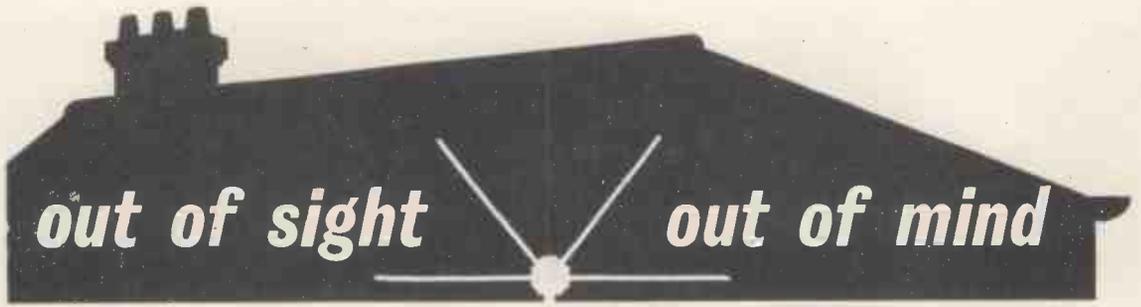


**but right
in the picture . . .**

The Antiference U4V multi-channel TV loft aerial for vertical polarisation is pre-assembled tuneable and **THE MOST POWERFUL OBTAINABLE TODAY!** Telescopic "tuneable" rods permit a tuning adjustment to counter the effects of surrounding buildings, pipes, etc. Peak performance is assured with this outstanding aerial under almost any set of conditions. **MODEL U4V** for vertically polarised channels. Complete with insulator, rods, mounting brackets and fixing screws—**LIST PRICE 22/6**




Above and below are alternative arrays designed to suit local conditions, while **MODEL U4H**—List Price 25/- is designed for horizontally polarised transmission.

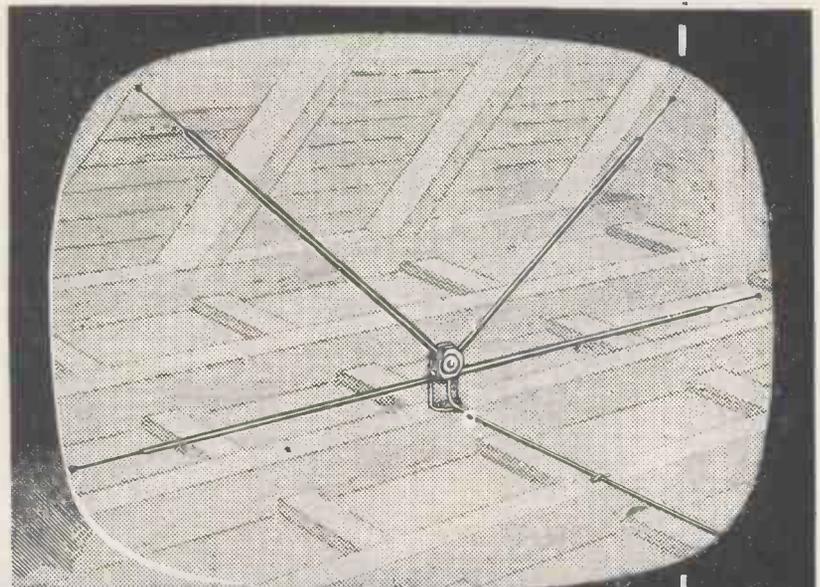

ANTIFERENCE
LIMITED

BICESTER ROAD, AYLESBURY, BUCKS Telephone: Aylesbury 1467/8
DHB/A/L

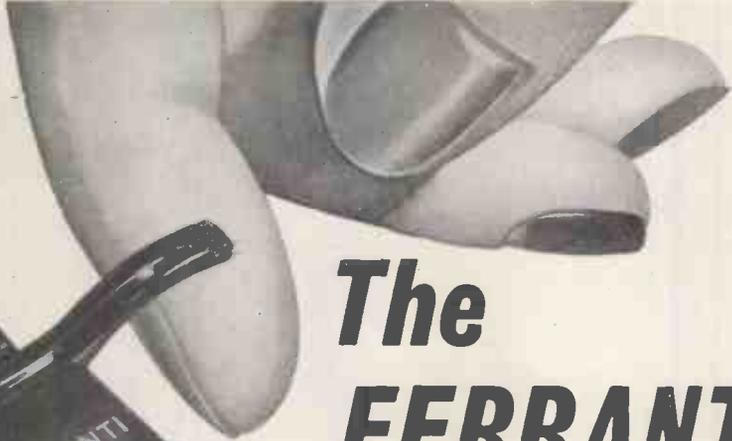

The FERRANTI Ribbon Pick-up

*... an important contribution
to better sound ...*


Ferranti Ltd. take pleasure in announcing that their Ribbon Pick-up is now in production, and that all distribution and marketing arrangements in the United Kingdom and overseas (excluding the U.S.A.) have been placed in the hands of The Acoustical Manufacturing Company, Ltd.

All enquiries should be sent to :—


**The Acoustical Mfg. Co., Ltd.
Huntingdon. Tel. 361.**

United States enquiries to :—

**Ferranti Electric Inc., 30, Rockefeller Plaza,
New York.**

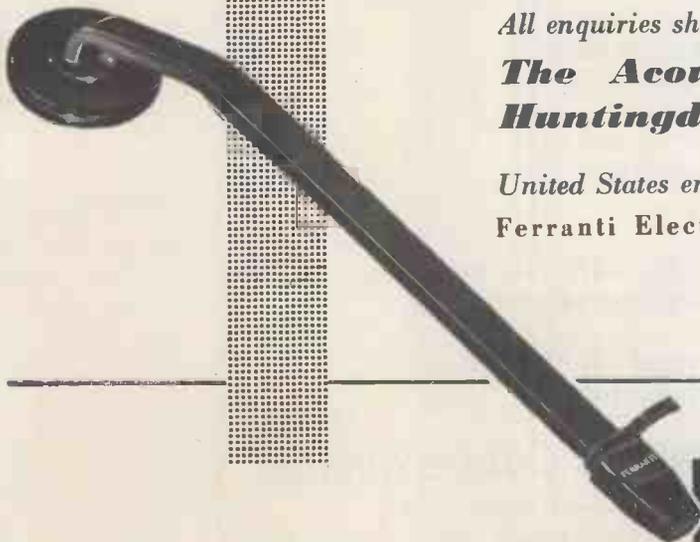

Now available...

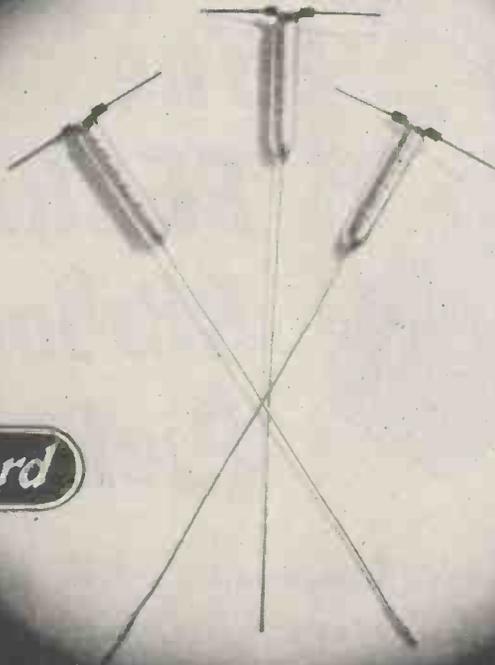

Standard

high-
grade

TRANSISTORS



Actual size

Pioneers in semi-conductor development and manufacture **Standard Telephones and Cables Limited** were also first to produce transistors in Europe.

Two types of germanium point contact transistors are now available for immediate delivery,

Code 3X/100N—for control and switching circuits.

• Code 3X/101N—for use as
• an amplifier or oscillator.


Enquiries are also invited for *Standard Junction type transistors.*



Standard Telephones and Cables Limited

(Registered Office: Connaught House, Aldwych, London, W.C.2.)

RADIO DIVISION, OAKLEIGH ROAD, NEW SOUTHGATE, N.11

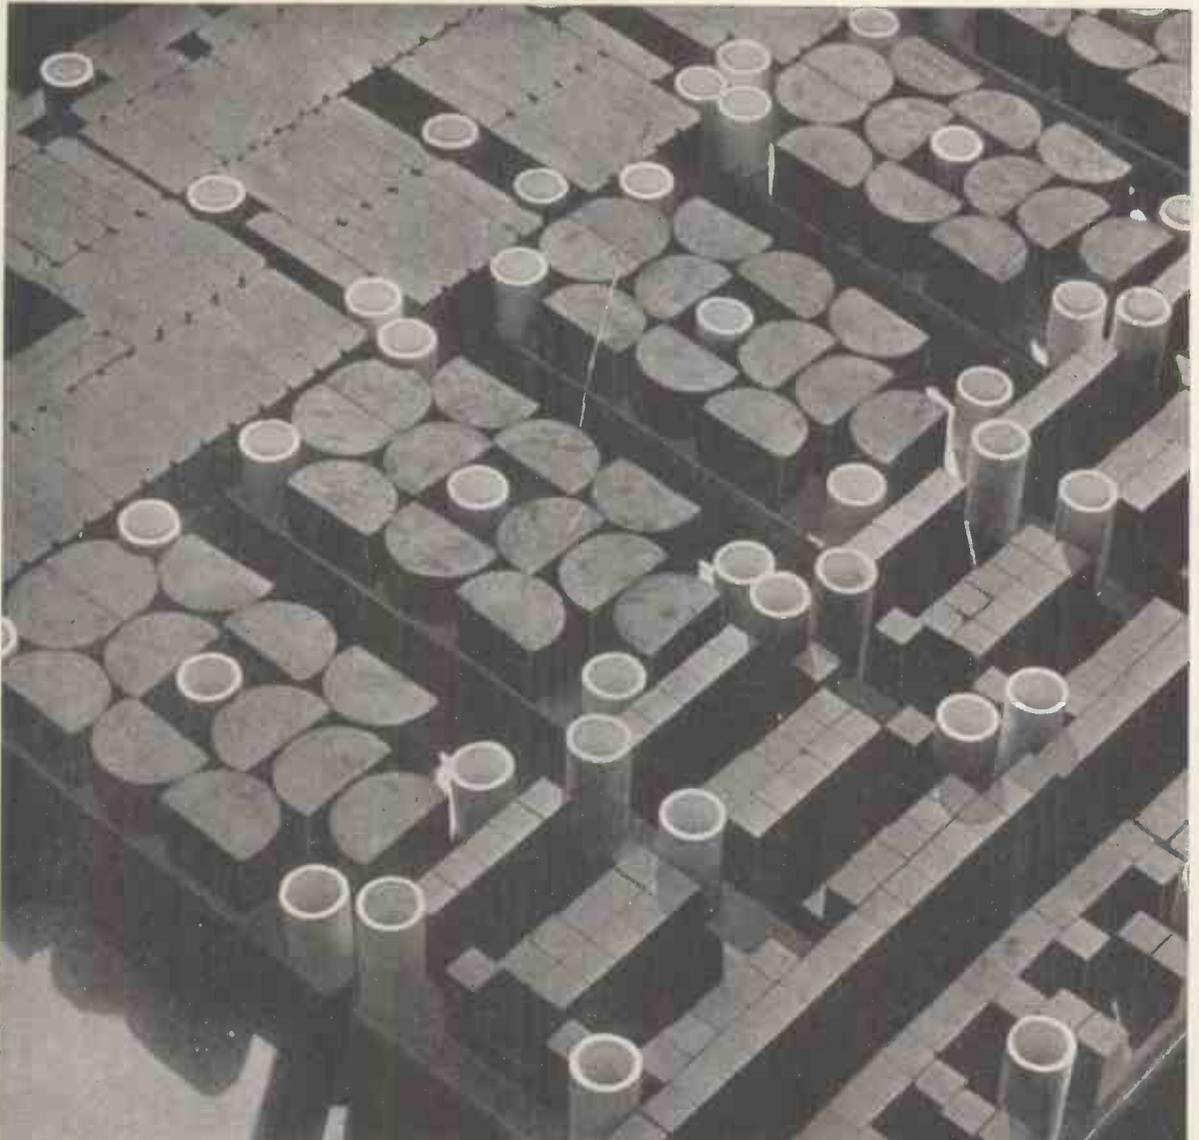

MAGNETIC MATERIALS Extensive research and manufacturing facilities have established Mullard as the leading producers of magnetic materials. They were the first, for example, to introduce Ferroxcube, the world's most efficient magnetic ferrite; 'Ticonal' anisotropic permanent magnets, renowned for their high stability and high energy output; and Magnadur, an entirely new type of permanent magnet with the insulating properties of a ceramic.

The wealth of experience gained from these developments is available to all users of magnetic materials through the Mullard advisory service. An enquiry to the address below will put a team of specialised engineers at your disposal.



Mullard

'TICONAL' PERMANENT MAGNETS • MAGNADUR (Formerly Ferroxdure)
PERMANENT MAGNETS • FERROXCUBE MAGNETIC CORE MATERIAL


MULLARD LTD., COMPONENT DIVISION, CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2.

*Mullard Magnadur permanent
magnets ready for firing.*

NORWAY



V.H.F. Pack Set
type 46

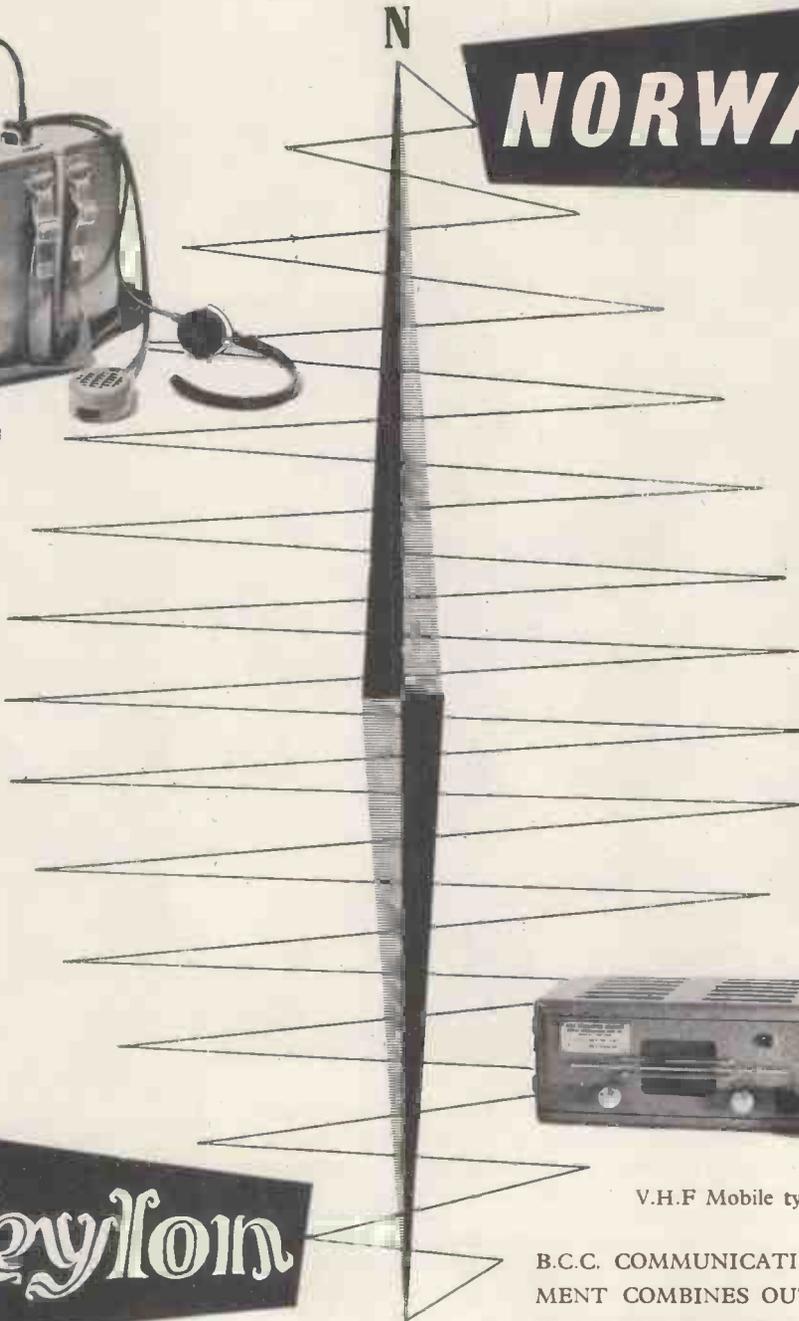

V.H.F. Mobile type 68

Ceylon

B.C.C. SETS THE STANDARD.

B.C.C. COMMUNICATIONS EQUIP-
MENT COMBINES OUTSTANDING
PERFORMANCE AND RELIABILITY
WITH EASE OF MAINTENANCE
AND SIMPLICITY OF OPERATION.


ANYWHERE . ANY CLIMATE . ALL CONDITIONS



**BRITISH COMMUNICATIONS
CORPORATION LIMITED**

Second Way, Exhibition Grounds, Wembley, Middlesex. Telephone : Wembley 1212

When it's a question of MINIMUM SIZES ...

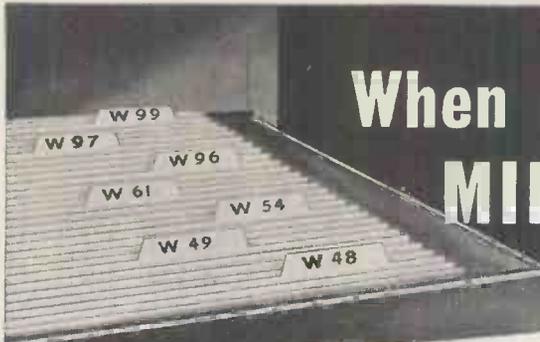

**HUNTS
METALLISED PAPER
CAPACITORS**

HUNTS METALLISED PAPER CAPACITORS MIDGET MOLDSEAL TUBULARS **TYPE W99**


Specification
Heat moulded housing ensuring an adequate seal against moisture. Wire leads soldered directly to capacitor unit in a manner ensuring freedom from intermittent contact (strength of joint exceeds tensile strength of wire lead).

RANGES


Working Voltage	Temperature Range	Capacitance (μF)	Size *
150 D.C.	-40°C to +71°C	0.004 to 0.01 0.02 to 0.04	A B
400 D.C.	-40°C to +85°C	0.001 to 0.003 0.004 to 0.01	A B
600 D.C.	-40°C to +85°C	50pf to 0.001 0.002 to 0.004	A B
300 A.C.	-40°C to +71°C	50pf to 0.001 0.002 to 0.004	A B

Capacitance Tolerance:
Standard ± 20% (Closer tolerance available)
Insulation Resistance:
20,000 meg ohm working voltage
Power Factor:
than 2% at 1,000 per second at 20.

SIZES * A = $\frac{1}{16}$ " x $\frac{3}{16}$ "
B = $\frac{1}{8}$ " x $\frac{1}{8}$ "

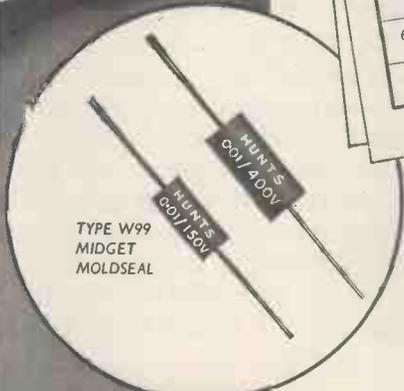

TYPE W99
MIDGET
MOLDSEAL

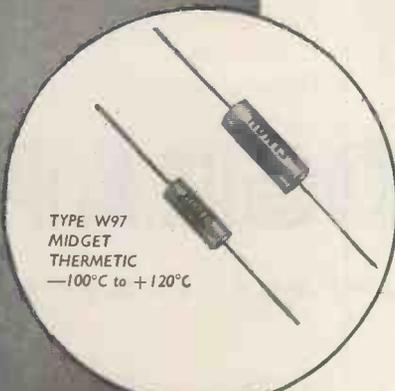

TYPE W97
MIDGET
THERMETIC
-100°C to +120°C

Look to HUNTS!


For maximum reliability. Hunts capacitors for radio and electronic equipment include many types designed to meet the need of designers for decreased dimensions.

Type W99 listed above is just one example taken from Hunts unparalleled range of capacitors for every purpose.

Years of specialisation in nothing but capacitor design and manufacture has enabled us to achieve and maintain that long-lasting reliability, and outstanding performance which characterises every Hunt product.

Please write for leaflet giving full details of types for all applications.



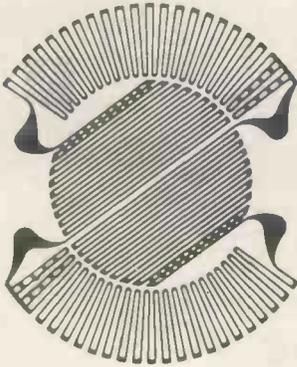

PRINTED Patents

Technograph — inventors and pioneers of the etched foil printed circuit technique

The wide and continuously expanding use of Technograph printed circuits has now attained to proportions that remove this technique from the sphere of merely academic interest and, possessing as it does positive economic and technical advantages, place it in the field of practical commercial use. An outstanding example is the joint development of the Saunders-Roe/Technograph foil strain gauge now in use throughout the world. Examination of the leading international technical journals provides the clearest possible evidence of the phenomenal growth of printed circuitry based on the Technograph techniques.

The process of etched foil circuits controlled by Technograph Printed Circuits Ltd. is now in use for such diverse purposes as

Guided Missiles

TV Receivers

Aircraft de-icing

Radio Receivers

Strain Gauges

Resistance Thermometers

Coils

Capacitors

Switches

Resistors

Computers


Heating Elements

TECHNOGRAPH

32 SHAFTESBURY AVENUE, LONDON, W.1

Telephone

CIRCUITS Protection

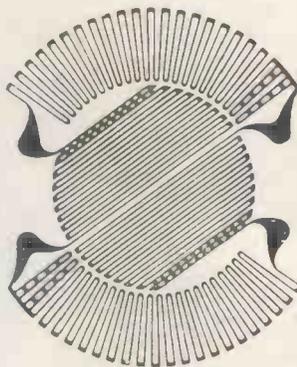

Technograph patents throughout the world now cover various alternative processes including the basic technique of making electrically conductive patterns by either the etching of metal foil previously laminated to any of the various types of insulating base, or the etching of foil patterns from metal insulated on one side by means other than laminating and bonding. These patents, together with numerous applications still pending, cover many fundamental aspects of the new technology.

Technograph offer to all makers of electrical apparatus the many techniques they have developed for the production of electrical circuits and their unrivalled and unique experience in this field, either by the execution of orders or—where manufacturers prefer to produce their own circuits—by the grant of licences together with any necessary assistance in establishing manufacture.

Among Technograph Licensees and users in England and America the following well-known names now appear and their number is growing rapidly

Baldwin-Lima-Hamilton Corporation

Bristol Aeroplane Co. Ltd.

Circuit Corporation of America

Cornell-Dubilier Electric Corporation

De Havilland Propellers Ltd.

Dunlop Rubber Co. Ltd.

Etched Products Corporation

The Formica Company

Hallicrafters Corporation

National Vulcanized Fibre Company

Phena-tron Circuitry

Photocircuits Corporation

Polytron Corporation

Saunders-Roe Limited

Telegraph Condenser Co. Ltd.

Truvox Ltd.


PRINTED CIRCUITS LTD

AND AT SYLVAN GROVE, LONDON, S.E.15


GERrad 4532



Instrument Type

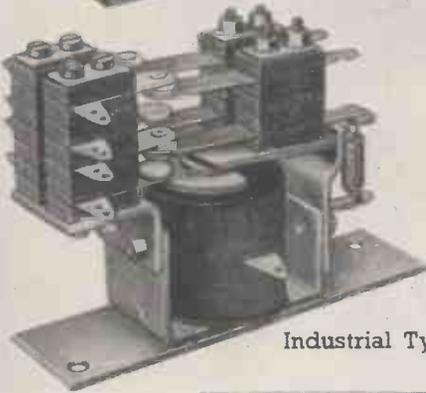

Industrial Type

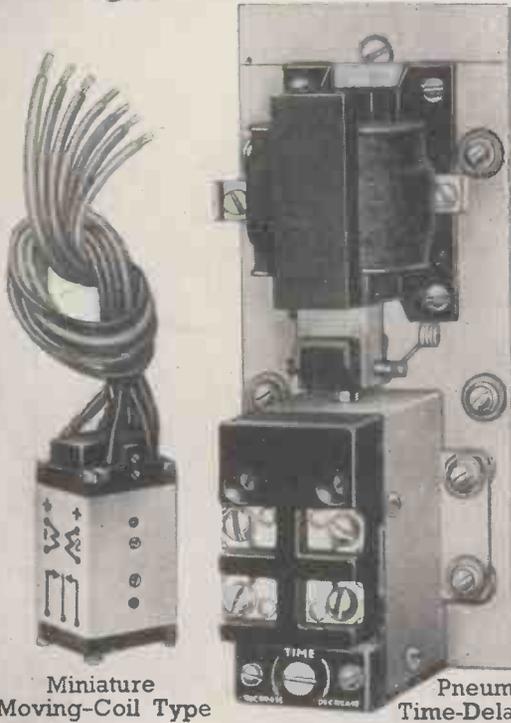Miniature
Moving-Coil TypePneumatic
Time-Delay Type

Also manufacturers of:- Cartridge Thermostats,
Adjustable Contact Thermometers,
Magnetic Amplifiers,
Low-Inertia Integrating Motors.

**ELECTRO
METHODS**
LTD
OF STEVENAGE


—the first
name for
precision
RELAYS

Comprehensive
technical data of our
extensive range of
standard relays
will be forwarded
on request

*Most types now available for
PROMPT DELIVERY*

ELECTRO METHODS LTD. (Division WR), CAXTON WAY, STEVENAGE, HERTS
PHONE: STEVENAGE 780

NEW Multi-Purpose Oscilloscope

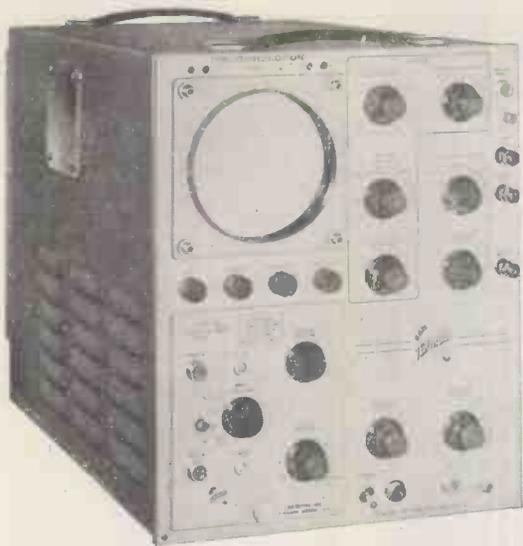

TYPE 531

You just plug in the proper vertical preamplifier to have at your service a wide-band dc oscilloscope, a wide-band high-gain oscilloscope, a wide-band dual-trace oscilloscope, or a differential-input high-gain dc oscilloscope. The Type 53-Series Plug-In Units are small, weigh less than 6 lbs. each, and you can change them in a few seconds.

This new instrument is designed to make your oscilloscope dollar go farther. Development of additional plug-in units already in progress will increase the versatility of the Type 531, and assure its modernity well into the future. But your greatest gain is the many hours of valuable engineering time you save through its use.

OSCILLOSCOPE CHARACTERISTICS

24 Calibrated Sweeps

0.1 $\mu\text{sec/cm}$ to 5 sec/cm . Accurate 5-x magnifier permits calibrated sweep times to 0.02 $\mu\text{sec/cm}$. Sweep continuously variable from 0.02 $\mu\text{sec/cm}$ to 12 sec/cm . Sweep calibration accurate within 3%.

New Cathode-Ray Tube

Tektronix T51P metallized CRT has helical post-accelerating anode; deflection-plate leads are brought out at the neck.

DC-Coupled Vertical Output Amplifier

Designed for use with any of the Type 53-Series Plug-In Units.

Balanced Delay Network

Provides 0.25- μsec vertical signal delay.

Horizontal Input Amplifier

Sensitivity 0.2 v/cm to 20 v/cm , continuously variable.

Internal or External Triggering

Amplitude level selection or automatic triggering.

Amplitude Calibrator

Square wave, 0.2 mv to 100 v in 18 steps, accurate within 3%.


DC-Coupled Unblanking

CRT Beam Position Indicators

Electronically Regulated Power Supplies



- Plug-In Vertical Preamplifiers
- 10-KV Accelerating Potential
- 600,000,000 to 1 Sweep Range
- Direct-Reading in Time and Amplitude
- Versatile Triggering Circuitry

PLUG-IN UNIT CHARACTERISTICS



Type 53A Wide-Band DC Plug-In Preamplifier—dc to 10-mc passband, 0.035- μsec risetime. Sensitivity 0.05 v/cm to 50 v/cm , ac or dc, continuously variable, with nine calibrated steps from 0.05 v/cm to 20 v/cm . Two input connectors with 80-db isolation. Price \$85.

Type 53B Wide-Band High-Gain Plug-In Preamplifier—same as the Type 53A with the addition of an ac-coupled input stage providing three additional calibrated sensitivity steps, 5 mv/cm , 10 mv/cm and 20 mv/cm . Passband 5 cycles to 9 mc, 0.04- μsec risetime. Two input connectors with 80-db isolation. Price \$125.



Type 53C Dual-Trace Plug-In Preamplifier—two identical amplifier channels, each with dc to 8.5-mc passband, 0.04- μsec risetime, sensitivity 0.05 v/cm to 50 v/cm continuously variable with 9 calibrated steps from 0.05 v/cm to 20 v/cm . Electronic switching triggered by oscilloscope sweep, or free running at about 100 kc. Polarity reversal switches. Price \$275.

Type 53D Differential High-Gain DC Plug-In Preamplifier—sensitivity 1 mv/cm at dc to 250 kc—with passband increasing to 750 kc at 50 mv/cm and lower. Sensitivity in calibrated steps—1 mv/cm to 50 v/cm , or continuously variable—1 mv/cm to 125 v/cm . Differential input. Price \$145.



Price \$995 plus price of desired plug-in units
Now in Quantity Production


For complete specifications and shipping schedules call your Tektronix Field Engineer or Representative or write to:



Tektronix, Inc.

P. O. Box 831D, Portland 7, Oregon • Phone: CYPRESS 2-2611 — Cable: TEKTRONIX

ALL PRICES F.O.B.
PORTLAND (BEAVERTON), OREGON

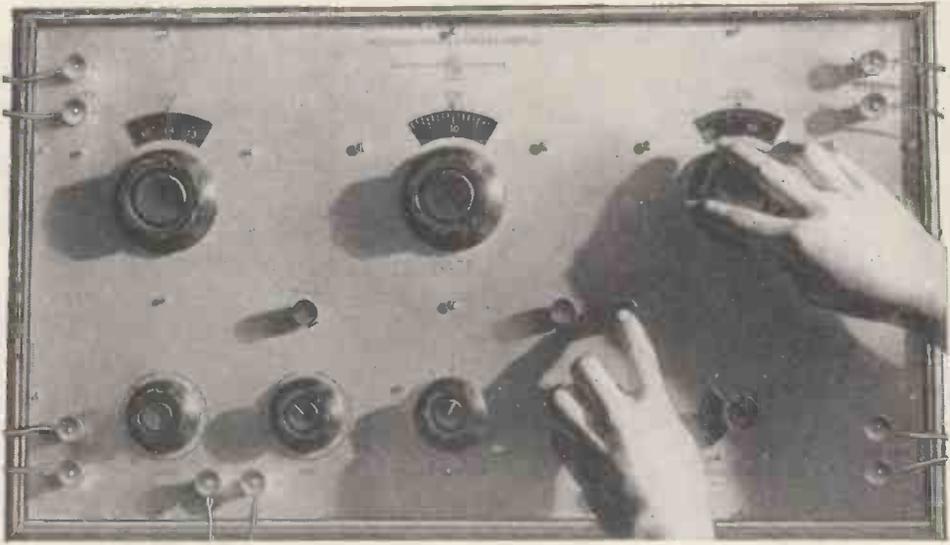

Built by Craftsmen

Pye Precision Vernier Potentiometer

ACCURACY WITHIN YOUR GRASP

Designed for measurements of a very high order of accuracy, this VERNIER potentiometer is being used extensively for the accurate measurement of resistance, as a standard for calibrating potentiometers, meters and other electrical measuring instruments, for measuring thermo-couple voltages and for many applications of a similar nature. Through every stage of its manufacture the most careful precautions are taken to eliminate possible sources of error.

Please write for details of our range of precision potentiometers which also includes a SLIDE-WIRE type reading to 1 microvolt with an accuracy of .02% as well as a PORTABLE type which is completely self-contained, compact, robust and always ready for immediate use.

Our new catalogue giving details of our comprehensive range of Galvanometers, Shunts, Standard Cells and other precision measuring instruments is available on request. May we please send you a copy?


STANDARD EQUIPMENT IN MANY LEADING LABORATORIES

SCIENTIFIC  INSTRUMENTS

W. G. PYE & CO. LTD., GRANTA WORKS, CAMBRIDGE, ENGLAND
WG.56


Leading DESIGNERS & USERS of Electronic Equipment

SPECIFY

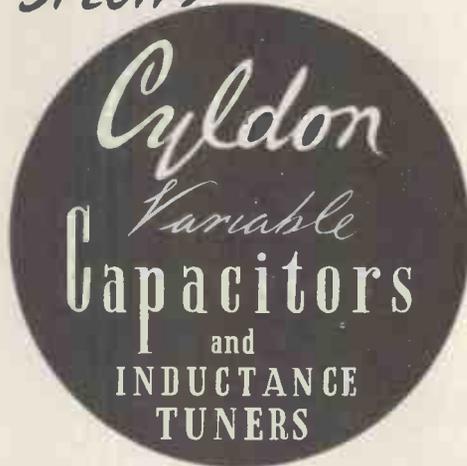

for

PRECISION, STABILITY, LONG LIFE



● "Cyldon" Capacitors have a world-wide reputation for efficiency and dependability. We welcome enquiries for types not covered by our standard range. Our resources and experience are at your service.

Equipment Manufacturers and Wholesalers are invited to write for literature covering Cyldon "Teletuners" (Ref. T.V. 1953) and Cyldon Trimmers (Ref. T. 1951), together with details of our complete range of Variable Capacitors and list of Agents for Home and Overseas.

**SYDNEY S. BIRD
& SONS, LTD.**

Contractors to Ministry of Supply, Post Office, and other H.M. Government Depts.


CAMBRIDGE ARTERIAL RD., ENFIELD, MIDDX.

Telephone: Enfield 2071-2.
Telegrams: "Capacity, Enfield."

a new T.D.M.S


The T.D.M.S. 5 & 6 are portable sets designed to measure distortion at any point in a radio teleprinter or line telegraph circuit without interfering with normal transmission.

The equipment consists of two units each 12" x 8" x 7" both mains driven and electronically controlled; either may be used independently for certain tests or both may be used in combination to cover a comprehensive range of testing operations.

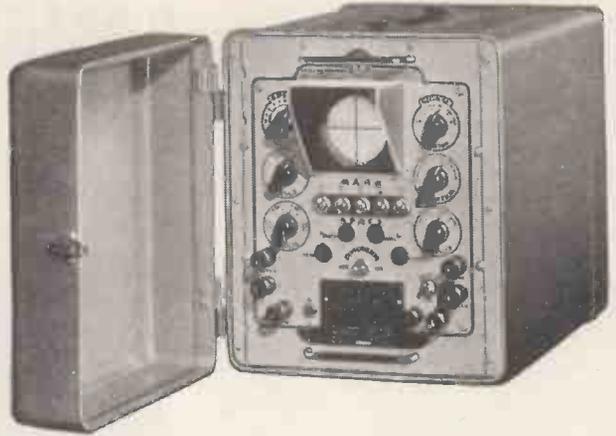

T.D.M.S. 5

Sends an automatic test message or characters or reversals at any desired speed and/or percentage of distortion. The CRO has a circular time base for distortion measurements or relay adjustment.

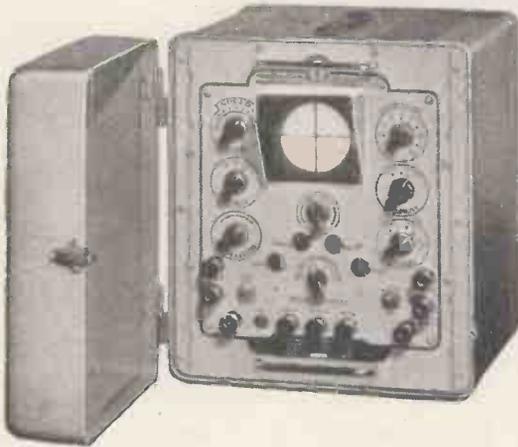

T.D.M.S. 6

For distortion measurements on working circuits without interrupting service. Each element of a start-stop signal appears separately on the spiral time base display. Adjustable speeds from 20-160 bauds.

You are invited to apply for a copy of a descriptive leaflet which describes the equipment in detail

Automatic Telephone & Electric Co. Ltd.

Radio and Transmission Division, Strowger House, Arundel Street, London, W.C.2. Telephone: TEMple Bar 9262. Cablegrams: Strowgerex London,



RONETTE MINIWEIGHT Pick-up



The RONETTE MINIWEIGHT Pick-up is a masterpiece of artistic styling and scientific achievement incorporating a light, well-balanced plastic arm, ivory finished with matching pillar rest, ensuring absolute minimum record wear.

The 1½ in. diameter mounting plinth revolves on ball bearings and is attached below the arm by a chrome plate. A concealed screened lead terminates in an ingenious contact plate in the off-set head shell. This shell forms a drop-in slot for the cartridges, which are located by a neat screw ensuring full electrical contact and easy release for cartridge changing.

The TOTAL length of the Arm is 9½ in., and the length from the sapphire stylus tip to mounting centre is 8 in., the level height from motor board being 1½ in. Needle pressure only 7½ grammes.

Crystal Cartridges Nos. N50/3 (Std.) and L50/3 (L.P.) are for 7,000 cps. Crystal Cartridges Nos. N50/4 (Std.) and L50/4 (L.P.) are for 14,000 cps.

and the following Table shows their voltage averages:—

Load Resistance	N50/3	L50/3	N50/4	L50/4
250,000 ohms	0.9	0.18	0.8	0.17
100,000 "	0.6	0.13	0.5	0.1 volts
50,000 "	0.3	0.08	0.25	0.07 (r.m.s.)

(peaks occur to more than twice these averages)

YOU WILL BE DELIGHTED WITH ITS FINE APPEARANCE AND SUPERB REPRODUCTION FROM YOUR RECORDS.

As Sole Concessionaires we are making it possible for you to obtain this wonderful "Ronette" Pick-up at the SPECIAL PRICES of:—

£3 : 9 : 6 for the 7,000 cps Model with L.P. and Std. Heads.

£3 : 16 : 3 for the 14,000 cps Model with L.P. and Std. Heads

Supplied with fitting template and instructions in neat box.

RONETTE Coronation MICROPHONE

52/-


(Post & packing 2/-)

- ★ CRYSTAL UNIT Vacuum sealed
- ★ Effective output level at 1000 c/s with DX 12 inset 1.3 mV/μbar in 5 meg.
- ★ Frequency response 30-13,000 c/s
- ★ OUTPUT IMPEDANCE=2200 μμt

The famous CORONATION microphone is the ideal "mike" for tape recording and "ham" work. It can be used as a hand microphone or, if fitted with a base, as a desk microphone. It is non-directional and is fitted with a long length of screened cable and annealed aluminium diaphragm. Now available with either black or cream urea housing.



A FULL RANGE of RONETTE MICROPHONES ALWAYS in STOCK



FULLY GUARANTEED 12 MONTHS

Build it yourself!

A 4-watt A.C. AMPLIFIER KIT for ONLY 75/-

20 page Manual (Including fault tracing data), usually 3/6, FREE to Readers of this magazine upon receipt of large S.A.E.

A 3 Valve Amplifier that you can build for use with Gramophone, Microphone or Radio Receiver, using 6V6, 6Q7 and 5Z4 Valves. For A.C. Mains 200-250 V. Unusual feature of this kit is the inclusion of a pre-assembled and wired group board with the "heart" of the Amplifier. Complete down to the last nut and bolt and comprehensive point to point wiring details in illustrated manual.



E. & G. MAIL ORDER SUPPLY CO.

33, Tottenham Court Road London W1 Tel. MUS 6667

The



TWO-SPEED

TAPE RECORDER

45 GNS.

(Carr. & packing 15/-)



SPECIFICATION:—Tape speeds 7½ in. and 3½ in. per second. Twin track heads ★ Three specially designed recording motors provide fast forward run and 50 sec. rewind without unlacing tape ★ **INDEPENDENT BASS AND TREBLE CONTROLS FOR RECORDING AND PLAY-BACK** ★ Negligible wow and flutter ★ 1,200ft. tape will provide **TWO** hours' playing time ★ Amplifier may be used independently for high quality record reproduction ★ High fidelity Recording head ★ Provision for external speaker ★ 4 watts output ★ Positive servo braking on all functions ★ Compact size for ease of handling only 16½ in. x 12 in. x 5 in. (with lid 7 in.) ★ 200-250 v. A.C. Mains ★ Radio/Gram and Microphone Inputs ★ Automatic Erasure ★ Complete with desk microphone and 1,200ft. spool Burgoyne tape.

The new two-speed Editor will be the recording sensation of the season. It scores heavily in appearance, performance and price. It is compact, simple to use and fully automatic.

EASY H.P. FACILITIES

Send only 10% deposit with order, balance over any period up to 24 months.



The
Tape Recorder
with
Single Knob Control

26 GNS.

(Carr. & packing 12/6)

Scientifically developed and precision engineered, this new Tape Recorder is the smallest portable, compact and lightweight unit giving a **FULL HOUR'S PLAYING TIME**. At 26 gns. it represents unbeatable value. Completely self-contained for recording and only needs connecting to pick up terminals of any radio or input of any amplifier for play-back.

The Playtime can be supplied complete ready for use with high fidelity matched crystal microphone and **ONE** hour spool of laboratory matched tape for £31/4/6. Microphone only 52/-. **ONE** hour spool tape 26/6.

EASY H.P. FACILITIES

★
Send only 10% deposit, balance over any period up to 24 months.

SPECIFICATION

- ★ 'PLAYTIME' gives you **ONE HOUR'S PLAYING TIME**.
- ★ The **ONLY** Recorder with single knob control for **RECORD, PLAY-BACK, REWIND** and **FAST FORWARD** without unlacing tape.
- ★ 'PLAYTIME' records and plays back with equal ease in any position, even upside down or on its side.
- ★ Because it is scientifically developed and precision engineered, there is absolute minimum wow and flutter.

- ★ Separate variable control ensures correct volume for all types of recording and playing back.
- ★ Built-in 3-stage specially matched pre-amplifier with miniature MULLARD valves.
- ★ Uniform frequency response between 60/6,000 c/s.
- ★ Instantaneous and positive braking.
- ★ Automatic erasure of unwanted recordings.
- ★ Powered by specially designed motor.
- ★ High fidelity twin track recording heads completely enclosed in handsome dress cover, affording complete protection against stray magnetic and electrostatic fields.
- ★ Self contained for recording. For play-back plug into any radio or amplifier.
- ★ Miniature self contained equipment **VERY** portable and compact, finished in attractive 2 tone leather cloth suitcase of ultra modern design with handsome gilt fittings; detachable lid for ease of handling.
- ★ Overall size 12½ in. x 10 in. x 4½ in. Weight 16lb.
- ★ Storage space for spare spools of tape.
- ★ Size of tape table only 11½ in. x 9½ in.
- ★ For use on AC mains 230/250 v.

See them and hear them at the RADIO CENTRE




E. & G.

MAIL ORDER

Telephone: MUSEum 6667.

THE RADIO CENTRE.

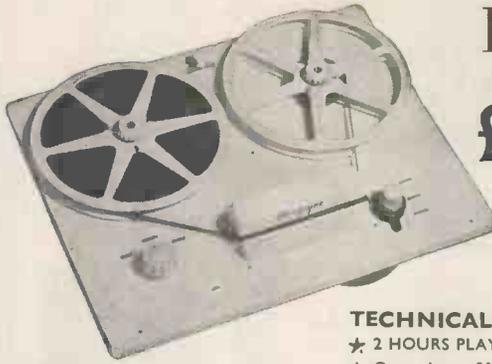

BURGROYNE TWO-SPEED TAPE DECK

3½" & 7½"/sec.

£13:19:6

(Carr. and packing 7/6)

Here is the heart of your Tape Recorder. If you are building or modernising your own equipment you **MUST** have the latest BURGROYNE Tape Deck giving 2 speeds, designed for building into complete recorders.

EASY H.P. FACILITIES
Send only 10% deposit, balance over any period up to 24 months.

The BURGROYNE TAPE DECK is made **EXCLUSIVELY** for MAIL ORDER SUPPLY and is **UNOBTAINABLE ELSEWHERE.**

ACCESSORIES

- 1,200ft. spool Burgoyne Tape (high coercivity)... 35/-
- 600ft. spool Burgoyne Tape (high coercivity)... 21/-
- Take-up spool 4/3

TECHNICAL DATA

- ★ 2 HOURS PLAYING TIME.
- ★ Operating at 3½in. and 7½in./sec.
- ★ Fully automatic mechanical speed change (no tinkering with pulleys and belts).
- ★ Instantaneous and positive braking.
- ★ Precision engineered, giving minimum wow or flutter.
- ★ Frequency range 50/10,000 c/s. at 7½in./sec. with suitable amplifier.
- ★ Overall size 11½in. x 14½in.
- ★ For use on A.C. mains 200-250 v.
- ★ Powered by 3 high-grade motors.
- ★ Fast forward run and high speed rewind *without unlacing tape.*
- ★ Permits automatic high frequency erasure:
- ★ Twin track high impedance heads totally enclosed in cover affording complete protection from stray magnetic and electrostatic fields. No matching transformers required.
- ★ Drop-in Tape loading.
- ★ Deck will take all standard plastic and paper tapes up to 1,200ft. capacity.
- ★ Washable top panel of very durable finish.

THE BURGROYNE 8 VALVE SUPERHET Radiogram Chassis


You will want to possess this super chassis which will provide years of service and satisfaction. High sensitivity enables distant stations to be received clear as a bell. Easy flywheel tuning with flexible control of bass and treble to suit individual taste. Power and concert-hall quality to satisfy the most critical connoisseur.

22 GNS.

(Carr. & Packing 7/6)

EASY H.P. FACILITIES

Send only 10% deposit, balance over any period up to 24 months.

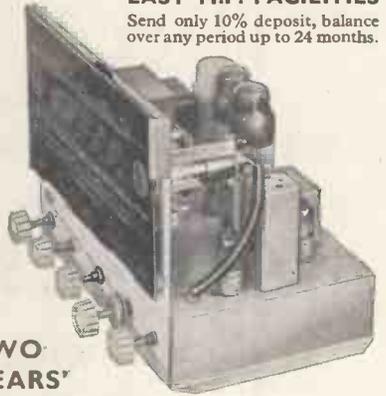

Every feature you have always wanted!

SPECIFICATION

- ★ **FREQUENCY COVERAGE.** 3 wave bands 165/385, 545/1,500, 6,000/18,750 Kcs., 800/1,800, 200/550, 16/50 metres.
- ★ **POWER SUPPLY.** 200/250 Volts 50 cycles A.C. mains.
- ★ **VALVES.** Mazda 6C9-6F15-6LD20-6L1-2 x 6P25-UU7-6M1.
- ★ **SIZE.** Height, 9½in.; width, 13in.; breadth, 8in.; chassis depth, 2½in.
- ★ **WEIGHT.** 16 lb. nett.
- ★ **FULL VISION DIAL.** Multi-coloured, fully illuminated, 11½in. by 6½in.
- ★ **OUTPUT.** 8 watts undistorted push-pull.
- ★ **TUNING.** Precision flywheel tuning with slide rule accuracy.
- ★ **MAGIC EYE INDICATOR.** Providing accurate visual tuning, mounted on dial for easy reference.
- ★ **CHASSIS.** Heavy gauge steel, anti-corrosion treated, finished in grey enamel. Size 12in. by 7½in. by 2½in., with cabinet mounting brackets.
- ★ **MAINS TRANSFORMER.** Special design to minimise hum.
- ★ **AUDIO AMPLIFIER.** Incorporates negative feedback, with push-pull beam tetrodes providing 8 watts undistorted output, giving realistic reproduction from any good quality 3 or 15 ohm loudspeaker. Built-in output transformer and extension speaker socket.
- ★ **SPEECH COIL IMPEDANCE.** 3 and 15 ohm provided.
- ★ **BASS AND TREBLE CONTROLS.** Independently variable controls to cut or lift bass and treble.

TWO YEARS' GUARANTEE

Our faith in this chassis is such that we offer with every chassis sold a 2 years' guarantee.

First and Foremost . . .

For a number of years we have been the first in presenting to the general public many different methods and schemes to enable all to obtain their requirements by means of easier and easier methods of repayment. We have also offered many items previously obtained elsewhere only for hard cash. Because of our initiative other companies have attempted to follow our lead. Therefore there exists a wonderful service to all with healthy competition and a large range of products available on easy terms. We have much satisfaction in knowing that this has been brought about largely by our efforts in originating the facilities offered today.

With the advent of the lifting of hire purchase restrictions, it is possible for us once again to lead in offering our customers whatever they require on extremely low deposit and easy repayment terms. We detail on the right our PERSONAL CREDIT PLAN revised to meet the situation existing today. Whatever you want, whether it is advertised in this periodical or not, is available under this scheme, and our reduced charges ensure you will get the best value from Mail Order Supply.

M.O.S. PERSONAL CREDIT PLAN

The deposit may be any amount convenient to the purchaser, but must be at least one-tenth of the total of Cash Prices for any item or items (which may be grouped).

The balance remaining when the deposit is subtracted from the total cash price may be spread over 6, 12, 18 or 24 months, and for these periods the charges are on a sliding scale.

For 6 months add 2/- in the £ to the Balance.

" 12	" 2/6	" "	" "
" 18	" 3/6	" "	" "
" 24	" 4/-	" "	" "

Minimum rates are necessary because administration costs are fixed for every transaction, no matter how small, and are as follows:—

20/-	where the balance is	£5 or under.
30/-	"	" £10
40/-	"	" £15

SEND OR BRING US YOUR ORDER TODAY WITH SECURING DEPOSIT. OUR RANGE OF MERCHANDISE IS UNSURPASSED.

Please add sufficient to allow for carriage and packing.

SUPPLY COMPANY


33 Tottenham Court Rd., London, W.1 Telephone: MUSeum 6667



MAXI-Q F.M. COMPONENTS

REGD.

PDT. 1




RATIO DISCRIMINATOR TRANSFORMER 10.7 Mc/s. Ref. RDT. 1

A 10.7 Mc/s. transformer for use in radio discriminator type circuits. Can size $1\frac{3}{8}$ in. square x $2\frac{1}{2}$ in. high. Secondary winding of bifilar construction. Iron dust core tuning, polystyrene former and silver mica condensers. Price 12/6 each.

PHASE DISCRIMINATOR TRANSFORMER 10.7 Mc/s. Ref. PDT. 1

A miniature 10.7 Mc/s. transformer for use in frequency modulation detector circuits where the limiter/Foster-Seeley type of circuit is employed. Designed for carrier deviation of ± 75 kc/s. Qk.—1.5 Wound on black bakelite former, complete with iron dust slugs and two 6 B.A. threaded fixing holes on .532 in. centres. Screening can: $1\frac{1}{8}$ in. x $13/16$ in. square. Price 9/- each.

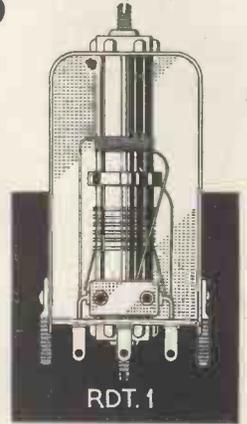

I.F. TRANSFORMER IFT.11/10.7

A miniature I.F. Transformer of nominal frequency 10.7 Mc/s. The transformer is primarily intended for the I.F. stages of frequency modulation receivers and convertors. The Q of each winding is 90 and the coupling critical. Construction and dimensions as PDT.1. Price 6/- each.

I.F. TRANSFORMER IFT.11/10.7/L

As I.F.T. 11/10.7 but with secondary tap for limiter input circuits. Price 6/- each. Full constructional details for building an F.M. Feeder unit are given in our TECHNICAL BULLETIN (DTB.8). Price 1/6 each.

Send 1/- in stamps for General Catalogue. Obtainable from your nearest stockist or in case of difficulty direct from:

DENCO (CLACTON) LTD. 357/9 Old Road, Clacton-on-Sea, Essex

Industry is Solving Valve Testing Problems

WITH THE

Mullard HIGH SPEED VALVE TESTER




Industries which deal extensively with radio and other electronic equipment are finding the Mullard High Speed Electronic Valve Tester ideal for routine checks. This instrument provides the quickest method of checking large quantities of valves, and can be operated if necessary by non-technical personnel after only a few minutes' instruction. Write for full details and a copy of the folder "High Speed Testing in Industry" to Department E.V.D. at the address below.

Mullard



MULLARD LTD., CENTURY HOUSE, SHAFESBURY AVENUE, W.C.2

They say
we make a perfect
pair...

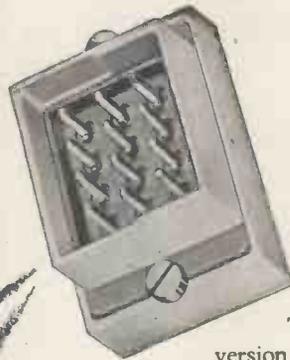

.. with
excellent
connections


To be exact, this is the 12 pin version of the Multi-Way Plug and Socket range, which covers 4, 8, 12, 20 and 28 ways. The range features unusually low insertion pressures, and embodies considerable experience in meeting humid conditions. Designed to overcome as far as possible the difficulties encountered when using this type of connector in rack mounting applications, they have greater latitude in matching up than any comparable product, and are in use throughout the world in Radio, Television and Telecommunications equipment by such renowned firms as:— Messrs. Marconi's Wireless Telegraph Co. Ltd., The English Electric Co. Ltd. and Messrs. Standard Telephones & Cables Ltd.

A.I.D. & A.R.B. - APPROVED

POWER CONTROLS

L I M I T E D

NEW PRODUCTS from the RADIO SHOW




The range of Aerialite Television Aerials has now been increased by the introduction of two special fringe area models both moderately priced, yet high in efficiency. In addition, aerials for frequency modulation are now available in single dipole, "H" type three element models.

MODEL 88

Designed for speedy fitting and high electrical performance, the Aerfringe Model 88 is £10.0.0d retail, complete with double lashing chimney brackets and 2in. o.d. x 10 feet alloy mast. The elements are factory assembled and are quickly tightened into the working positions. The forward gain is 7.5dB and broad bandwidth and sharp directivity are achieved.

tightened into the working positions. The forward gain is 7.5dB and broad bandwidth and sharp directivity are achieved.




MODEL 89

The Model 89 is a four element (2 directors, 1 reflector and folded dipole) T/V Aerial with 9.5dB forward gain. Like the Model 88, it is quickly assembled and of light yet extremely robust construction. The insulator employed ensures a positive, permanent and fully waterproof connection for 75 ohm twin or coaxial downlead. Price retail is £11.17.6d complete with double lashing, 10feet x 2in mast, etc.

ACCESSORIES

Two new aerial accessories are added to the Aerialite range—the Part No. 166 Coaxial Plug which fits all coaxial cables (and yet is only three piece construction) and the Part No. 169 in line attenuator. The in line attenuator has the feature of providing a quick means of inserting attenuation 6, 12, 18, 24, or 36 dB in the aerial lead without disturbing the wiring. Prices 166 plug 1/4 retail. Attenuator 4/9.



THE AERAXIAL CABLE

Thanks to a special method of manufacture the new Aeraxial semi-airspaced cable is the same price as ordinary solid insulation coaxial cables. Aeraxial has a unique air cell construction which results in a very low attenuation—2.1dB/100 feet at 45 mc/s and 4.5dB at 200

mc/s. Super Aeraxial has even lower losses 1.2dB/100 feet at 45 mc/s. and 2.6dB at 200 mc/s.
Retail price: Aeraxial 8½ per yard.
Super Aeraxial 1/8 per yard.

You are invited to send for our new comprehensive catalogue and interesting leaflets on Aerials and Accessories.

AERIALITE LTD., CASTLE WORKS, STALYBRIDGE CHEESHIRE

'AERIALITE' Aerials

TRUVOX

Introduce A NEW
HIGH FIDELITY
CORNER
DIFFUSION UNIT



Designed for small and medium sized halls and for use in homes where quality is a vital factor.

The lower registers are reproduced with exceptional smoothness assisted by the bass reflex action of the corner cabinet. The high notes are brought out with brilliant clarity from the specially designed acoustic system.

The overall effect of this construction is to give life and extraordinary depth to the sound which thereby approaches a three dimensional quality and truly justifies the term "high fidelity." The technical excellence of this instrument is matched by its artistic conception as a piece of stylish furniture finished in walnut veneers.

Maximum handling capacity	12 watts
Speaker flux density	10,000 lines
Impedance	15 ohms
Height	32 inches
Maximum width	27 inches
Maximum depth	18 inches
Net weight	54 lbs.

PRICE :

CABINET Only (Pats. applied for)	... £26 8 6
SPECIAL SPEAKER TO MATCH	... £3 0 0
Plus Purchase Tax on Speaker	... £1 0 6

TRUVOX LIMITED

HARROW MIDDLESEX

Sales Office : 15 Lyon Road, Harrow, Middlesex.
Telephone : Harrow 9282.
Technical & Service Depts. : 328 The Broadway,
Station Road, Harrow, Middlesex.
Telephone : Harrow 4455.





(photograph by courtesy of E.S.A. Ltd., Stevenage)

This is a typical application of R.F. Heating as used in the Woodworking Industry, showing how shapes are manufactured with veneers. The jig is of laminated wood, in the form of the final shape, and is lined with aluminium sheets which are connected to the terminals of the R.F. Heater.

The pressure, which should be about 50 lbs. per square inch, is applied on the centre ram by means of a hydraulic pump. With this method the R.F. is fed to the two plates which cause the wood mass to become hot and the resin to cure in a few minutes.

Thus only one jig is required to give a large daily output and the cost of the job is thereby reduced. Less floor space is required than for any other method.

The main advantage of R.F. Heating over other methods, however, is that heating can be localised and heat will only be applied where it is needed.

Agent for London & Southern England

Messrs. H. F. Industrial Services Ltd., Fairfax Road, London, N.8. Telephone: Fitzroy 0045

Agent for Scotland

*Messrs. Pye Scottish Telecommunications Ltd., 74 York Street, Glasgow.
Telephone: Glasgow Central 7637.*

*Agents are required for other areas of the
United Kingdom and countries abroad*

ALL COMMUNICATIONS TO BE ADDRESSED TO:-

MESSRS.  LIMITED

R. F. HEATING DIVISION • RADIO WORKS • CAMBRIDGE • ENGLAND

Telephone: Cambridge 57590



DUROFIX

the only adhesive with
all these qualities ▶

A clean, free-flowing liquid, Durofix is the perfect adhesive for such work as securing coil windings and terminations, binding laminations, locking trimmer condensers and cores, fixing diaphragms to moving-coils of speakers, knot fixing on

Nylon, and for fixing felt to wood or metal. Durofix more than meets the most exacting requirements of radio and T.V. manufacture, and is ideal for servicing and home construction. Used by Famous Radio & T.V. Manufacturers Durofix is a Rawlplug product—famous throughout the world for finest quality and complete dependability. For further Technical Information and Prices write to—

DUROFIX SPECIFICATION


Tensile Strength *Approx. 10,000 lbs/sq. in.*
Resistivity (50% Relative Humidity) *1010 ohms/cm. cube.*
Dielectric Strength *600/1200 volts/mil.*
Thermal Conductivity *(3.1 to 5.1) x 10⁻⁹ cal/sec/sq. cm/°C/cm*
Temperature Stability *Satisfactory from minus 40°C to plus 120°C*
Water Resistance *Very good up to boiling point.*

THE RAWLPLUG CO. LTD., CROMWELL RD., LONDON, SW7 FROBisher 8111 (20 lines) Grams: Rawlplug Southkens London

B484

**INSULATING
HEATPROOF
WATERPROOF
NON-CORROSIVE
5 MINUTE
DRYING
STICKS almost
any material
OUTSTANDING
ADHESIVE
STRENGTH**

MUREX SINTERED PERMANENT MAGNETS are used in this **Tri-ang** ELECTRIC MODEL TRAIN

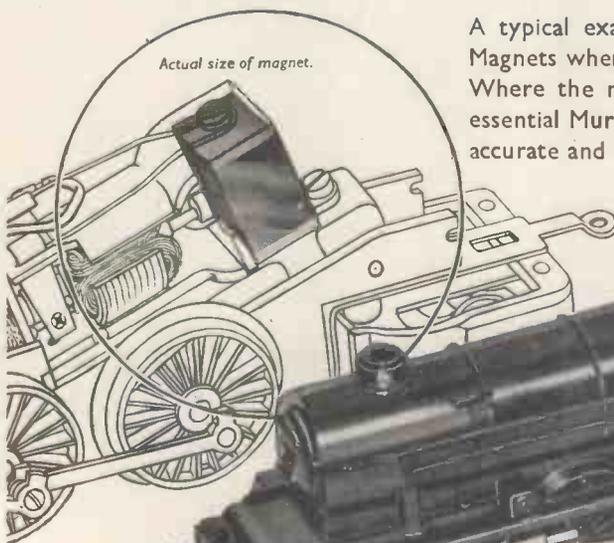

A typical example of the use of Murex Sintered Permanent Magnets where a stable source of energy is required. Where the need for high magnetic stability and efficiency is essential Murex Sintered Permanent Magnets continue to give accurate and reliable service.

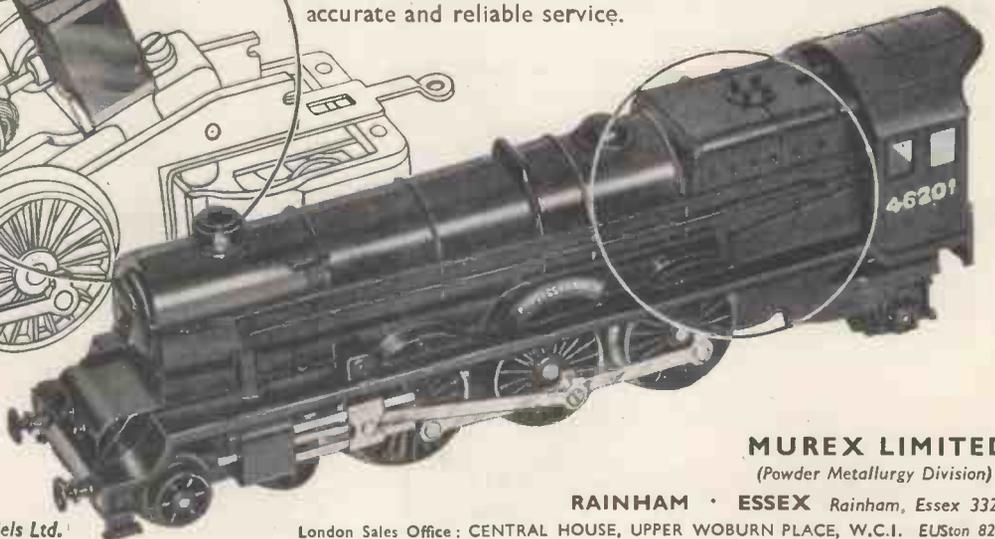


Illustration
by courtesy of
Rovex Scale Models Ltd.

MUREX LIMITED
(Powder Metallurgy Division)

RAINHAM · ESSEX Rainham, Essex 3322

London Sales Office: CENTRAL HOUSE, UPPER WOBURN PLACE, W.C.1. EUSon 8265

An outstanding general purpose communication receiver



Justly acclaimed as Britain's finest post-war communication receiver the BRT 400 D is in widespread use by Military, Post and Telegraph and Broadcasting authorities throughout the world.

Combining first-class performance with a wide range of facilities, the BRT 400 D is equally suitable for both narrow-band telegraphy and wide-band telephony reception—with a very high standard of reliability.

It is available in either cabinet or rack mounting form, with a 500 kc/s crystal calibration unit as an optional extra. Normal operation is from an A.C. mains supply: an auxiliary power unit is available for 12 volt battery operation.

G.E.C.

BRT 400D

SHORT SPECIFICATION

BAND COVERAGE

0.150—0.385 Mc/s }
0.510—30.0 Mc/s } in 6 bands

SENSITIVITY

Better than 1.0 μ V for 1.5 watts output, over the whole band.

SIGNAL/NOISE RATIO

Standard input for 20 db:—

1.3—30.0 Mc/s	< 7.0 μ V
0.150—1.3 Mc/s	< 10.0 μ V

SELECTIVITY

Six switched bandwidths:—

0.5 kc/s	1.0 kc/s	2.0 kc/s
5.5 kc/s	9.0 kc/s	13.0 kc/s

OVERALL FIDELITY

Less than 2 db down at 50 c/s
Less than 6 db down at 5,500 c/s

A.G.C. CHARACTERISTICS

Output constant within 3 db for 100 db change in signal input.


OUTPUT CIRCUITS

At 2.5 or 15 ohms	2.5 watts
At 120 ohms	0.05 watts
At 600 ohms	0.2 watts

POWER SUPPLY

95—130 and 195—250 volts, 40/80 c/s. Also from 12 volt battery, using BRT 401 auxiliary power unit.

For the full specification please send for a copy of publication BC2084.

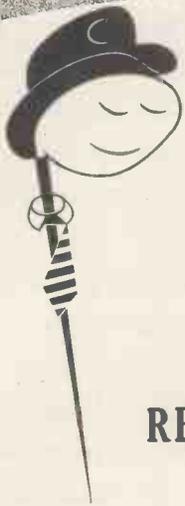

These qualities are ESSENTIAL to a good RECORDING TAPE

- ★ A fine, evenly distributed grain structure
- ★ Tensile strength and the ability to withstand rough usage
- ★ First-class mechanical handling qualities
- ★ Good frequency response
- ★ Constancy, both in dimensions and magnetic properties
- ★ Good stacking properties—

BASF Magnetic Recording Tape has ALL these qualities and MORE... making it not only the best tape available in this country..... but the finest in the world!

Suitable for use with all makes of recorders for home or professional use. BASF recording tape, based on PVC, brings a new high standard of efficiency to the field of sound recording. It is unaffected by humidity, practically non-inflammable and resists temperatures up to 120°F. Its exceptional magnetic properties enable it to be used over and over again—with a constant high level of sound reproduction and assured ELIMINATION of 'Background Noise.' BASF Recording Tape is naturally a little more expensive than other makes... but this initial cost is more than offset by its outstanding performance and extra long-life.

BASF Magnetic Recording Tape

F. A. HUGHES & CO., LTD. Sole Concessionaries
Trade only supplied
Devonshire House · Piccadilly · London · W.1.
Telephone : Mayfair 8867

MAINS TRANSFORMERS

**FULLY INTERLEAVED
SCREENED AND IMPREGNATED. ALL GUARANTEED
ALL PRIMARIES ARE 200/250 v. Half Shrouded.**

HSM63 (Midget). Output 250-0-250 v. 60 m/a., 6.3 v. at 3 amps., 5 v. at 2 amps.	16/3
HS43 . Output 250-0-250 v. 60 m/a., 6.3 v. at 3 amps., 5 v. at 2 amps.	16/6
HS40 . Windings as above. 4 v. at 4 amps., 4 v. at 2 amps. ...	16/6
Output	
HS2 . 250-0-250 v. 80 m/a.	19/-
HS3 . 350-0-350 v. 80 m/a., 19/-.	19/-
HS2X . 250-0-250 v. 100 m/a., 21/-.	21/-
HS30X . 300-0-300 v. 100 m/a., 21/-.	21/-
HS3X . 350-0-350 v. 100 m/a.	21/-

Fully Shrouded

FSM63 (Midget). Output 250-0-250 v. 60 m/a., 6.3 v. at 3 amps., 5 v. 2 amps.	16/9
Output	
FS2 . 250-0-250 v. 80 m/a.	21/-
FS30 . 300-0-300 v. 80 m/a., 21/-.	21/-
FS2X . 250-0-250 v. 100 m/a., 23/-.	23/-
FS30X . 300-0-300 v. 100 m/a., 23/-.	23/-
FS3X . 350-0-350 v. 100 m/a.	23/-
All the above have 6.3 4-0 v. at 4 amps., 5-4-0 v. at 2 amps.	
FA43 . Output 425-0-425 v. 200 m/a., 6.3 v. 4 amps., C.T. 6.3 v. 4 amps., C.T. 5 v. 3 amps. Fully shrouded	47/6
FS50 . Output 450-0-450 v. 250 m/a., 6.3 v. 2 amps., C.T. 6.3 v. 4 amps., C.T. 5 v. 3 amps. Fully shrouded	67/6
F35X . Output 350-0-350 v. 250 m/a., 6.3 v. 6 amps., 4 v. 8 amps., 4 v. 3 amps., 0-2-6.3 v. 2 amps. Fully shrouded	65/-
FS160X . Output 350-0-350 v. 160 m/a., 6.3 v. 6 amps., 6.3 v. 3 amps., 5 v. 3 amps. Fully shrouded	44/-
FS43X . Output 425-0-425 v. 250 m/a., 6.3 v. 6 amps., 6.3 v. 6 amps., 5 v. 3 amps. Fully shrouded	63/6
HS6 . Output 250-0-250 v. 100 m/a., 6.3 v. 6 amps., C.T. 5 v. 3 amps. For receiver RI355. Half shrouded	26/6
HS150 . Output 350-0-350 v. 150 m/a., 6.3 v. 3 amps., C.T. 5 v. 3 amps. Half shrouded	27/9
F36 . Output 250-0-250 v. 100 m/a., 6.3 v. 6 amps., C.T. 5 v. 3 amps. Fully shrouded	29/6
FS120 . Output 350-0-350 v. 120 m/a., 6.3 v. 2 amps., C.T. 6.3 v. 2 amps., C.T. 5 v. 3 amps. Fully shrouded	29/9
FS256 . Output 250-0-250 v. 80 m/a., 6.3 v. at 6 amps., 5 v. at 3 amps. Fully shrouded	28/6
PR1/1 . Output 230 v. at 30 m/a., 6.3 v. at 1.5/2 amps.	21/-
FS150 . 350-0-350 v. 150 m/a., 6.3 v. 4 amps., 5 v. 3 amps.	31/6
FS150X . Output 350-0-350 v. at 150 m/a., 6.3 v. at 2 amps. C.T. 6.3 v. at 2 amps., C.T. 5 v. at 3 amps. Fully shrouded... The above have inputs of 200/250 v.	31/6

OUTPUT TRANSFORMERS

MIDGET OP. 5,000Ω to 3Ω	3/9
8,000Ω to 3Ω	3/9
MOPI. Ratios 26, 46, 56, 66, 90, 120-150 m/a. max. current, C.T. for Q.P.P. Class B, etc. Secondary 2/4 ohms. Top panel, and clamped, each	5/6
OPI0. 10/15 watts output. 20 ratios on Full and Half Primary	17/9
OP30. 30 watts output, 20 ratios on Full and Half Primary... ..	25/9
Williamson's O.P. Transformer to Author's specification... ..	£4 4/-
Chokes for Williamson's Amplifier , 30 H. at 20 m/a.....	16/6
10 H. at 150 m/a.	32/-

FILAMENT TRANSFORMERS

All 200/250 v. Input.

F3 . 6.3 v. @ 3 amps.	9/6
F4 . 4 v. @ 2 amps., 7/6. F6 . 6.3 v. @ 2 amps.	7/6
F6X . 6.3 v. @ 0.3 amps., 5/6. F12X . 12 v. @ 1 amp.	8/-
FU6 . 0-2-4-5-6.3 v. @ 2 amps., 10/-.	10/-
F12 . 12.6 v. tapped 6.3 v. @ 3 amps.	16/6
F24 . 24 v. tapped 12 v. @ 3 amps.	23/6
F29 . 0-2-4-5-6.3 v. @ 4 amps., 18/9. FU12 . 0-4-6.3 v. @ 3 amps.	17/6
FU24 . 0-12-24 v. @ 1 amp.	17/6
F5 . 6.3 v. @ 10 amps. or 5 v. @ 10 amps., or 12.6 v. @ 5 amps., or 10 v. @ 5 amps.	34/-
F6/4 . Four windings at 6.3 v. tapped 5 v. @ 5 amps. each, giving by suitable series and parallel connections up to 6.3 v. @ 20 amps.	51/6

Quotations, etc.—stamped addressed envelope, please.

C.W.O. (add 1/6 in £ for carriage).

Export enquiries invited.

**H. ASHWORTH (Dept. W.W),
676, Gt. Horton Road, Bradford 7, Yorks.**



OSCILLOSCOPE

TYPE 723

AND

OSCILLOSCOPE CAMERA

TYPE 758

THE OSCILLOSCOPE TYPE 723 is a general purpose instrument with a flat frequency response from D.C. to 5 Mc/s. Special features include an Automatic Brilliance Control, adjustable E.H.T. voltages, Time Base speeds up to 10 cms per microsecond, automatic synchronisation limiting, instantaneous shifts, and a versatile Auxiliary Amplifier.

The instrument utilises a vertical cathode ray tube with a 4in. flat screen, viewed through a surface-aluminised mirror. For recording purposes the Oscilloscope Camera Type 758 is mounted permanently above the Oscilloscope, and photographs are taken by withdrawing the viewing hood and photographing directly downwards through an aperture thus exposed in the top of the instrument.

Y Plate Amplifier:

Input: *Balanced, Unbalanced or Differential.*
Frequency Response: ± 2 db from D.C. to 5 Mc/s.
Overload: *Over 5 cms at 4 kV. E.H.T. voltage.*

Time Base:

Range: *0.5 second to 1 microsecond.*
Operation: *Repetitive or Triggered.*

E.H.T. Voltages: *1, 2 or 4 kV.*

Dimensions: *19in. wide, 21in. high and 8½in. deep.*

Price: *£160.*



THE OSCILLOSCOPE CAMERA TYPE 758 is designed specifically for use with Airmec Oscilloscopes. It may be used for single shot photography or continuous recording, and a motor with variable speed gearing is included for the latter purpose. The cassettes will accommodate 100 feet of 35 mm. film or paper and a footage indicator shows the amount of film used.

Film: *Standard 35 mm film or paper.*

Film Speed: *0.5, 1.5 and 4.5 f. per second.*


Lens: *The camera employs an f/3.5 lens.*

Dimensions: *19in. wide, 7in. high and 8½in. deep.*

Writing Speed: *Using a fast film and an E.H.T. voltage of 4kV on the Oscilloscope Type 723, the maximum writing speed is approximately 20 kilometres per second.*

Power Supply: *The camera operates from 200-230 volt, 50 c/s mains.*

Price: *£100.*

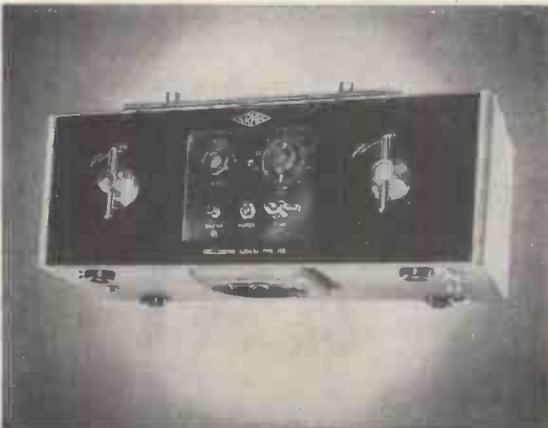

Full details of these or any other Airmec instruments will be forwarded gladly upon request.

AIRMEC
L I M I T E D

HIGH WYCOMBE - BUCKINGHAMSHIRE

Telephone : High Wycombe 2060

Cables : Airmec, High Wycombe



LONDON REGION
SEVENTH
**ENGINEERING
DISPLAY**
OCTOBER 12TH - 14TH 1954
AT THE
R.H.S. NEW HALL
VINCENT SQUARE
LONDON S.W.1.
Admission by Trade Card

YOU ARE CORDIALLY INVITED TO VISIT THIS INTERESTING DISPLAY OF PRODUCTS AND PROCESSES OF THE ENGINEERING INDUSTRY.

ENTRY IS FREE by Trade Card or ticket from the London Regional Secretary

ENGINEERING INDUSTRIES ASSOCIATION
99 EYEMOUR ST., LONDON, W.1

Telephone: Welbeck 2241

SEND FOR CATALOGUE (Price 1/4d. post free.)

NEW ARCOLECTRIC SIGNAL LAMPS

For Low Voltage or Mains

Illustrated are a few signal lamps taken from our wide range. The insulation of every Arcolectric signal lamp will resist a flash test of 1,500 volts A.C.

The S.L.90 illustrated here is a typical Arcoelectric low voltage signal lampholder. It is designed to accept popular M.E.S. bulbs. The bulb is accessible from front or rear of panel. The domed plastic lens surrounded by a polished chrome bezel gives a most attractive panel appearance. This holder can be fixed in a single $\frac{3}{4}$ " hole.


The mains voltage signal lamp S.L.88/N is supplied complete with an M.E.S. neon tube and a suitable series resistance.

Write for Catalogue No. 128



ARCOLECTRIC
SWITCHES · LTD


CENTRAL AVENUE, WEST MOLESEY, SURREY · TELEPHONE: MOLESEY 4336 (3 LINES)

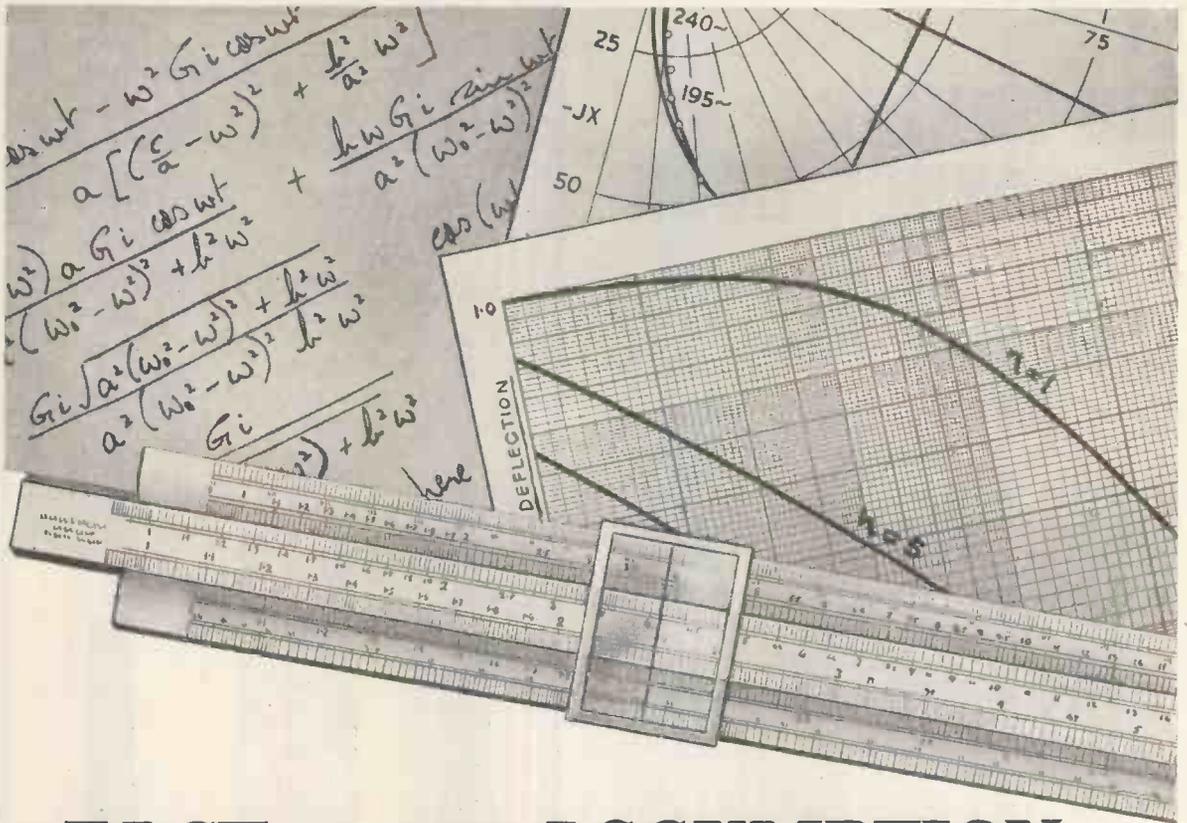

FACT *versus* ASSUMPTION

Vibration effects can be assessed by assumption, estimation and long calculation. Prototypes can be built on those assumptions, but with many anxious moments awaiting operational test results—results which may nullify months of patient effort. It is much simpler, and certainly more economical, to conduct preliminary tests in the laboratory by creating vibrations under controlled conditions—and so obtain the facts. That is the precise function of Goodmans Vibration Generators. They provide vibratory sinusoidal forces at controlled frequency and amplitude, by which specific vibratory conditions over a wide frequency range can be accurately simulated to assess their effects on materials, structures and components.

Applications include FATIGUE TESTING, ELECTRICAL COMPONENT TESTING, VALVE MICROPHONY TESTING, TORSIONAL VIBRATION TESTING, FLEXURE TESTING OF METALS AND PLASTICS, ETC., AND MECHANICAL STRUCTURE TESTING.

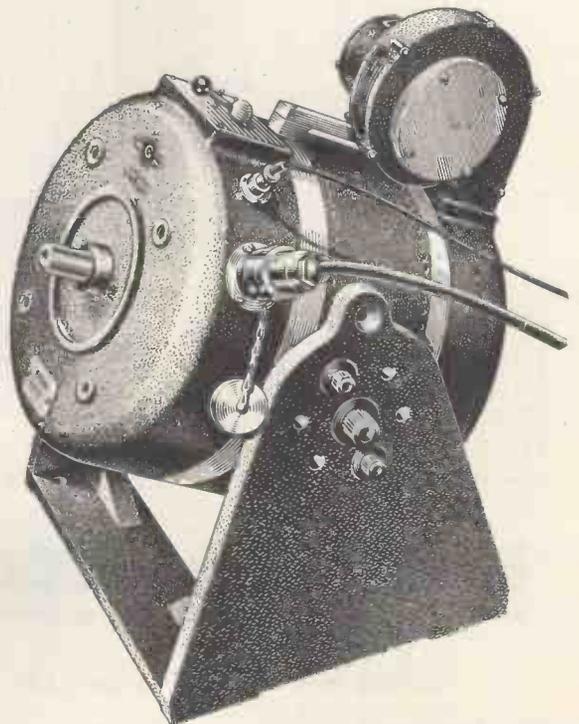

GOODMANS


VIBRATION GENERATORS

GOODMANS INDUSTRIES LIMITED,
Axiom Works, Wembley, Middx. Tel.: WEMbley 1200 (8 lines)

The range includes models from the 8/600 illustrated, developing a force of ± 300lb. to the midget model with a force of ± 2lb.

THE RD JUNIOR CORNER HORN

"The ideal reproducer for domestic use"

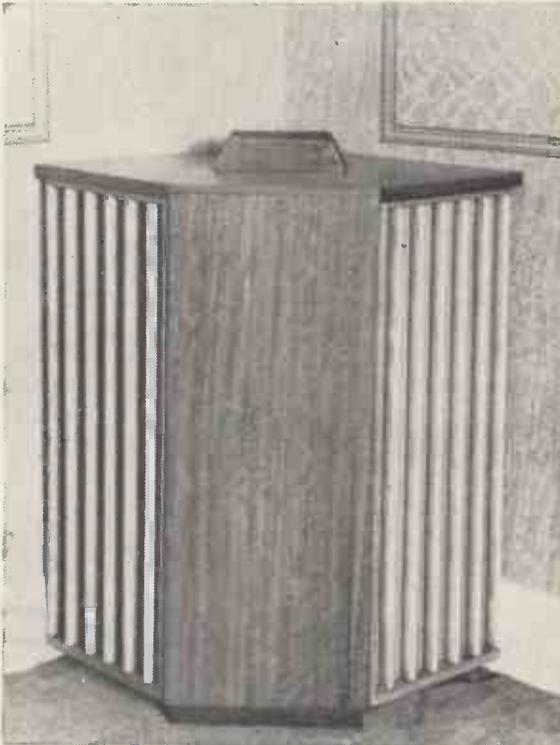

Designed to house a limited number of carefully selected 8in. or 10in. loudspeakers, this reproducer provides a standard of performance far superior to that suggested by its modest price.

Horn loading ensures excellent bass response down to approximately 35 cps., whilst virtually perfect diffusion of the extreme treble gives that illusion of perspective so necessary for the realistic reproduction of orchestral music.

We invite you to send for a copy of the new illustrated leaflet which deals with this cabinet in detail and also covers our "RD UNIFLEX" a universal bass reflex cabinet for housing either 10in. or 12in. units RD JUNIOR CORNER HORN, less speaker and louvred side panels

£18.17.6d.

Trade enquiries invited

ROGERS DEVELOPMENTS Co.

Manufacturers of Precision Built Sound Equipment.

"RODEVCO HOUSE,"

116, Blackheath Road, Greenwich, London, S.E.10

Telephone: TIDeway 1723.

DEMONSTRATION TIMES: Mon.—Fri. 9.30—5.30.
Sat.—9.30.—12.30.

SOLDERING INSTRUMENTS

AND ALLIED EQUIPMENT
for factory, maintenance
and instrument makers

★MINIATURE JOINTING becomes a

★MINIATURE problem with ADCOLA EQUIPMENT



FACTORY BENCH LINE MODEL
 $\frac{3}{16}$ " Bit
List No. 64



(Centre)
PROTECTIVE SHIELD
List No. 68



INSTRUMENT MODEL
With Collet held $\frac{1}{8}$ " Bit
List No. 70

OTHER MODELS AVAILABLE

Standard Volt ranges stocked:

6/7	12/13	22/24	50/55
100/110	200/220	230/250	

Write for complete catalogue



PRODUCTS LIMITED


Cranmer Court · Clapham High Street
London, S.W.4 Phone: MACaulay 4272



By Appointment to the Professional Engineer

PAINTON WINKLER SWITCH

PAINTON & CO. LTD. have entered into an exclusive arrangement with Eduard Winkler Apparatebau of Nuremberg, Germany, to manufacture and market the well-known Winkler Precision Multi-Way Switches.


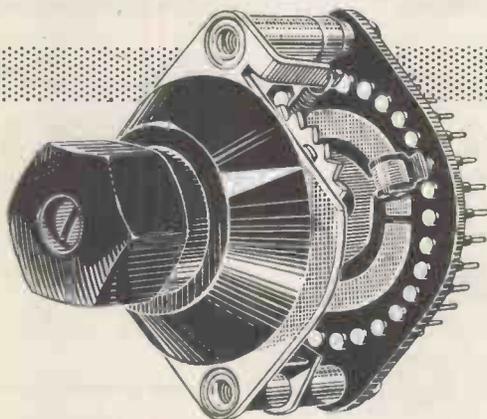


- Switching up to 30 positions per bank.
- Adjustable stop to set number of positions.
- Single, Double, Three-Pole or Four-Pole designs.
- 1 to 6 Banks operated from common shaft.
- Distinctive design Knob, with adjustable skirt.

PAINTON
Northampton England


SOMERFORD TRANSFORMERS AND CHOKES

A range of 360 standard types available for "off the shelf" delivery in several different mounting styles including both open and hermetically sealed "C" cores.

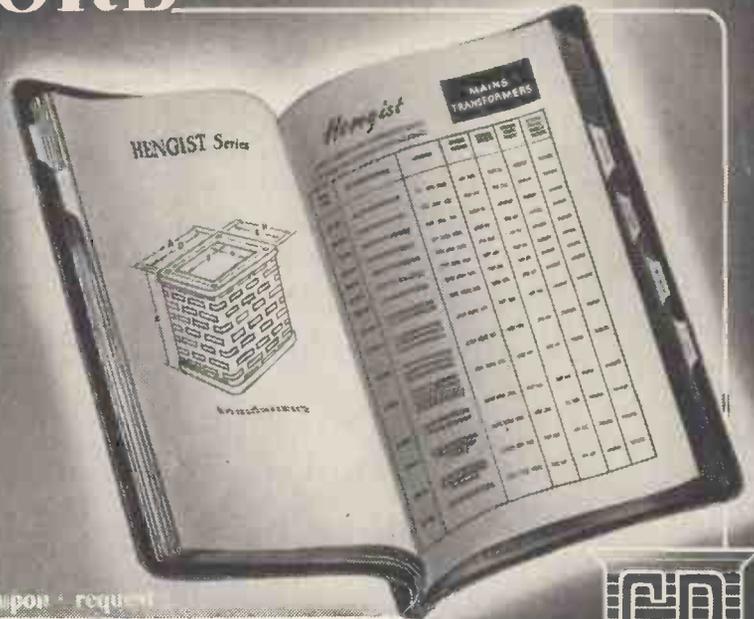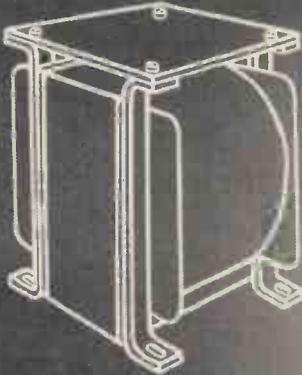

Fully descriptive Catalogue upon request

GARDNERS RADIO *Ltd*



SOMERFORD CHRISTCHURCH HANTS Tel: 1024/5

FOR WIDE RANGE FREQUENCY AND VOLTAGE

AUDIO FREQUENCY SIGNAL GENERATOR

Model LO63

Accuracy to $\pm 1\frac{1}{2}\%$ or 0.5 cycle



FREQUENCY RANGE: 50 cycles to 55,000 cycles.
BASIC RANGE: 50-550 cycles direct reading on a 6" diameter scale over an arc of 300.
MULTIPLIER: 1, $\times 10$, $\times 100$.
TOTAL SCALE LENGTH: 48".
 Alternatively 30-33,000 cycles or 10-11,000 cycles.

- Completely Self-contained
- Operates from A.C. Mains—Stabilised Voltages

Here is a standard calibrated audio frequency voltage generator designed to cover a wide range. The use of high value capacity components in the bridge circuit allied to the two valve phase-shift oscillator which is equipped with fully automatic electronic feed-back control, results in a circuit of exceptionally high stability.


Please write for full specification.

BRITISH PHYSICAL LABORATORIES

Tel: RADLETT 5674-5-6



Radlett HERTS

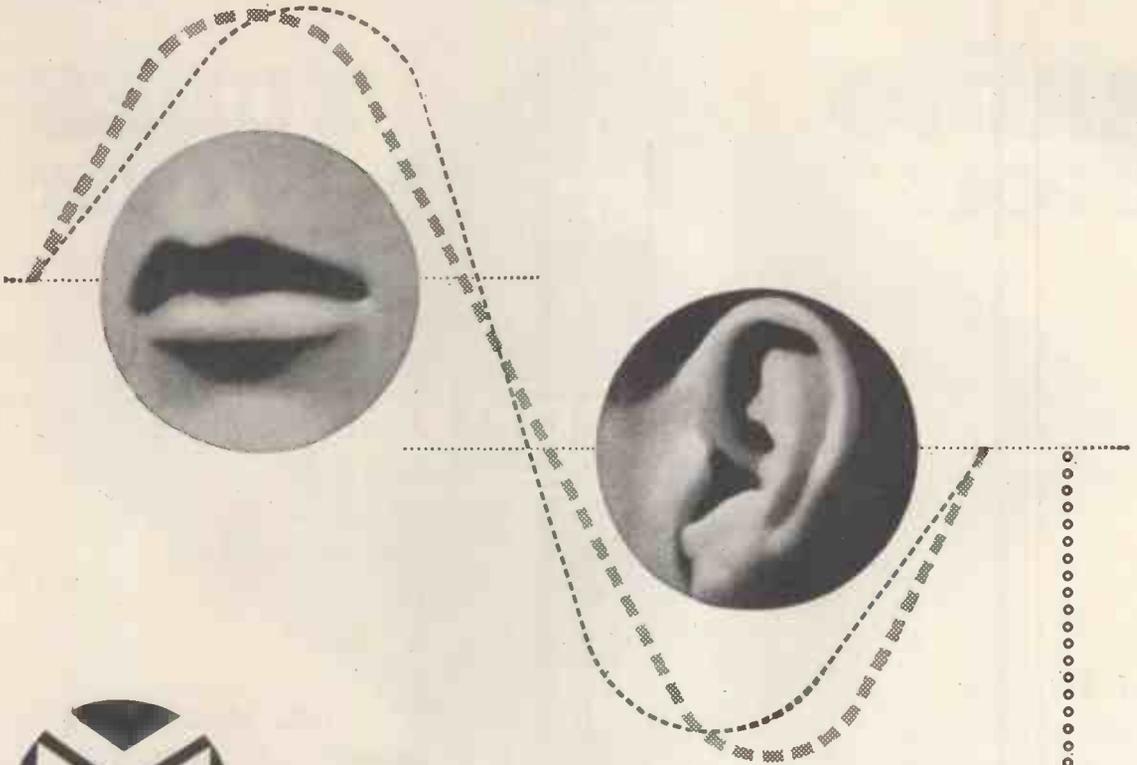

RADIO-TELEPHONE SCHEMES

In more than fifty countries Pye V.H.F. Radio-Telephones are providing an economical and reliable means of instantaneous communication between fixed points, between mobile units, and between fixed points and mobile units. Over two-thirds of the equipment in use in Great Britain alone has been produced by Pye. The Pye Systems Department will be pleased to advise you on your communications schemes whilst Pye agents and representatives overseas will demonstrate, install and maintain the equipment.



Telecommunications



Pye (New Zealand), Ltd., Auckland C.I., New Zealand.	Pye Canada, Ltd., Ajax, Canada.	Pye-Electronic Pty., Ltd., Melbourne, Australia.	Pye Ireland, Ltd., Dublin, Eire.
Pye Radio & Television (Pty.) Ltd., Johannesburg, South Africa.	Pye Limited, Plaza de Necaxa 7, Mexico 5.	Pye Limited, Tucuman 829, Buenos Aires.	Pye Limited, 5th Ave. Building, 200 5th Ave., New York

PYE LIMITED . . . CAMBRIDGE . . . ENGLAND

RADIO EXPORT

TUBES ONLY



1,000 types
of Receiving and
Transmitting Radio
Tubes available ex stock.

HALL ELECTRIC LTD
Haltron House, 49-55 Lisson Grove,
London, N.W.1.

Tel.: Ambassador 1041 (5 lines) Cables: Hallectric, London

Treasure your Valves!

Valves are a sensitive lot. Their delicate constitutions are easily shocked by unsympathetic vibrations transmitted through the chassis. That's why they need to be protected by *McMurdo Antimicrophonic Valveholders*.

These holders have special resilient mountings which absorb unpleasant shocks and knocks. The B9A and B7G holders are both screened and unshielded while B8A is unshielded. All are available in P.V.C. or Silicone rubber mountings. Use P.V.C. when operation temperature does not exceed 50° C and Silicone rubber up to 120° C. For full details write for information to-day.



THE · McMURDO · INSTRUMENT · CO · LTD

Victoria Works, Ashted, Surrey
Telephone: ASHSTEAD 3401



No Second Chance . . . ?

When there's a special recording to be done . . . when there's no chance of a second take, or repeats will send costs soaring — that's when you need the M.S.S. White Label Master Disk.

Out of every hundred recording disks made at M.S.S. most are graded as excellent for direct play-back, but only about three meet our stringent demands for master recordings. That will give you an idea what *we* mean by perfection! And that is why so many of the World's recording and broadcasting companies rely upon M.S.S. Disks. There is a range of M.S.S. Disks to suit all types of recording work. May we send you further information?


MSS DIRECT RECORDING DISKS



M.S.S. RECORDING COMPANY LTD, POYLE CLOSE, COLNBROOK, BUCKS, ENGLAND. COLNBROOK 284.

MANUFACTURERS OF SOUND RECORDING EQUIPMENT

For the **LABORATORY and PRODUCTION LINE**

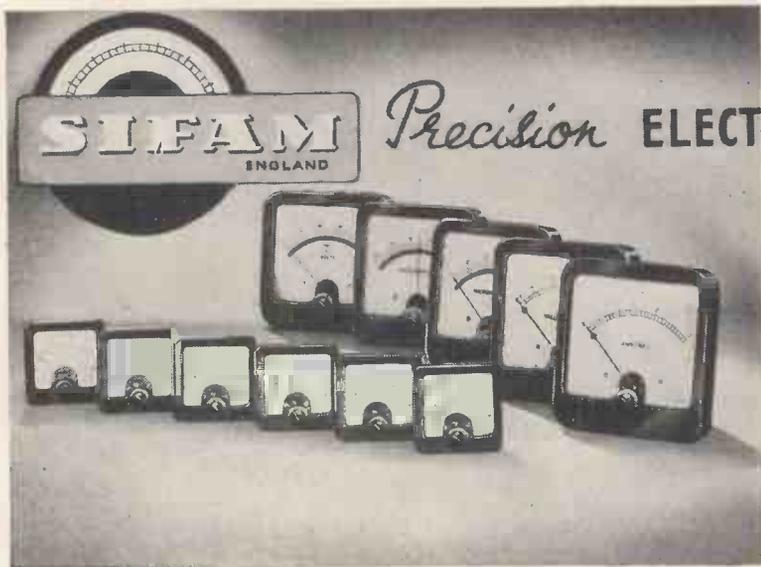

Precision **ELECTRICAL INSTRUMENTS**

In addition to our well-known standard ranges of 2in. to 4½in. square and round panel-mounting instruments, the following are a few examples of special types which we have developed to meet industrial requirements:—

- Moving coil rectifier type to suit various frequencies, for laboratory use.
- 6in. and 8in. Portables. Sub-standard or B.S. 1st Grade.
- Pyrometer indicators.
- Thermo-couples for temperature measurement.
- Audible Braille Multi-range mA.
- Contact Voltmeters.
- D.C. Shunts up to 2,000 amperes.

SIFAM Electrical Instruments fully meet the high standards of accuracy and reliability demanded by modern industrial techniques, production control, laboratory testing, etc.

Write for illustrated catalogue detailing the wide SIFAM range.

SIFAM ELECTRICAL INSTRUMENT CO. LTD. Leigh Court, Torquay. Telephone: TORQUAY 4547-8

Bullers CERAMICS
FOR INDUSTRY

High quality material and dimensional precision are attributes of Bullers die-pressed products. Prompt delivery at competitive prices.



We specialise in the manufacture of — **PORCELAIN** for general insulation
REFRACTORIES for high-temperature insulation

FREQUELEX for high-frequency insulation
PERMALEX & TEMPLEX for capacitors

BL12C



BULLERS LIMITED

Porcelain Works: MILTON, STOKE-ON-TRENT Stoke-on-Trent 22341	Sales Office: 6, LAURENCE POUNTNEY HILL, LONDON, E.C.4 MANSion House 9971	Iron Works: TIPTON, STAFFORDSHIRE Tipton 1691
---	--	--

INCREMENTAL
INDUCTANCE
BRIDGE



Designed for the measurement of iron-cored
inductors (of Q value not less than 2)
with d.c. flowing

Range	0.01 to 1000 H.
Superimposed d.c.	Variable from 0 to 1 amp.
a.c. Excitation	1, 2, 5, 10 or 20 Volts r.m.s.
Frequency	50 or 60 c/s.
Accuracy	Better than $\pm 5\%$.

Full technical information available on request.

CINEMA-TELEVISION LIMITED

A Company within the J. Arthur Rank Organisation

WORSLEY BRIDGE ROAD · LONDON · SE26

Telephone Hither Green 4600

SALES AND
SERVICING AGENTS

F. C. Robinson & Partners Ltd.,
287 Deansgate, Manchester, 3

Hawnt & Co. Ltd.,
59 Moor St. Birmingham, 4

Atkins, Robertson & Whiteford Ltd.
100 Torrisdale Street, Glasgow, S.2

**AIR-DAMPED
ANTI-VIBRATION MOUNTS**

**of exceptional performance:
FOR THE PROTECTION OF AIRBORNE EQUIPMENT**



- Superior vibration isolation.
- Improved shock absorption.
- Low permanent set and drift.
- Operation over wide temperature range.
- Minimum side sway.
- Wide load range with uniform performance.

Air-damped BARRYMOUNTS have been specially developed to provide assured protection for sensitive equipment against shock and vibration. An outstanding feature is their remarkably uniform performance over the full range of rated load variation. Over 1,000,000 BARRYMOUNTS go into use every year for the protection of every type of air-borne equipment, from the lightest and most delicate instruments and electronic devices to apparatus up to 140 lbs. weight. There are also BARRYMOUNTS available for specialised vehicle-borne and ship-borne equipment applications.

Air-damped BARRYMOUNTS are supplied in a wide range of sizes for Rated Loads of from 0.1 to 35 lbs.

MINIATURIZED BARRYMOUNTS ARE USED IN THE BRISTOL "BRITANNIA"



Write for technical bulletins


European Licensees:

CEMENTATION (MUFFELITE) LTD.,

39 VICTORIA ST., LONDON, S.W.1 (Abbey 5726)

BARRYMOUNTS

A SOUND TIE UP



A.I.D. APPROVED

"WILLESDEN" TRANSFORMERS
for all
ELECTRONIC & TELECOMMUNICATION REQUIREMENTS

WILLESDEN TRANSFORMER CO. LTD., 2a, FRITHVILLE GARDENS, SHEPHERDS BUSH, LONDON, W.12. Telephone: SHE 5819, 2714.



FLEXIBLE REMOTE CONTROL OUTFITS

Our experience in the industrial field has indicated that there is a definite need for this type of outfit offering facilities for making prototype flexible remote controls as required.

The three gauges of Remote Control flexible shafts in these outfits cover the range of torque loadings required for • volume controls • all types of wave change switches • condensers • all controls likely to be met in electronic, radio and television equipment.

These outfits are reasonably priced and comprise :

- | | | |
|---------|--|---------|
| No. 117 | (.117 in. dia. remote control shafting and accessories). | £6.10.0 |
| No. 130 | (.130 in. dia. remote control shafting and accessories). | £7. 0.0 |
| No. 150 | (.150 in. dia. remote control shafting and accessories). | £7.10.0 |


The S. S. White Company will be pleased to advise which Outfit is most suitable for specific applications.

A detailed Parts List is available upon request.



BRITANNIA WORKS, 25-31 ST. PANCRAS WAY, LONDON. N.W.1.

Telephone : EUSton 5393



EDDYSTONE

RADIO ENGINEERING OF SURPASSING EXCELLENCE



MODEL '680X' COMMUNICATION RECEIVER

30 Mc/s to 480 kc/s

USED PROFESSIONALLY IN ALL PARTS OF THE WORLD

Compare critically the Eddystone "680X" against world-wide production of similar equipment and you will find nothing to equal either the performance or the construction of this receiver at anywhere near its price level.

The solid diecast chassis ensures robust mechanical strength and rigidity and adds to the electrical screening. The large open dial is accurately calibrated and permits precise tuning and re-setting. The flywheel-controlled, geared tuning mechanism is a masterpiece

of light engineering; its perfection can only be judged by practical experience.

The "680X" has a first-class electrical specification. Fifteen valves are used; two RF and two IF stages, separate oscillator and push-pull output. Figures for sensitivity, noise, selectivity and image ratio are excellent. Frequency drift is negligible on all ranges. The "680X" receiver is handsomely finished in polychromatic grey and has an all-round performance of the highest order.

LIST PRICE £106-0-0 EX WORKS

Please write for full specification to the manufacturers:

STRATTON & CO. LTD., EDDYSTONE WORKS, BIRMINGHAM 31

GECALLOY CORES

FOR RADIO and T.V. APPLICATION



GRADE M.E.

Low cost cores for frequencies up to 50 Mc/s.

GRADE M.F.

High quality cores for frequencies up to 300 Mc/s.

Write for List No. GRC 5303/6

SALFORD ELECTRICAL INSTRUMENTS LTD.


PEEL WORKS · SILK STREET · SALFORD 3 · LANCs.

A SUBSIDIARY OF THE GENERAL ELECTRIC CO. LTD. OF ENGLAND


There are those who consider that there is little to choose in the range of power amplifiers now available—perhaps because the power amplifier is usually considered the “easy” part in the search for audio perfection. Why is it then that leading engineers are so enthusiastic about the QUAD II design?

... on feedback and linearity

They like the unique integrated feedback to provide complete stability independent of phase changes in the load current . . . the method used for eliminating the loop gain outside the audio range without prejudice to the input signal . . . the way that feedback is again used to provide optimum design stage by stage and to control the effective time constants. They like its use yet again to provide a unique self-balancing phase changer without the usual asymmetry to the H.T. line. They like, too, the fact that the specification is fully met with commercially tested valves without matching or alignment of any kind. They extol the conservative ratings and restoration from overload (several nation-wide broadcasting corporations officially uprate the output to 20 watts, since with this degree of overload, distortion is still well within their acceptance figures).

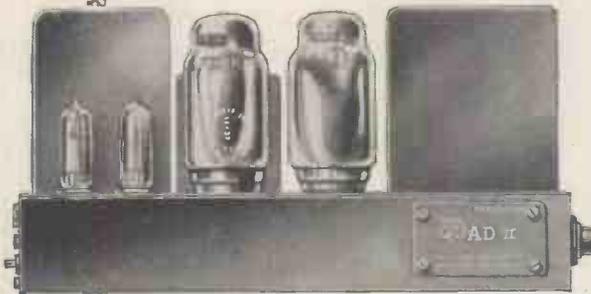

Good engineering for the best performance* also results in greater efficiency. Compare the size of the QUAD with any other amplifier of approaching specification. Note the size of the output transformer which results from optimum choice of flux and core material to suit design requirements.

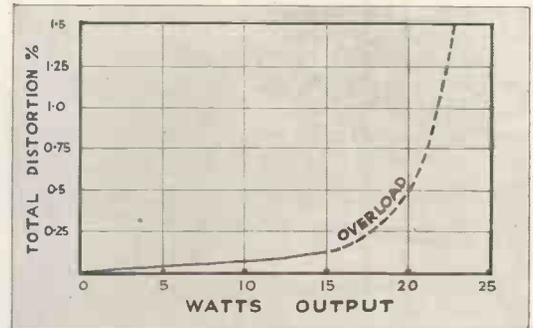

Linearity and overload of the QUAD II amplifier

The QUAD II power amplifier is primarily designed as part of the complete QUAD II amplifier. The power amplifier is also supplied separately as a quality standard when with a suitable input transformer it can be fed direct from a 600 ohm line.

* The unique output stage design principles are discussed in *Wireless World*, September, 1952.

The QUAD II is available throughout the world. Fully stocked servicing organisations are now operating in Canada, throughout U.S.A., Panama, Canal Zone, Trinidad, Jamaica, Venezuela, Australia, Malaya, Singapore, Japan, Hong Kong, Burma, India, Ceylon, Pakistan, South Africa, Portugal, Italy, France, Switzerland, Belgium, Norway and Sweden.



ACOUSTICAL MANUFACTURING CO. LTD., HUNTINGDON, ENGLAND

We stock the G.E.C. Metal Cone Loudspeaker and all components for making the "Osram Nine-one-two" amplifier as described in the publication giving constructional details available from us, price 3/6d. We can also supply the loudspeaker cabinet manufactured to the design published by the G.E.C.



BSC 1851 Metal Cone Loudspeaker £8-15-0 tax paid. Postage and packing 2/6 extra.



CABINET £12-10-0 Carriage extra.


This new range of equipment will appeal to all Home Constructors who require the very best quality at a reasonable cost. The combination will achieve an exceptionally clean and realistic reproduction of speech and music with a balance of performance which will be appreciated by all music connoisseurs.

DEMONSTRATIONS DAILY

TELE-RADIO (1943) LIMITED

189, EDGWARE ROAD, LONDON, W.2. Phone : PAD 4455/6.

SHOP HOURS : MON.-SAT. 9 a.m. to 6 p.m. THURSDAY 9 a.m. to 1 p.m.

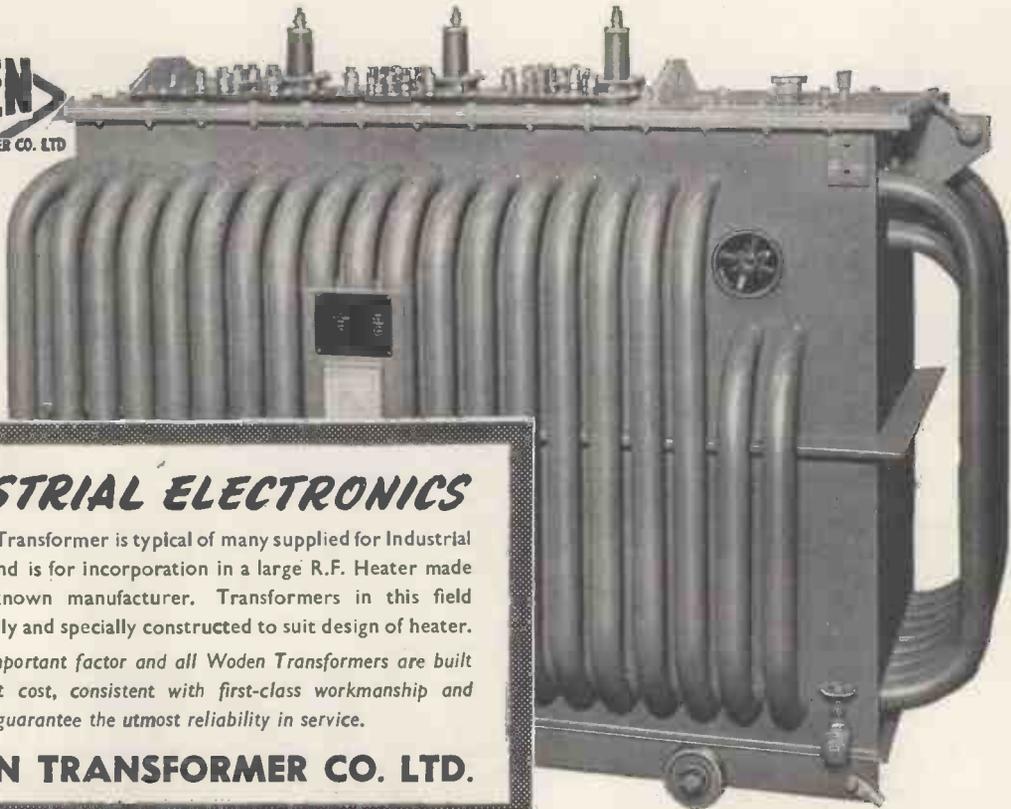

INDUSTRIAL ELECTRONICS

This Woden Transformer is typical of many supplied for Industrial Electronics and is for incorporation in a large R.F. Heater made by a well known manufacturer. Transformers in this field are individually and specially constructed to suit design of heater.

Price is an important factor and all Woden Transformers are built at the lowest cost, consistent with first-class workmanship and materials, to guarantee the utmost reliability in service.

WODEN TRANSFORMER CO. LTD.



radio products Ltd.

(Dept. W.58) 418 BRIGHTON RD, SOUTH CROYDON, SURREY. Telephone Croydon 5148/9



These really powerful units in compact form give quality and performance right out of proportion to their midget size and modest cost. Osmor "Q" Coilpacks have everything that only the highest degree of technical skill can ensure—extra selectivity, super sensitivity, adaptability. Size only $1\frac{1}{2} \times 3\frac{1}{2} \times 2\frac{1}{2}$ with variable iron-dust cores and Polystyrene formers. Built-in trimmers. Tropicalised. Prealigned. Receiver-tested and guaranteed. Only 5 connections to make. All types for Mains and Battery superhets. and T.R.F. receivers. Ideal for the reliable construction of new sets, also for conversion of the 21 Receiver, TR.1196, Type 18, Wartime Utility and others. Send to-day for particulars!

SEPARATE COILS

4/-



A full range is available for all popular wavebands and purposes. Fully descriptive leaflets and connection data available. (Optional) new simple fixing 2d. extra. Just note these "5 Star" Features. * Only 1in. high. * Packed in damp-proof containers. * Variable iron-dust cores. * Fitted tags for easy connection. * Low loss Polystyrene formers. L. or M.W. T.R.F. REACTION COIL TYPE QR 11-12 4/9.

A range of coils for F.M. Receivers shortly available. A special design of coils now available for reflex circuits.

OSMOR STATION SEPARATOR

The Separator may easily be tuned to eliminate any one station within the ranges stated and fitting takes only a few seconds. Sharp tuning is effected by adjusting the brass screw provided.



TYPE METRES

1	141-250
2	218-283
3	267-341
4	319-405
5	395-492
6	455-567
7	1450-1550
8	410-550 k/c.

7/6 COMPLETE

CHASSIS CUTTER



Type	Hole Sizes
1	1in. x 1 1/4in.
2	3/4in. x 1 1/4in.
3	3/4in. x 1 1/2in.
4	1 1/2in. x 2in.

Illust. price list on request.

I.F.s. 465 k/c. Permeability-tuned with flying leads. Standard size 1 1/4in. x 1 1/4in. x 3 1/2in. For use with OSMOR coilpacks and others, 14/6 pair. Midget I.F.s. 465 k/c. 2 1/2in. x 2 1/2in. x 2 1/2in., 21/- pair. PREALIGNED, 1/6 extra, both types.

FREE!

Send 5d. (stamps) for fully descriptive literature including "The really efficient 5-valve Superhet Circuit and practical Drawings," 6-valve ditto, 3-valve (plus rectifier) T.R.F. circuit, Battery portable superhet circuit, Coil and Coilpack leaflets, Chassis Cutter leaflet, and full radio and component lists, and interesting miniature circuits, e.c.

DIALS—VARIOUS DIALS CALIBRATED TO COILS

Metal dials, overall size 5 1/2in. square. Cream background, 3-colour Type M1, L.M.S. waves. M2, L. & M. waves. M3, M. and 2 S. waves. Price 3/6 each. Pointer 1/6; Drum, Drive, Spring and Cord, 3/2. Type A glass dial assembly, measuring 7in. x 7in. (9 1/2 x 9 1/2 overall). Mounts in any position. Choice of two 3-colour scales, 24/6. P. & P. 1/6.

OUR TECHNICAL DEPT. WILL BE PLEASED TO ANSWER (BY LETTER ONLY) ANY ENQUIRY RELATING TO CIRCUITS IN WHICH OSMOR COILS OR COIL PACKS ARE USED OR ARE INTENDED TO BE USED.

WE ENDEAVOUR TO KEEP ABREAST OF THE TIMES BY BUILDING THE VARIOUS CIRCUITS PUBLISHED IN "WIRELESS WORLD," "PRACTICAL WIRELESS," "RADIO CONSTRUCTOR" ETC. WE KEEP STOCKS OF THE COMPONENTS SPECIFIED.

"PRACTICAL WIRELESS"

Coronet Four; Beginners' Superhet; Modern High Power Amplifier 2; Astache Case Portable; RI155 Converter; A.C. Band-Pass 3; Modern 1-Valver; 3-speed Autogram, modern reflex, etc.

"WIRELESS WORLD"

"No Compromise" TRF Tuner. "Midget Mains Receiver." Sensitive 2-valve Receiver. Television Converter (special coils in cans available), Midget sensitive T.R.F., etc.

"RADIO CONSTRUCTOR"

Converting the TR1196 receiver to a general purpose s'het receiver simple crystal diode set. Radio feeder units. Economy 8 W.P.P. Amplifier. Circuit and details available for adding push-pull to the 5/6 valve Osmor superhet.

A LIST OF FIXED CAPACITIES AS REQUIRED FOR SWITCH TUNING AVAILABLE ON APPLICATION.

Single variable condensers	9/-
2 Gang variable condensers	12/6
3 Gang variable condensers	17/6
reaction variable condensers	3/10

Smoothing choke 7 ohm A.....	6/6
Output Trans. for 6v6/25A6.....	7/6
Fil. trans., 6.3 v. 5 v. output.....	8/6 & 15/6

Mains Trans. 250-0-250	29/6
350-0-350	35/-
Push-pull Trans. heavy duty	40/-
Chassis for various circuits from...	5/-

Potentiometers less swit.	4/-
Potentiometers with swit.	6/6
Switches 4 P. 3 way	3/6
Switches 4 P. 2 way	3/6
Trimmers	
Single bank	10d.
Two bank	2/4
Three bank	3/6

Capacitors to L. mFd., 10d. 25uF x 25 v., 3/6, 50 x 25, 3/6, 50uF x 50 v., 3/6, 500/12 v., 3/6, 8 x 16 mfd., 5/-, 32/32, 5/3.

SPECIAL COILS for SPECIAL CIRCUITS

(Such as Midget Sensitive T.R.F. W.W.) A modern reflex receiver P.W.

ALL 1/4w RESISTORS

6d. each

(On marked cards)

SPECIAL REDUCTION

in sets for

PUBLISHED CIRCUITS

DESIGNERS ARE ASSURED OF FULL CO-OPERATION
 PLEASE LET US KNOW YOUR REQUIREMENTS
NEWCOMERS TO RADIO. WE HAVE A NEW DEPARTMENT READY AND WILLING TO HELP
SEND US YOUR PROBLEMS



MODELS

AM/250/M 5 watt Vehicle Station (60 to 100 Mc/s).
 AM/250/M MK2 as above but with P.A.
 AM/150/M 5 watt Vehicle Station 100 to 185 Mc/s.
 AM/250/F 6 watt Fixed Station 60 to 100 Mc/s.
 AM/150/F 5 watt Fixed Station 100 to 185 Mc/s.
 AM/150/10C 10-Channel AM Marine Radio Telephone.
 HED.102 Walkie-Talkie, 60 to 132 Mc/s.
 FM. 101 10-watt FM Fixed Station 60 to 185 Mc/s.
 FM.101/10C 10-Channel FM Marine Radio Telephone.
 FM.102/4C 10-watt 4-Channel FM Vehicle Station
 60 to 185 Mc/s.
 HED.113 50-watt Fixed Station AM or FM 60 to
 185 Mc/s.

Supplied to the G.P.O. and the Home Office

HUDSON RADIO-TELEPHONES

"Model AM/250/M in conjunction with Model AM/250/F are particularly suited for use by Radio Dealers to control their outside service vehicles."

"Model AM/150/F/6C can be readily converted to Model FM.101/6C by the addition of minor components. This is of vital importance to Marine users where there is no international standard and possible changes in the future of systems of modulation may occur"

HUDSON ELECTRONIC DEVICES LTD.

APPACH ROAD, LONDON, S.W.2

TEL. TULSE HILL 4861

Connoisseur with DIAMOND STYLUS!



Facsimile in Sound

The **SUPER LIGHTWEIGHT PICK-UP**
can now be supplied to order—

with an armature system fitted with diamond stylus. Price complete with one head (either Standard 78 r.p.m., or Microgroove, 33½ and 45 r.p.m.) fitted with diamond stylus £7.12.9d. plus Purchase Tax £2.9.0d. Each additional head £5.12.9d. plus Purchase Tax £1.16.2d. Replacement armature system fitted with diamond stylus £3.13.0d. plus Purchase Tax £1.3.5d.

Existing model with sapphire system still available.

3 SPEED MOTOR

New Price:

Retail Price .. £17 15 0

Purchase tax .. 5 13 11

Total Price .. £23 8 11



3 HEAD PICK-UP



3 SPEED MOTOR


A. R. SUGDEN & CO. (ENGINEERS) LTD.

WELL, GREEN LANE, BRIGHOUSE, YORKSHIRE.

TEL: HALIFAX 69169

Telegrams: "Connoisseur, Brighouse"

OVERSEAS AGENTS: S. Africa: W. L. Procter (Pty.) Ltd, 63 Strand Street, Cape Town. Australia: J. H. Magrath & Co. Pty. Ltd, 208 Little Lonsdale Street, Melbourne. Canada: The Astral Electric Co. Ltd., 44 Danforth Road, Toronto 13, Ontario. New Zealand: Turnbull & Jones Ltd., Head Office, 12/14 Courtenay Place, Wellington. Hong Kong: The Radio People Ltd., 31, Nathan Road, Hong Kong. Malaya: (Main Distributors) Eastland Trading Co., 1 Prince Street, Singapore. U.S.A. (Main Distributors): Danby Radio Corporation, 2042 Chestnut Street, Philadelphia. 3. Pa. Audio Supply Laboratories, Nickels Arcade Buildings, Ann Arbor. Michigan.

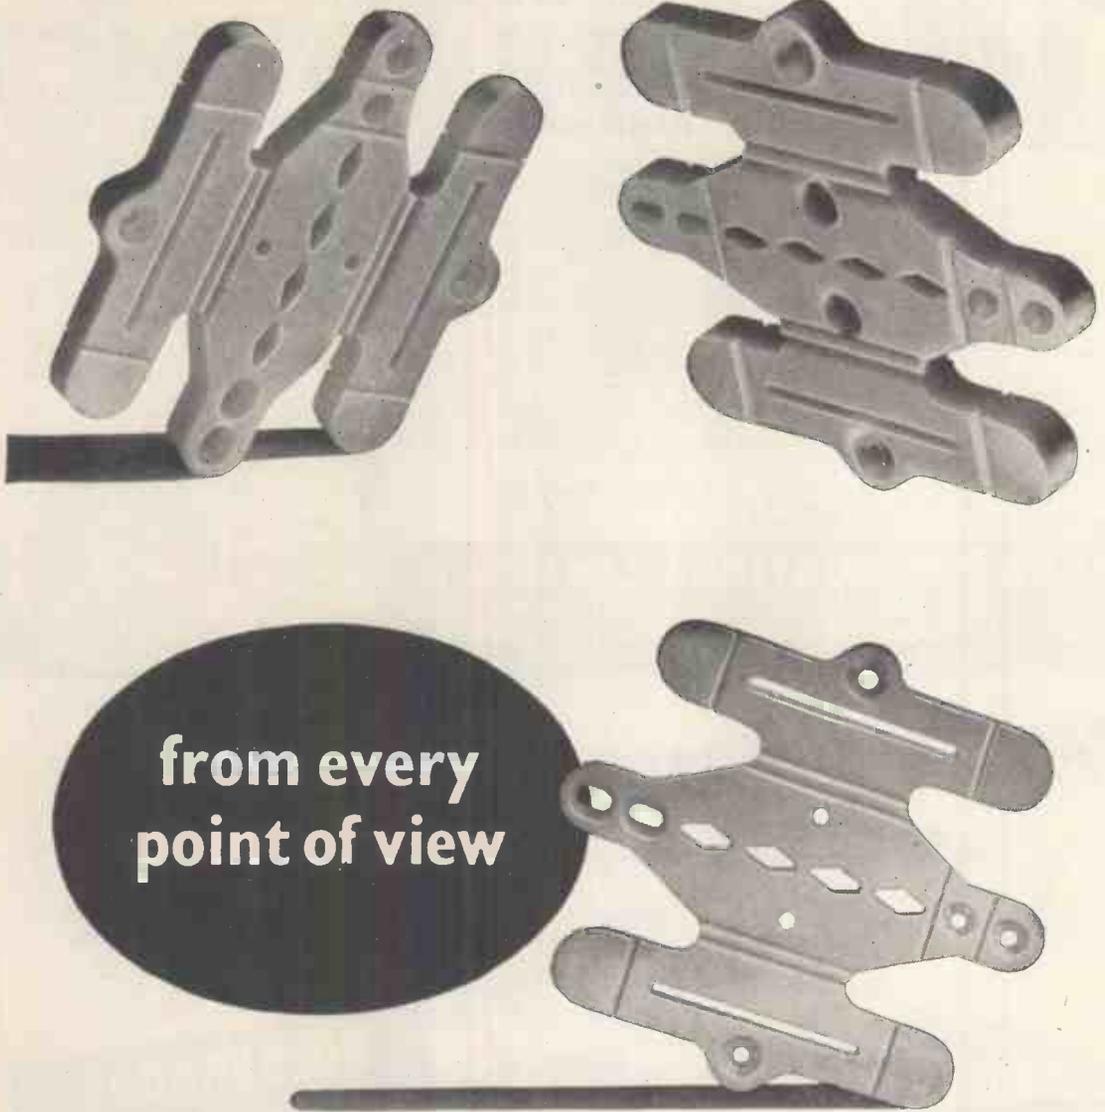

from every
point of view

'Frequentite' is the most suitable insulating material for all high frequency applications. Seventeen years ago we introduced the first British-made low-loss ceramic, and consultation with us before finalising the design of new components is a wise precaution.

STEATITE & PORCELAIN PRODUCTS LTD.

Head Office: Stourport-on-Severn, Worcestershire. Telephone: Stourport 111. Telegrams: Steatoin, Stourport



S.P.66



14 reasons why *those concerned*
with recorded sound choose

FERROVOICE

MAGNETIC RECORDING TAPE


- 1 Does not curl—lies flat on the transducer head, giving better frequency response, and smooth tracking.
- 2 Has the lowest possible surface friction—reducing wear on transducer heads, and guide pillars.
- 3 Has the best possible dispersion of oxide particles, free from coagulation, and flocculation ensuring low noise level.
- 4 Is correctly heat-dried to preclude "blocking" and sticking, layer-to-layer, under storage conditions.
- 5 The Lacquer is formulated to attain the maximum adhesion to the base material.

- 6 Gives the highest possible signal-to-noise ratio—excelling in high-frequency response.
- 7 Has a superlative dimensional stability—negligible stretch, and the highest possible tensile strength.
- 8 Discourages static collection during fast forward, and fast re-wind operations.
- 9 The Kraft Paper base has been selected after careful development with the paper manufacturers—flexibility, and supercalendering being prime considerations.
- 10 The Lacquers are pigmented with the highest grade powder. The individual particle size is less than one micron (0.000039 inch).

- 11 The pigment is dispersed and milled, with the highest degree of control, thus ensuring a uniform dispersion of the oxide particles within the binder.
- 12 The spools were designed to incorporate the "universal" hub, perfect balance, and negligible rotation noise.
- 13 "FERROVOICE" products are subject to continuous development by our technical staff.
- 14 "FERROVOICE" has a Coercivity of 270 oersteds (BHC) remanence = 730 gauss, when subjected initially to a magnetising force of H = 2,000 oersteds.

Suitable for Single or Double Track Recording. Length 1,200ft. on 7in. Diameter Spool—Frequency response 50 C.P.S. to 10 kc/s. at 7.5 in. per sec. Breaking strain exceeds 4lb.

22/6 RETAIL PRICE


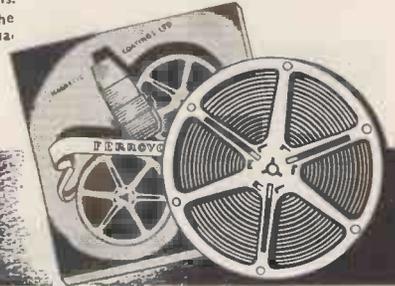


MAGNETIC COATINGS LIMITED

38 GROSVENOR GARDENS LONDON SW1 Telephone: SLOANE 9129

WORKS & LABORATORY: 25 DASHWOOD TRADING ESTATE LARCH ROAD · LONDON · SW12 BALHAM 5579

SPEED UP your SOLDERING

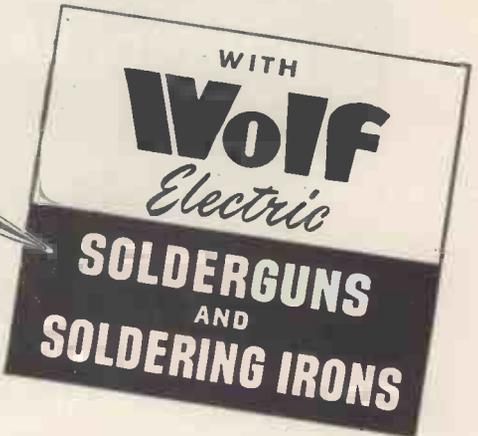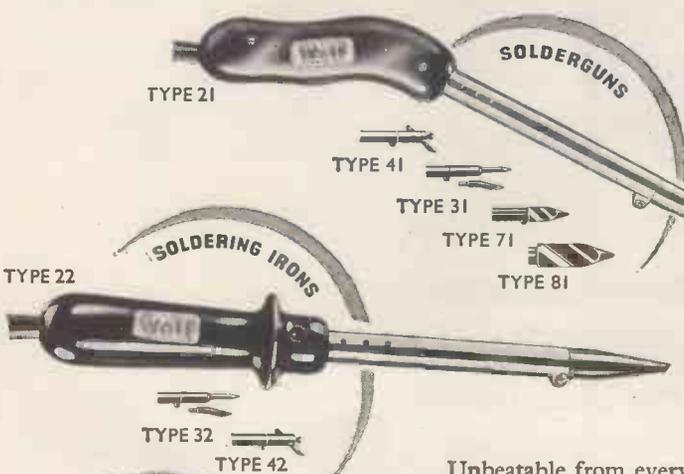


Unbeatable from every point of view, well able to withstand hard workshop treatment and ideal for continuous use. Features include rapid-constant localised heat—solid sturdy construction—low current consumption—perfect balance—absolute dependability. A type and bit for every purpose from fine instrument to heavy industrial work. Each tool includes 5 feet tough rubber 3-core cable.

Obtainable from all leading tool merchants and factors. Fully descriptive Brochure free on request

Type No. 51 is designed specially for all assembly operations. Solder is fed automatically with trigger-action and two reels are supplied—one 15 ft. acid-cored and one 15 ft. resin-cored.

WOLF ELECTRIC TOOLS LTD · PIONEER WORKS · HANGER LANE · LONDON · W.5
Tel: PERIVALE 5631-4 Branches: BIRMINGHAM · MANCHESTER · LEEDS · BRISTOL · NEWCASTLE · GLASGOW

... they came in their
THOUSANDS...

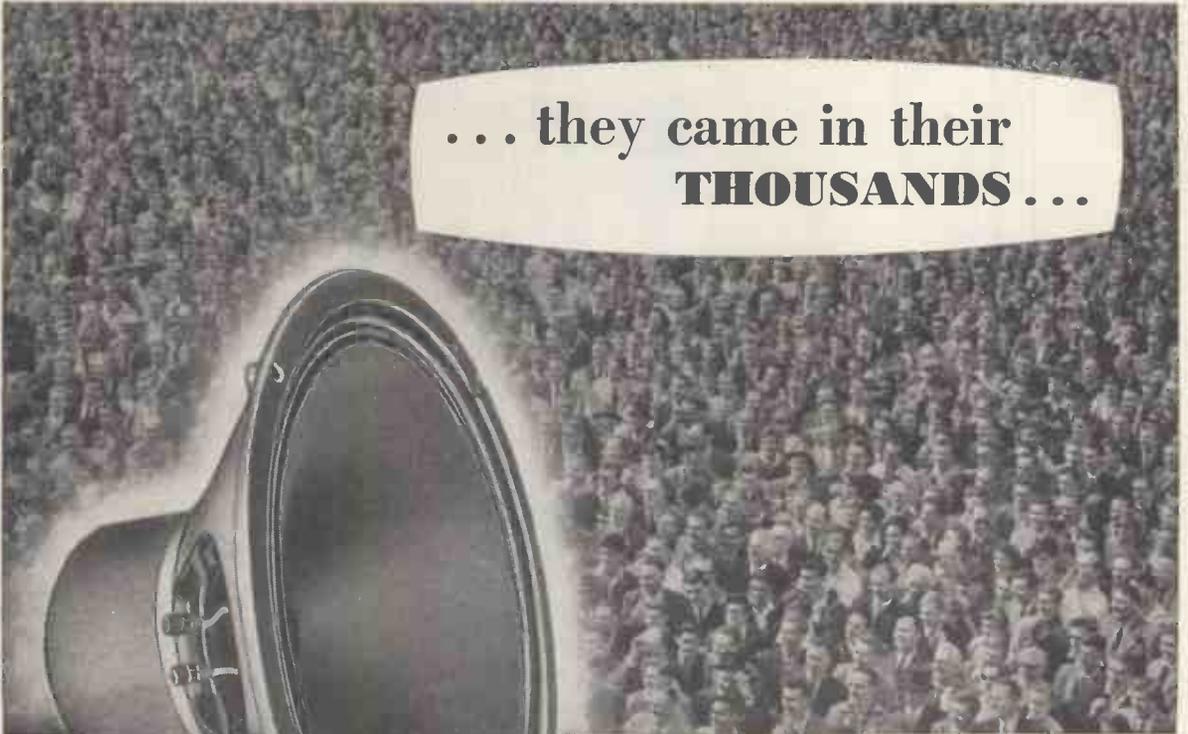

to hear the NEW
GOODMANS
ORLIN III
LOUDSPEAKER

ORLIN III

- FUNDAMENTAL RESONANCE 55 c/s
- FREQUENCY COVERAGE 40—13,000 c/s
- OVERALL DIAMETER 12 15/16in. (31.3 cms)
- OVERALL DEPTH 6 15/16in. (17.6 cms)
- VOICE COIL IMPEDANCE 15 ohms at 400 c/s
- MAX. POWER HANDLING CAPACITY ... 12 Watts A.C.
- FLUX DENSITY 15,000 gauss
- NETT WEIGHT 12 lb 13 oz
- FINISH Grey Hammer


Goodmans new ORLIN III Loudspeaker was enthusiastically received by an appreciative audience when demonstrated for the first time at this year's Radio Show.

Versatile and designed to enhance the Goodmans reputation for high quality, the ORLIN III reproduces a wide variety of inputs, from old but valued recordings to the latest wide range High Fidelity discs.

Price: £9 : 15 : 0 Retail (inc. Tax)

Over 5,000 members of the Public again attended the demonstrations of Goodmans range of High Fidelity Loudspeakers at Earls Court this year. High Fidelity at its best, as demonstrated to these large audiences, is the result of a constant programme of Research and Development in Goodmans Laboratories—probably the best equipped in the country.



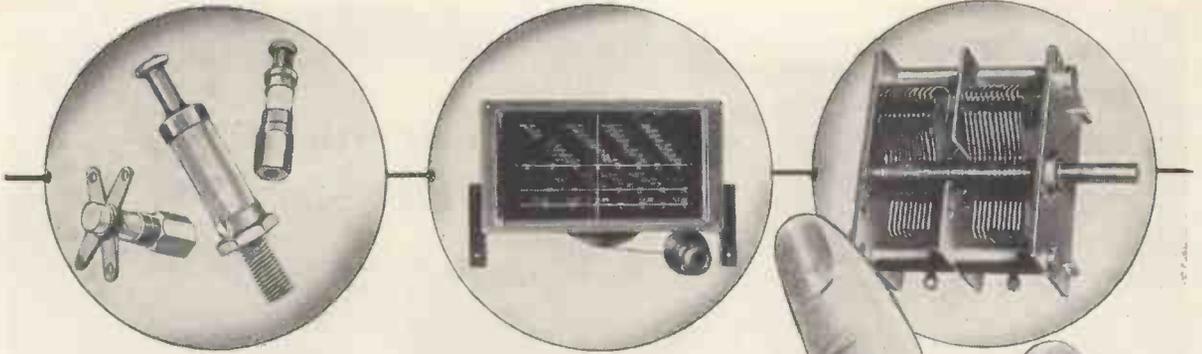

**You can count on these . . .
 . . . for a reliable performance**

STAND-OFF INSULATORS. Working voltage 1,500/5,000. Very high insulating resistance. Ceramic non-tracking. Silicone treated to repel moisture (ideal for tropics). Tag or spill end. We have a full range to cover most needs.

S.L.8 SPIN WHEEL DRIVE. A precision slide rule drive complete with 3 band glass scale. The spin wheel drive gives perfect control through ratio 24:1. Fitted with constant velocity coupling, eliminating strain on condenser and providing mechanical and electrical isolation from vibration and noise.

M.G. GANG CONDENSER. Available as 1, 2 or 3 gang, 490 p.F. nominal capacity, matched and standardised to close limits. Cadmium plated steel frame. Aluminium Vanes. Low loss non-hygroscopic insulation. Length excluding spindle: 1 gang—1 1/4 in. to 3 gang—3 1/4 in.
 Price 1 gang, 9/3.
 2 gang, 14/-, 3 gang, 18/3.

Write for full details of the complete range of precision-built components for Radio and Television industry.

JACKSON BROS. (London) LTD., KINGSWAY · WADDON · SURREY
 Telephone : CROYdon 2754-5. Telegrams : WALFILCO, SOUPHONE, LONDON.

**TWO HOURS RECORDING on standard 1200 ft. spool
 and TEN WATTS OUTPUT . . .**

★ TO THE TRADE:
 Ask for details of special Dealer facilities and Information Sheet T1/6

With standard 1200ft. spools, the SIMON Portable Tape Recorder affords two hours recording and brilliant playback—at 10 watts output if required. Twin tracks, two speeds. Frequency response is wide: 50-12,000 c/s at 7 1/2 in./sec. and 50-7,000 c/s at 3 1/2 in./sec. Bass and treble are independently variable.

Designed for the discriminating user, the SIMON Portable opens up new fields of activity in tape recording.

SIZE	18 in. x 15 in. x 10 in.
LOUDSPEAKER	6 1/2 in. built-in monitor
POWER SUPPLY	200/250 v. 50 Cycles A.C.
INPUT CHANNELS	High impedance for microphone low or high impedance for radio
POWER CONSUMPTION	100 watts approx.



Portable TAPE RECORDER Model SP11

Ask for
"THE GENTLE ART OF TAPESMANSHIP"
 and Information Sheet T1/6
SIMON SOUND SERVICE LTD. (Dept. W)
 48-50 GEORGE ST., LONDON, W.1. Phone: WELbeck 2371 (5 lines)

- ★ Monomaster "Finger-tip" Control
- ★ Separate capstans
- ★ Three motor drive
- ★ Drop-in loading
- ★ Fast rewind and wind-on
- ★ Provision for Remote Control and independent use of amplifier for P.A., etc.

**SIMON for
 Sound Recording**
 at a
Sensible Price

m-i-n-u-t-e-s into seconds...

with the brilliant **NEW**
Superspeed
SOLDERING IRON

MANUFACTURED FOR ENTHOVEN SOLDERS LTD. BY SCOPE LABORATORIES, MELBOURNE, AUSTRALIA



STAR FEATURES

- ★ Heats up from cold in 6 seconds—by a light thumb pressure on the switch ring.
- ★ When not in use, current is automatically switched off—thus greatly reducing wear of copper bit. Electricity consumption is correspondingly reduced.
- ★ It is 10" long, weighs 3½ ozs., can be used on 2.5 to 6.3-volt supply. 4-volt transformer normally supplied.
- ★ More powerful than conventional 150-watt irons and equally suitable for light wiring work or heavy soldering on chassis.
- ★ Simple to operate, ideal for precision work. Requires minimum maintenance at negligible cost. Shows lowest operating cost over a period.
- ★ Can be used from a car battery.
- ★ It is by far the most efficient and economical soldering iron ever designed for test bench and maintenance work.



STAR APPLICATIONS

Designed on an entirely new principle, this light-weight, versatile iron is eminently suitable for soldering operations in the RADIO, TELEVISION, ELECTRONIC and TELECOMMUNICATION industries, particularly for all SERVICE work. For general purpose work the Superspeed Iron is the ideal stand-by soldering tool.

The **Superspeed** soldering iron is available **NOW**


Write for full particulars, including guarantee terms and free trial facilities, to the sole concessionaires in this country—

ENTHOVEN SOLDERS LIMITED
 (Industrial Equipment Division), 89 Upper Thames St.,
 London, E.C.4. Telephone: MANSion House 4533

LIST PRICES

Subject to trade discounts.

Superspeed Soldering Iron	39/6
Transformer (optional)	31/6
Replacement Element	1/-
Replacement Copper Bit	10d.




This is the PYE PF91 amplifier with the PF91A control unit

People who happen to possess a critical eye in addition to a sensitive and discerning ear will welcome Imhofs new high-fidelity range, for the greatest possible attention has been paid to presentation and appearance. This range of cabinets has been designed with the PYE PF91 amplifier in mind because we feel that its unique positive feed-back circuit and its zero output impedance provides a higher standard of transient response than any other amplifier available. The Layton Trolleygram shown here, is designed to house the PF91 and its control unit PF91A together with record player and radio feeder if desired.

Of compact, contemporary design, gliding easily on special rollers, the Trolleygrams are extremely versatile. Used as remote control units they allow for the speaker to be installed in the acoustically best position whilst controls and player are within easy reach. With speaker incorporated they can be moved from room to room, (ideal for clubs, schools, etc.). Write or phone for details of Imhofs High Fidelity Service, or visit us at our showrooms in New Oxford Street.

the Layton Trolleygram is available only from Alfred Imhof Ltd., 112-116 New Oxford St., London, W.C1. Tel: Museum 7878 (20 lines)

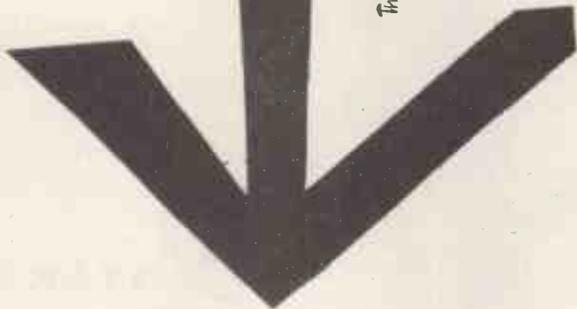

This is the Layton Trolleygram designed to house the PF91 amplifier and its associated equipment



IMHOFS




THE TANNOY

Autograph

PRE-AMPLIFIER

This extraordinarily versatile Pre-amplifier has been designed for use with the new TANNOY High Fidelity Power Amplifier. Recording characteristic correction is provided not only for the more modern long playing records, but also for the older 78 r.p.m. types, for it is on these discs that is enshrined the music of some of the greatest artists who have ever lived—artists whose work was recorded by early and imperfect techniques. The availability of the correct recording characteristic, together with the sharp cut-off treble filter, enables you to enjoy all music with the minimum of undesirable background noise. The treble and bass controls are completely isolated from each other, there being no interaction at the crossover point, and their range provides ample compensation for varying listening levels as well as deficiencies inherent in other elements of the reproducing system. The built-in rumble filter not only removes the unpleasant low pitched sound resulting either from faulty recording, or re-play motors, but also serves to prevent the intermodulation products caused by this. Here then is a Pre-amplifier designed to extract the maximum enjoyment not only from modern records but also from the treasured recordings of days gone by.



The "Autograph" Pre-amplifier and the Tannoy High Fidelity Power Amplifier together form the heart of the TANNOY DOMESTIC SOUND SYSTEM which has been the subject of much favourable comment since it was announced earlier in the year.

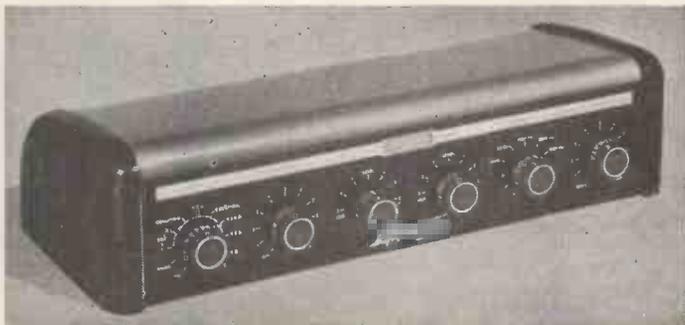

TECHNICAL SPECIFICATION

CONTROLS	INPUT SELECTOR	SENSITIVITY at 1 Kc	IMPEDANCE (unchanged by correction switching)	
				LEVEL RESPONSE
	MICROPHONE	5 mV	0.5 megohms	
	RADIO	0.5 V	0.25 megohms	
PHONO	BRIT 1 (EMI)	78 r.p.m.	5 mV	0.5 megohms
	BRIT 2 (DECCA)			
	COLUMBIA (U.S.A.)			
	R.C.A. (OLD)	78, 45 & 33½ r.p.m.		
	COLUMBIA	L/P		
	NARTB/RIAA			
	AES			
NAB				
	TAPE	LEVEL RESPONSE	0.5 V	0.25 megohms
VOLUME	Continuously variable			
BASS	3 steps each cut and lift. As shown below			
TREBLE	3 steps each cut and lift. As shown below			
TREBLE FILTER SELECTOR	9 Kc 7 Kc 5 Kc 4 Kc			
FILTER SLOPE CONTROL/MAINS ON/OFF	6 dB per octave to 30 dB per octave, infinitely variable			


- INPUT CONNECTIONS Radio, Tape/TV, Mic. Phono.
- OUTPUT 2 V into 0.5 megohms
- POWER REQUIREMENTS Filament 6.3 V. 0.9 amp. Plate (B+) 350 V. 5 mA
- RUMBLE FILTER 30 dB per octave below 20 cps. (fixed)
- MAINS OUTLET 3 switched by on/off switch
- TUBE LINE-UP 2 ECC 83 or 12AX7
- FINISH Coin bronze and hammer bronze, freestanding ends, hand polished mahogany
- DIMENSIONS Panel Mounting 13½" x 7" x 3½" Freestanding 16" x 7½" x 4"

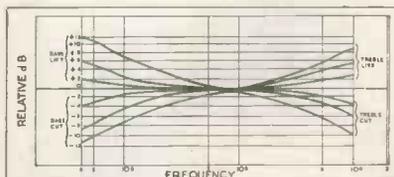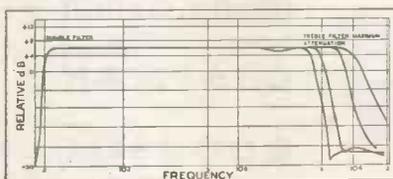

PRODUCTS LIMITED

Sound Practitioners

GOODSELL

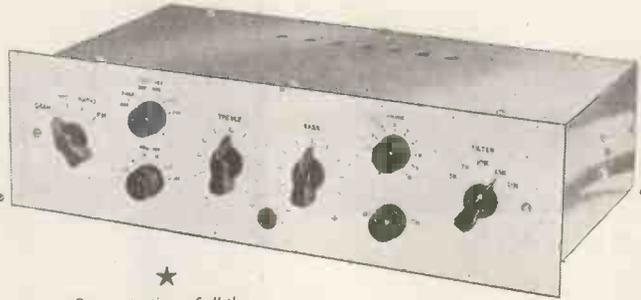


TYPE T/W/100 Tape Pre-amplifier (below)

Containing oscillator, equalised record and play-back amplifier. Separate monitoring facilities. Response ± 2 db, 60-11,000 cycles. For use with PFA pre-amplifier and Wearite Deck only. Price £40 with PFA unit. (This unit is only supplied with Deck at current price.)

★
Demonstrations of all these units at B. K. Partners Ltd., 229 Regent St., London, W.1 and Classic Electric Co. Ltd., Croydon.

TYPE PFA Pre-amplifier (above)

The latest PFA unit is built especially for use with our range of Williamson Amplifiers. Separate bass and treble control in equaliser section. Low noise—high gain. 5 mv. input. 6 valves. Price £20.

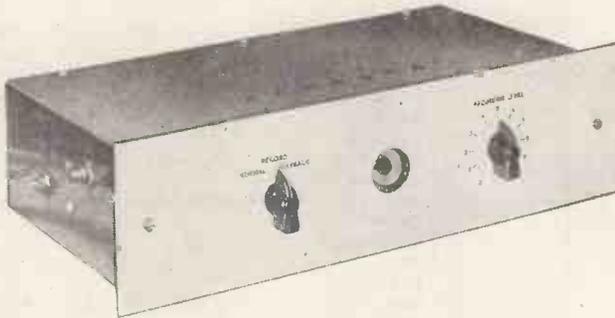

Williamson Amplifiers


With separate built-in auxiliary power supply. With standard output £33.15.0. With "C" Core output £37.15.0. Ultra Linear connection £1 extra. (Available with "C" Core output only.)

GOODSELL LTD. . 40 Gardner Street . Brighton 1 . Sussex . Tel. : Brighton 26735



cordially invite all
High Fidelity enthusiasts
TO VISIT THEIR

REGENT ST. SHOWROOM



GOODSELL FMT/401

FOR A
DEMONSTRATION
of the latest precision built

CHAPMAN

and

GOODSELL
FM TUNER UNITS

● Also demonstrated

are the latest versions of quality equipment by ACOUSTICAL, GOODSELL, LEAK and ROGERS, as well as the NEW HIGH FIDELITY AMPLIFIER by ARMSTRONG.



CHAPMAN FM81


These Equipments can be heard with a wide range of high quality loudspeaker systems and associated equipment.

These and other high fidelity equipments are demonstrated at our show-rooms: Daily 10.30 a.m.—5.30 p.m. Saturday 10.30 a.m.—12.30 p.m.

★ H.P. TERMS AVAILABLE

B. K. PARTNERS LTD.

229 Regent St., London, W.1. (Entrance Hanover St.) Phone : REG 7363

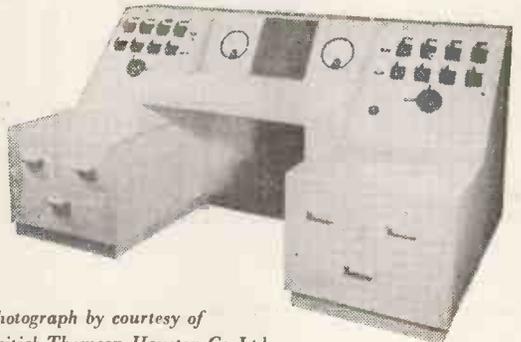

Photograph by courtesy of
British Thomson-Houston Co. Ltd.

This power station control desk was supplied by us to British Thomson-Houston Co. Ltd.

We are makers of

FINE WOOD CABINETS

to the RADIO, ELECTRONIC AND ALLIED INDUSTRIES, and invite Trade Enquiries.

H. ASHDOWN

CABINET MAKER

98 HERTFORD ROAD, EDMONTON, N.9

Phone : EDM. 2621

Works: 784/792, High Road, Tottenham, N.17. Phone: TOT. 9947

Loud-speaker Manufacturers to the radio industry since 1930



We don't presume

... to know all the set manufacturer's problems, and still less how they should be solved. Our job is looking after that final, critical link in the chain of reproduction—the loud-speaker. And there we do know what we are talking about.


We do, for instance, supply hundreds of thousands of loud-speakers every year to many of the best-known radio and television manufacturers in the world. Among them are firms with "household names" in North America, where competition is as keen and vigorous as it can be. What we can do for some, we can pretty certainly do for others.

REPRODUCERS AND AMPLIFIERS LIMITED
WOLVERHAMPTON ENGLAND

Telephone: Wolverhampton 22241 (5 lines)

Telegrams: Audio, Wolverhampton

AM

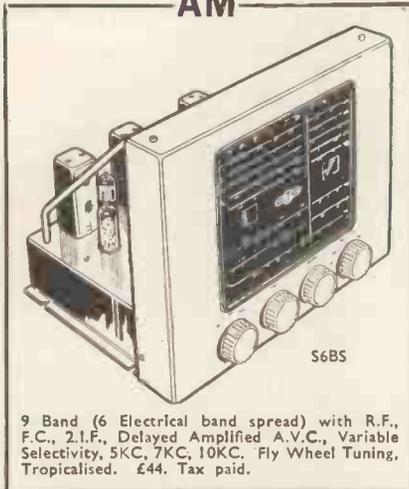

S6BS

9 Band (6 Electrical band spread) with R.F., F.C., 2.I.F., Delayed Amplified A.V.C., Variable Selectivity, 5KC, 7KC, 10KC. Fly Wheel Tuning, Tropicalised. £44. Tax paid.

- S6E Similar in specification to S6BS but only 4 wave bands. 12.5 m.—37 m., 35 m.—100 m., 90 m.—250 m., 190 m.—550 m. £30. Tax paid.
- S6 As S6E but 3 wave bands, 16 m.—50 m., 195 m.—550 m., 800 m.—2,000 m. £30. Tax paid.
- S5E 4 wave bands, 12.5 m.—550 m. R.F. pre-amplifier, variable selectivity I.F., Delayed Amplified A.V.C. £21/6/8. Tax paid.
- S5 As S5E but 3 wave bands, 16 m.—2,000 m. £21/6/8. Tax paid.
- S4 Standard High Quality Feeder Unit. Specification as S5 but without R.F. amplifier. £16. Tax paid.

TUNERS

WE SPECIALISE IN
HIGH QUALITY
TUNERS FOR USE
WITH ANY OF THE
WELL-KNOWN
AMPLIFIERS

FM



FM81

For use on the new V.H.F. Frequency Modulation Broadcasts. Will provide amazing degree of realism with complete absence of background noise. £21. Tax paid.

- ★ THE NEW FM82. Self Powered 200/250v. Three V.H.F. Stations on a switch. Separate trimmer for each position. Range of each position 87mcs—100mcs. Output 2 volts approx.

C. T. CHAPMAN (Reproducers) LTD.

RILEY WORKS, RILEY STREET, CHELSEA, S.W.10.

FLAxman 4577/8.

Export Enquiries Invited

COIL WINDING MACHINERY



We invite your enquiries for the Type A1/1 automatic machine, as illustrated. Also for the Type H/1 hand coil winder and Type AW/1 Armature Winding Head.

KOLECTRIC LTD

73 UXBRIDGE ROAD, EALING, LONDON, W.5


Ealing 8322

SEE THE NEW RANGE OF PRODUCTS BY

'TELEMAX'

AND THE EVER-POPULAR
PROJECTION TELEVISION
for your Own-Styled Cabinet

(TO PROJECT 4' x 3' PICTURE)

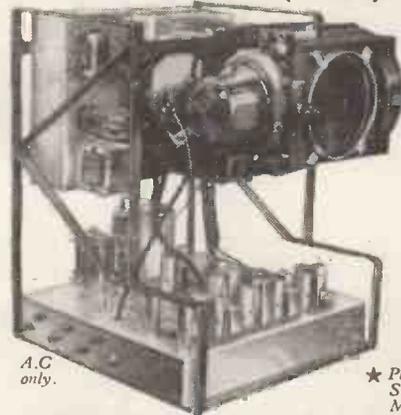

A.C.
only.

- ★ 23-valve Superhet circuit.
- ★ Sensitivity better than 50 microvolts.
- ★ Full bandwidth. 5-channel facility.
- ★ Complete with valves, c.r.t. and optical unit
- ★ Chassis size approx. 19" x 17" x 15".

★ Please write for detailed Specifications from Manufacturers

TELEMECHANICS LTD.

3, NEWMAN YARD, NEWMAN ST., LONDON W.1
LANgham 7965

A New Portable Wave Analyser

THE WAYNE KERR MODEL A.321

An audio frequency analyser of the heterodyne type to measure the relative levels of the components of a complex waveform down to -75 db below fundamental.

It is light, compact and simple to operate and can be supplied either in a transportable case or for standard 19" rack mounting.



Specification

FREQUENCY COVERAGE: 50–20,000 c/s in two ranges

FREQUENCY STABILITY: Better than $\pm 1\%$

INPUT LEVEL: Between -20 and $+20$ db relative to 1mV into 600 ohms adjusted by a 5-step attenuator and fine control of $0-10$ db

FREQUENCY RESPONSE: Flat to within ± 1 db over the whole working range.

LEVEL STABILITY: ± 1 db if mains supply voltage remains within $\pm 5\%$

ACCURACY OF HARMONIC MEASUREMENTS: Harmonics below fundamental

to -55 db $\pm 5\%$

to -75 db $\pm 10\%$ or ± 1 db whichever is the greater.

INPUT IMPEDANCE: $100,000$ ohm unbalanced (greater than $25,000$ ohm, balanced, can be supplied to order)

SELECTIVITY: Constant over the frequency range. 2 stage crystal filter, mid band frequency 100 Kc/s. Flat top (± 1 db) pass band extending over 10 c/s ± 1 c/s. -55 db

HUM LEVEL:

POWER SUPPLY: $110/115$ and $200/250$ volts $40/60$ c/s

POWER CONSUMPTION:

Approx. 60 watts

DIMENSIONS: In case $20'' \times 9'' \times 8\frac{1}{2}''$


WEIGHT: 31 lbs. approx.

Wayne
Kerr

bring YOUR set up to date with this really modern range of **ENGRAVED** control knobs

16 special **GOLD FILLED** inscriptions that will meet the demand of every radio, T/V, tape recorder or amplifier enthusiast—beautifully made and designed to enhance the appearance of every commercial or amateur constructed set. We are always prepared to engrave to special order.

Sizes: Type "A" $1\frac{1}{8}$ in. dia. Type "B" $1\frac{1}{10}$ in. dia. Both types are $\frac{3}{8}$ in. deep.

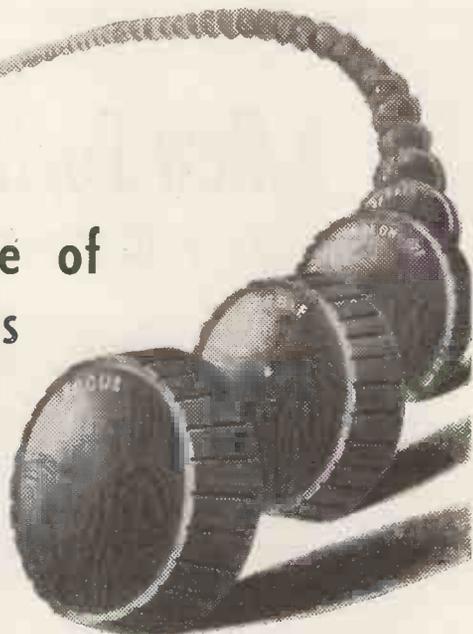

**YOU CAN OBTAIN THEM NOW AT
YOUR LOCAL COMPONENT STOCKIST**

If in difficulty please write to us—

AN ENGRAVING FOR EVERY PURPOSE—

RADIO: "Volume," "Tuning," "Wavechange," "On-Off," "S.M.L.-Gram.," "Radio-Gram.," "Tone," "Vol./On-Off."

TELEVISION: "Focus," "Contrast," "Brilliance," "Brightness," "Brilliance/On-Off."

AMPLIFIER: "Bass," "Treble" (plus any of above).

TAPE RECORDER: "Record-Play" (plus any of above).

AVAILABLE IN WALNUT OR IVORY.

PRICES: Type "A," 1/6 each; Type "B," 1/2 each.
Plain knobs can also be supplied at 1/- and 10d., respectively.

UNCLES, BLISS & Co., LTD., (Dept. W.W.), 139, Cherry Orchard Road, East Croydon, Surrey. Telephones: Croydon 3379/6390



*** ULTRA LOW
capacitance & attenuation**

38 STOCK TYPES
for your
**STANDARD or SPECIAL
APPLICATIONS**

TYPE	$\mu\text{F}/\text{ft}$	IMPED. Ω	O.D.
C1	7.3	150	.36
C11	6.3	173	.36
C2	6.3	171	.44
C22	5.5	184	.44
C3	5.4	197	.64
C33	4.8	220	.64
C4	4.6	229	1.03
C44	4.1	252	1.03



U.G. CONNECTORS—R.G. CABLES

TRANSRADIO LTD, 138A Cromwell Rd, London SW7. Tel: FRE 4421

F.M. FEEDER UNIT
£19.19.0 INCLUSIVE
FOR USE NOW ON
TRANSMISSIONS FROM WROTHAM



6 Stage high sensitivity F.M. feeder unit with built-in A.C. power supply. Complete band II coverage. Grounded grid triode low noise R.F. stage. High stability frequency changer. 2 stages of high gain I.F. amplification. Latest type ratio discriminator using balanced diodes. Pre-set control for minimum A.M. noise. Special de-emphasis circuit. One stage of high fidelity L.F. amplification. Specially designed for F.M. reception and ease of operation.

Place your orders NOW for early delivery.

CONCERTO RECORDERS
54 Lansdowne Place, Hove, Sussex. Hove 70776



MODEL L.1

Operating in the decimetre wave region, this Signal Generator has been designed to meet the increasing requirements of the development laboratory at Ultra High Frequencies. Besides a wide frequency range and reliable attenuator system, provision is made in the L.1 for both internal and external sinewave and pulse modulation. Full technical details are available on request.

Write for Folder W.25.

Advance

U.H.F. SIGNAL GENERATOR

Nett price in U.K. £375

ADVANCE COMPONENTS LTD., MARLOWE ROAD, WALTHAMSTOW, LONDON, E.17

Telephone : LARKSWOOD 4366/7/8




Type O-120

Portable, High-Sensitivity Audio 'Scope. 4mV/cm. r.m.s.;—3 c/s to 25 Kc/s.

Two NEW

Furzehill

'Scopes!

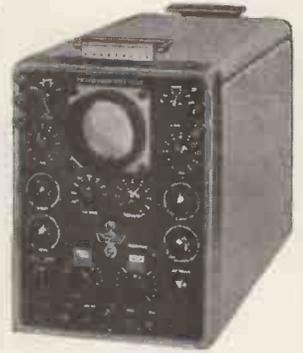

Type O-100

Sensitive General Purpose 'Scope. Direct-coupled 'X and 'Y' Amplifiers Triggered Time-Base, Time and Voltage Calibration;—Zero to 4 Mc/s.

**MAY WE SEND
YOU PARTICULARS?**

Furzehill Laboratories Ltd.

SHENLEY ROAD · BOREHAM WOOD · HERTS.

Cables: FURZLAB, LONDON.

Tel.: ELStree 3940

ALWAYS "FIT"



CASTORS

THE WORLD'S BEST

**CONTRACTING
TUBE
ADAPTOR**

For $\frac{7}{8}$ ", 1", $1\frac{1}{8}$ ", $1\frac{1}{4}$ " tubes, Quickgrip Adaptors are fitted by hand as no tools are required. 2", $2\frac{1}{2}$ ", 3", and 4" wheels may be used.

Ask for Brochure
and pages 8, 25, 57.

Numerous other types of
head fittings available



Engineers, Patentees and Sole Manufacturers
AUTOSET (PRODUCTION) LTD.
DEPT. "H," STOUR STREET, BIRMINGHAM, 18
EDG. 1143 (3 lines). Estd. over 30 years.

Please mention "Wireless World"

F. E. Terman

Professor of Electrical Engineering
Dean of the School of Engineering
Stanford University
Past President: Institute of Radio Engineers

Terman and Petit
ELECTRONIC MEASUREMENTS
9 x 6 707 pages 72s 6d

"This book is well written and carefully indexed... It is confidently anticipated that this will be in constant demand both by the radio engineering student and the practising engineer." **The Electrical Review.**

F. E. Terman
RADIO ENGINEERS' HANDBOOK
9 x 6 1019 pages 52s 6d

F. E. Terman
RADIO ENGINEERING. Third Edition
9 x 6 813 pages 50s

Available from your Bookseller

Published by


McGRAW-HILL LONDON

Osram 912

**A modern high quality
amplifier & reproducer
for the home constructor**

BUILD THIS HIGH QUALITY AMPLIFIER

- Every part specified and readily obtainable from your Radio dealer.
- Every stage in construction clearly explained with step-by-step wiring, in instruction book.
- Rock-like stability in performance—no hum, no microphony, wide frequency response (9 octaves), low harmonic distortion at full power (12 watts) and ensured reliability, with Osram valves specified.
- Full control on frequency characteristic to introduce 'art' into listening.
- Unparalleled clarity of both speech and music when used in conjunction with G.E.C. Metal Cone Loudspeaker in octagonal loaded-port cabinet.

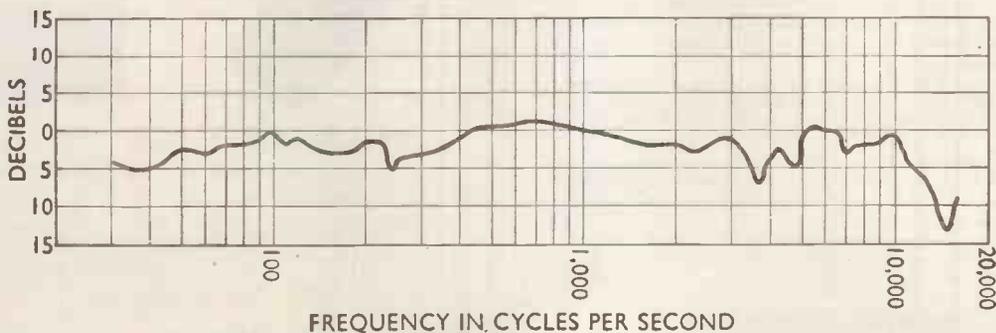

Overall frequency response of the complete equipment, comprising L.P. record, specified pick-up, Osram 912 amplifier and G.E.C. Metal Cone Loudspeakers in octagonal loaded port-cabinet.

How to build the Osram 912

A book giving full constructional details is obtainable from your dealer, or by post (3d. extra) from the Osram Valve and Electronics Dept.

PRICE **3/6^{d.}**

FIDELITY WITH ECONOMY

Is that possible? YES! The answer is to be found in the now complete range of "BAKERS Quality Speakers" comprising some 14 models covering the requirements of both the "Quality" enthusiast and the more general purpose Public Address. Further information on the above, including constructional details of suitable enclosures, will be gladly forwarded on request.



THE 12" 15W. DE LUXE
MK. I & MK. II

ALL EXPORT enquiries to:—

JOHN LIONNET & COMPANY,
62-63, Queen Street, London, E.C.4.

PROMPT QUOTATIONS WILL BE SUBMITTED ON REQUEST.

BAKERS 'Selhurst' RADIO

Please write for full details to:

24 DINGWALL ROAD, CROYDON, SURREY.

Croydon 2271/2

Sole Distributors for Eire: BRIAN CURRAN, 283, Harold Cross Road, TERENCE, DUBLIN

- T/V TECHNOLOGY
- RADIO ENGINEERING
- ELECTRONICS
- RADIO SERVICING

There's a big future in T/V and Radio. Act now! Increase your knowledge. Back up experience with a sound-theoretical background. I.C.S. offer courses of instruction in—

- T/V TECHNOLOGY ● ADVANCED SHORT-WAVE RADIO ● RADIO ENGINEERING ● RADIO SERVICE ENGINEERING ● RADAR ● BASIC ELECTRONICS ● FREQUENCY MODULATION.

I.C.S. will also coach you for the following examinations:—
B.I.R.E.: P.M.G. Certificate for Wireless Operators;
Radio Servicing Certificate (R.T.E.B.); C. & G. Telecommunications, etc., etc.

DON'T DELAY—SEND COUPON TODAY for free descriptive booklet, stating which subject or examination interests you. Fees include all books needed. Examination students coached until successful.

Reduced terms for H.M. Forces.

Dept. 223D, I.C.S., 71 Kingsway, W.C.2

INTERNATIONAL CORRESPONDENCE SCHOOLS
Dept. 223D, International Buildings, Kingsway, London, W.C.2.


Please send Booklet on subject

Name..... Age.....
(Block letters, please)

Address.....



ELECTRO- MAGNETIC COUNTER



MAJOR TYPE 6 × 1½ × 1¼ ins.

3 ohms operates on 3/6 Vo. D.C.

500 ohms operates on 18/24 Vo. D.C.

1000 ohms, operates on 100/110 Vo. D.C.

2,300 ohms, operates on 200/230 Vo. D.C.

17/6 Post & Pkg. 9d.

MAGNETIC RELAYS
UNISELECTORS
KEY SWITCHES

JACK DAVIS (RELAYS) LTD.

36 PERCY STREET · LONDON W.1
MUSEUM 7960 LANGHAM 4821

OUR NEW EXTENSION IS ALMOST COMPLETE



This new production unit will assist us to meet the increasing demand for

SUFLEX POLYSTYRENE CAPACITORS

SUFLEX POLYSTYRENE CAPACITORS, of small dimensions and having low dielectric loss, are admirably suited for I.F. transformers and padding circuits. Uniquely high insulation resistance and low dielectric absorption make them indispensable in computers, nucleonic and medical equipment.

CAPACITIES: 5pf to 0.5 mfd.

TOLERANCE: 20 per cent. to 1 per cent.

VOLTAGES: 250 v.-750 v. D.C.

HS Type for general use.

HSA Type, with additional sealing for use in exceptional humidity conditions.

SUFLEX

Limited

LONDON

For further information kindly write to:

35, BAKER STREET, LONDON, W.1.

Telephone: WELbeck 0791



'SCOTCH BOY'

REGD. TRADE MARK

MAGNETIC RECORDING TAPE

ANOTHER **3M** COMPANY PRODUCT


MINNESOTA MINING & MANUFACTURING CO. LTD
 Arden Rd, Adderley Park, Birmingham 8 167 Strand, London WC2
 90 Mitchell St, Glasgow C1 16 Mosley St, Manchester 2

We are glad to announce
 the immediate availability of "Scotch Boy" Magnetic Recording Tape on a new clear plastic 7" reel—more solid, perfectly balanced, with a large centre hub and simplified V slot threading.

Each new reel has its own sturdy handsome hinged box, in our familiar black and plaid, with ample writing space on the underside.

As for the tape, it will "speak for itself." On all types of recorders it will give true, brilliant quality. It is an all-British product of which we are proud.

Daily, professional and home recordists alike are changing to "Scotch Boy."

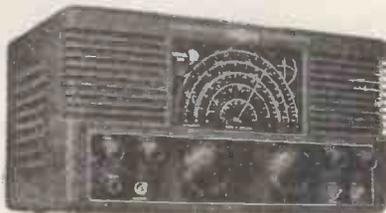

EDDYSTONE COMMUNICATION RECEIVERS

Now Available on attractive Hire Purchase Terms.

Model	Cash Price	Deposit	Monthly
740	£42 15 0	£8 11 0	£3 2 10
840	£45 0 0	£9 0 0	£3 6 0
750	£68 0 0	£13 12 0	£5 0 0
680	£106 0 0	£21 4 0	£7 15 6

Instalments are for 12 months.

The model illustrated is the 740. All are for AC only operation except the 840 which is AC/DC 110/250 v. making it especially suitable for universal use. Descriptive literature on request. The relaxation of H.P. restrictions enables us to offer the above attractive terms.

Latest Eddystone component catalogue 1/-.
 The

HP
RADIO SERVICES LTD.,

55 COUNTY ROAD, LIVERPOOL, 4
 Telephone: AINTREE 1445 ESTAB. 1935

Ready by October!

COMPLETELY UNIQUE &

UNIVERSAL MINIATURE RECORDER A.C.E. CONSORT

Operates from Internal Batteries and External AC/DC Mains Feeder. (Feeder ready shortly.)

SIZE ONLY
 12" x 7" x 6 3/4"

£52

ALL MAINS FEATURES INCLUDE:
 2 TRACKS • 3 SPEEDS • POWER
 REWIND • AUTOMATIC ERASE

WITH BATTERIES
 & MICROPHONE

• MONITOR-
 ING CIRCUIT
 • BUILT-IN 5"
 SPEAKER.

•
 FULL TRADE AND
 EXPORT TERMS



OPERATES IN ANY POSITION
 Send for leaflet giving advance information

ASSOCIATED CINE EQUIPMENTS LTD
 353 BEXLEY ROAD, ERITH, KENT. Phone: ERITH 2543


★ *The answer to a persistent demand—*



READY-TO-ASSEMBLE

**BASS REFLEX
CONSOLE CABINET**

for use with Stentorian
10" or 12" Hi-Fi Units

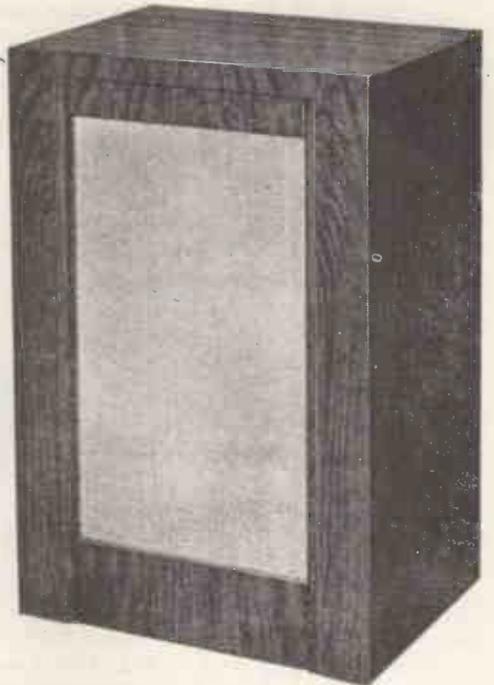

SIZE 32" x 22" x 16"


£10 . 10 . 0

Ever since we introduced our now world-famous range of Cambric Cone Units, we have been receiving requests for a suitable cabinet. Now we can offer an easily assembled polished walnut veneer cabinet, specially designed to give maximum reproduction quality from either the 10-inch or 12-inch unit. It is supplied packed flat, complete with screws, ready for instant assembly.

This cabinet was first demonstrated at the Radio Show, and was most enthusiastically received. The combination of speaker and cabinet provides a standard of reproduction hitherto unobtainable except at many times the price. Descriptive leaflets are available on request, ask your dealer to demonstrate, or hear them at our London Office, 109 Kingsway, any Saturday between 9 a.m. and noon.

★ *new extended range of*

Stentorian **HI-FI**
CAMBRIC CONE UNITS

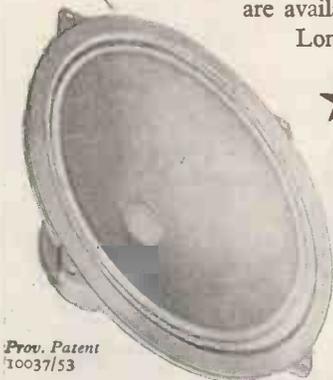

Prov. Patent
10037/53

acclaimed at Radio Show by experts & public

MODEL HF510. 5" unit, incorporating 10,000 gauss magnet. Handling capacity, 2 watts. Frequency response, 100-7,000 c.p.s. Bass resonance, 160 c.p.s. Steel chassis £1.17.6
Die cast chassis £1.19.6 (Tax Paid)

* **MODEL HF912.** 9" unit, incorporating 12,000 gauss magnet. Handling capacity, 7 watts. Frequency response, 40-13,000 c.p.s. Bass resonance, 45 c.p.s.
Die cast chassis £3.9.6 (Tax Paid)

MODEL HF610. 6" unit, incorporating 10,000 gauss magnet. Handling capacity, 3 watts. Frequency response, 60-12,000 c.p.s. Bass resonance, 70 c.p.s. Steel chassis £2.10.6
Die cast chassis £2.12.6 (Tax Paid)

* **MODEL HF1012.** 10" unit, incorporating 12,000 gauss magnet. Handling capacity, 10 watts. Frequency response, 30-14,000 c.p.s. Bass resonance, 35 c.p.s.
Die cast chassis £3.17.6 (Tax Paid)

MODEL HF810. 8" unit, incorporating 10,000 gauss magnet. Handling capacity, 5 watts. Frequency response, 50-12,000 c.p.s. Bass resonance, 65 c.p.s. Steel chassis £3.0.6 (Tax Paid)

* **MODEL HF812.** Die cast chassis (£12,000 Gauss) £3.5.6 (Tax Paid)

MODEL HF1214. 12" unit, incorporating 14,000 gauss magnet. Handling capacity, 15 watts. Frequency response, 25-14,000 c.p.s. Bass resonance, 39 c.p.s.
Die cast chassis £9.15.6 (Tax Free)

* NOW—with universal-impedance speech coil at 3 ohms, 7.5 ohms and 15 ohms.

WESTALITE
REPLACEMENT RECTIFIERS
for
COMMERCIAL RADIO AND TELEVISION RECEIVERS

This handy wallchart now available will enable wholesalers, retailers and service engineers alike to tell at a glance the type of Westinghouse rectifier incorporated in commercial television and radio receivers. The manufacturers are listed, in the adjoining column the type numbers of the sets marketed, and the next column contains the type number of the rectifiers incorporated in the receivers. A photograph of rectifiers with type numbers also aids identification.



WALLCHARTS LISTING MANUFACTURER, TYPE OF SET AND WESTALITE RECTIFIER INCORPORATED, CAN BE OBTAINED FROM ADDRESS BELOW.

Dept. W.W.10
WESTINGHOUSE BRAKE & SIGNAL CO., LTD., 82 York Way, Kings Cross, London, N.1.

Three-Range **PROBE MILLIVOLTMETER**

Model VM6451



- SELF-CONTAINED**
- STABILISED**
- POWER PACK**
- ACCURACY TO ± 5% OF FULL SCALE DEFLECTION**
- AUTOMATIC OVERLOAD PROTECTION**

Designed to provide direct readings for A.C. voltages from 10 millivolts to 2 volts. Three ranges are provided and readings are accurate within 1db from 50 cycles to 150 megacycles. The double triode measuring valve is detachable from the cabinet. This instrument can also be used for modulation carrier detection with the use of headphones. Write for full specification.

BRITISH PHYSICAL LABORATORIES
 Radlett HERTS Tel: RADLETT 5674-5-6



S. G. Brown

LIGHTWEIGHT HEADPHONES FOR LADIES

Specially designed for use with dictation and recording machines.



S. G. Brown provide Headphones and associated equipment for all known purposes. Brochure 'W' sent on request.

These Headphones are extremely light in weight—only 3½ ounces. They can be worn for long periods without the slightest discomfort. They do not disarrange the hair and are designed to ensure long and reliable service.

S. G. Brown, Ltd.
SHAKESPEARE STREET, WATFORD, HERTS.
 Telephone: Watford 7241

RELAYS

TWO GENERAL PURPOSE TYPES



SERIES 100

A.C. OPERATED

SERIES 105

D.C. OPERATED

An extremely sturdy general purpose relay, which is available in a range of contact combinations from 1 pole normally open to 4 pole changeover, and 6 pole normally open, with a maximum contact rating of 10 amps 250v A.C. Normal power consumption is 3 watts, which can be reduced for the smaller contact assemblies if required. Vacuum impregnated coils can be supplied for tropical or humid conditions.

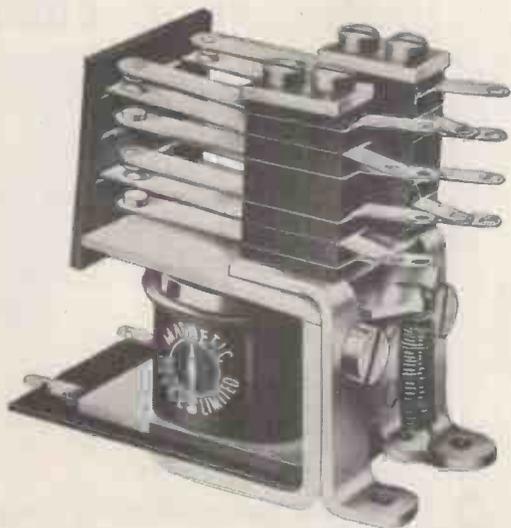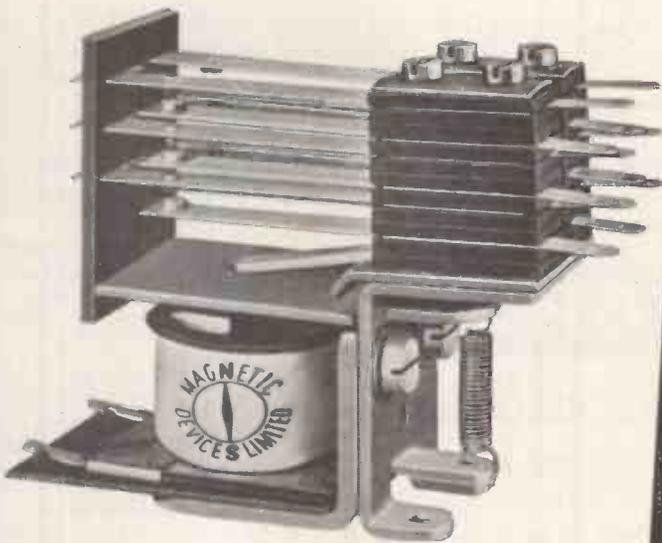

SERIES 600

A.C. OPERATED

SERIES 605

D.C. OPERATED

This relay is similar to the Series 100/105 and has been specifically designed for light duty applications. Featuring sturdy and extremely compact blade assemblies from 1 pole normally open to 4 pole changeover, and 6 pole normally open. The contacts will carry 5 amps at 250v A.C. Following the usual practice all contact connections are conveniently grouped at one end, and coils can be wound for either current or voltage operation to requirement. Vacuum impregnated coils if specified.

PHONE: NEWMARKET 3181-2-3.

TELEGRAMS: MAGNETIC NEWMARKET.



MAGNETIC DEVICES LTD
NEWMARKET

M.D.2A

A PORTABLE Tape Recorder with a frequency range of 40 c.p.s. to 14,000 c.p.s.



With two tape speeds of 3½ in./sec. and 7½ in./sec. respectively, the Grundig TK 819 records with true balance the smallest details of vocal, musical or mechanical sounds and reproduces them with absolute fidelity. The wider your experience of sound recording the more you will appreciate the technical achievement of this compact, superbly designed instrument . . . But make your own assessment!

ASK FOR A DEMONSTRATION. Most Radio and Photographic Dealers stock Grundig. Or write for folder to Grundig (Great Britain) Ltd., Kidbrooke Park Road, London, S.E.3.

GRUNDIG

TAPE RECORDER TK 819

Attractive Hire Purchase
Terms Available.

Features Include: Simple push-button controls; Magic Eye tuning device for recording and play-back; two tape speeds giving one hour of 'hi-fi' music recording or two hours perfect speech recording; built-in clock timing indicator.


PRICE 95 Gns. (less microphone).
Wide-range Grundig Ribbon Microphone 12 gns. or unique Moving Coil. Microphone 6 gns.



DESIGNED FOR THE CONNOISSEUR OF SOUND

6162

BROOKES Crystals

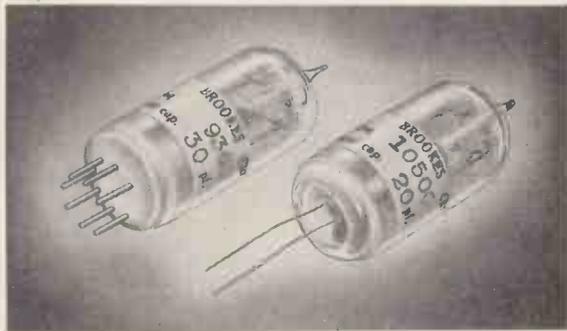

mean DEPENDABLE frequency control

• Illustrated above are two Type G Crystal units from a range covering 100 kc/s to 500 kc/s and 3 Mc/s to 20 Mc/s.

All Brookes Crystals are made to exacting standards and close tolerances. They are available with a variety of bases and in a wide range of frequencies. There is a Brookes Crystal to suit your purpose—let us have your enquiry now.



Brookes Crystals Ltd.,
Suppliers to Ministry of Supply, Home Office, B.B.C., etc.
EARLSWOOD STREET, GREENWICH,
LONDON, S.E.10 Phone: GRGreenwich 1828
Grams: Xtals Green, London. Cables: Xt'as London

CO-AX PRECISION CONNECTORS Better ON all COUNTS



- design
- machining
- performance
- price
- delivery



The most comprehensive range of
U.S. CONNECTORS outside the U.S.A.

CO-AX Connectors
CO-AX Cables R.G. Cables
Microdual drives

TRANSRADIO LTD. 138A Cromwell Rd. London SW7. FRE4421

Tel:

INDEPENDENT SIDEBAND RECEIVER

... developed to British Post Office
Specification

THIS new Independent Sideband Receiver type GFR 552 is designed for operation on long-distance, point-to-point, short-wave radio links forming part of the international trunk network. On independent sideband working, the GFR 552 provides facilities for the reception of two single sideband signals, each 6 kc/s wide, one above and one below the frequency of a reduced-level pilot carrier. Each sideband will accommodate either two 3 kc/s wide telephony channels, or several voice frequency telegraph channels. The GFR 552 may also be used for reception of single sideband or double sideband transmission. In the case of the second application this receiver offers two advantages: firstly, the absence of non-linear distortion which occurs in normal d.s.b. receivers when signals are subjected to selective fading conditions; and, secondly, the ability to select upper or lower sideband for demodulation, dependent upon which is freer from adjacent channel interference. The circuit and chassis layout of the GFR 552 closely follows that of the Mullard Receiver GFR 551, which was based on a British Post Office design (Receiver, Radio No. 22).

Special features of the GFR 552 include a high order of oscillator stability and freedom from cross-modulation through which cross-talk between channels or inter-modulation between wanted and unwanted signals might occur. A brief technical summary is given below. More detailed information supplied on request.

FREQUENCY RANGE—4-30 Mc/s..

NOISE FACTOR—better than 7 dB over the band.

SIGNAL TO NOISE RATIO—25 dB for 4 microvolts peak sideband input over the band.

SELECTIVITY—The response is flat within 2 dB for sideband frequencies between 100 c/s and 6000 c/s. At 10 kc/s from the carrier frequency the response is -60 dB relative to the pass band.

A.F.C.—The a.f.c. system operates effectively with a pilot carrier level of -26 dB relative to 1 microvolt (which corresponds to a peak sideband level of 1 microvolt and a signal to noise ratio of 15 dB).

NON-LINEAR DISTORTION—Third order intermodulation products which might result in cross talk between sidebands do not exceed -50 dB relative to the sideband levels.

OUTPUT—Variable up to +14 dB relative to 1 mW into 600 ohms.



Mullard



SPECIALISED ELECTRONIC EQUIPMENT


PHILIPS

Present...

GM 5660 HIGH SPEED OSCILLOSCOPE FOR PULSE, RADAR AND T.V. APPLICATIONS

Features:

- 1 Vertical sensitivity 100mVrms/cm.
- 2 Vertical amplifier 15 c/s—10 Mc/s (-3dB).
- 3 Amplifier gain 90 X.
- 4 Vertical input 1 M.ohm and 40 pF (Max.)
- 5 Built in pulse generator 220-2,500c/s.
- 6 Time base 2-50,000/u sec. in 5 ranges.
- 7 Built in post acceleration voltage.
- 8 Screen 10 cms. diameter.

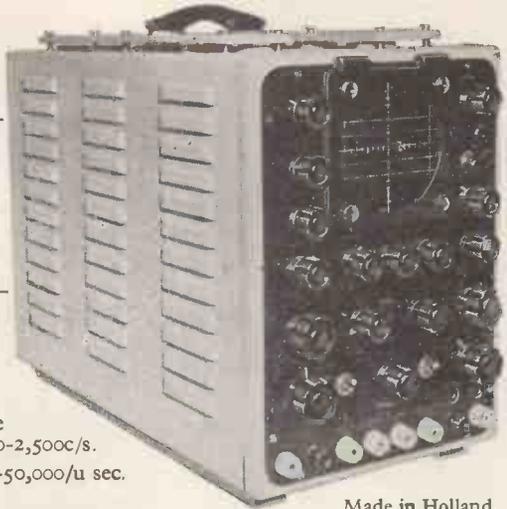

Made in Holland.



PHILIPS ELECTRICAL LIMITED

INDUSTRIAL PRODUCTS DEPARTMENT, CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2.

"THE OSCILLOSCOPE AND ITS APPLICATIONS" As a result of the great demand for the original book we have now reprinted the above publication. The new edition has been brought up to date and contains new data on the design of Oscilloscopes for pulse work and television. All the original information is still included, together with one hundred illustrated samples of the use of modern Oscilloscopes and associated equipment. *The "Oscilloscope and its Applications" can be obtained from us post free, at 5s. od. per copy.*

M. R. SUPPLIES Ltd.

(Established 1935)

Trustworthy offers of brand new material. Our selective buying is your guarantee of satisfaction. All prices nett.

ELECTRIC FAN UNITS (200/250 v. A.C.). By Woods (G.E.C.), fitted fine induction motor and 7 1/2 in. Impeller. Motor body has four radial pillars tapped at ends (with screws) ready for mounting either as extractor or cooling fan of high efficiency. New, in maker's cartons. A very few at only 5/6 each (despatch 2/-). Early application essential.

ADJUSTABLE COUNTERPOISE LAMPS (by well-known makers). Extended arm length 2ft., with two friction joints and spring counterpoise, to hold at any angle. Wired and fitted SBC holder and tilting shade. Lightweight and very handy in drawing office, machine shop, laboratory, etc. Under half usual price, 35/- (des. 2/6).

TUBULAR HEATERS. Fine tax-free bargain! 200/240 v., 300 watts. Length 5 feet. Cheap, efficient black heating, 29/6 (des. England only 3/6-2/- more elsewhere mainland). Also **STRIP HEATERS**, black heat, 230 volts, 230 watts. 13in. long by 1 1/2 in. wide. Suitable for small space heating, processing, drying cupboards, frost protection, etc., 4/6 each (des. 1/-) or 12 for 48/- (des. 2/6). Also **LOW VOLTAGE HEATER PADS**, 24 volts 75 watts, 4in. x 2 1/2 in., with terminal block, 2/6 (des. 6d.), or 29/6 dozen.

AIE THERMOSTATS (Brand new product of first-class manufacturer). Range 35/75 deg. F. (differential only 2 deg.). Capacity 15 amps. A.C. In neat housing 4in. x 2in. x 2in. and unbeatable value at 35/- (des. 9d.).

SYNCHRONOUS TIME SWITCHES (Sangamo). 200/250 v., 50 c. Up to 3 on-off operations each 24 hours, capacity 20 amps. Fitted day-omitting device (see optional). Size 4in. dia. by 3 1/2 in. deep. Easily installed and utterly reliable, 55/6 (des. 2/-).

SYNCHRONOUS ELECTRIC CLOCK MOVEMENTS, 200/250 v. 50 c. With spindles for hours, minutes, and seconds hands, in plastic dust cover 3 1/2 in. dia., by 2in. deep, with flex., ready for use, 2/6 (des. 1/-). Set of three hands, in good style, for 6/12 in. dial, 2/-.

MAINS VOLTMETERS (E.A.C.). Proj. switchboard type with 4in. dial, scaled 0/300 volts calibrated at 50 c. Fine accurate instruments, 4/6 (des. 2/-).

LONDEX RELAYS (type LF), 230 v. A.C. coil, with 3-pole 6 amp. "make" switching, silent in operation, 32/6 (des. 9d.).

PORTABLE VOLTAGE CHANGING TRANSFORMERS, 100/110 v. to 200/220/240 v. (and vice versa), cont. rated up to 1,000 watts. In portable steel case 8in. x 6in. x 6in. with carrying handle. The ideal unit for cine projectors. Brand new, at keenest "factory" price, 28/10/- (des. 5/-).

PHILIPS VARIABLE TRANSFORMERS (All the new models from stock). Input nominal 250 v. Output continuously variable 0/250 v. Examples—200 va. (panel mount), 27/5/- (bench) 27/12/6 (des. either 2/6). 520 va. panel or bench, 25/15/- (des. 2/6). 1040 va., panel, 212/17/6 (des. 2/6). And other ratings. Considerable expense is saved by using these fine units.

DUAL ELECTROMAGNETIC COUNTERS. Operation 20/24 v. D.C. (or 50 v. A.C.) and fitted with manual re-set. Each contains two separately energised counters each counting up to 9999 (speed up to 1,000 operations per minute). In cylindrical housing 3 1/2 in. dia. by 5in. deep, suitable for panel mount. Brand new, in moisture-proof pack, 37/6 (des. 1/6).

MICROAMMETERS (first-class makers). 0/50 Microamps. 1st gde m/coil in projection housing, 3 1/2 in. dia. by 5in. prof., 52/6 (des. 1/6).

We are stockists of Stuart Turner Electric Pumps, B.P.L. Measuring Instruments—details on request.

M. R. SUPPLIES, Ltd., 68 New Oxford St., London, W.C.1.

Telephone: MUSEum 2958

NEW! AMAZING "SELF-BUILD" FURNITURE

Superb quality—easy to assemble



NO SKILL NEEDED! NO SPECIAL TOOLS! Anyone can easily assemble one of these kits and **SAVE POUNDS!**



Think of it! Quality furniture—mainly in **SOLID Oak, Walnut or Mahogany**—so cleverly designed that you can easily put it together yourself and save pounds. Positively no skill needed. Everything tongued, grooved, dovetailed and satin-finished, ready for instant assembly. It's easy, it's fascinating, and you get superb quality furniture at really astonishing prices.

THIS BOOK WILL TELL YOU Find out about this exciting new idea by sending for illustrated book, "I Made It Myself!" Full specifications of the timber used and details of 30 Kits, including ideal gifts like Occasional Tables, Bookcases, Cots, Child's Desk and Chair, Tea Trolleys, Nest of Tables, Bathroom Furniture, Needlework Cabinets (every woman wants one!), kitchen cabinets, etc., real photos, dimensions, and 100 per cent. Satisfaction or No Charge Guarantee. Send for this intriguing book now—**FREE** and without obligation.



FREE! SEND NOW

YES... please send me Free Book and details of Easy Payments. Write if you prefer not to cut page.


NAME

ADDRESS



FURNI-KIT (Dept. W.S.3)
29/31, WRIGHT'S LANE, LONDON, W.8

Parts fit like magic! No skill needed!

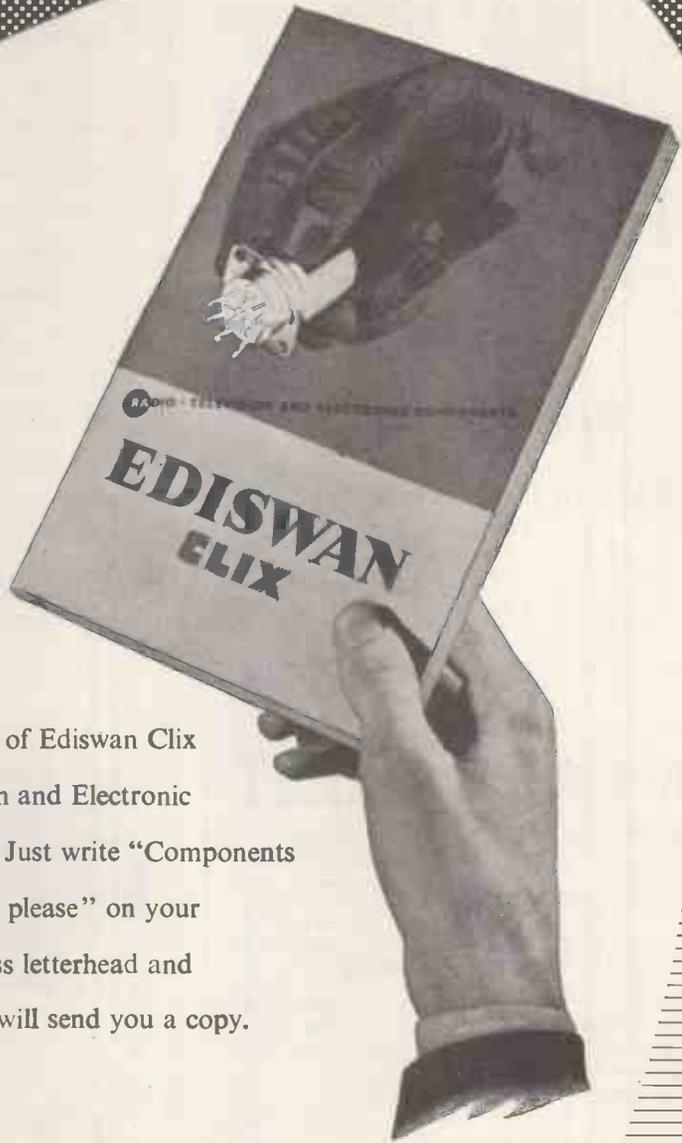

MANUFACTURERS OF
EQUIPMENT, and
DEVELOPMENT GROUPS
are invited to send
today for this NEW

complete catalogue of Ediswan Clix
Radio, Television and Electronic
Components. Just write "Components
Catalogue please" on your
business letterhead and
we will send you a copy.

EDISWAN

CLIX

RADIO COMPONENTS

THE EDISON SWAN ELECTRIC COMPANY LIMITED, *Member of the A.E.I. Group of Companies*
155 Charing Cross Road, London, W.C.2 and Branches. Telephone: Gerrard 8660. Telegrams: Ediswan, Westcent, London.
C.R.1a Radio Components Sales Office: 21 Bruton Street, London, W.1 Telephone: Mayfair 5543

A new edition of an invaluable reference book

RADIO LABORATORY HANDBOOK

M. G. Scroggie, B.Sc., M.I.E.E.

6th Edition
now ready

25s. net BY POST 26s. 3d.

8½in. × 5½in. 460 pp.

Available from booksellers or direct from :—

Iliffe & Sons Limited, Dorset House, Stamford Street London S.E.1

This well-known practical work describing laboratory equipment and methods of operation has now been entirely re-written and greatly enlarged. Among the subjects considered are layout and furnishing of premises, methods of measurement, sources of power and signals, indicators and other instruments and circuit and signal measurements. There is a comprehensive references section, and the text is supplemented by many photographs, diagrams, graphs and tables.

ASK ARTHURS FIRST

★ **NEW VALVES** Send your enquiries for all Radio and Electrical goods, especially those in short supply.

We have probably the largest variety of valves in the country. Let us know your requirements.

AVO METERS IN STOCK

Avo Model 7	£19 10 0
Avo Model 8	£23 10 0
Signal Generator, Mains and Battery Models	£30 0 0
Electronic Test Meter	£40 0 0
Valve Characteristics Meter	£60 0 0

Also full range **TAYLOR METERS**. List on request

VALVE MANUALS

Mullard	5 0
Osram	5 0
Brimar No. 5	5 0
Mazda, Part 2	2 0
Mullard Valve Replacement Guide	2 6
Art and Science in Sound Reproduction by F. H. Brittain, D.F.H.	2 6

Postage 6d. each extra.

Leak TL/10 Amplifier and "Point One" Preamplifier complete	£28 7 0
Chapman Tuning Units	£17 6 8
Leak Tuning Unit	£35 6 3
Grundig Tape Recorder	£68 5 0
Grundig Microphone ...	£6 6 0

Recording Tapes: All makes in stock.

Terms C.O.D. or Cash with order. Goods offered subject to being unsold and to price alteration.

Arthur's EST. 1919

PROPS: ARTHUR GRAY, LTD.

GRAY HOUSE, 150-152 OHARING CROSS ROAD, LONDON, W.C.2
TEmple Bar 5833/4 and 4765. Cables: TELEGRAY, LONDON



AUDIO AMPLIFIER MODEL AC/34



A small three valve, three stage, audio amplifier for operation on 200/250 v. A.C. 50 cycles (100/125 v. to special order).

INPUT. Voltage 30 mV. Impedance 0.5 megohm.

OUTPUT 4 watts impedance 2-4 ohms.

RADIO. Power for a feeder unit is available.

MICROPHONE. Crystal pattern recommended.

PICK-UP. High-fidelity crystal types need no special matching.

High-fidelity magnetic pick-ups can also be used.

CONTROLS. Volume, Tone and on-off.

VALVES. 6SL7, 6V6, 5Y3.

CHASSIS DIMENSIONS. 7in. by 5in. by 2in.—overall height 5½in.

LIST PRICE
£7 : 10 : 0

Each Amplifier is supplied with 12 months' guarantee.

LEE PRODUCTS (GREAT BRITAIN) LTD.
Elpico House, Great Eastern Street, London, E.C.2.

Vitavox make very good microphones, loudspeakers, horns and pressure units


We will gladly send you our catalogue and full information on request

VITAVOX LIMITED, Westmoreland Road, London, N. W. 9. Telephone: COLindale 8671

YES—We have them all

- B.J. Tracking Arm £2 6 0
- G.E.C. Metal Cone, 8in. loud-speaker £8 15 0
- TRANSISTORS, Mullard Point, 30/-; Junction type..... £2 0 0
- LEAK TL/10 Amplifier and Point One pre-amp..... £28 7 0
- LEAK Dynamic Pick-up with plug-in heads fitted diamond Scyli (L.P. or Std.), with one head £11 9 6 (Extra heads £7/15/3 each.)
- LOWTHER F.M. Unit Var. Tuning 85-100 Mc/s. F.M. or A.M. £22 0 0
- SOUND SALES F.M. Unit 86-100 Mc/s. Variable Tuning F.M. or A.M. (with aerial) £15 10 0
- QUAD II Amplifier with control unit (record equalising and pick-up matching) £42 0 0

8-VALVE ARMSTRONG SUPERHET




8 watts push-pull output, Negative feedback, Bass and Treble controls
2 Short, medium and long wave bands. Provision for F.M. Adaptor.

£23/18/-. Or £8 down and 12 monthly payments of 29/3.
Also 10 valve Superhet Chassis (Model RF41) £31 19 8

"Q-MAX" CHASSIS CUTTERS

STILL the easiest and quickest way of cutting holes in SHEET METAL.

each	
3" or 2" ...	11/6
1" 11/2" or 1 3/4" ...	12/6
1 1/2" or 1 1/4" ...	14/9
1 1/2" or 1 1/4" ...	16/6
2 1/2" ...	18/6
2 1/2" ...	30/-
2 1/2" ...	35/-
1 square ...	23/-
Keys, small, 10d.; medium, 1/3; large, 1/9.	



Patent No. 619178



"Q-MAX" MODEL G.D.O.I.A. GRID DIP OSCILLATOR

is an ideal instrument for the determination of tuned circuit resonant frequency, tuning transmitters without application of power, for the determination of coil mutual and stray inductances and both fixed and stray capacitances. Covers 1.5 to 300 Mc/s. (in eight ranges). PRICE: 12 Gns. Complete. (Or 4 Gns. Dep. and 12 monthly payments of 15/5.)

GRAMOPHONE UNITS



"COLLARO" 3-sp. Studio TRANSCRIPTION DESK. Heavy duty non-ferrous balanced turntable. 100% dynamically balanced rotor assembly. Off position between each speed change. Rumble, wow and flutter free. PRICE, less pick-up and arm £13 9 6 (With Studio Pick-up £4/15/3 extra.)

COLLARO
3/544 3-sp. with Studio Pick-up £10 6 11
3/RC/531, do., auto. £15 3 10

GARRARD
TA/AC or TB 3-sp. (less heads) £8 10 11
TA/AC T/O Crys. head, £2/5/1. T/O Mag. head, £2/8/-.

HGP 35/1 Std. or L.P. (for TA/AC), each £2/2/11.
DECCA XMS (for TB) £2 14 8

CONNOISSEUR
3-speed Transcription Desk £23 8 11
Pick-up with one head (extra heads 66/3), £5/19/3. Head with Diam. Styli, £7/8/11.

BERRY'S (SHORT WAVE) LTD.

25 HIGH HOLBORN, LONDON, W.C.1
TEL. HOLBORN 6231

THE "WILLIAMSON" AMPLIFIER

This is a world-wide known HIGH QUALITY AMPLIFIER, BUT high quality can ONLY be obtained if precision quality products as specified by the designer are used. WE can supply ALL COMPONENTS, including precision condensers and resistors, potted transformers and chokes. EXACTLY AS SPECIFIED, not substitutes.

*Quality minded people
the world over
are choosing the
Ambassador VISCOUNT*

This new radiogramophone version offers world-wide performance, eight wavebands, all coll ranges, six electrically bandspread. Garrard record changer. Record storage compartments for 200 records. 10" speaker. £79.10.0. in Gt. Britain. Export prices on application.



SEE it's **AMBASSADOR**

AMBASSADOR RADIO & TELEVISION, PRINCESS WORKS, BRIGHOUSE, YORKSHIRE

GIVE YOUR WINDINGS A GOOD LIFE

IMPREGNATE WITH A BLICKVAC
HIGH VACUUM IMPREGNATOR



Full range of models available to meet the needs of

- ★ The large-scale Producer.
- ★ The Research Laboratory.
- ★ The small Rewind Shop.

**BLICKVAC UNITS MEET THE
MOST STRINGENT SPECIFICATIONS.**

Outstanding features:

- ★ Ease in Control.
- ★ Simple attachment of auxillary autoclaves.
- ★ Best quality fittings.
- ★ Fully demountable to facilitate cleaning.

UNEQUALLED FLEXIBILITY AND PERFORMANCE.

Units available for:
VARNISH
WAX

BITUMEN
POTTING RESINS

If your problem is *Coil Impregnation*

CONSULT BLICKVAC

Write today to

HAMILTON ROAD WORKS, HAMILTON ROAD, S.E.27
Associated with Blick Time Recorders Ltd., Blick Engineering Ltd.

• TAPE RECORDERS •

Send for our leaflet AM/31, with illustrations and full details of most modern tape recorders using British/U.S.A. Standard left/right top track recording sense, together with attractive Personal Payment Terms. Prompt Mail Order Service.

Examples	Cash	Deposit	Weekly
PLAYTIME —Single knob control. To play back through your own radio, etc. Playing time 1 hour. Weight 16 lbs.	26 Gns.	£5/10	7/3
EDITOR —With all the features you are likely to need. Two colour case. Complete with mic. and tape	45 Gns.	£9/9	12/-
SOUNDMASTER KIT —Splendid performance and well worth building. Complete with case, mic. and 1,200 feet tape, approx.	60 Gns.	£12/12	16/3
GRUNDIG TK 9 —With all the features you could possibly want. Playing time 1½ hours. All push button Weight 28 lbs.	65 Gns.	£13/13	17/6
GRUNDIG 819 —All features as TK 9 plus studio quality 40-14,000 c.p.s. Two hours playing time. 4½ watts undistorted output, etc.	95 Gns.	£19/19	25/9
CONVERTOR —6 or 12 volt input 230 A.C. smoothed output, suitable to run tape recorders from car battery	13 Gns.	£2/15	5/6

ALSO Tapes, recording accessories, record players and amplifiers.

• TELERECORDING RADIOGRAMOTAPE •

Have you the "chaotic" problem of parking all the units? We have a unique Trolley Cabinet which will house the lot—including table T/V—on a floor space of 22 x 16 inches. For armchair control. Tape recorder is "built in" yet remains portable. In medium walnut 10 Gns. Ask for illustration and details.

• AERCO •

ADDLESTONE · WEYBRIDGE · SURREY

Exceptional Chassis
with provision for frequency modulation tuner

Announcing the NEW *Armstrong* F.C. 48

OUTSTANDING FEATURES INCLUDE :-

*8 Valves including 2 double Triodes. *8 watts output from push-pull tetrodes. Heavy negative feed back is used resulting in negligible distortion and high damping factor. *Provision for using F.M. adaptor to receive the present high quality transmissions from Wrotham and the new B.B.C. V.H.F. stations. *An accessible socket at rear provides the power supply for this unit. **THE F.M. UNIT WILL BE**

AVAILABLE SHORTLY. *Independent controls give BASS and TREBLE lift and cut with unique Thermometer visual indicator. *Magic eye tuning Indicator. *4 wave - bands. Coverage—16-51, 50-120, 190-550. 1,000-2,000 metres. *Components by T.C.C., Woden and Morganite, etc. *Large four-colour illuminated dial.

PRICE £23/18/- (including P.T.)

OTHER MODELS :-

R.F. 41. Ten valves, four wavebands, ten watts of audio. R.F. stage and 2 I.F. stages. PRICE £31/19/8 (inc. P. Tax). EXP. 125/C. 14 valves, 5 wave-

bands, 15 watts of high quality audio output. Provision for F.M. adaptor as provided on the F.C.48.

PRICE £49/10/- (inc. P. Tax).

EXPORT MODELS :-



EXP. 119. 10 valves, medium and two short wavebands plus six bandsread channels, 10 watts output. PRICE £55/19/4 (inc. P. Tax).

BS.125. A 15-valve chassis giving 15 watts of audio. Medium and two short wavebands plus six bandsread channels. PRICE £70/12/6 (inc. P. Tax).

PLEASE WRITE FOR FULL DESCRIPTIVE LITERATURE

ARMSTRONG

WIRELESS & TELEVISION CO., LTD., WARTLERS ROAD, HOLLOWAY, N.7. Tel.: NORTH 3213

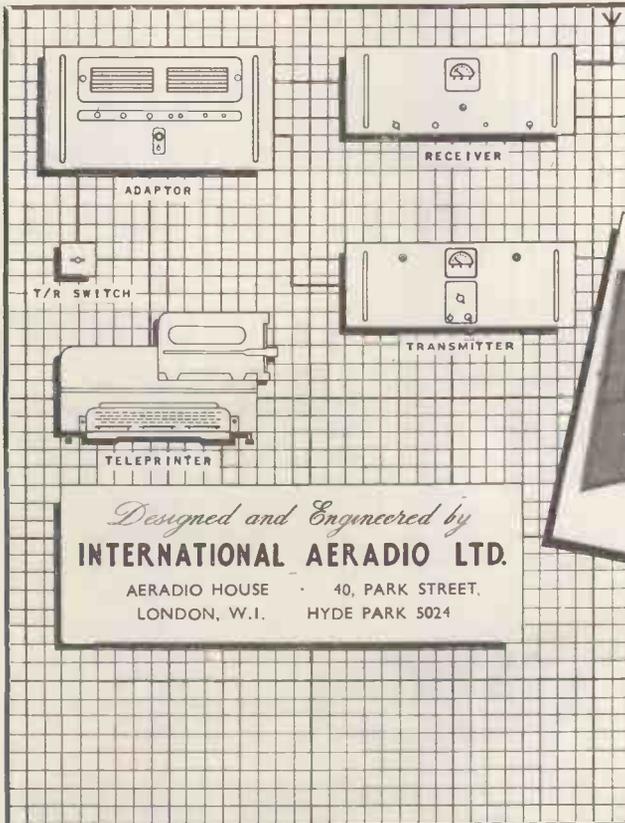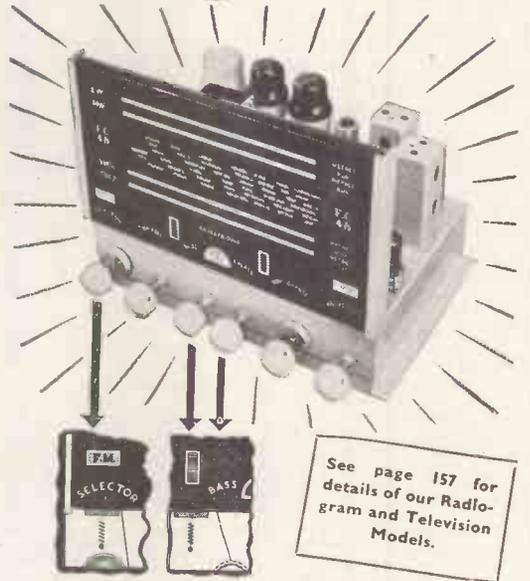

Designed and Engineered by
INTERNATIONAL AERADIO LTD.

AERADIO HOUSE 40, PARK STREET,
LONDON, W.1. HYDE PARK 5024

Introducing THE I-A-L SHORT RANGE RADIO TELEPRINTER TERMINAL



The International Aeradio VHF short range radio teleprinter terminal is designed to combine the highest engineering standard with low initial cost. This equipment is especially valuable where landline facilities are unreliable or not available, as may happen between a town and its airport.

MODERN ELECTRICS LTD.

164 Charing Cross Road, London, W.C.2.

Tel.: TEMple Bar 7587.

Cables: Modcharex, London.

Export enquiries welcomed.

Immediate delivery from stock.

Prompt attention to post orders.

TAPE RECORDERS

GRUNDIG 819.....	£99	15	0
GRUNDIG TK9.....	£68	5	0
BAIRD Mk. II.....	£61	19	0
BAIRD Soundmaster.....	£68	5	0
FERROGRAPH 2A.....	£79	16	0
VORTEXION 2A.....	£84	0	0
EDITOR.....	£47	5	0
ELIZABETHAN.....	£50	8	0
WEARITE TAPE DECK.....	£35	0	0

RECORDING TAPES

GRUNDIG L.G.S. 1,200ft.....	£2	0	0
850ft.....	£1	14	0
FERROVOICE 1,200ft.....	£1	2	6
Spare Spools.....	4	6	
E.M.I. 1,200ft.....	£1	15	0
E.M.I. 600ft.....	£1	1	0
GEVAERT 1,200ft.....	£1	15	0
SCOTCH BOY 1,200ft.....	£1	15	0
600ft.....	£1	1	0
Spare Spools, 1,200ft.....	4	6	
Spare Spools 600ft.....	3	3	
FERROGRAPH 1,200ft.....	£2	5	0
1,750ft.....	£3	3	0
8 1/2 in. Spools.....	9	6	
AGFA 1,200ft.....	£1	17	6
600ft.....	£1	2	6
Lead on tape 150ft.....	8	0	

RECORD REPRODUCING EQUIPMENT

COLLARO TRANSCRIPTION Model 2000.....	£13	9	6
Model 2010.....	£18	6	6

GARRARD UNITS RC75M, RC75 A.C./D.C., RC80M, TA/AC, TA/B for Decca heads.			
--	--	--	--

CONNOISSEUR 3-spd.....	£23	8	11
------------------------	-----	---	----

SPEAKERS

TRUVOX 12in. 3Ω.....	£2	5	0
----------------------	----	---	---

W.B. STENTORIAN HF. 610.....	£2	10	6
HF. 810.....	£3	0	6
HF. 912.....	£3	7	0
HF. 1012.....	£3	13	6

GOODMANS Axiom 160 Mk. II.....	£10	5	6
Axiom 102.....	£9	18	2
Axiom 101.....	£6	12	1

WHARFEDALE W15 CS.....	£17	10	0
Super 12 CS/AL.....	£17	10	0
W12 CS.....	£9	15	0
Golden 10 CSB.....	£8	6	7
Super 5 and 8 CS/AL.....	£6	13	3
Bronze 10in.....	£4	12	9
Bronze 8in.....	£3	4	0
W.B. Crossover Unit.....	£1	6	6
W.B. Tweeter Unit.....	£3	15	6

TEST EQUIPMENT

AVO Model 8.....	£23	10	0
Model 7 (latest).....	£19	10	0
Unimior Mk. II.....	£10	10	0
Electronic Meter.....	£40	0	0
Wide Band Sig.Gen.....	£30	0	0
Valve Characteristic Meter.....	£60	0	0
D.C. Minor.....	£5	5	0
10kV Multiplier for Model 8.....	£3	5	0
Carrying Cases for Models 7, 8 and 40.....	£3	0	0

ADVANCE H.I (Sig/Gen).....	£25	0	0
E.2 (Sig/Gen).....	£28	0	0
J.I New Model.....	£35	12	0
P.I.....	£19	19	0

COSSOR Oscilloscope 1035.....	£120	0	0
Oscilloscope 1052.....	£104	0	0
Volt: Calibrator 1433.....	£18	5	0

TAYLOR All new Taylor Test Gear in stock.			
---	--	--	--

PICK-UPS

ACOS Hi G 20.....	£3	8	4
DECCA X.M.S. Magnetic.....	£6	9	5
CONNOISSEUR Super L/weight.....	£9	5	6
Spare Heads.....	£3	6	3
COLLARO STUDIO Type O or P.....	£3	14	4

ACOS Mic 22 (Crystal).....	£4	4	0
Mic inserts for above.....	£1	0	0
Mic 16 (Crystal).....	£12	12	0
Mic 35-1 (Crystal).....	£1	5	0

LUSTRAPHONE M/C with T/F CS1.....	£5	15	6
Table base for above.....	£1	1	0
RESLO M/C (Low Imp.).....	£6	0	0
URA Ribbon.....	£7	5	0
RVA Ribbon.....	£9	0	0
Mumetal Transformer.....	£1	15	0

MICROPHONE STANDS Floor, 3 extensions.....	£3	12	6
Table Stand.....	£1	1	0

LEAK AMPLIFIERS TL.10 complete.....	£28	7	0
Point 1, TL.12.....	£28	7	0
Point 2, TL.25.....	£34	7	0
Vari-slope pre-amp.....	£12	12	0
Type VS RF Tuner Unit.....	£35	1	3

SOLO. New Instrument Iron 200-250 v. 25 w.....	19	8	
--	----	---	--

ALL GARRARD, CONNOISSEUR, DECCA and COLLARO HEADS, SAPPHIRE and DIAMOND STYL! for the above HEADS NOW AVAILABLE.

H.P. Tweeters available on all items over £10 . 0 . 0



Heat, shock and moisture proof.
Diameters from 0.5 mm. to 30 mm.
in 36" lengths. It is manufactured
in all colours and bi-colours.

SPICERS LIMITED

19 New Bridge St., London, E.C.4. Tel.: CENTral 4211



DC-DC CONVERTERS

for changing low voltage DC to a higher voltage DC—
providing anode supply to amplifiers, radio transmitters, etc. Prices from £7.6.0.

DC-AC CONVERTERS

accepted
as the
standard

for use with

ELECTRIC GRAMOPHONES · RADIOS
RADIOGRAMS · AUTOCHANGE
RADIOGRAMS · TELEVISION
TAPE RECORDERS · TV from
Country House Lighting Plants (price
according to instrument).

Prices: From £8.16.0—for small
motors—or from £11.16.6—for radio-
grams (including 3-speed types).

Inputs: 6, 12, 24, 32, 50, 110 or
200/250v. D.C.
Outputs: 110v. or 230v. 50 or 60 cfs.
30w. to 300w.

Units complete & ready for use.

Write for descriptive folder W.W.



Specialists in Converters since 1937

NEW CHAPEL RD., HIGH ST., FELTHAM, MIDDX. Tel: FELTHAM 4242
Service Dept: 57 Fortess Road, London, N.W.5. GULlver 5165 & 7202
Overseas enquiries to nearest E.M.I. Organisation Depot.

Great Britain's Valve Mail-Order House

One Year's Guarantee

IR5	18/5	12A7T	22/1
IR5	18/5	12AU7	22/1
IT4	14/8	12AX7	22/1
384	14/8	12SA7	20/2
3V4	14/8	12SK7GT	
01A	7/4		18/5
1A4	13/3	12SQ7GT	
1B4	13/3		15/1
IF4	10/2	25L6GT	18/5
1E5G	12/-	3Z5GT	13/3
IF5G	11/4	50L6GT	16/5
1J6G	12/-	10	12/-
5Y3GT	13/3	22	18/3
6A4	15/1	80	13/3
6AL5	11/4	81A	18/11
6AQ5	11/5	71A	8/10
6AT6	15/1	112A	12/-
6AV6	22/1	1A7GT	18/11
6BA6	16/5	1C5GT	14/6
6X4	13/3	1H5GT	14/6
6J6	31/6	1N5GT	14/6
6SA7GT	20/2	3A4	18/11
6SK7GT	18/5	3A5	31/6
6SQ7GT	15/1	6X5G	13/3
6V6GT	18/5	156L1(W4)	
7E7	14/8	EK32	22/8
AZ1	13/3	EL3(N)	20/2
AZ51	13/3	EL33	18/5
AZ50(DW4)		EL37	22/1
CB1L	22/1	EL38	25/2
CL4	20/2	EL41	18/5
CY1	13/3	EM1	16/5
EB41	11/4	EM4	18/5
EB91(6AL5)		EM34	18/5
		GZ34(GZ33)	
EBC33	15/1		18/6
EBL1	22/1	EY61	25/2
EBP80	18/11	EZ40	13/3
ECC40	22/1	EZ41	13/3
ECH3	22/8	PY80	15/9
ECH25	20/2	PY81	18/11
ECH42	20/2	PY82	13/3
ECL80	23/4	PL81	16/5
EP1	19/6	PL82	16/5
EF37A	22/1	UBC41	15/1
EF39	16/5	UBL21	20/2
EF40	22/1	UCH21	20/2
EF41	16/5	UF41	16/5
EF50	22/1	UY41	16/5
EF60	22/1		13/3
EF91	22/1		Post 9d.

SALE (2,000 101) VALVES FROM 2/-

01A	2/-	6F32	6/-
1B4	3/-	4TSP	5/-
IH6	3/-	138PA	5/-
1LN5	7/-	41MTL	3/-
2A6	2/-	71A	2/-
2A7	3/-	202STH	8/-
2B7	2/-	220PT	4/-
6F7	6/-	ACHLDD6	6/-
6J7	5/-	EP6	17/8
9D2	4/-	KT283	5/-
12A	2/-	MSP4	5/-
128F5	6/-	MSPen	5/-
21	2/-	MSPenB	5/-
34	3/-	P2	3/-
35L6	8/-	P215	2/-
48	4/-	PM12M	3/-
50Y6	8/-	PM24A	7/6
954	2/-	SP13	4/-
117Z6	7/-	VP13C	7/-
4TSA	6/-		Post 9d.



DEMOSSED Valves "Manual" 2/3

Giving equivalents of British and American Service and Cross Reference of Commercial Types with an Appendix of B.V.A. Equivalents and Comprehensive Price List. We have still some Valves left at very old Budget Rates (33% which are actually sold at the old price. (1951 rate).

PIFICO
All-in-one Radio-meter A.C./D.C.
Tests everything in Radio. Complete with Test prods. 29/6. Post 1/6



TYANA TRIPLE THREE
Small Soldering Iron Latest development. Complete with detachable bench stand, 19/6. Post 1/-.

Deposit and Monthly 10/-
AG ELECTRIC PAINT SPRAYER
Easier than a brush and twice as fast. Post 75/-



2/- Ceiling Adaptor Free.
Electric PAINT STRIPPER
Outdates blow lamp. It's a unique foolproof electric tool. Easier and Faster. Clean and safe. Old paint goes like magic. Cost 1d. per hour. A.C./D.C. Complete. Guaranteed.

TAYLOR METERS
on EASY TERMS ask for Catalogue

RADIO STETHOSCOPE

A novel device aptly called a Radio Stethoscope is described in a recent edition of the "Radio Constructor." With it in most districts a receiver can be checked from the grid of the first valve right through to the output. It is a complete fault-finder. The only parts needed to make the simple circuit tracer are a pair of crocodile clips, a germanium crystal, and a paper tubular condenser, and we will supply whole outfit for 6/6, post free, and with each outfit we will give reprint of the article as it appeared in the "Radio Constructor."



RADIO BULL'S VALVES 246.HIGH ST. HARLESFORD RW10



BLACK & DECKER
HANDY UTILITY 1/2" Portable Electric DRILL
Deposit £2
CASH PRICE £5/19/6
or 9 easy payments.



Chassis Cutters with Keys
The easiest and quickest way of cutting holes in sheet metal. The cutter consists of three parts: A die, a punch and an Allen screw. The operation is quite simple. Prices incl. key: 1 1/2 in. 12/4; 1 in. 12/4; 1 1/4 in. 13/4; 1 1/2 in. and 1 3/4 in. 16/- each; 1 1/2 in. and 1 3/4 in. 18/- each; 1 1/2 in. 19/9; 2 1/2 in. 31/9; 2 1/2 in. 36/9; 1 in. square 24/3. Post 1/-.

10/6 monthly.

ROD Antennas. 1ft. sections interlocking and extending, copper plated steel. BARGAIN. 2/6 dozen.



B.T.E. GERMANIUM CRYSTAL DIODE. Complete with Blueprint and operating instructions. 2/-



7/6 REDUCED 7/6 FROM 21/-

Pre-heated Electric Soldering Irons. 24 v. 36 Watts. Press button switch fitted. Corrosion-free Blk. Specially designed for fine work. Limited quantity.

"2000" AUTOMATIC BLOWLAMP



SERVICE SHEETS
The one you require enclosed if available in a dozen assorted of our best choice. 10/6.



An excellent microphone that's what is said about this **Ronette type HM** crystal handmicrophone



When we claim our HM the finest handmicrophone ever made we do not exaggerate. A patented filter cartridge, obtainable in a variety of voltage/frequency response curves, built into a sturdy die-cast housing of beautiful contour and finished in fine hammered laquer, either brown or gray.

HM type microphones have a screened cable attached and can be mounted to all standard types microphone stands.

Sole Importers to Great Britain!
TRIANON ELECTRIC LTD. LONDON NW10
95, Cobbold Rd., Willesden Telephone: Willesden 2116
Sole Distributors for the wholesale and retail trades only:
E. & G. DISTRIBUTING CORPORATION LTD.
33 Tottenham Court Road, London, W1 Telephone: Museum 6667

No end in view?

Will a miniature moulded component solve YOUR problem of space and weight?

Amplivox Ltd., specialise in the manufacture of a variety of miniature plastic plugs (moulded on extruded p.v.c. insulated tinsel cords) sockets, "Y" junctions, etc. in urea, p.v.c., or any of a wide range of injection moulding materials.

All Amplivox cordage is nylon strengthened copper or silver tinsel and is ideal wherever constant flexing is of primary importance. Quantity supplied to order in various colours and sections, screened, or unscreened. Manufacturers' Enquiries Invited.



AMPLIVOX LTD.

2, Bentinck Street, London, W.1. WELbeck 2591

PROGRESS... The Result of Splendid Effort!

P.V.C. AND POLYTHENE SLEEVINGS INSULATED WIRES AND FLEXIBLES

British enterprise, energy and ingenuity produced the Jet Engine... There is no limit to British achievements... There is also no end to the insulating Sleevings which we produce for many industrial applications.

A.I.D. Approved

PLASTICABLE LIMITED HAWLEY LANE, FARNBOROUGH, HANTS Phone: Farnborough, Hants 85

MANUFACTURERS of MAGNETIC RELAYS POST OFFICE TYPE

3,000 and 600

Contractors to: H.M. GOVERNMENT AND LEADING MANUFACTURERS

COILS up to 80,000Ω. CONTACTS up to 8 amps. INSULATION up to 5 kV.



Specialists in Tropicalisation and Inter Services Jungle Finish.

Conforming to A.I.D. and C.I.E.M.E. standards.

PROTOTYPE Relays made to specification.


POST OFFICE TYPE KEYS supplied to specification.

Speedy deliveries Enquiries invited



A.D.S. RELAYS LTD. Dept. W.W. 12, STORE STREET, LONDON, W.C.1. Tel.: MUSEum 2453

A. C. SOLENOID TYPE SB.



Continuous 2.3/8 lb. at 1" Instantaneous to 16 lb.

100% PRODUCTION INSPECTION

Smaller Sizes Available. Also Transformers to 6 KVA 3 Phase

R. A. WEBBER LTD. 18 FOREST ROAD, KINGSWOOD, BRISTOL: PHONE 74065

THE WORLD'S GREATEST BOOKSHOP

FOYLES FOR BOOKS

All new Books available on day of publication. Secondhand and rare Books on every subject. Stock of over three million volumes.

Subscriptions taken for magazines.

Foyles have depts. for Gramophone Records, Handicraft Materials, Stationery, Music.

119-125 CHARING CROSS ROAD, LONDON, W.C.2

Gerrard 5660 (16 lines) Open 9-6 (Thurs. 9-7)

Nearest Station: Tottenham Court Road



Group of Magnifiers by GOWLLANDS


Marland Road Croydon Surrey

Obtainable from all Scientific Instrument & Small Tool Dealers

PREMIER RADIO CO.

B. H. MORISS & CO. (RADIO) LTD. EST. 40 YRS.

(Dept. W.W.) 207 EDGWARE RD., LONDON, W.2. Tel.: AMBassador 4033 & PADdington 3271

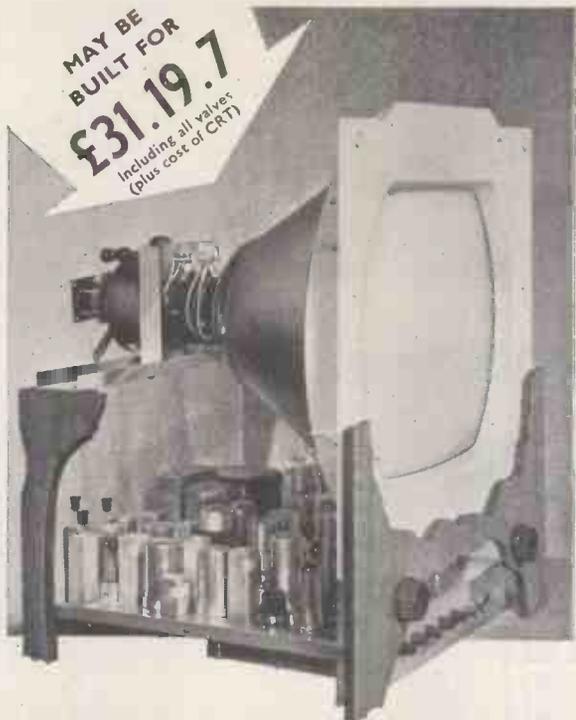

THE COMPLETE TELEVISOR IS SAFE TO HANDLE, BEING COMPLETELY ISOLATED FROM THE MAINS BY A DOUBLE WOUND MAINS TRANSFORMER. ALL PRESET CONTROLS CAN BE ADJUSTED FROM THE FRONT, MAKING SETTING UP VERY SIMPLE.

The NEW PREMIER TELEVISOR

USING THE ENGLISH ELECTRIC CATHODE RAY TUBE T901

Brief Technical Details are as follows:

20 valves (plus tube) Superhet Receiver, tunable from 40-68 Mc/s without coil or core changing. Wide Angle scanning Flyback EHT giving 14 kV, Duomag Focalliser, permanent magnet focussing with simple picture centring adjustments, suitable for any wide angle Tube, may also be used with a 12in. Tube with very minor modifications.

VISION CIRCUIT. Common RF Amplifier, single valve frequency changer, two IF stages, Video Detector and Noise Limiter followed by special type of Video Output Valve. ALL COILS PRE-TUNED ASSURING ACCURATE ALIGNMENT AND EXCELLENT BANDWIDTH.

SOUND CIRCUIT. Coupling from anode of frequency changer, two IF stages, Double Diode Triode detector and first LF Amplifier, Diode Noise Limiter and Beam type Output Valve, feeding a 10in. Speaker. ALL COILS PRE-TUNED.

TIME BASES. 2 valve sync. Separator, giving very firm lock and excellent interlace.

LINE TIME BASE. Blocking Oscillator using a pentode driving a high efficiency output stage comprising Ferroxcube Cored Output Transformer with Booster Diode.

FRAME TIME BASE. Blocking Oscillator driving a Beam Output Valve coupled through a Transformer to the high efficiency FERROXCUBE Cored Scanning Coils.

POWER PACK. Double wound Mains Transformer supplying all L.T. and H.T. using two full-wave Rectifiers.

The Televisor may be constructed in 5 easy stages: (1) Vision, (2) Time Base, (3) Sound, (4) Power Pack, (5) Final Assembly. Each stage is fully covered in the Instruction Book, which includes layout, circuit diagrams and point-to-point wiring instructions.

The Instruction Book also includes full details for converting existing Premier Magnetic Televisors for use with modern wide angle tubes. All components are individually priced.

Instruction book 3/6, Post Free.

PREMIER TELEVISOR CONSOLE CABINETS

For 14", 16" and 17" Televisors

A handsome Walnut Cabinet that will be a fitting housing for a first-class Televisor.

Folding doors are fitted to cover the Cathode Ray Tube when not in use. A flap is provided which gives access to the preset controls on the front edge of the Chassis. A baffle board suitable for a 10in. Loudspeaker and all the necessary Tube and Chassis bearers are included. The overall dimensions of the Cabinets are the same: Height 38½in. Width 19in. Depth Top 19in. Depth Bottom 21in.

TUBE ESCUTCHEONS

17in. White Moulded	21/- (pkg. & post 1/6)
17in. Bronze Moulded, complete with Protective Glass	48/- (pkg. & post 2/6)
14in. Black Moulded	7/6 (pkg. & post 1/-)
Dark Screen Filter suitable for 14in. Tube	21/- (pkg. & post 1/6)
Dark Screen Filter suitable for 16in. and 17in. Tubes	25/- (pkg. & post 1/6)
Polystyrene Mask for E.E.T.901	45/4 (pkg. & post 2/6)
Rubber Ring (anti-Corona) for E.E.T.901	6/8
Polystyrene Shroud for E.E.T.901	6/2

PRICE **£13-10-0** PLUS 21/- PKG. & CAR. H.P. TERMS: DEPOSIT £4.10.0 & 12 MONTHLY PAYMENTS OF 16/11

TERMS OF BUSINESS: Cash with order or C.O.D. over £1. Please add 1/- for Post Orders under 10/-, 1/6 under 40/-, unless otherwise stated.



PREMIER RADIO COMPANY

WILLIAMSON AMPLIFIER KIT 15 gns. plus 7/6 p.p.p.
H.P. Terms Dep. £ 5.5.0 & 12 m'thly p'ym'ts of 19/9
 This Kit is absolutely complete and all components are guaranteed exactly to author's specification.

WILLIAMSON OUTPUT TRANSFORMER
 Author's Specification 3.8 ohms secondaries **£4.4.0**

MAINS TRANSFORMER 8P425A
 (Completely shrouded)
 This Transformer has an additional 6.3v. 3A and is capable of supplying an extra 50mA for Pre-amp or Feeder Unit **£2.12.6**

WILLIAMSON CHOKES
 12H 150mA Fully shrouded **19/6**
 30H 20mA **11/9**

SPECIAL OFFER

For Personal Shoppers only

5-VALVE SUPERHET RADIO RECEIVER

PRICE
£10.19.6



In highly polished walnut cabinet. Built to high standards ensuring quality reception. Specifications:

VALVE LINE-UP: 7S7, 7B7, 7C6, 7C5, 7Y4, 3 WAVEBANDS, Long, Medium and Short. **CONTROLS:** Tuning, wave change, volume tone control on/off Gram Position on Switch. Pick-up and Extension Speaker Sockets incorporated. For use on 200/250 v. A.C. mains. **DIMENSIONS:** Width, 16 1/2 in., Height 13 1/2 in., Depth 8 1/2 in.

H.P. Terms: £2.14.11 deposit, and 12 monthly payments of 15/6.

DECCA MODEL 33A

DUAL SPEED RECORD PLAYER

Includes crystal pick-up with sapphire stylus and a light-weight plastic spring balanced arm. Heavy gauge pressed steel case with brown enamel finish in good quality for operation on A.C. mains 200/250 v. 50 c.p.s. Supplied complete with single head (either standard or long playing). **£4.19.6**
 Extra Head can be supplied. Plus pkg. and carr. 3/-.



ANOTHER SENSATIONAL BUY!

A Three-Speed Automatic Record Changer made by World famous manufacturer. The Unit designed to play 12 in., 10 in. and 7 in. Records at 33 1/3, 45 or 78 r.p.m. Capacity 10 records.
 New reversible dual stylus crystal Pick-up has extended frequency range to 10,000 c.p.s. Self-compensated for the L.P. lower frequencies with the Turnover frequency at the correct point.
 An essential feature is the simplicity of design. For use on 100/125-200/250 volts 50 cycles A.C. mains.



LIMITED QUANTITY ONLY Plus packing and carriage 5/- **£10.10.0**

BRAND NEW, guaranteed and in manufacturer's orig. carton.

METERS		Movement	
Full Scale Deflection	External Dimensions in.		
25A.....	2 1/2 round	R.F. Thermo	7/6
3.5A.....	2 1/2 x 2 1/2	R.F. Thermo	7/6
4A.....	2 1/2 x 2 1/2	R.F. Thermo	7/6
20A.....	2 1/2 round	M/C	8/6
40A.....	2 1/2 round	M/C	8/6
1.5mA.....	2 1/2 round	M/C	12/6
5mA.....	3 1/2 round	M/C	7/6
6mA.....	3 1/2 round	M/C	18/9
50 mA.....	2 1/2 x 2 1/2	M/C	7/6
20 V.....	2 1/2 x 2 1/2	M/C	8/6
40 V.....	2 1/2 x 2 1/2	M/C	8/6
1mA.....	2 x 2	M/C	17/6
1mA.....	2 1/2 round	M/C	22/6
1mA.....	2 1/2 round	Desk type M/C	25/-

H.T. ELIMINATOR AND TRICKLE CHARGER KIT

All parts to construct an eliminator to give an output of 120 volts at 29mA., and 2 volts to charge an accumulator. Uses metal rectifier, 37/6.

POWER SUPPLY UNIT



Incorporating output stage. Supplies an output of 250 volts at 80 mA. which is ample for the B1165 with the output stage. Jones plugs for connecting the Power Pack to the Receiver are included. The 6V8 output stage complete with Output Transformer and 6 in. speaker is built into the unit. Price £5/5/-, plus 5/- packing and carriage.

CORRECT ASPECT WHITE Rubber Mask—Round or Flat

6in. 8/6 15in. 22/6
 12in. 12/11

T.V. PRE-AMPLIFIER

Amplifier Unit Type 208A using 2-VR91 valves suitable for operation on London frequency. Brand **19/6**
 New. Plus 1/6 pkg. and carr.

BUILD THESE NEW PREMIER DESIGNS


TRF RECEIVER

4-WATT AMPLIFIER



MAY BE BUILT FOR **£5.15.0** Plus 2/6 Pkg. & Carr.

The circuit is the latest type TRF using 3 valves and Metal Rectifiers for operation on 200/250 A.C. mains. Wave band coverage is 180/550 metres on medium wave and 800/2,000 metres on long wave. The dial is illuminated and the Valve line-up is 6K7 H.F. Pentode 6J7 Detector and 6V6—Output. The attractive Cabinets to house the Receiver size 12 in. long, 6 1/2 in. high, 5 1/2 in. deep, can be supplied in either WALNUT or IVORY BAKELITE or WOOD **INSTRUCTION BOOK 1/-** (post free) which includes Assembly and wiring diagrams, also a detailed Stock List of priced components.



MAY BE BUILT FOR **£4.10.0** Plus 2/6 Pk. & Carr.

Valve line-up 6SL7, 6V6 and 6X5. FOR A.C. MAINS 200/250 VOLTS. The twin triode 6SL7 is used for preamplification and also for a comprehensive tone control circuit, which includes two very wide range and continuously variable tone controls for bass and treble. The output Valve is of the beam type and feeds 4 watts into a specially designed output Transformer which is suitable for either 3 ohm or 15 ohm Speakers. Negative feed-back is applied from the secondary of the output Transformer over the whole of the Amplifier to the input stage giving an excellent frequency response. Due to the high gain and wide range tone controls any type of pick-up may be used. Overall size 9 x 7 x 5 in. Price of Amplifier complete, tested and ready for use, £5/5/-, plus 3/6 pkg. and carr.

INSTRUCTION BOOK, 1/- (Post Free) which includes Assembly and wiring diagram, also a detailed Stock List of priced components.

MINIATURE TUNING CONDENSERS

2-gang .0005 mfd. with trimmers..... 6/9

PREMIER VARIABLE IMPEDANCE "MATCHMAKER" M.O. IS OUTPUT TRANSFORMER

Designed to meet the demand for an efficient variable ratio Output Transformer 11 ratios from 13:1 to 80:1 all centre tapped and can be used to match any output valves either single or push-pull Class "A" "AB1" "AB2" or "B" to any low impedance speech coil or combination thereof. Primary inductance 50 henries 15 watts audio 100 mA. Price 45/-.

LOUDSPEAKERS

ELAC—2 1/2 in. dia., Moving Coil, 15 ohm Imp.	15/-
PLESSEY—3 in. dia., Moving Coil, 3 ohms Imp.	9/11
ELAC—3 1/2 in. dia., Moving Coil, 3 ohms Imp.	15/-
GOODMANS—3 in. dia., Moving Coil, 3 ohms Imp.	15/6
ELAC—8 in. dia., Moving Coil, 3 ohms Imp.	19/6
PLESSEY—8 in. dia., Mains Energised, 3 ohms Imp. (600 ohms field) with Pentode Transformer	22/6
PLESSEY—8 in. dia., Mains Energised, 3 ohms Imp. (600 ohms field)	19/6
PLESSEY—10 in. dia., Moving Coil, 3 ohms Imp.	23/6
GOODMANS—12 in. dia., Moving Coil, 15 ohms Plus 5/- packing and carriage	28/3
VITAVOX—K12/20 12 in. dia., Moving Coil, 15 ohms Imp.	211/11
	Plus 5/- packing and carriage.

CRYSTAL MICROPHONE INSERTS

Ideal for tape recording and amplifiers. No Matching transformer required. 8/6 post free.

ACCUMULATORS

2 volt 10 amp. (by famous maker) 4/11
 2 volt 16 amp. 5/11

MOVING COIL METER

A super quality Moving Coil Meter basic movement 2 mA. and 4 mA. Scale dimension 2 1/2 in., Overall dimensions 2 1/2 in. dia. 1 1/2 in. deep. Bakelite Case projecting type. At present scaled 1 amp. R.F. By removing thermo couple, reversing scale and recalibrating the meter, a high grade test instrument with any range above the basic F.S.D. may be built up. Price 3 mA., 5/9 4 mA., 4/8.

MICROPHONES

LUSTRAPHONE: Moving Coil; High Impedance Stand Type: £5/15/6—Hand Mike £8/6/-.
 BONE-TITE—Crystal Mike Incorp. the Filter Cell Insert; High Imped. Ball Type, £3/19/6.
CRYSTAL MICROPHONE—Rohrmerl 2AD56. Especially recommended. £2/10/6. Table stands for all the above 10/6 and 17/6.
 ACOS. High impedance Crystal Microphone, type 35-1, 25/-.
 ACOS. High impedance Crystal Microphone, type 33-1, 22/10/-.
 ACOS. 'MIC 30' impedance Crystal Microphone £2/10/- (This Microphone can be used as either Hand or Desk type.)

CRYSTAL MICROPHONE

An entirely insulated crystal microphone which can be safely used on A.C./D.C. amplifiers. High impedance. No background noise, really natural tone. The Ideal Mike for tape, wire and sound projectors, price 22/6.

MAINS NOISE ELIMINATOR KIT

Two specially designed chokes with three smoothing condensers with circuit diagrams. Cuts out all mains noise. Can be assembled inside existing receiver, 4/11. Plus 6d. pkg. and carr.

Germanium Crystal Diodes. G.E.O. wire endel, 2/6. 24/- doz.

PREMIER RADIO COMPANY

Limited supplies of C.R. TUBES

VCR517C

6½in. picture. This tube is a replacement for the VCR507 and VCR517. Guaranteed full size picture. Price 35/- Plus 2/6 pkg., carr., ins.

VCR516

9in. blue picture. Heater volts 4 Anode 4 Kv. In manufacturer's original carton. £3/19/6. Plus 5/- pkg., carr., ins.



ALL BRAND NEW

QUALITY CRYSTAL PICK-UP

ROTHERMEL TYPE U48 26/-

Plus 1/6 Pkg. and Carr.

CABINETS—PORTABLE

Model PC/1

Brown Rexine covered. 22/6
Overall dimensions 15in. x 13½in. x 5in.
Clearance under lid when closed 2½in.

Model PC/2

Grey Lizard Rexine covered. 45/-
Overall dimensions 15in. x 13in. x 6in.
Clearance under lid when closed 2½in.

Model PC/3

Rexine type covering in various cols. 60/6
Overall dimensions 16½in. x 14½in. x 10½in.
Clearance under lid when closed 6½in.

All the above Cabinets are supplied with Panel, Carrying Handle and Clips.

Packing and Postage 2/6.

PREMIER MAINS TRANSFORMERS

All primaries are tapped for 200-230-250 v. mains 40-100 cycles. All primaries are screened.

SP175B, 175-0-175, 50 mA., 4 v. @ 1 a., 4 v. @ 2-3 a. 15/-
SP250A, 350-0-350, 100 mA., 5 v. @ 2-3 a., 6.3 v. @ 2-3 a. 21/-
SP501, 500-0-500, 150 mA., 4 v. @ 2-3 a., 4 v. @ 2-3 a., 4 v. @ 2-2 a., 4 v. @ 3-5 a. 37/-
SP501A, 500-0-500, 150 mA., 5 v. @ 2-3 a., 6.3 v. @ 2-3 a., 6.3 v. @ 2-3 a. 40/-
SP425A, 425-0-425, 200 mA., 6.3 v. @ 2-3 a., 6.3 v. @ 3-5 a., 5 v. @ 2-5 a. 52/6
250-0-250, 80 mA., 6.3 v. @ 4 a., 5 v. @ 2 a. 18/6
350-0-350, 80 mA., 6.3 v. @ 4 a., 5 v. @ 2 a. 19/6
200-230-250 output 3 v.-30 v. @ 2 a. 17/6

RECTIFIERS

Type	K3/25	K3/40	K3/45	K3/50	N3/160	R.M1	R.M2	R.M3	R.M4
E.H.T. Pencil Type S.T.C.	650 v.	3.2 kv.	3.6 kv.	4 kv.	12 kv.	125 v.	125 v.	125 v.	250 v.
	1 mA.	1 mA.	1 mA.	1 mA.	1 mA.	60 mA.	100 mA.	125 mA.	250 mA.
	4/7	6/-	8/2	8/8	21/6	4/-	4/6	5/6	18/-
H.T. Type S.T.C.									
L.T. Type Full Wave									
6 v. 1 amp.									
12 v. 1 amp.									
12 v. 2 amp.									
12 v. 4 amp.									

BATTERY CHARGERS

200-250 v. A.C. Will charge 2 v., 6 v. and 12 v. Car Battery at 1 amp. Housed in strong metal casing. Finished in Green hammered enamel. Size: 6in. long, 3½in. wide, 3½in. high. Guaranteed 12 mths. The above unit is manufactured by PREMIER and does not contain Ex-Govt. components. Plus 2/6 p.kg. 39/6



BATTERY CHARGER KITS

All incorporate metal rectifiers. Transformers are suitable for 200/250 v. A.C. cycle mains.

2002 Charge 6 volt accumulator at 1 amp. Resistance, supplied to charge 2 v. Accumulator. 19/6
2004 Charges 2, 6 and 12 v. accumulators at 1 amp. 22/6

ALUMINIUM CHASSIS 18 s.w.g.

Substantially made from Bright Aluminium, with four sides:

7 x 5½ x 2in.	4/-	10 x 9 x 3in.	7/-
7 x 3½ x 2in.	3/9	12 x 10 x 3in.	7/9
9½ x 4½ x 2in.	4/3	14 x 10 x 3in.	7/11
10 x 5 x 2in.	5/6	16 x 10 x 3in.	8/3
12 x 9 x 2in.	7/-	16 x 8 x 2½in.	8/-
14 x 9 x 2½in.	7/6		

ALUMINIUM PANELS 18 s.w.g.

7 x 4in.	1/3	7 x 4in.	1/-
9½ x 6in.	1/8	9½ x 4in.	1/5
10 x 6in.	2/2	10 x 7in.	1/11
12 x 9in.	2/8	12 x 7in.	2/5
14 x 9in.	3/2	14 x 7in.	2/11
16 x 9in.	3/8	16 x 7in.	3/5
20 x 9in.	4/8	20 x 7in.	4/5
22 x 9in.	5/2	22 x 7in.	4/11

RADIOGRAM CHASSIS

5 Valve 3-waveband Superhet Receiver covering short, medium and long waves. Using the latest miniature all glass valves, overall chassis size 13½in. x 7in. high x 6in. deep, dial aperture 10in. x 4½in. BRAND NEW READY FOR USE AND £10.5.0 GUARANTEED. Packing and postage 10/- Or on Hire Purchase terms, deposit £2/11/3 and 12 monthly payments of 14/5.

CABINET available for above Chassis in figured walnut, lined with white aycamore, size 31t. wide, 21t. 8 inches high, 11t. 5 inches deep. £15/15/- Or on Hire Purchase terms, deposit £3/18/9 and 12 monthly payments of £1/2/2. Packing and Carriage extra.

Famous Manufacturer's Surplus of

ANTI-INTERFERENCE AERIALS

offered at a fraction of original cost

The aerial is designed for reception of long, medium and short waves, with any ordinary of communications receiver, having an input impedance greater than 1,000 ohms long/medium waves and 150 ohms short waves. The installation discriminates against locally generated electrical interference, especially on the short wavebands. The equipment enables the installation of an 8.3 Mc/s flatly-tuned dipole which operates as a "T" aerial on medium and long waves. The aerial and receiver transformers are intended to be interconnected with a 70 ohms co-axial cable.

COMPONENT PARTS

Aluminium Aerial Transformer Assembly. Comprising one each: Aluminium transformer, Transformer clip Rubber sucker, ½in. x ½in. brass screw, 4AB x ½in. brass bolt, 4BA nut. Receiver Transformer. Complete with Insulators, clips, etc.; Porcelain insulators, 2 each, 60ft. Insulated Aerial Wire, 60ft. Screened Co-Axial Down lead. Installation instruction leaflet included. LESS CO-AXIAL CABLE & AERIAL WIRE, 15/- plus 1/6 pkg. and carr. COMPLETE 35/-, plus 1/6 pkg. and carr.

The New

"PREMIER PORTABLE"

TAPE RECORDER

USING THE NEW LANE 2 SPEED TAPE UNIT MARK 6

COMPLETE **39** GNS CASH


Packing & Carriage 1 gn.

(Including Reel of Scotch Boy Tape and Microphone)

or Complete Kit including All Parts, Valves, Speaker Cabinet, Tape Unit, Reel of Scotch Boy Tape, Rewind Spool and Microphone at **£37.4.0** plus pkg. & carr. 15/-.

SPECIFICATION

- ★ TWO SPEEDS 7½in. AND 3½in. ★ 7 VALVE HIGH QUALITY PER SECOND. AMPLIFIER.
- ★ THREE SPECIALLY DESIGNED RECORDING MOTORS. ★ INDEPENDENT TREBLE AND BASS CONTROLS.
- ★ 1,200ft. TAPE REELS PROVIDING PLAYING TIMES OF 1 HR. AND 2 HRS. ★ MAGIC EYE RECORD LEVEL INDICATOR.
- ★ DROP IN TAPE LOADING. ★ AMPLIFIER MAY BE USED FOR RECORD REPRODUCTION OF HIGH QUALITY.
- ★ EASY FORWARD OR REWIND WITHOUT REMOVING TAPE. ★ COMPARTMENT FOR HOUSING MICROPHONE.
- ★ ONE KNOB DECK OPERATION. ★ SPECIALLY DESIGNED MICROPHONE BY A LEADING MANUFACTURER.

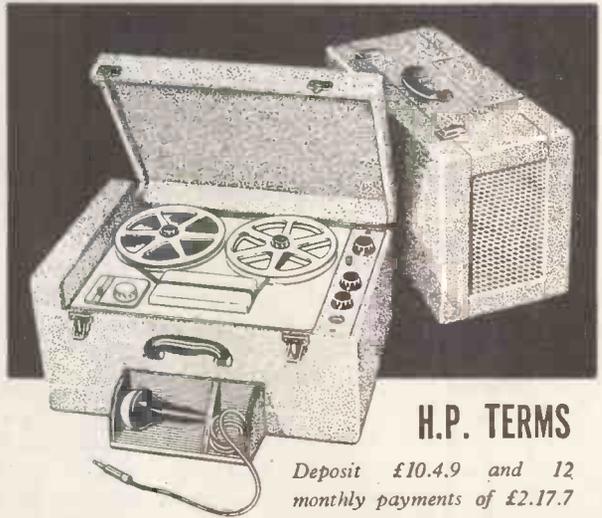

H.P. TERMS


Deposit £10.4.9 and 12 monthly payments of £2.17.7

SEPARATE UNITS CAN BE SUPPLIED AS LISTED BELOW:—

- Amplifier (built, wired and tested with Speaker). £14/15/-, plus postage and carriage 7/6.
- Hire purchase terms, Deposit £3/13/9 and 12 monthly payments of £1/0/9.
- Amplifier Kit (including speaker). £11/- plus packing and carriage 5/-.
- Hire purchase terms, Deposit £2/15/- and 12 monthly payments of 15/6.
- New Lane 2 speed Tape Unit Mark 6, £18/10/-, plus packing and carriage 7/6.
- Hire purchase terms, Deposit £4/12/6 and 12 monthly payments of £1/6/-.
- Portable Cabinet (Rexine covered), £4/19/6, plus postage and carriage 5/-.
- Microphone, £2/19/5, plus postage and carriage 1/-.
- Reel Scotch Boy Tape MC2-111 (1,200ft.), £1/15/-, plus packing and carriage 1/-.
- Instruction Booklet, 2/6. Post free.

THE MONARCH

lasts a lifetime!

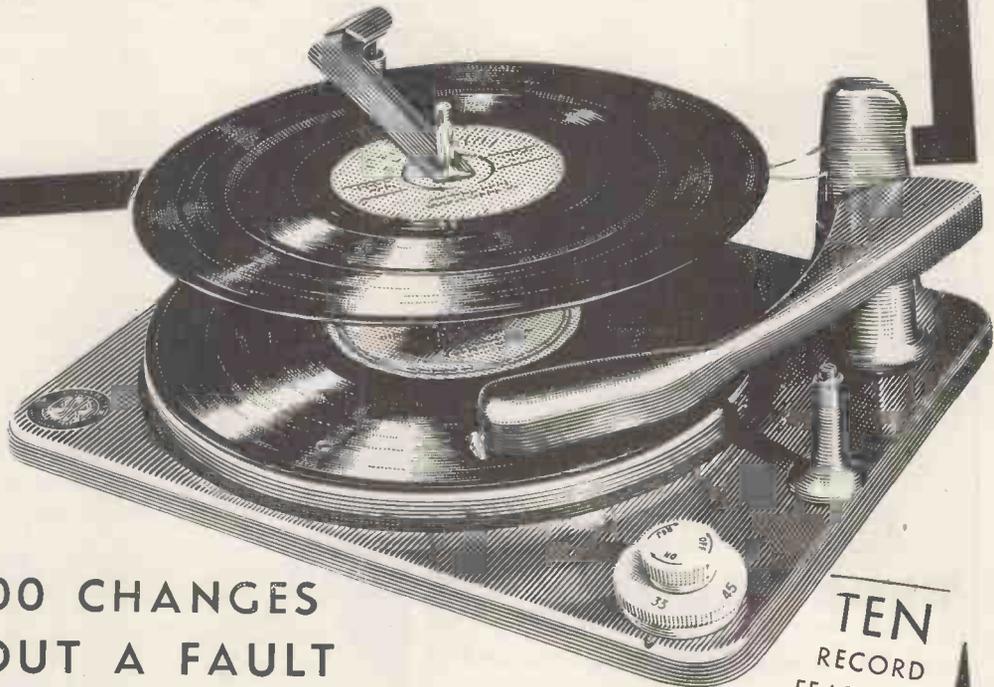

500,000 CHANGES WITHOUT A FAULT

A radiogram manufacturer reports that the Monarch mechanism, using a special test disc, performed 500,000 changes without developing a fault.

This amounts to something like a lifetime of normal use.

Because the Monarch Automatic Record Changer is a scientifically designed precision built instrument, leading radiogram and record player manufacturers install it as standard equipment. The excellent high fidelity performance makes this compact and streamlined unit famous for every modern gramophone use throughout the world.



*The world's finest and most
wanted auto-changer.*

Write for complete details:

TEN RECORD FEATURES

- 1 Plays 10 mixed diameter records at 33, 45 or 78 r.p.m.
- 2 The unique "Magidisk" automatically selects 7in., 10in. and 12in. discs.
- 3 Pick-up returned and motor switched off after last record.
- 4 Extended frequency range dual sapphire styli pick-up.
- 5 Simple unit control "ON," "OFF," "REJECT" and record speed switch.
- 6 Fitted anti-acoustic feed back suspension springs.
- 7 Compact overall dimensions ideal for radiogram or T.V. console.
- 8 Turntable rim drive by vibration damped induction motor eliminating rumble and "wow."
- 9 10in. diameter heavy steel recessed turntable with rubber mat.
- 10 Beautifully styled smooth, modern lines; faultless finish.

BIRMINGHAM SOUND REPRODUCERS LIMITED, OLD HILL, STAFFS.

Wireless World

RADIO, ELECTRONICS,
TELEVISION

44th YEAR OF PUBLICATION

Managing Editor: HUGH S. POCOCK, M.I.E.E.

Editor: H. F. SMITH

OCTOBER 1954

In This Issue

EDITORIAL COMMENT	471
FARNBOROUGH 1954	472
WORLD OF WIRELESS	474
RADIO SHOW REVIEW	478
CARBON-ELEMENT SOLDERING IRON	494
NEW PICKUP ARM	495
REMOTE CONTROL OF RADIO RECEIVERS. By <i>C. E. Tate</i>	496
LETTERS TO THE EDITOR	499
BAND III TELEVISION INTERFERENCE. By <i>F. R. W. Strafford</i>	501
STYLUS IN WONDERLAND. By <i>O. J. Russell</i>	505
MAGNETIC RECORDING. By <i>H. G. M. Spratt</i>	508
H.M.V. TAPE RECORDS	512
RECTIFICATION. By " <i>Cathode Ray</i> "	513
SHORT-WAVE CONDITIONS	517
TRANSISTOR H.T. GENERATOR. By <i>D. L. Johnston</i>	518
FLYWHEEL SYNCHRONIZING—1. By <i>W. T. Cocking</i>	519
AMATEUR TELEVISION TRANSMISSIONS	522
EUROPEAN TELEVISION. By <i>J. Treeby Dickinson</i>	523
MIDGET TELEVISION SET	525
RANDOM RADIATIONS. By " <i>Diallist</i> "	526
UNBIASED. By " <i>Free Grid</i> "	528

PUBLISHED MONTHLY (last Monday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. Telephone: Waterloo 3333 (60 lines). Telegrams: "Ethaworld, Sedist, London." Annual Subscription: Home and Overseas, £1 7s. 0d. U.S.A. \$4.50. Canada \$4.00. BRANCH OFFICES: Birmingham: King Edward House, New Street, 2. Coventry: 8-10, Corporation Street. Glasgow: 26a, Renfield Street. C.2. Manchester: 260 Deansgate, 3.



VALVES, TUBES & CIRCUITS

22. TEN WATT AUDIO AMPLIFIER

In accordance with the Mullard practice of issuing information on valve applications, details have recently been published of a design for a ten watt audio amplifier. The circuit* is of a simple, well-tryed form, and consists basically of three valve stages, with 26db of negative voltage feedback taken from the secondary of the output transformer to the cathode circuit of the first valve. It has been designed primarily for home constructors, is easy to build, and requires only a relatively small outlay on components. By making good use of the advantages possessed by the valves, the circuit performance meets as far as possible the fundamental requirements of a medium power amplifier intended for home entertainment.

On account of the high basic sensitivity of the amplifier circuit, a separate valve pre-amplifier will not be required with certain types of crystal pick-up giving a comparatively large output voltage. The first valve is then preceded by a simple R-C tone control network used to control treble and bass response. The main difference between 78r.p.m. and microgroove recordings has to be taken care of by the appropriate fixed equalisation network placed between the pick-up and tone-control circuit.

The high gain input stage uses the EF86 low hum, low microphony pentode. It is directly coupled to the phase splitter to ensure that the phase shift will remain small at low frequencies. The load resistor is shunted by a C-R series network, thus producing an advance in phase which increases the stability at high frequencies.

The phase splitter employs double triode type ECC83 connected in a cathode coupled circuit which provides for low distortion and facilitates direct coupling to the first valve. There is some sacrifice of available gain using this form of phase splitter, but nevertheless there is sufficient gain in this stage as the ECC83 has the high amplification factor of 100.

The output stage is designed round two EL84 output pentodes operated in self-biased push-pull with separate cathode resistors: the EL84 is the new output pentode with a maximum anode dissipation of 12W. The anodes are supplied directly from the reservoir capacitor, which has been given a large value (50 μ F) for this purpose. R-C smoothing is used throughout the amplifier circuit.

The anode-to-anode loading of the output transformer, R_{a-a} , and the value R_k , of each of the two cathode bias resistors correspond to either 'normal' loading or 'low' loading in the output stage. 'Low' loading ($R_{a-a} = 6000 \Omega$; $R_k = 437 \Omega$) has been devised to produce less distortion during the high peaks of power occurring in the reproduc-

tion of speech and music; but 'normal' loading ($R_{a-a} = 8000 \Omega$; $R_k = 270 \Omega$) is essential if sine wave testing is to be undertaken up to full output power. Some makes of output transformer, built to give the performance specified for satisfactory operation in this circuit, have primary tapings of 8000 Ω and 6000 Ω .

The recommended rectifier is the octal-based GZ30. The noval-based EZ80 may be used, provided (i) that the amplifier is to remain permanently adjusted to low loading and (ii) that extra current will not be required for a radio feeder unit. These two provisions also decide to what extent, as a measure of economy, a lower rating can be given to the mains transformer.

The brief specification of the circuit is as follows:—

Power Output

Rated output 10W Max. output 12-13W

Total Harmonic Distortion

The total harmonic distortion is less than 0.4%, measured for 10W output with normal loading and sine wave input.

Hum and Noise -73db relative to 10W

Frequency Response ± 0.5 db, 10c/s to 20,000c/s.

Sensitivity

An input of 50mV to the first valve gives 10W output. This output power is produced by an input of 600mV to the tone control circuit.

Treble Control

Continuously variable control of treble from +10db to -10db at 10,000c/s.

Bass Control

Continuously variable control of bass from +11db to -5db at 20c/s.

Power Consumption 60W approx.

** Amplifiers built to this specification were demonstrated with great success at the Radio Show in a programme which included 'classical' and 'modern' music, an organ prelude, and the now well-known recording of "Breaking Glass". Full details of the design are given in the booklet "The Mullard Five Valve Ten Watt High Quality Amplifier Circuit" on sale at radio retailers price 2s. 6d. It contains: complete description of tone control and amplifier circuit; specification and winding details for output transformer; brief specification of mains transformer; performance figures; illustrations showing a suitable layout; equalisation networks; introductory notes on playback equipment; and valve data.*



MULLARD LTD., Technical Service Department, Century House, Shaftesbury Avenue, W.C.2

We see to it...



are more reliable than EVER!

Rigid control of production processes, a ready acceptance of improved manufacturing techniques, and continual vigilance in the analysis and selection of raw materials ensure that every BRIMAR valve will do its job more efficiently . . . more reliably.

Modern manufacturing methods backed by an intensive research and development organisation enable BRIMAR to anticipate and meet the changing demands of the radio and electronic industries. There is bound to be a BRIMAR valve to exactly meet YOUR specification.



The 12AT7 is a very reliable frequency changer and is widely used in modern TV receivers, VHF and UHF communications equipment. It is also frequently employed in industrial equipment, computers, navigational aids and test equipment.

*now is the time
to BRIMARIZE!*

BRIMAR	MULLARD	MARCONI OSRAM	COSSOR EMITRON
12AT7	ECC81	B152 & B309	12AT7

Standard Telephones and Cables Limited
FOOTSCRAY, KENT. FOOTscray 3333

**Use the BRIMAR
12AT7**
with improved performance
at
NO EXTRA COST

acos

For
tape
and
disc
recording,
P.A.
and
amateur
radio.


quality crystal microphones

at reasonable prices


A crystal hand or desk omni-directional microphone for the high quality public address and tape recording field, incorporating a specially designed acoustic filter giving a response flat from 30 to 7,000 c/s.

RETAIL PRICE: £2-10-0d.

MIC 33

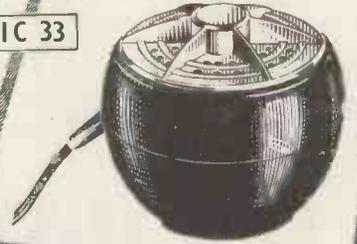


MIC 36

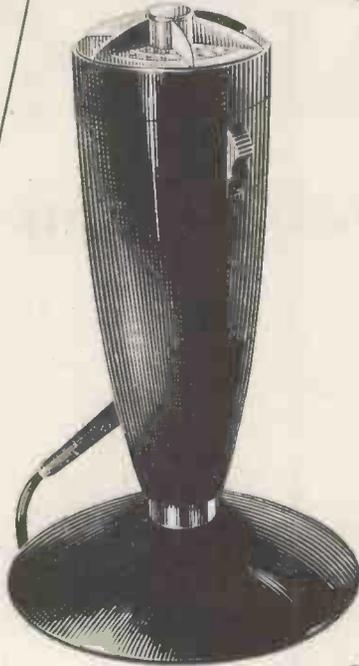

A handsome omni-directional instrument of high sensitivity and a substantially flat response from 30 to 7,000 c/s. Alternative models, with or without switch, are available with suitable adaptors for floor or table stands or for hand use.

RETAIL PRICE: £3 - 3 - 0d. without switch or £3 - 8 - 0d. with switch.

MIC 35



A general purpose hand microphone of robust construction with substantially flat response from 50 to 5,000 c/s. Suitable for recording apparatus. Public Address equipment etc.

RETAIL PRICE £1 - 5 - 0d.

... always well ahead

ACOS devices are protected by patents, patent applications and registered designs in Great Britain and abroad.

“BELLING-LEE” NOTES

More about Band III

There are one or two misconceptions in connection with band III that can be cleared up now. Band III is a higher frequency than band I; therefore technical readers might be forgiven for doing some quick thinking and arriving at the conclusion that “line of sight” reception would be better and easier than on band I. Whilst the propagation of band III signals under these conditions is in fact more efficient, the wave is more adversely affected than band I by objects in its path, and this will tend to reduce the signal at the receiving end. Readers may perhaps also overlook the fact that a domestic television receiver is not built like a communication receiver.

Further, an aerial is a tuned device offering a surface to energy in space, the lower the frequency the bigger the aerial, and vice versa. A band III “H” is a very small collector compared with a band I “H,” and to receive a comparable proportion of energy, one has to add several elements as directors and/or reflectors, and that is why band III aerials may have three, six or nine elements, sometimes stacked or in broadside, for fringe reception.

Do bear in mind that the mechanical design of “Belling-Lee” aerials is such that they are stronger than those of many of our competitors and strong enough for all the winds that blow, but they may not have been designed to withstand the additional windage that would be applied if band III aerials are added without thought. Where this is practicable we will let you know, and having said “yes” to such a suggestion the 3 years guarantee and insurance cover would stand. But to look at any T.V. skylines there are not many that would stand up for long with attachments.

In a large majority of cases where an indoor aerial is being used for band I reception, an out-door array will be required for band III.

Will those in coastal towns, fishing ports, yachting centres, etc., bear in mind that we specialise in suppression on board ship.

Work of this nature has been carried out by us on ships of all sizes from the “Queen” class to trawlers, drifters and yachts.

Advertisement of
BELLING & LEE LTD.
Great Cambridge Rd., Enfield, Middx.
Written 24th August 1954.


CRIMP THAT FEEDER!

*
**Special feature
of B·L
Co-axial Socket
enables crimping
over feeder**



A VERY common fault in domestic television installation is the careless manner in which feeders are attached to co-axial plugs and sockets. Often the feeder is merely pushed through the co-axial pin without soldering, leaving a loose, dry joint.

To facilitate a good connection in the minimum time we have incorporated a feature in our Co-axial Free Socket L.734/J to enable plug and socket to be crimped over the feeder. One grip of the pliers — and the job is done simply, effectively, securely. This is good practice; it is easy to do and it eliminates a possible source of trouble.

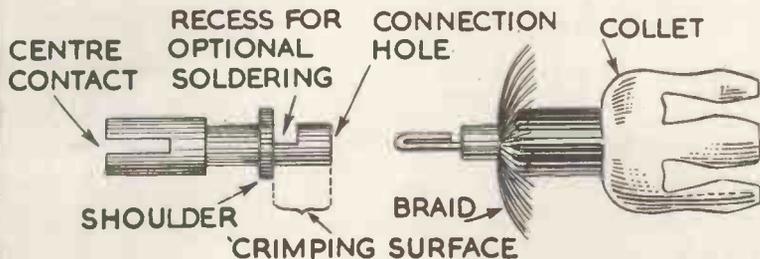

BELLING & LEE LTD
GREAT CAMBRIDGE RD., ENFIELD, MIDDX., ENGLAND

INTRODUCING THE NEW E.M.I. MAGNETIC RECORDING TAPE

EMITAPE TYPE '77' AND '88'

E.M.I. with a small select team of scientists and research chemists pioneered the manufacture of Magnetic Recording Tape in this country, and due to the ever increasing demands for this tape by the famous studios of His Master's Voice, Columbia and Parlophone, etc., the British Broadcasting Corporation and leading Broadcasting Studios at home and abroad, the E.M.I. plant today is the largest and most up-to-date production unit in this country.

Unremitting research with this new development in electronics has produced: *The magnetic recording tape by which all other tapes are judged.*

EMITAPE is the universal tape, suitable for all types of Tape Recorders, whether they are single or twin track recording. The tape is readily joined and edited with the E.M.I. jointing accessories.


EMITAPE '88' SPECIAL FEATURES

- High Sensitivity
- Anti-static-P.V.C. Base
- High Tension Strength
- Freedom from Curl
- Editing leader and trailer Strip
- Metallic Contact Strip on 5" spools for auto-stop
- New domestic plastic spool

EMITAPE is available wound on a range of five spools covering all professional and domestic hub machines. Spare empty reels are available in all sizes.

EMITAPE '77'

"Pen Tested" for Special Applications

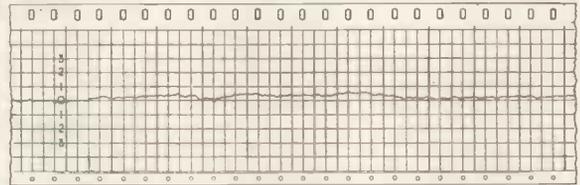

Although manufactured under the same conditions as Type '88' and having all the special features, Type '77' undergoes an individual "Pen Test" examination for accuracy of sensitivity. Each reel is "Pen Tested" throughout its entire length to ensure a level of sensitivity not exceeding $\pm \frac{1}{2}$ dB, and an overall variation from reel to reel not greater than ± 1 dB. A typical example of a "Pen Tested" chart is given above.

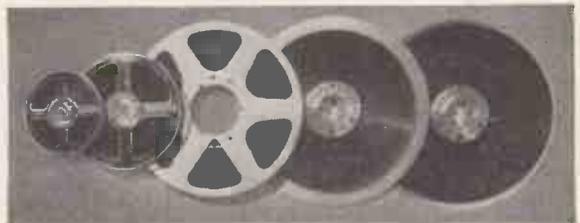


Illustration of range of tape available in Type '77' and '88'

EMITAPE SPECIFICATION

Magnetic Properties:—

Coercive Force 270 Oersteds
Remanence 0.6 flux lines per $\frac{1}{4}$ " width

Sensitivity Uniformity for Type '77'

- 1 Kc at optimum bias at 15"/sec.
- (a) Slow variation within one reel not greater than $\pm \frac{1}{2}$ dB on mean sensitivity
 - (b) overall variation from reel to reel not greater than ± 1 dB on mean sensitivity
 - (c) Instantaneous variation in sensitivity not greater than $\frac{1}{2}$ dB

Sensitivity:—

The sensitivity for a given recording current is 8 dB above H50 tape.
Sensitivity of tape at 15"/sec.
1 Kc ± 1 dB
10 Kc ± 2 dB on sensitivity at 1 Kc.
15 Kc ± 3 dB on sensitivity at 1 Kc.

Bias Ratio:—

Optimum bias is 80% of that required for H50 tape

Print:—

At least 60 dB below test signal after close contact for 5 minutes at 70°F.

Modulation Noise:—

At least 50 dB below peak mod. (2% total harmonics)

Basic Unweighted Noise:—

At least 65 dB below peak recording level

Tensile Strength:—

7 $\frac{1}{2}$ lbs. per $\frac{1}{4}$ " width

Elastic Elongation:—

At 1 lb. load — less than 0.5% (15 secs. application)

Yield Point:—

4 $\frac{1}{2}$ lbs. per $\frac{1}{4}$ " width

Recommended Operational Tension:—

3 ozs.

Longitudinal Temp. Coeff:—

4×10^{-5} per degree F.

Humidity Expansion:—

Negligible

PRICE LIST


	REEL	LENGTH	TYPE 88		TYPE 77	
5"	DOUBLE SIDED PLASTIC SPOOL	600 ft.	88/6	1. 1.0	77/6	1. 10.0
7"	DOUBLE SIDED PLASTIC SPOOL	1,200 ft.	88/12	1. 15.0	77/12	2. 8.0
10 $\frac{1}{2}$ "	NAB DOUBLE SIDED ALUMINIUM SPOOL	2,400 ft.	88/24N	4. 3.0	77/24N	5. 17.6
11"	EUROPEAN SINGLE SIDED ALUMINIUM SPOOL	2,400 ft.	88/24E	3. 13.6	77/24E	5. 8.0
11"	EUROPEAN SINGLE SIDED ALUMINIUM SPOOL	3,250 ft.	88/325	4. 11.0	77/325	6. 0.0

Send for illustrated brochure of Emitape Tape Accessories & Magnetic Tape Recording equipment to:—

E.M.I. SALES & SERVICE LTD., RECORDING EQUIPMENT DIVISION, HAYES, MIDDLESEX. Telephone: SOUTHALL 2468.



Interference and the Controlled Heat Iron

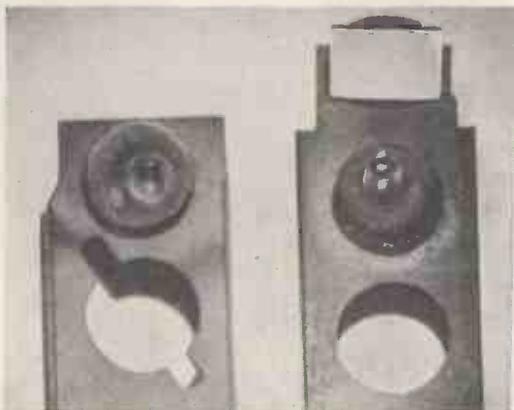

This illustration shows the pronounced pip and crater formed on the contacts of a slow make and break switch after only 7,000 operations at 230 volts, 3 amps. A.C.


One of the problems associated with the design of thermostatically controlled smoothing irons is the suppression of interference on television and radio frequencies caused by the action of the thermostat switch.

Contact erosion of the switch is one of the chief sources of trouble, which was particularly prevalent on earlier types of irons employing slow-break switches. Short-break snap action thermostats largely eliminate contact erosion and consequently keep interference well below acceptable limits. This type of thermostat switch is used in the new H.M.V. 'Milady's' Iron Model I.C. 10.

The first thermostatically controlled irons appeared on the British market a few years before World War II. The thermostats were fitted with a slow break switch which consisted of two cantilever spring arms made from a heat resisting alloy, with fine silver contacts riveted to the free ends. These contacts were parted slowly by the action of a cantilever bimetal clamped to the sole plate.

When the contacts were about to make or break, the force holding them together would be reduced very gradually to zero and so when an arc was drawn or struck the resulting slight explosion would cause the cantilever strips to vibrate and further intermittent arcing would continue for several seconds. This frequent arcing causes much contact erosion and also some of the prolonged crackles which are only too familiar to radio listeners. The fine silver contacts showed a very pronounced pip and crater side by side on each contact after several hundred hours of ironing, and the pip on each contact fitted almost exactly into the corresponding crater on the opposing contact. Overheating would then sometimes occur when the two contacts locked together mechanically.

Slow break switches were also used on D.C. with the addition of a 0.02 mfd condenser, but eventually a pip

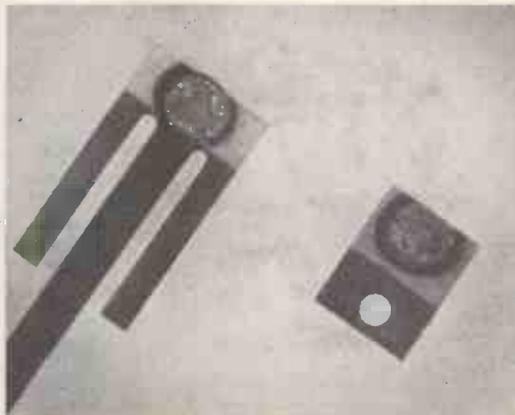

After 200,000 operations at 230 volts, 15 amps. A.C., the contacts of a short break snap-action switch were still free from pronounced pips and craters.

would form a hot spot on one contact and the condenser would be unable to quench the arc.

If the gap between contacts is less than $.000025''$, electrons from the cathode will liberate ions from the anode and form a crater. This accounts for the complementary pips and craters which become visible on slow break switches after a few thousand operations on A.C. If, however, the contacts break quickly, the gap is limited to say $.005''$ and the bounce on making is minimised; cathode erosion which is caused by ion bombardment will mask the effect of a reduced anode erosion. Furthermore, since with short break snap action switches the arc is usually extinguished within $1/100$ of a second on 50 cycles, very little total erosion will occur. Tests show that after 200,000 operations on 15 amps A.C. (5 times the normal current taken by an iron) the contacts become pitted but the depth of deformation is insufficient to cause a mechanical lock.


With 3 amps D.C. at mains voltage a snap action switch will sometimes fail to extinguish an arc with a .05 mfd condenser if a pip has formed on one contact. If, however, the capacity of the condenser is increased to .1 mfd the arc will always become extinguished within $1/100$ of a second provided the contact gap is limited to $.005''$. Switches of this type have completed over 60,000 thermal operations on 3 amps D.C. 230 volts without failure.

The introduction of a short break snap action switch will therefore not only increase the life of the contacts many times, but will also reduce the energy liberated at each switching operation to such a low value that the thermostat will comply with the exacting requirement of B.S.800: 1954 on television frequencies, and on radio broadcast frequencies the energy liberated will be of such a short duration that it will often pass unnoticed.

H M V

HOUSEHOLD APPLIANCES

This
ALUMINIZED
Picture tube gives

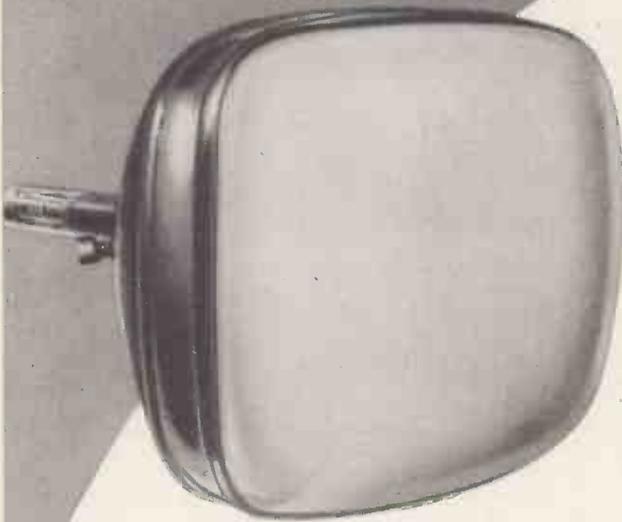

60% brighter pictures
more contrast
extra tube life

AN Ediswan Mazda aluminized picture tube gives a picture 60% brighter and more contrasty than is possible with an ordinary tube.

In addition, Ediswan aluminizing protects the screen from ion burn and, with the new Ediswan ion trap tetrode gun to protect the cathode, tube life is increased.


Ediswan production methods, which include the special in-line vacuumizing system, ensure a higher, more uniform standard of lasting efficiency. For complete satisfaction demonstrate and recommend Ediswan Mazda aluminized picture tubes.

EDISWAN
 M A Z D A

ALUMINIZED CATHODE RAY TUBES


THE EDISON SWAN ELECTRIC COMPANY LIMITED,
 155 Charing Cross Road, London, W.C.2 and Branches.

Member of the A.E.I. Group of Companies.

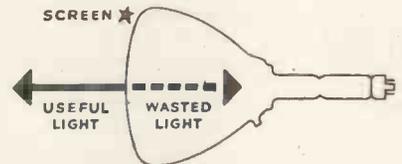

WITHOUT ALUMINIZING

Without aluminizing, tubes waste half their light (see diagram above). To counteract this the brilliance must be increased and the tube life is shortened.

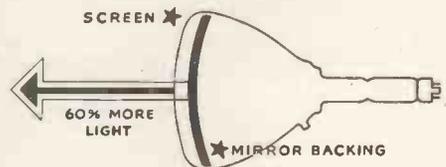

WITH EDISWAN ALUMINIZING

Ediswan aluminized tubes have a mirror backing to the screen. All the light is thus thrown forwards giving brighter, clearer pictures and extra life.

NATION WIDE SERVICE

6 fully equipped cathode ray tube service depots provide better, quicker tube testing should the need arise. Stocks of tubes are available in 26 Ediswan Offices. Only Ediswan give such complete backing to the Trade.



**The new Mk. III Camera
with 4½" or 3"
image orthicon
tube...**

The use of the new Marconi camera BD 687 with 4½" or 3" image orthicon tube and the employment of better circuit techniques in the camera channels have reduced to a negligible degree such faults as black halos, edge effects and electronic ghosts; whilst resolution, grey scale and signal-to-noise ratios are greatly improved. Ingenious design has led to simplicity of control and provided for fully remotely controlled applications.



Besides the camera the channels BD 808/809 comprise a Camera Control and Preview Monitor, Regulated Power Supply Unit and Focus Supply Unit.


MARCONI

Complete Broadcasting and Television Systems

Marconi equipment has been installed in every one of the BBC Television transmitter stations and in the USA, South America, Canada, Italy and Thailand.

MARCONI'S WIRELESS TELEGRAPH CO. LTD., CHELMSFORD, ESSEX



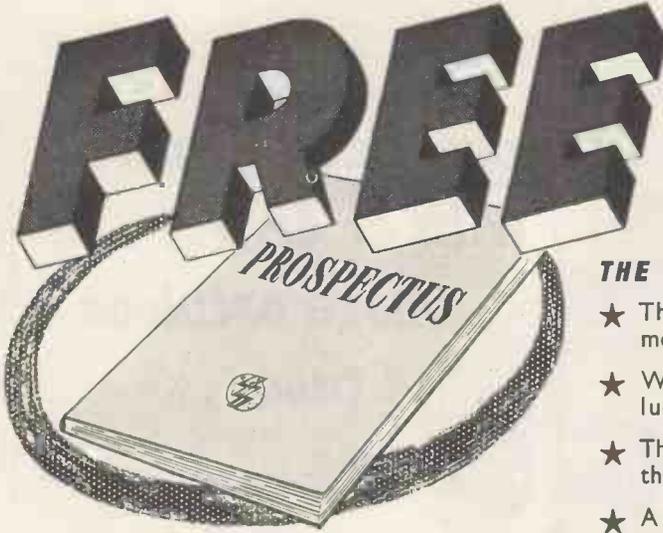

**POST THE COUPON TODAY
FOR OUR BROCHURE ON THE
LATEST METHODS OF HOME
TRAINING FOR OVER
150 CAREERS AND HOBBIES**

THE ADVANTAGES OF E.M.I. TRAINING

- ★ The teaching methods are planned to meet modern industrial requirements.
- ★ We offer training in all subjects which provide lucrative jobs or interesting hobbies.
- ★ The student is taken carefully and thoroughly through his chosen subject.
- ★ A tutor is personally allotted by name to ensure private and individual tuition.
- ★ Free advice covering all aspects of training is given to students before and after enrolment with us.

NEW

**LEARN THE PRACTICAL WAY
— COURSES WITH EQUIPMENT**

With many courses we supply actual equipment thus combining theory and practice in the correct educational sequence. The equipment, specially prepared and designed, remains your property. Courses include: Radio, Television, Electronics, Draughtsmanship, Carpentry, Photography and Commercial Art, Amateur S.W. Radio, Electricity, Languages, Mechanics, etc.



Equipment supplied upon enrolment and remains your property.

PRIVATE AND INDIVIDUAL TUITION IN YOUR OWN HOME

Accountancy	Customs & Excise Officer	M.C.A. Licences	Secretaryship
Advertising	Draughtsmanship	Mechanical	Shorthand & Typing
Aeronautical Engineering	Dressmaking	Engineering	Sound Recording
Automobile Engineering	Economics	Motor Engineering	Structural Engineering
Banking	Electrical Engineering	Photography	Telecommunications
Book-keeping	Electronics	P.M.G. Licences	Television
Building	Fashion Drawing	Police	Time & Motion Study
Business Management	Heating & Ventilating Engineering	Production Engineering	Tracing
Carpentry	Industrial Administration	Public Speaking	Welding
Chemistry	Journallism	Radar	Writing
Civil Service	Languages	Radio & Television Servicing	Workshop Practice
Civil Engineering	Marine Engineering	Refrigeration	Works
Commercial Subjects	Mathematics	Retail Shop Management	and many others.
Commercial Art & Drawing		Salesmanship	
		Sanitation	

Also courses for University Degrees, General Certificate of Education, B.Sc. Eng., A.M.I. Mech. E., L.I.O.B., A.C.C.A., A.C.I.S., A.M. Brit. I.R.E., A.M.I.I.A., City & Guilds Examinations, R.S.A. Certificates, etc.

Courses from 15/- per month

**EMI
INSTITUTES**

**THE ONLY POSTAL COLLEGE WHICH
IS PART OF A WORLD-WIDE
INDUSTRIAL ORGANISATION**

POST THIS COUPON TODAY

Please send without obligation your FREE book,
E.M.I. INSTITUTES Dept. 127k,
Grove Park Road, London, W.4.


NAME

ADDRESS

SUBJECT(S) OF INTEREST

(We shall not worry you with personal visits)

COSSOR presents Model 1052 double beam oscillograph

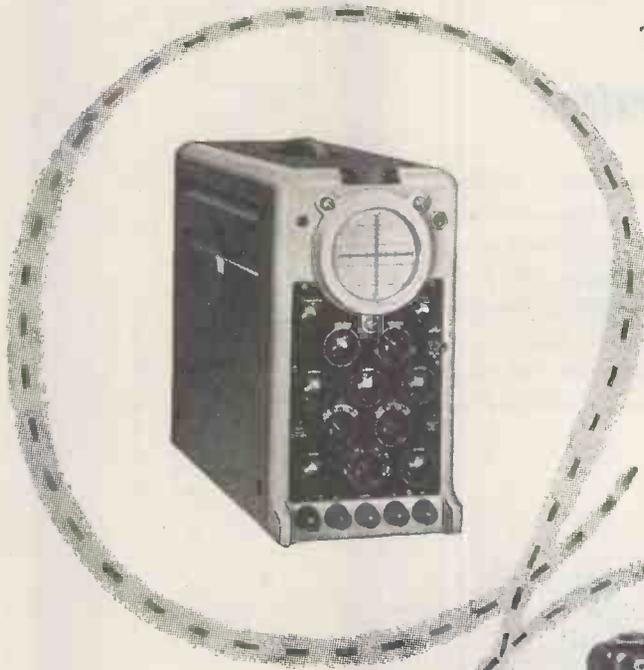

Two similar amplifier channels with an approximate gain of 2000 and an upper frequency response of 5 megacycles (-6DB) are features of this new Cossor Double Beam general purpose oscillograph. The repetitive or triggered time base has a sweep duration from 200 milliseconds to 5 microseconds.

The instrument will operate from power supplies of any of the various frequencies and voltages encountered in the Armed Services or from standard civil supply mains.

and Model 1433 voltage calibrator



Primarily designed to be used with the Model 1052 oscillograph the Cossor Voltage Calibrator Model 1433 provides an accurate means of calibration of input voltages to the plates or amplifiers of any oscillograph. Calibrating voltages are read directly from a wide scale meter without any computation being necessary. Measurements can be made to an accuracy of $\pm 5\%$ and the instrument can be used in any application where a source of accurately-known voltage is required.

COSSOR ELECTRONIC INSTRUMENTS

Write for illustrated leaflets about both of these instruments

A. C. COSSOR LTD., INSTRUMENT DIVISION, DEPT. I, Highbury Grove, N.5

Telephone: CANonbury 1234 (33 lines). Telegrams: Cossor, Norphone, London. Cables: Cossor, London

C.I.56

Watch out for the
NEW
**TELE-CHECK AND
CRYSTAL CONTROL
MARKER GENERATOR**
for Bands I and III.

MARCONI HR 21***Independent Sideband
HF Receiver for
point-to-point services***

This receiver is designed for independent sideband reception of telephony and covers the frequency range 3-27.5 Mc/s. It provides: selection of one of 6 crystal controlled spot frequencies or continuous tuning over the whole range, motor driven automatic frequency correction, reducing errors of up to 3 Kc/s to substantially zero mistune. Reconditioned or local carrier may be used for demodulation, full metering and monitoring facilities.



Particular attention has been given to ease of servicing and all units are easily withdrawn.

**MARCONI****COMPLETE COMMUNICATION SYSTEMS*****Surveyed, planned, installed, maintained*****MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED • CHELMSFORD • ESSEX**

NEW!

RADIO & T.V. OUTFITS

LEARN THE PRACTICAL WAY

Specially prepared sets of radio parts with which we teach you, in your own home, the working of fundamental electronic circuits and bring you easily to the point when you can construct and service radio sets. Whether you are a student for an examination; starting a new hobby; intent upon a career in industry; or running your own business—these Practical Courses are intended for YOU—and may be yours at very moderate cost.


EASY TERMS FROM 15/- A MONTH

With these outfits, which you receive upon enrolment, you are instructed how to build basic Electronic Circuits (Amplifiers, Oscillators, Power Units, etc.) leading to complete Radio and Television Receiver Testing and Servicing.



RADIO Elementary—For carrying out basic practical work in Radio and Electronics, from first principles and leading to the design and building of simple Receivers.

ALL EQUIPMENT SUPPLIED IMMEDIATELY AND REMAINS YOUR PROPERTY

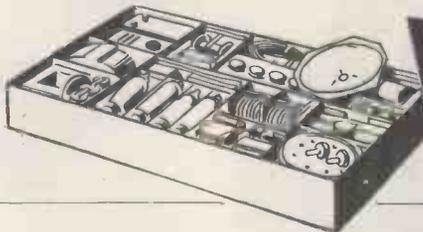


2

RADIO Advanced—With this equipment, you are instructed in the design, construction, testing and servicing of a complete modern Superhet Radio Receiver.

TELEVISION Outfit No. 3—With this equipment you are instructed in the design, construction, servicing and testing of a modern high-quality 15" Television Receiver.

3

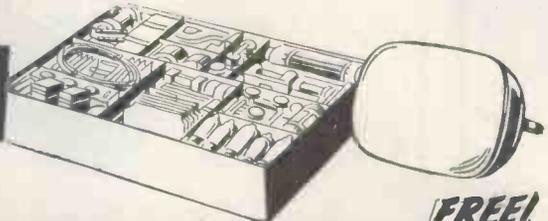

OTHER COURSES WITH EQUIPMENT INCLUDE:

**MECHANICS · ELECTRICITY
CHEMISTRY · PHOTOGRAPHY
CARPENTRY**

**ALSO DRAUGHTSMANSHIP · COMMERCIAL ART
AMATEUR S.W. RADIO · LANGUAGES · ETC.**

POST THIS COUPON TODAY

Please send me your FREE book on Practical Courses: I am interested in Radio 1 , Radio 2 , Television .

Other subjects _____

To: E.M.I. INSTITUTES, Dept. 127x, 43, Grove Park Road, Chiswick, London, W.4.

NAME _____

ADDRESS _____

9/54 _____



E.M.I. INSTITUTES The only Postal College which is part of a world-wide Industrial Organisation

SenTerCel H.T. rectifiers

from 125V 30mA
to 250V 300mA

Specially designed for use in domestic Radio & Television receivers, these miniature rectifier stacks have an established position with manufacturers to whom reliability, small dimensions and low costs are important.

FEATURES

- Instant starting — no warming-up period
- Unlimited instantaneous overload
- No limit to size of reservoir capacitor
- Simple mounting—no valve holder
- Withstand overloads such as charging current of de-formed electrolytic capacitors
- Low heat dissipation
- Practically indestructible in service
- Simple wiring—two connectors only
- Small size . . . low weight
- Low cost

TYPE	RM0	RM1	RM2	RM3	RM4	*RM5
Maximum ambient temperature	35°C	55°C	35°C	55°C	35°C	55°C
Maximum output current (mean)	30mA	15mA	100mA	60mA	120mA	90mA
Maximum input voltage (r.m.s.)	125V	350V	125V	350V	125V	350V
Maximum peak inverse voltage	Unlimited	350V	Unlimited	350V	Unlimited	350V
Max. instantaneous peak current	0.82 oz.	Unlimited	1.3 oz.	Unlimited	2 oz.	Unlimited
Weight						

* For use in voltage doubler circuits the peak inverse and maximum input voltages are halved, current being as for half wave operation.




Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

RECTIFIER DIVISION: Warwick Road, Boreham Wood, Hertfordshire. Telephone: Elstree 2401

VORTEXION TAPE RECORDER

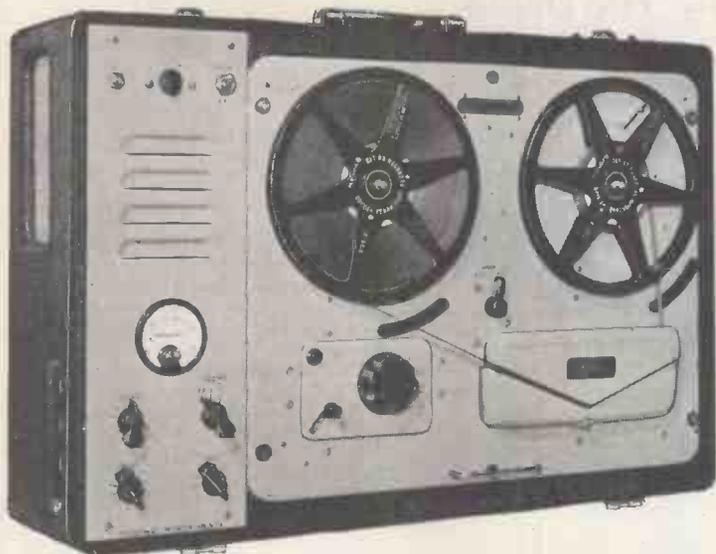

The amplifier, speaker and case, with detachable lid, measures 8½ in. x 22½ in. x 15½ in. and weighs 30 lb.

PRICE, complete with WEARITE TAPE DECK £84 0 0

★ The noise level is extremely low and audibly the hum level and Johnson noise of the amplifier and deck are approximately equal. Only 25% of this small amount of hum is given by the amplifier alone.

★ Extremely low distortion and background noise, with a frequency response of 50 c/s.—10 Kc/s., plus or minus 1.5 db. A meter is fitted for the measurement of signal level and bias level.

★ Sufficient power is available for recording on disc, either direct or from the tape, without additional amplifiers.

★ A heavy mu-metal shielded microphone transformer is built in for 15-30 ohms balanced and screened line, and requires only 7 micro-volts approximately to fully load.

★ The .5 megohm input is fully loaded by 18 millivolts and is suitable for crystal P.U.s, microphone or radio inputs.

★ A power plug is provided for a radio feeder unit, etc. Variable bass and treble controls are fitted for control of the play back signal.

★ The power output is 3.5 watts heavily damped by negative feedback and an oval internal speaker is built in for monitoring purposes.

★ Facilities are provided for using the amplifier alone and using power output or headphones while recording or to drive additional amplifiers.

★ The unit may be left running on record or play back even with 1,750 ft. reels with the lid closed.

POWER SUPPLY UNIT to work from 12 volt Battery with an output of 230 v., 120 watts, 50 cycles within 1%. Suppressed for use with Tape Recorder. **PRICE** £18 0 0.

FOUR CHANNEL ELECTRONIC MIXER

is almost essential for the professional or semi-professional where a number of different items have to be mixed on one tape recording.

It is recommended by a number of tape recorder manufacturers for this purpose.


Any normal input impedance can be supplied to order, balanced or unbalanced, the standard being 15-30 ohms balanced.

The normal output is 0.5 volt on 20,000 ohms or less, but 600 ohms is available as an alternative.

The steel stove enamelled case is polished and fitted with an engraved white panel suitable for making temporary pencil notes.

An internal screened power pack and selenium rectifier feed the five low noise non-microphonic valves.

Used in many hundreds of large public address installations and recording studios throughout the world.

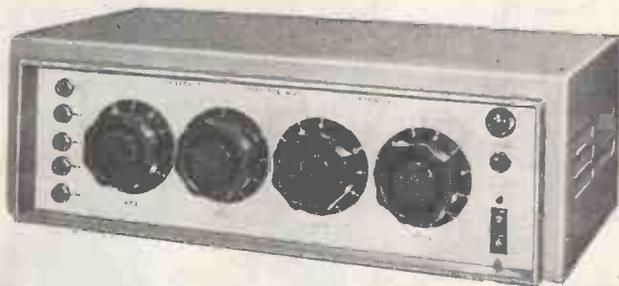

PRICE £36 15 0.

Manufactured by

VORTEXION LIMITED, 257-263, The Broadway, Wimbledon, London, S.W.19


Telephones: **LIBerty 2814 and 6242-3** Telegrams: **"Vortexion. Wimble. London."**

Delanco

REGD.

ELECTRICAL INSULATING MATERIALS

There is a "Delanco" material for every application and our tool-room and machine-shop can deal with the manufacture of the most intricately shaped components.

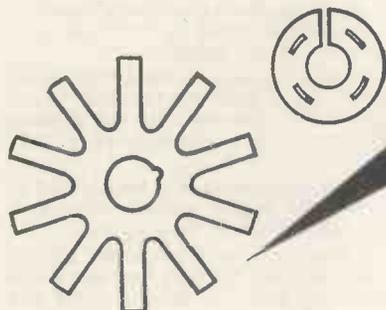

Vulcanized Fibre in sheet, rod, tube, strip and coil.
 Presspahn and Leatheroid in sheet and coil.
 Bakelite sheet, rod and tube.
 Varnished Cotton and Silk Sleevings.
 Machined, Stamped, Pressed parts in all materials.

Enquiries on every aspect of this trade are welcome.

ANGLO-AMERICAN VULCANIZED FIBRE CO. LTD.

CAYTON WORKS . BATH STREET . LONDON, E.C.1


Phone: CLerkenwell 3271

SOUND SALES LEADS WITH THE DX FOUR—F.M. RADIOGRAM

This is a distinctly Hi-Fi Plus instrument combining F.M., Standard Broadcast Bands, AM/VHF, plus the ability to reproduce superbly your favourite long-playing or standard 78 records.

Achieved by the "A-Z"—F.M. Unit the "A-Z" Radio Unit and the phase inverter speaker. (Praised by Mr. P. Wilson of "The Gramophone" in his technical report) together with "A-Z" Junior Amplifier and the Collaro 3-speed motor.

All combined in one instrument £67/10/-, plus £23/11/- P.T.

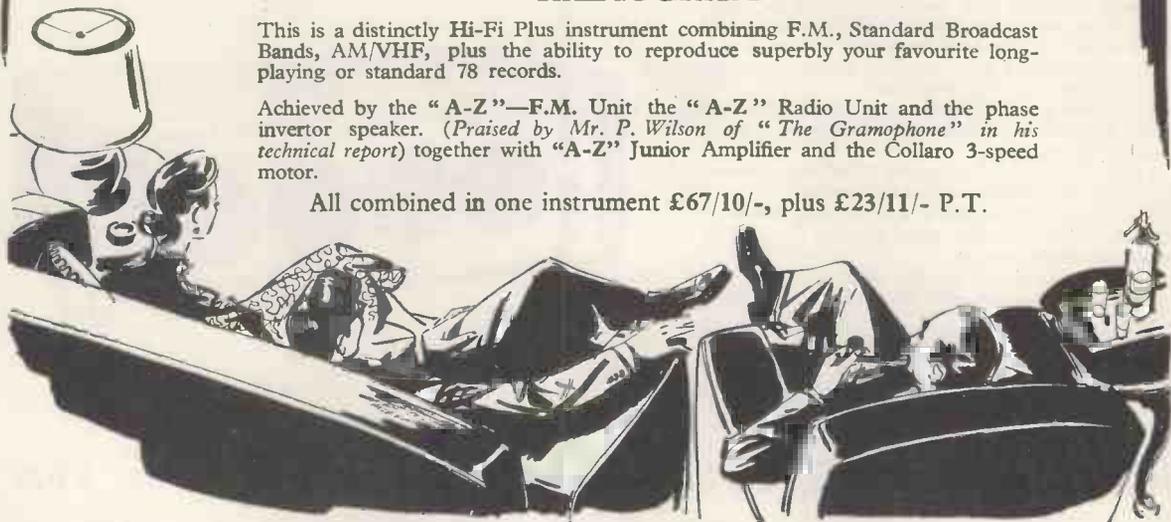

SOUND SALES LIMITED • WEST STREET • FARNHAM • SURREY

Telephone: Farnham 6461-2-3.

Telegrams: Sounsense, Farnham.


Introducing

THE

LEAK

DYNAMIC PICKUP

This pickup will very probably earn recognition as the best in the world. It is a definite advance on the pickup introduced five years ago, which is used in many recording studios for dubbing and playback.

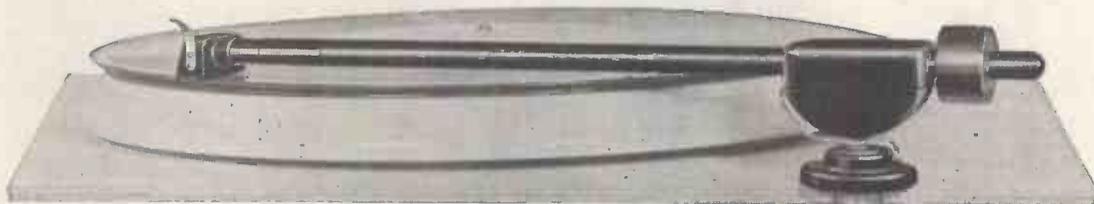

PRICES

The arm: £2/15/-, plus 19/3 Purchase Tax.

L.P. hand with diamond stylus:
£5/15/-, plus £2/0/3 Purchase Tax.

78 head with diamond stylus:
£5/15/-, plus £2/0/3 Purchase Tax.

Mumetal-cased transformer: £1/15/-.

★ The motor-board has been cut away to show the simplicity of mounting.

SPECIFICATION

★ THE ARM

This is of advanced design having very low inertia. Friction is kept to a minimum by using a single pivot bearing. The arm is counter-weighted and has provision for plug-in interchangeable heads. An arm rest is provided.

★ GENERATING SYSTEM

Dynamic (moving-coil). Coil impedance approximately 6 ohms, 1,000 c/s. No magnetic material is embodied in the moving parts, and the pickup is free from the inherent distortion of moving iron (magnetic variable reluctance) types. These distortions are also inherent in those dynamic pickups in which the moving coil is wound on a magnetic core.

★ STYLUS

Material: Diamond only.
Stylus sizes: 0.001in. radius + nothing -0.0001in.
0.0025in. radius ±0.0001in.

★ PLAYING WEIGHTS

Between 2 and 3 grammes for L.P.
Between 5 and 6 grammes for 78.
Automatically adjusted by the weight of the head.

★ RECORD AND STYLUS WEAR

These are lower than on any pickup of which we have cognisance.

★ OUTPUT

The shielded step-up transformer delivers an output of 11 mV for each cm/sec. r.m.s. recorded velocity. This means that an amplifier with a sensitivity of 40 mV at 1,000 c/s will be easily loaded by the pickup from commercial records.

★ FREQUENCY RESPONSE

Total variation ±1 db 20,000 c/s to 40 c/s with the L.P. head, including transformer.

Low frequency resonance.

20 c/s ±5 c/s, with our very lightweight arm.

High frequency resonance:

0.001in. radius Vinyl, 21,000 c/s ±2,000 c/s.

0.0025in. radius on shellac, above 27,000 c/s.

No grease or rubber is used, and the frequency response is independent of temperature.

★ DIMENSIONS

From the centre of the fixing stem to the front of the pickup head, 9½in. From the centre of the fixing stem to the rear of the arm 2in. The height of the pickup is adjustable and it can be used with any turntable.

★ MOUNTING

The distance from the centre of the fixing hole to the centre of the turntable spindle is 8½in. The fixing hole is ½in. and the stem contains a miniature socket which accepts the plug leading to the transformer. The turntable may be magnetic, in which case a spacer of ½in. should be used.

★ Write for illustrated leaflet 'W'.

Sales Concessionaires.

AUDIO TRANSDUCERS LTD., PICCADILLY HOUSE, 33-37 REGENT STREET, LONDON, S.W.1

Telephone: REgent 5659


Telegrams: HIFI, PHONE, LONDON

Cables: HIFI, LONDON



INSTANT HEAT CONVECTOR

The heater with the lowest possible thermal capacity, 4ft. long; made from heavy gauge sheet steel (galvanised) 1 kw., suitable A.C. or D.C. Price only £2 or with thermostat £3/15/-. Note: The thermostat mounts separately and will control up to three heaters.



EX-ROYAL NAVY SOUND POWERED TELEPHONE


These require no batteries, and will go for long periods without attention. Complete with generator and sounder which gives a high pitched note, easily heard above any other noise. Also fitted with an indicator lamp which in quiet situations can be used instead of the sounder, or where several h'phones are used together will indicate which one is being called. Size 7 1/2 in. x 9 in. x 7 1/2 in., wall mounting, designed for ships' use, but equally suitable for home, office, warehouse, factory, garage, etc. Price 57/6 each, plus 4/6 carriage.

MULTIMETER KIT



All the essential parts, including 2in. moving-coil meter, selected resistors, wire for shunts, 8-point range selector, calibrated scale, stick-on range indicator and full instructions for making are available as a kit, price 15/-, plus 9d. post and packing.

SENT FOR £1 ONLY BLACK AND DECKER ELECTRIC TOOLS



1/2 in. drill, £5/19/6 or £1 deposit—Bench stand for drill, £3/7/6—Lathe stand for drill, £5/5/- or £1 deposit. The three items supplied for £14/12/- or 30/- deposit.

CONSTRUCTOR'S PARCEL

Contains cabinet as Wolsey 54, drilled metal chassis—dial—pointer, etc., 29/6. All other components available total cost £5. Data 1/6 (free with components).

THE INFRA-RED LAMP


Means real comfort in bed or in work-room or other place where air temperature is low as it emits Infra-Red Rays which not only warm you but relieve pain, if you have any, and keep you healthy.

- Economical because its rays warm you and not the room.
 - Costs only 1/4d. per hour to run (electricity at 1d. per unit).
 - Works off lighting circuit (full instructions supplied).
 - Absolutely safe for continuous burning, no health or fire risk.
 - Ideal for many other uses:—over pet's basket—rearing pup, chicks—over desk—work bench, etc.
 - Completely and unconditionally guaranteed for five years.
 - All complete and ready to work. Price 36/-, post and pkg. 2/-.
- Money refunded in full if after seven days' trial you are not completely satisfied.



SUPERHET RADIO BY BEETHOVEN

NOW AVAILABLE FOR LONG, MEDIUM AND SHORT WAVES



Extremely well built on chassis size approx. 9 1/2 x 7 1/2 x 8 1/2 using only first-class components, fully aligned and tested, 110-240 volt A.C. mains operation. Large clear edge-lit dial. Three wave bands covering Long, Medium and Short waves. Complete with five Mullard valves, frequency changer, double diode triode, pentode output and full wave rectifier. Complete with Rola loudspeaker ready to operate. Special cash-with-order price this month, £8/17/6, carriage and insurance 7/6. Hire purchase terms £3 deposit, balance over 12 months.

Really beautiful walnut veneered and polished cabinet for only 39/6 if purchased at the same time as the Beethoven 5 valve superhet chassis (illustrated above). Bought separately the price of the cabinet is 49/6. H.P. deposit on cabinet and chassis is 32/- only.



THE WOLSEY 54

A really fine ready built modern Superhet at the remarkable price of £8/19/6 or £3 deposit, balance over twelve months.


The Wolsey 54 is an A.C. mains superhet employing latest circuitry covering long and medium wave bands in an ultra modern case with illuminated dial—overall size approximately 11 1/2 x 7 x 8—complete ready to work—twelve months' guarantee.

"ORGANTONE"

The Cleveland "ORGANTONE" is a 5-valve, 3-wave band superhet covering long wave (1,020-1,875 metres) medium wave (187.5-545.5 metres) and short wave (16-50 metres). Built to a very stringent specification, it attains a high level of performance both with regard to sensitivity and fidelity.

Osram all-glass miniature valves are employed throughout and low loss iron cored coils in both aerial and oscillator sections together with permeability tuned I.F.s account for an excellent signal to noise ratio. Full A.V.C. is applied to both frequency changer and I.F. stages, and particular care has been taken to ensure freedom from frequency drift.

The output stage utilises variable negative feedback for tone control, and, but for standard pentode correction, no cut in the ordinary sense is applied. A gram position is provided on the wave change switch and reproduction of records is particularly good. An amply proportioned power transformer with a primary tapped for 110-280 volts gives complete isolation from the mains. Chassis size is 12in. x 7in. x 7in.—scale size is 10 1/2 in. x 4 1/2 in. This receiver has been tested in particularly difficult areas and its stability and noise rejection have produced exceptional results. It is an instrument which could fairly be described as a custom-built chassis. Price £11/10/-, 35/- deposit. Carriage, etc., 7/6. A circuit diagram and photograph available, price 2/-, post free.



VARIABLE POWER RESISTORS

Mounted on substantial framework, overall dimensions approximately 11 x 3 1/2 x 6 in. high, 25 amps. 4 ohms. Quite suitable for rewinding for other values, power rating exceeds 250 watts. Adjustment is by twisting protruding knob which is the only part that needs to show in front of panel. Price 17/6, carriage and packing, 2/- extra.

HEAVY DUTY MAINS TRANSFORMERS

400-0-400 at 200 m/a. with two 4-volt L.T. windings, both rated at 6 amps. A really massive job made for services equipment—limited quantity 19/6 each.

TRANSFORMER LAMINATIONS

Ideal for making up experimental and special purpose jobs. Price 1/6 per lb. or 6d. per dozen pairs (approximately 48 required for 1in. stack), size 2 1/2 x 2 1/2 in. (approx.) Suitable for output transformers, etc., price 6d. per dozen pairs.

BREAKDOWN UNIT

Unit for breaking down, offered at little over the price of the 1/2 in. Aladdin Coil Formers. Note: all parts can easily be removed as they nut and bolt together. The unit contains:—

- 6 Aladdin 1/2 in. coil formers with dust cores.
- 6 metal cans for above coil formers.
- 1 4-position 12-pole switch.
- 6 miniature R.F. chokes.
- 2 25 mfd. 25 v. electrolytic.
- 30 paper tubular condensers .002 to .1 mostly for 450 v.
- 56 carbon resistors value from 1/2-watt to 2-watt.
- 2 medium size R.F. chokes.
- 7 moulded octal valve holders.
- 1 moulded diode valve holder.
- 20 mica condensers (moulded silver and ceramic).
- 7 insulated top caps for valves
- 4 components strips (1 40-way, 1 11-way, 1 5-way, and 1 3-way).
- 1 very useful chassis size 18 x 5 x 3 1/2 in. Plus dozens of nuts, bolts, screws, washers and other useful items such as 1/2 in. spindle extender, etc., etc.

Price 7/6, post and packing 2/6.

MAKING A CONVECTOR HEATER

250-watt elements ideal for use with home built convectors, towel rails, airers, etc. Price only 2/6 each, post and pkg. 6d.

METERS FOR BATTERY CHARGERS

2in. square Bakelite cased meter reading 0-5 amps. Price 9/6. post and packing 9d.

CHANGER TRANSFORMERS

0-9 15 v. secondaries, tapped primary, suitable for 6 v. and 12 v. batteries. Charging rate up to 6 amps. Amply rated, price 21/6, post and packing 2/6.

UNIVERSAL METER

2-milliamps moving coil movement. Complete with sheet of printed scales, covering most ranges of volts, milliamps, amps. Price 9/6 post and packing 9d.

VALVES FOR V.H.F.

Type C.V. 64 and C.V. 186 Magnetrons unused and guaranteed. Price £2/10/-, post and insurance 10/-.

HEAVY DUTY CHOKES

300 milliamps, 7 henrys, 50 ohms. D.C. Size approximately 4 1/2 x 4 1/2 x 3 in. New, not Government surplus, price 10/- plus 2/- post and packing.

ORDERS TO →

7-WAVE BAND ASSEMBLY



5-wave coil pack for up to 11 mtrs., with R.F. stage, three-gang tuning condenser, slow motion drive, I.F. transformers and numerous other parts, make a really fine receiver. Price £6, plus 10/- post and insurance. Note: The above are new, but removed from chassis.

ELECTRICAL BARGAINS


In addition to our large range of radio accessories we also carry a good stock of electrical wiring accessories; details of a few of these can be found below:—

T.R.S. CABLES, 250 v. CLASS

1/044 Twin flat	9d.
3/029 Twin flat	1/-
3/029 Twin with earth	1/3
3/020 3 Core flat	1/6
3/036 Twin flat	1/4
3/036 Twin with earth	1/7
3/036 3 Core flat	2/-
7/029 Twin flat	1/6
7/029 Twin with earth	1/11
7/036 Twin flat	2/9
7/036 Twin with earth	3/3
7/064 Twin flat	4/9

LEAD-COVERED CABLES

250 v. CLASS	yard
3/029 3 Core	2/3
3/036 3 Core	2/8
7/044 Twin	3/3
3/036 Twin	2/-
7/029 Twin	2/9
7/064 Twin	5/-



CLIX 15 AMP. FOOT PLUG
Maded to B.S.S. specification, shuttered in moulded Bakelite case, 8/6 each.

SOCKETS HICRAFT
Flush type for skirting, 5 amp. 3-pin shuttered, 1/3 each; ditto with switch, 2/3 each.



LAMP HOLDERS
Bakelite, 1/- each or 10/6 doz. Bakelite skirted Batten holder, 1/6 or 15/- doz. Bakelite type threaded, for 1/4 in. with HO. skirt, 1/6.



5 AMP. SURFACE SWITCHES—HICRAFT
Oblong Brown Plastic 1-way 1/3 each.
Oblong White Plastic 1-way, 1/3 each.

Oblong Brown 2-way	1/6 each
Oblong White 2-way	1/6 "
Round Brown 1-way	1/3 "
Round White 1-way	1/3 "
Round Brown 2-way	1/6 "
Round White 2-way	1/6 "

15 per cent. discount if bought in dozens.



EMPRESS CONSOLE


ALSO AVAILABLE AS BUREAU TYPE

This cabinet is undoubtedly a beautiful piece of furniture. It is elegantly veneered externally in figured walnut, internally in white sycamore. The radio section is raised to convenient level but is not drilled or cut. The lower deck acts as the motor-board, again is uncut, it measures 16 x 14 and has a clearance of 5in. from the lid. There is a compartment for the storage of recordings. Overall dimensions of this essentially modern cabinet are 3ft. wide, 2ft. 8in. high, and 1ft. 4 1/2 in. deep.

Special price this month 14 gns—also available by H.P., deposit being 5 gns.

DULCI RADIO CHASSIS

Complete range of these famous receivers now available at all our branches—cash or Hire Purchase—demonstrations gladly given.



3-wave (L. M. & S.) 5-valve	£12 12 0	Ref B3
Pushpull 6-valve 3-wave	£15 15 0	Ref. B3PP
Pushpull with R.F. stage 3-wave 7-valve	18 18 0	B3PP/RF
6-wave L.M. and 4 short waves (band spread)	15 15 0	B6
6-wave with pushpull	18 18 0	B6PP
6-wave with pushpull and R.F. stage	23 2 0	B6PPRF

All available on H.P.—deposit 15 per cent, balance over 12 months.

MULLARD AMPLIFIER

A High Quality Amplifier designed by Mullard engineers. Robust, high fidelity, with a power output exceeding 10 watts and a harmonic distortion less than .4% at 10 watts. Its frequency response is extremely wide and level being almost flat from 10 to 20,000 C.P.S.—three controls are provided and the whole unit is very suitable for use with the Collaro Studio and most other good pickups. The total cost of the amplifier is around £10. For 30/- extra a unit completely made up and tested can be supplied. Carriage in either case is 10/- extra. Data will be provided with all orders for components. Send for the "Mullard Amplifier Shopping List."

THIS MONTH'S SNIP

7-valve pushpull radio chassis with approximately 7 watts output—designed for high quality gramophone reproduction but equally good on radio—covers long, medium and short wave bands—uses latest midget B.V.A. valves and most up-to-date circuitry—price only £12/15/- or in fine walnut veneered cabinet £14/14/-—carriage and insurance 10/- extra.

GRAMOPHONE AUTO CHANGER
COLLARO 3/521

£9.19.6 carriage 7/6

H.P. DEPOSIT 30/-.
The latest three-speed type with the famous "Studio" turn-over pickup.



THE ELPREQ "SELECTIVE FEED-BACK" AMPLIFIER



The amplifier is fitted with independent bass and treble control, both connected through different feed-back loops so that no "cut" at all in the ordinary sense is applied. The variation which can be achieved, by applying various degrees of negative feed back in the higher and lower ranges of the sound strata will accommodate all individual tastes. We strongly recommend a 12in. speaker in order to make the fullest use of the instrument's potentialities. Booklet and set of components available at once at £3/19/6, post, etc., 2/6. Booklet separate 1/6. 12in. speaker to suit £3, post free if bought with amplifier.

LIGHT WEIGHT REFLECTORS

Ideally suitable for all purposes where the intensification of electric illumination or infra red is required. The material used is light-weight aluminium, highly polished. All are pierced for Standard Lampholder.


STAR
7 1/2" diameter by 6" deep. Price 7/6 ea. Post etc. 1/3.

SENIOR
1 1/2" diameter by 4" deep. Price 13/6 each. Post etc. 1/9.

JUNIOR
6 1/2" diameter by 3 1/2" deep. Price 7/3 each. Post etc. 1/3.

BIOU
5 1/2" diameter by 2" deep. For 40/60 watt lamps. Price 6/6 each. Post etc. 1/3.

BELL
5 1/2" diameter by 5" deep. Price 6/3 each. Post etc. 1/3.



1" MICROMETER

Exceptional purchase enables us to offer a 1in. precision micrometer at the very low price of 10/-. A micrometer is an essential part of an engineer's equipment. You will have found the need for one on many occasions in the past for measuring wire gauge, etc. If you act quickly you can now acquire this precision instrument at the remarkably low price of 10/- post free.



12" TELE-CABINET

19/6

Carr. 3/6
Veneered & polished—less glass, makes ideal extension speaker cabinet for 12in




SOMWEAVE

This really lovely loud-speaker fabric we offer at approximately a third of today's cost. It is 42in. wide and our price is 12/- per yard or panels 12in. x 12in., 1/9 each. This is also very suitable for covering plain wooden cases, for portable radio amplifiers, etc.



CLEVELAND CAR BATTERY CHARGER

gives 1 1/2-amp. charge—uses everlasting metal rectifier and robust double wound mains transformer—in metal carrying case with leads and croc. clips. Price, 6 volt 29/6. 6 to 12 volts, 39/6, post 2/6.



ELECTRONIC PRECISION EQUIPMENT LTD.

249, Kilburn High Road, Kilburn.

42-46 Windmill Hill, Ruislip, Middlesex.
Phone: RUISLIP 5780
Half-day Wednesday.

152-153, Fleet Street, E.C.4
Phone: CENTRAL 2833
Half-day Saturday.


29, Stroud Green Road, Finsbury Park, N.4.
Phone: ARCHWAY 1049
Half-day Thursday.

Post orders should be marked "Dept. 2" and addressed to our Ruislip dept.

A fair question

From General Radio Co. Cambridge, Mass., U.S.A.

SUPER 5: Enclosed is a pressure curve of this unit, which performs excellently. It is used as a tweeter in a 3-way system. The low frequency horn (40-300) is driven by one 10 watt amplifier, and the high frequency unit (Super 8/CS/AL and Super 5/CS/AL) is driven by a second 10 watt amplifier. The crossover frequency is 4kc for the high frequency unit. I have repeatedly seen the 10 watt overload indicator flash during intervals during which cymbals were used in orchestration. It is my belief that the frequency distribution of these sounds could centre above 4kc. If this is so, it is possible that the Super 5 gets considerably more than 3 watts for brief intervals. Could this damage the unit? *R. W. Frank, Engineer.*

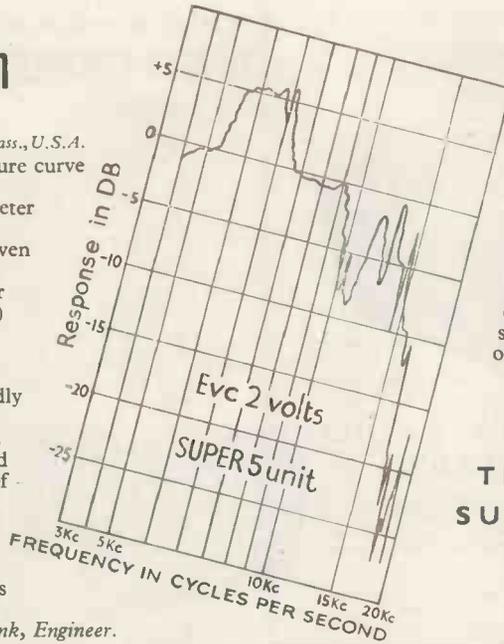

A straight answer

The Super 5 unit should withstand transient peaks up to 5 or 6 watts at high frequencies without distress. The risk of damage to this unit occurs at frequencies below 500 cycles, because the centring device is made of very thin bakelite fabric which is easily distorted by excessive cone movement. The efficiency of the speaker at 10kc upwards depends partly on the delicacy of the centring device.



THE SUPER 5

Wharfedale

WIRELESS WORKS LTD.

IDLE · BRADFORD · YORKS TELEPHONE : IDLE 1235/6

A highly efficient treble unit for use at frequencies above 3,000 c/cs. Flux density 13,000 lines. 1in. centre pole. Aluminium voice coil. 3, 6 or 10 ohms. Baffle opening 3½in. diameter. Price 100/-. Plus 33/3 Tax.

The Miniature Oscilloscope with the GIANT Specification!



TYPE 2300 (Industrial Electronics)

- ★ Direct-coupled X and Y amplifiers.
- ★ D.C. to 3Mc/s. frequency response.
- ★ 7c/s to 50Kc/s time-base with a trace expansion control from zero to 15in.
- ★ Compact and portable.
- ★ Weight: 6½lb.
- ★ Size: 7½in. × 4½in. × 7½in.
- ★ 2½in. effective screen diameter.

SEND NOW FOR FULL DETAILS to Sole Distributor —

G. A. STANLEY PALMER A.R.Ae.S.,
MAXWELL HOUSE, ARUNDEL ST., STRAND, LONDON, W.C.2
TELEPHONE : TEMPLE BAR 1610



PRECISION HI-FIDELITY MAGNETIC SOUND HEADS

HALF TRACK HEADS AVAILABLE:

Model 5RP Record/Play Head.....	£3 5 0
Model 6RP Super Fidelity Record/Play Heads.....	£3 15 0
Model 5R Record Head (Used in conjunction with 6RP head).....	£3 5 0
Model 5E Erase Head.....	£3 5 0
Commercial "friction" type mounting stems ...	4/- extra

Standard Heads—High Impedance, Low Impedance Heads and Special Heads made to order.

SCREENING CANS:

All Mumetal	8/6 each.
Composite (Steel/Mumetal)	4/6 each.

We specialise—that is why deck manufacturers standardise our heads.

Model 5 range of desks to take 7in., 9½in. or 10½in. Reels. Push-button control—three heads—two speeds—three motors.

Write for details. Trade supplied.

BRADMATIC LIMITED
Station Road, Aston, Birmingham 6.
Telephone: East 2881-2. Telegrams: Bradmatic, Birmingham.

for

SELENIUM RECTIFIERS

consult



WHETHER the need is for a single unit or a supply running into thousands . . . if it's a Selenium Rectifier that must fulfil critical requirements and maintain its characteristics over long periods . . . the answer is to be found with Electrix.

- Electrix Rectifiers are characterised by their cool running and consistent long-life conformity to stated specification.
- Manufacturers, Traders and Electronic Engineers, send us your specific requirements.
- Your needs may possibly be met from "standard" types, or
- "To specification" models can be quickly prepared.
- Quotations by return . . . and deliveries a matter of days only.
- We welcome export enquiries.

Here are some typical "standard" full-wave types each

Output 12/15 Volts D.C. 1 Ampere.	List Price	9/-
Output 12/15 Volts D.C. 2.5 Ampere.	"	13/6
Output 12/15 Volts D.C. 4 Ampere.	"	22/6
Output 12/15 Volts D.C. 6 Ampere.	"	35/-

Trade Supplied

- Heavy duty rectifiers with say 230/250 volts A.C. input and 220 volts D.C. output a speciality.
- We use only freshly manufactured selenium plates and components, no ex-W.D. materials whatsoever.

HOUSEHOLD ELECTRIX LTD
 47-49 HIGH ST., KINGSTON-ON-THAMES
 Telephone: KINGston 4585



Estd.

1925

EASY

TERMS

LEAK QUALITY EQUIPMENT
for the Connoisseur

The amazing New
 "TL/10" AMPLIFIER and
 "POINT ONE" PRE-AMPLIFIER



SENT FOR
60/-
 DEPOSIT

This 10-watt amplifier maintains, in every respect, the world-renowned LEAK reputation for precision engineering, fine appearance, and fastidious wiring. The Pre-amplifier will operate from any well-known pick-up, whether crystal, moving iron or moving coil. Provision is made for Tape Recorder and Play back and, as an exclusive feature, readily accessible jacks are provided on the front panel for instantaneous use.

The total Cash Price for these Two Units is £28.7.0. Our **NEW EASY TERMS** are £3 Deposit with order and 14 monthly instalments of 40/- (carriage and crate free).

If you require **FINEST QUALITY REPRODUCTION** together with **WORKMANSHIP** of the **HIGHEST ORDER** your choice must be



The very latest
LEAK DYNAMIC PICK-UP
 with detachable heads is now available from stock.
 See maker's advt. p.113 for full technical specification.

The L.R. SUPPLY COMPANY LTD.
 Telephone: Balcombe 254 **SUSSEX**

Outstanding new developments in HI-FI,

Including new range of
Audio Furniture

at

Holley's



Models illustrated: "Perry" Console, 29 Gns.
"Court" Corner Cabinet, 14 Gns.

Now demonstrating: large range of Equip-
ment by:—

LOWTHER, LEAK, ACOUSTICAL,
DECCA, ROGERS, SOUND SALES PAM-
PHONIC, TANNOY, WHARFEDALE,
EKCO GOODMAN'S, GOODMAN'S
BARKER, CHAPMAN

ALSO IN STOCK

G.E.C. "Metal Cone" loudspeaker	£8 15 0
Wharfedale "R.J." Cabinet	£7 10 0
Chapman F.M. Tuner, Model FM81	£21 0 0
Sound Sales F.M. Tuner. Tax extra.	£15 10 0
Collaro Transcription motor "2000"	£13 9 6
Garrard Transcription Motor "301"	£25 3 6
New B.J. Pick-Up Arm	£2 6 0
Leak "Varislope" Mk. II Pre-amp	£11 9 6
Leak Moving Coil Pick-up	£23 18 0
Armstrong Model 48 Chassis	£23 18 0
Grundig new high-fidelity tape recorder, Model TK 819 (40-14,000 cycles)	95 gns.

HOLLEY'S RADIO

285, CAMBERWELL ROAD, LONDON, S.E.5.

Tel: RODney 4988.

Hours: 9.30 to 6 p.m. including Saturdays, 1 p.m. Thursday.
Hire Purchase Terms Arranged, Technical Advice and
AFTER SALES SERVICE

Smith's for Technical Books



Books on the theory and practice of electronics, new developments, circuit design, and other specialized subjects can be quickly supplied through your local Smith's shop or bookstall.

Your copies of WIRELESS WORLD can be bound into attractive volumes; and all your stationery and printed matter supplied through our local branch.

W. H. Smith & Son
for SPECIALIZED BOOKS

HEAD OFFICE: STRAND HOUSE, LONDON W.C.2

BK

SPECIALISED LOUDSPEAKER ENCLOSURES

No. 6 CLR 8



A handsome new cabinet in contemporary style, specifically designed for use with high fidelity loudspeaker units.

Recommended particularly for use with the AXIOM 101, AXIOM 102, SUPER 8 CS and SUPER 8 CS/AL, this cabinet has specially modified lagging resulting in improved clarity rarely associated with this type of enclosure.

For use with
HIGH FIDELITY LOUDSPEAKER UNITS

H.P. TERMS
AVAILABLE

INDIVIDUALLY MADE, with bronze expanded aluminium grill, this hand french-polished case is available in a variety of oak, walnut or mahogany finishes.

SIZE: 24 1/2" high x 26" wide x 10" deep. **£10. 10. 0**

Model also available for 10" loudspeakers **£13. 13. 0**

This and other high fidelity equipment is demonstrated at our showrooms daily 10.30 a.m.—5.30 p.m. Saturdays 10.30 a.m.—12.30 p.m.

Visit our showrooms to hear the C.L.R.8. and other modern B. K. Housings for 8in., 10in., 12in. and 15in. units—and a wide range of high fidelity equipment which our staff will gladly demonstrate.

B. K. PARTNERS LTD.

229 Regent St., London, W.1. (Entrance Hanover St.) Phone: REG 7363

PANORAMIC WAVEFORM ANALYSER

FOR THE ANALYSIS OF VIBRATION, NOISE, DISTORTION AND OTHER COMPLEX WAVEFORMS THE ANALYSER SHOWN HERE IS UNIQUE.

It provides a continuous presentation of the A.F. spectrum simultaneously showing frequencies and amplitudes of the individual components. Frequency components differing from each other by only 10 c.p.s. may be distinguished and harmonics, etc. as low as 0.1% of the fundamental shown. Permanent records may be obtained by photographing the display.



MODEL 1950/2
A.F. PANORAMIC WAVE ANALYSER

FOR FULL TECHNICAL DETAILS OF THIS AND OTHER INSTRUMENTS, PLEASE COMMUNICATE WITH . . .

INDUSTRIAL ELECTRONICS

DERBY ROAD, EAST SHEEN, LONDON, S.W.14

Telephone : PROspect 8211/2

Compelling reasons for choosing the

'Astronic' HIGH FIDELITY AMPLIFIER



AI254C
£26.5.0

AI280 Tone
Corrector Unit
£11.11.0



OUTPUT	HARMONIC DISTORTION		INTERMODULATION DISTORTION*		RESPONSE
	60 c/s	1,000 c/s	400-4,000 c/s	60-7,000 c/s	
1 W ...	0.22%	0.03%	0.022%	0.056%	± .5db 20 c/s-20 kc/s
12 W	0.43%	0.12%	0.36%	0.42%	± .5db 20 c/s-20 kc/s

* In each case lower frequency modulated by higher frequency 12 db down. Noise level 63 db below full output.

- SENSITIVITY: MICROPHONE, 20 mv, 1 megohm.
- PICK-UP AES, 10 mv (100,000 ohms or less depending on setting of attenuator).
- PHONO f.f.r.r. 10 mv.
- RADIO (Tuner) 200 mv, ½ megohm.
- TREBLE CONTROL, ± 10 db at 10 kc/s with 1 kc/s zero.
- BASS CONTROL, ± 10 db at 100 c.p.s. with 1 kc/s zero.
- Both controls independently and continuously variable.

N. MIERS & CO. LTD., 115 Gower Street, London, W.C.1

Telephone: EUSton 7515.

Cables: MIERSCO.

THE COMPLETE COMPONENT STOCKIST

A few lines we stock you might have difficulty in obtaining.

FEW ONLY

GARRARD RC75M Immediate Delivery £17-9-6.

SPECIAL MINIATURE MAINS TRANSFORMERS. 30. m/a, $\frac{1}{2}$ wave, 250 volts, 6.3 volts at 2 amps and 5 volts at 2 amps, fully shrouded, 22/6. 20 m/a type, $\frac{1}{2}$ wave, 250 volts, 6.3 volts at 1 amp and 5 volts at $1\frac{1}{2}$ amp, 21/-. 40 m/a type, 150 volts and 6.3 at 1 amp, 21/-. All above transformers, standard tapped primary 200/250 volts.

HIGH STABILITY 2% $\frac{1}{2}$ w. RESISTORS. Range 100 \sim to 2 meg (these check better than 1%). Price 1/6 each.

MORGANITE TYPE "T" $\frac{1}{2}$ w. MIDGET RESISTORS. 6d. 1 watt 8d. 10 Ω to 10 meg.

WIREWOUND SMALL COATED RESISTORS. 25, 33, 40, 50, 68, 100, 125, 150, 200, 250, 330, 400, 450, 500, 600, 680, 800, 1K, 1.5K, 2K, 2.5K, 3.3K, 4K, 4.5K, 5K, 6K, 6.8K, 8.2K, 10K. 7 watt max 2/3. 10 watt max 2/9 each.

LINEAR POTENTIOMETERS. Up to 100K, 5/- each (Morganite), $\frac{1}{2}$ meg, $\frac{1}{2}$ meg, 1 meg, 6/6 (Dubilier).

TAPPED POTENTIOMETERS. $\frac{1}{2}$ meg, $\frac{1}{2}$ meg, 1 meg, 2 meg, with centre tap, 7/6 (Dubilier).

.0003 mfd. 3 GANG CONDENSERS
NEW JB 18.3.

D/POLE SWITCHED POTENTIOMETERS. 10K to 2 meg, 5/9. Midget $\frac{1}{2}$ meg, $\frac{1}{2}$ meg, 1 meg., 6/6.

CELESTION 12in. HIGH FIDELITY SPEAKERS. Type P44, 3 Ω £4/5/-; 15 Ω £4/7/6; W.B. 1012, 3 Ω or 15 Ω , £3/13/6.

YAXLEY SWITCHES. All 2 bank, with 2in. spindles. New 7/6 each. 8p 2 way, 6p 3 way, 5p 4 way, 2p 11 way. Midget BT type single wafer, 3/6 each. 1p 12 way, 2p 6 way, 3p 4 way, 4p 3 way. Personal portable lid switches, 3/- each.

EHT R.F. COIL. Wound on Polystyrene former (complete with circuits). Type 'E' 6 to 9 KV, 15/-. Type 'F' 6-18 KV, 25/-.

AVO INSTRUMENTS IN STOCK. Model 7 £19/10/-. Model 40 £19/10/-. Model 8 £23/10/-. Universal Avominor £10/10/-. D.C. Avominor £5/5/-.

Q MAX CHASSIS PUNCHES. $\frac{3}{8}$ in. and $\frac{1}{2}$ in. 12/4; 1in. and $1\frac{1}{8}$ in. 16/-; $1\frac{1}{2}$ in. and $1\frac{3}{4}$ in. 16/-; 1in. square 24/-. All include the keys.

TRIMMERS. Postage stamp 4-70 pf 9d.; 40-100 pf 9d.; chassis mounted type 20-250 pf 1/-; 100-550 pf 1/3; 150-700 pf 2/3; twin 50 pf 9d.; Philips Bee Hive type 1/6.

SOLDERING IRONS. Adcola pencil bit 25/6; Detachable bit 33/6; available 200/220 v., 230/250 v., 6 v., 12 v. Henley Solon new small pencil bit iron (230/250 v. only) 19/8 each. Large pencil bit 23/8. Oval bit 23/8. 200/220 v. 230 250 v. Tyane pencil bit, 14/11.

PLUGS/SOCKETS. Octal top entry 2/3; Side entry 2/3; Belling-Lee 5 pin plug 4/6; Socket 1/6; 7 way 5/6; Socket 2/9; 10 way 7/-; Socket 3/9; Insulated single sockets Clix 6d.; Plugs 4d.

Write now for

CATALOGUE NO. 12 PRICE 1/-

● 70 PAGES

● 250 ILLUSTRATIONS

RADIO SERVICING CO.

82 SOUTH EALING ROAD, LONDON, W.5.

EALing 5737

Next to Stn. Ealing
Tube Station


LEEVEES RICH

HEAVY DUTY

MAGNETIC TAPE RECORDER

for Industrial and Professional Use

Frequency Range (± 2 db.),
30-18,000 c/s.
Volume Range 50 db.
Flutter < 0.1%

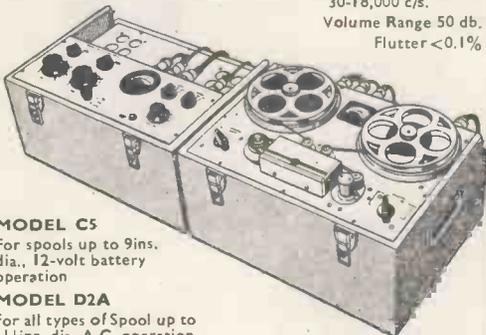

MODEL C5

For spools up to 9ins. dia., 12-volt battery operation

MODEL D2A

For all types of Spool up to 11 $\frac{1}{2}$ ins. dia. A.C. operation

MODEL D2B

For all types of Spool up to 11 $\frac{1}{2}$ ins. dia., 12-volt battery operation

All of these models may also be supplied with

SYNCRYPULSE (prov. pat.) INTERLOCK SYSTEM
LEEVEES-RICH EQUIPMENT Ltd.

Please note new address:

78, Hampstead Rd., London, N.W.1. EUSTON 1481

NEW!

The Manning-Carr Miniature Polarised Relay



Actual Size

DATA—A Sensitivity of 25 milli-watts and capable of handling mains voltage on the contacts with alternating currents up to 0.25 amps. Being polarised it has the advantage that the Armature contact can be biased to lock in either direction by suitable adjustment of the contact screws, which provides a useful facility where pulse operation is required. Speed of operation is also high and the Relay will follow A.C. frequency of 50 c.p.s. Resistance up to 8,000 ohms, which is acceptable for Anode circuits. Alternatives to specification if required. Sole Concessionaires.

POST OFFICE TYPES 3,000 AND 600 RELAYS

to specification. Tropicalising, impregnating and Services jungle finish if required. Delivery 3-4 weeks.

Manufacturers to H.M. Govt. Depts. and leading contractors

L. E. SIMMONDS LTD.

5, BYRON ROAD, HARROW, MIDDX.

Telephone Harrow 2524-0315.

CLASSIC

THE MAIL ORDER SPECIALISTS
—CREDIT SALE AND HIRE PURCHASE TERMS TAPED!

Now that the restrictions have been lifted from Hire Purchase transactions, Classic can offer you the finest selection of the very best Tape Recording apparatus at lower deposits than ever.

HI-FI EQUIPMENT LOUD SPEAKER UNITS

	Cash Price	Credit Sale		HIRE PURCHASE TERMS		
		£1 Deposit	9 Pmts. of	Deposit	12 Pmts.	18 Pmts.
W.B. HF.610	£2 10 6	—	—	—	—	—
W.B. HF.810	£3 0 6	—	—	—	—	—
W.B. HF.912	£3 7 0	—	—	—	—	—
W.B. HF.1012	£3 13 6	—	—	—	—	—
W.B. Duo Concentric	£22 10 0	54/9	£4 10 0	34/6	24/-	—
Goodmans Axiom 25	£14 14 0	34/9	£2 14 0	23/-	16/-	—
Goodmans Axiom 101	£6 12 1	13/-	£1 12 1	10/-	6/8	—
Goodmans Axiom 102	£9 18 2	22/5	£1 18 2	15/4	10/8	—
Goodmans Axiom 150 Mk. II	£10 5 6	23/7	£2 5 6	16/8	11/1	—
Goodmans Axiom 80	£22 0 0	53/8	£4 8 0	33/7	23/4	—
Goodmans Axiom 60	£8 12 6	19/3	£1 12 6	13/7	9/4	—
Tannoy 12in. Dual Concentric	£27 10 0	67/6	£5 10 0	42/2	29/4	—
Tannoy 15in. Dual Concentric	£33 10 0	82/0	£6 10 0	51/9	38/-	—
Wharfdale Loudspeaker Super 5	£8 13 3	14/3	£1 13 3	10/-	6/8	—
Wharfdale Super 8/CS/AL	£8 13 3	14/3	£1 13 3	10/-	6/8	—
Wharfdale Golden 10in.	£8 6 8	18/7	£1 6 8	13/5	9/4	—
Wharfdale W.10.CSB	£12 6 6	28/10	£2 6 6	20/-	13/4	—
Wharfdale W.12.CS	£9 15 0	22/1	£1 15 0	13/4	10/8	—
Wharfdale W.16.CS	£17 10 0	44/-	£3 10 0	27/-	18/8	—
Wharfdale Super 12 CS/AL	£17 10 0	44/-	£3 10 0	27/-	18/8	—
Lowther PM.2	£35 0 0	86/10	£7 0 0	53/8	37/4	—

AMPLIFIERS AND PRE-AMPLIFIERS

Leak T.L.10	£17 17 0	43/2	£3 11 6	27/5	19/-	
Leak T.L.12	£22 7 0	36/7	£3 13 6	43/8	30/3	
Leak Vari-Slope Pre-amplifier	£12 12 0	29/5	£2 12 0	19/2	13/4	
Leak Point-One Pre-amplifier	£10 10 0	22/-	£2 2 0	17/6	11/8	
Quad Mk. II Amplifier	£22 1 0	53/9	£4 8 0	33/8	23/5	
Quad Mk. II pre-amplifier	£19 19 0	48/1	£4 0 0	30/7	21/3	
Goodsell GW18 Williamson	£33 0 0	81/9	£6 12 0	50/6	35/1	
Goodsell G.W.18 E. Core	—	—	—	—	—	
Williamson	£28 0 0	94/6	£7 12 0	58/3	40/9	
Goodsell GW12 Williamson	£27 10 0	67/6	£5 10 0	42/2	29/4	
Goodsell CR50 "C" Core	£19 10 0	47/1	£3 18 0	22/3	20/8	
Goodsell F/TC Pre-amplifier	£10 10 0	22/-	£2 2 0	17/4	11/7	
Goodsell FU/TC Pre-amplifier	£14 14 0	34/9	£2 14 0	23/-	16/-	
Goodsell F/F/A Pre-amplifier	£18 18 0	45/6	£3 18 0	29/-	20/8	
Goodsell G. II Minor	£12 17 6	18/6	£2 17 6	20/-	13/4	
Rogers Mk. II Baby-de-Luxe Pre-amplifier	£14 0 0	33/3	£2 16 0	21/5	14/10	
Rogers Mk. II Junior	£9 0 0	20/5	£1 16 0	15/4	10/3	
Pye P.P.91	£29 8 0	72/5	£5 18 0	35/4	24/7	
Pye P.P. 91A	£12 12 0	29/5	£2 12 0	19/2	13/4	
Panphonic 25 watt Ultralinn	£45 0 0	112/5	£9 0 0	69/-	46/11	
Mullard	Details on application.					

MOTORS AND PICKUPS

Connoisseur 3-speed motor	£23 8 11	57/2	£4 8 11	36/5	25/4	
Connoisseur 3-speed motor with pickup and 2 heads	£32 14 5	80/10	£6 14 5	49/10	34/8	
Thorens 3-speed motor	£32 0 0	79/2	£6 15 0	49/9	33/11	
Garrard Mod. R.C.90	£21 6 7	43/9	£3 6 7	30/8	21/4	
Garrard R.C.90	£22 9 0	54/8	£4 9 0	34/6	24/-	
Garrard R.C.110	Prices not announced.					
Garrard R.C.111	Prices not announced.					
Garrard T	£10 12 8	24/5	£2 2 8	16/2	11/3	
Garrard TJA	£10 16 0	25/-	£2 8 0	16/2	11/3	
Collaro Transcription motor 2000	£13 9 0	31/8	£2 9 0	21/1	14/8	
Collaro Transcription motor 2000 with studio pickup 2010	£18 10 0	44/7	£3 10 0	29/-	20/-	
Collaro autochanger	£16 10 0	39/5	£3 6 0	25/3	17/7	

TUNER AND F.M. UNITS

Leak	£24 19 0	86/5	£6 19 0	53/8	37/4
Goodsell S.P.1	£9 17 8	22/5	£1 17 6	15/4	10/8
Goodsell FM. Unit	£18 10 0	44/7	£3 10 0	29/-	20/-
Rogers	£24 16 0	58/4	£4 16 0	38/4	26/8
Chapman	£16 16 0	40/1	£3 6 0	25/10	17/10
Chapman FM. Unit	£18 10 0	44/7	£3 10 0	29/-	20/-
Chapman	£21 6 8	51/10	£4 6 8	32/7	22/8
Lowther L.E.S.	£23 2 0	56/5	£4 2 0	36/5	25/4
Lowther D.T.4	£33 0 0	81/9	£6 12 0	50/6	35/1
Lowther D.T.5	£45 0 0	112/5	£9 0 0	69/-	46/11
Lowther FM. Unit	£22 0 0	53/8	£4 8 0	33/7	23/4

CHASSIS

Armstrong RF.38	£23 2 0	56/5	£4 2 0	36/5	25/4
Armstrong RF.41	£31 19 8	78/10	£6 10 8	48/8	33/10

COMPLETE RECORDERS

	Cash Price	Credit Sale		Deposit	12 Pmts.	18 Pmts.
		£20/- Deposit	9 Pmts. of			
Ferograph 2A (as available)	£79 16 0	201/1	£16 16 0	0	120/9	82/8
G.B.	£81 0 0	204/5	£17 0 0	0	122/6	85/4
Vortexion W.W. Deck 2A	£84 0 0	211/8	£17 0 0	0	116/9	81/4
Vortexion W.W. Deck 2B	£89 0 0	251/5	£20 0 0	0	151/5	105/4
M.S.S. P.M.R.3	£99 15 0	252/1	£20 15 0	0	151/5	105/4
C.J.R. D.5	£129 10 0	338/2	£28 10 0	0	197/5	137/4
E.M.I. TR.50	£125 0 0	316/10	£25 0 0	0	191/8	133/4
Emicorda	£94 10 0	238/9	£18 10 0	0	145/8	101/4
E.M.I. Reporter	£94 0 0	237/8	£18 0 0	0	145/8	101/4
Wirek Reporter	£55 0 0	138/-	£11 0 0	0	84/4	58/2
Wirek Reporter De Luxe	£59 0 0	145/2	£12 0 0	0	90/1	62/8
Grundig TK.9	£68 5 0	160/8	£14 5 0	0	103/6	72/-
Grundig TK.819	£99 15 0	252/1	£20 15 0	0	153/1	105/4
Kenton Courier	£63 0 0	158/5	£13 0 0	0	95/10	66/8

AMPLIFIERS

Bradmatic C.1	£62 0 0	155/10	£12 8 0	0	94/7	63/1
E.A.P. record/replay for Lane Deck	£15 0 0	35/9	£3 0 0	0	23/-	30/8
For Truvox	£15 0 0	36/9	£3 0 0	0	23/-	30/8
Vortexion for Wearite 2A	£40 0 0	99/8	£8 0 0	0	61/4	41/-
Goodsell TR. pre-amp	£18 18 0	45/5	£3 13 0	0	29/2	20/-
Elpico AC/64	£16 16 0	40/1	£3 5 0	0	26/8	17/9
Lane Kit	£13 13 0	32/1	£2 13 0	0	21/8	14/8

TAPE DECKS

Wearite 2A	£35 0 0	86/10	£7 0 0	0	53/8	38/11
Wearite 2B	£40 0 0	99/8	£8 0 0	0	61/4	42/8
Bradmatic 5	£42 0 0	104/9	£8 8 0	0	65/11	45/10
Bradmatic 6C (98 spools)	£45 10 0	113/7	£9 10 0	0	69/-	46/-
Bradmatic 6D (104in. N.A.B. spools)	£50 0 0	125/2	£10 0 0	0	78/8	53/4
Reflectograph	£39 10 0	98/2	£8 10 0	0	59/5	41/4
Truvox	£23 2 0	56/5	£4 12 0	0	35/6	24/8
New Lane Mark VI	£18 10 0	44/6	£3 10 0	0	28/9	20/-

CABINETS

For Truvox Deck	£6 0 0	12/9	£1 4 0	0	11/4	7/7
For Soundmaster	£6 0 0	12/9	£1 4 0	0	11/4	7/7
For Wearite	£3 0 0	17/10	£1 12 0	0	14/-	9/4
Classic Console	£27 0 0	87/6	£5 8 0	0	42/11	29/11

SOUNDMASTER TAPE RECORDER

Complete Kit	£62 0 10	115/11	£13 0 10	0	93/11	65/4
Soundmaster Booklet 6/6.	All components and parts available from stock.					
Technical information and every assistance given. Write for Lists.						

MICROPHONES

Selection from our comprehensive stock, which can be tested in our new Recording Unit for actual working performance.						
Reslo VMC-M/C	£6 0 0	12/9	£1 4 0	0	11/4	7/7
Reslo VR Ribbon	£9 0 0	20/5	£1 16 0	0	15/4	10/3
Reslo UR Ribbon	£7 5 0	15/10	£1 9 0	0	13/-	8/8
Goodmans M/Coil	£7 7 0	16/1	£1 9 0	0	13/2	8/10
Cosmocord 22-1 Crystal	£4 4 0	—	£1 18 0	0	8/10	5/11
Lustraphone G.51.2	£5 15 0	—	£1 3 0	0	11/-	7/4
Lustraphone LX.55	£2 10 0	—	—	—	—	—
Lustraphone Ribbon	£12 12 0	28/5	£2 10 0	0	20/2	13/5
S.T.C. (Ball)	£17 17 0	42/-	£3 17 0	0	26/10	18/8

RECORDING TAPES

All principal types stocked, supplied in any quantity.						
Scotch Boy	£1 15 0	0	0	0	0	0
Agfa	£2 0 0	0	0	0	0	0
Ferograph	£2 15 0	0	0	0	0	0
Gevaert	£1 17 6	0	0	0	0	0
E.M.I.	£1 15 0	0	0	0	0	0
Ferrovoice	£1 2 6	0	0	0	0	0
Grundig	£2 0 0	0	0	0	0	0
G.E.C.	£1 15 0	0	0	0	0	0
Spare spools for above in all sizes from 3 1/2in. to 1 1/2in. diameter.						

RECORDING STUDIO

now available to our customers for live demonstrations of equipment advertised. Send for latest T.R. Lists and dubbing service charges.

FOR THE WIDEST SELECTION AND THE MOST FAVOURABLE H.P. TERMS COME TO

CLASSIC ELECTRICAL CO LTD

352-364 LOWER ADDISCOMBE ROAD · CROYDON · SURREY TEL · ADDISCOMBE 6061-2

CITY SALE & EXCHANGE LTD *THE HI-FI SPECIALISTS*

OFFER THE FOLLOWING SECONDHAND GUARANTEED EQUIPMENT :

Truvox Tape Deck (shopsoiled) ...	£17 17 0	Connoisseur two speed motor.....	£12 12 0	Hartley-Turner 9in. speaker.....	£7 7 0
Lane Tape Deck (shopsoiled)	£15 15 0	Garrard TA three speed unit, less head	£7 0 0	Wharfedale W15/CS 2-3 ohms.....	£12 0 0
Line a Tone Tape Deck	£8 8 0	Connoisseur 78 r.p.m. with transformer	£2 5 0	Wharfedale W12/CS 15 ohms.....	£7 0 0
Eddystone S640 Communications Receiver	£25 0 0	Acos GP20 P.U. one head.....	£1 10 0	Wharfedale Super 8/CS/AL speaker	£4 10 0
Acoustical QUAD I, control unit...	£5 0 0	Leak 78 r.p.m. Diamond P.U.	£7 10 0	Wharfedale Golden 10in. speaker	£3 5 0
Leak RC/PA/U Control Unit	£5 10 0	Leak L/P Ruby Pick Up	£6 0 0	Acoustical QUAD amplifier and TRF Tuner	£17 10 0
Armstrong EXP125/3, 14 valve 1954 Radio Chassis	£27 10 0	Transformer for above	£1 10 0	C.B. amplifier in case.....	£6 0 0
B.S.R. Three Speed Gram Motors...	£4 10 0	Voight Pressure Unit with power pack	£15 0 0	Wharfedale 10in. baffle	£2 10 0
Garrard RC75A with 2 Decca heads	£15 0 0	W.B. HF 1012 Hi-fi unit.....	£3 0 0	Webbs type of crossover	£1 10 0
				Phase in tweeter	£3 3 0

NEW EQUIPMENT by LEAK, ROGERS, ACOUSTICAL, DECCA, LOWTHER, PYE, COLLARO, GARRARD, Etc., Etc., always in stock.

WHY NOT PART EXCHANGE

your existing equipment for the latest type?
Write giving details for an approximate offer.

HIRE PURCHASE

arranged on all NEW apparatus. Details on application. Mail Orders dealt with promptly.

90-94 FLEET STREET, LONDON, E.C.4

Phone: *CENTRAL* 9391/2

MOTEK



TWO SPEED—SIMPLE PUSH BUTTON CONTROL

THE NEW K6 UNIT

List Price **19 GNS.**

SEE AND HEAR IT AT
YOUR LOCAL DEALER

MODERN TECHNIQUES

138-144 Petherton Road, London, N.5


Tel. : Canonbury 5896

MARINE & BROADCAST RADIO RECEIVER

Designed specifically to meet the demand for an efficient, sensitive battery operated receiver for use on small craft.

FEATURES:

- ★ Long, medium and short wave reception.
- ★ Marine, trawler and aircraft band.
- ★ Console and Marine Beacon DF.
- ★ 600 metre shipping.
- ★ Excellent loud speaker output.



MCS 21 RECEIVER[®]
Price £24 Complete

- ★ Provision for Loop operation.

This unpretentious little instrument is available from stock in quantity for 6, 12 or 24 volt input. Price complete—£24.

SHIP TO SHORE RADIOTELEPHONE

Immediate delivery of Model McA.10 (5 watt) Radiotelephone. 12 or 24 volt input. Continuously tuned Receiver covering Marine and Broadcast frequencies.

G.P.O. Type approved for coastal craft.
Price complete—£55.

McA.25 (25 watt) Radiotelephone for export only—£85.

MARINE RADIO COMMUNICATIONS CO.,
46, Greyhound Road, London, W.6.

Cables: Hallicraft, London.

Phone: Fulham 1138'9



HARTLEY-TURNER

Sound Equipment

It is sometimes said that craftsmanship is dead. In these days of fierce competition that statement may often seem to be true. For that very reason it is stimulating in the extreme to be able just once in a while to show that we in Britain can make the really superb. The illustration shown here is the proof of what can be done.



This photograph shows the exhibit that the H. A. Hartley Company Ltd., has prepared for demonstration at the Baghdad Trade Fair. Quite out of the common rut, it includes all that we consider the very best in High Fidelity Radio Gramophone Reproduction.

Specification includes: Superb hand-built Cabinet of solid teak, manufactured and finished in our own workshops.

Equipment includes our standard 20-watt Amplifier • The Hartley Super Control Preamplifier • A special pre-set tuned T.R.F. Unit • Deep Record File for sixty 12in. Records • Collaro Record Changer • Twin Hartley-Turner 215 Speakers • Separate Hartley-Turner Box Baffles.

Apart from the cabinet and record file, all the above items are available in this country, usually from stock. Why not write for full particulars to:

H. A. HARTLEY CO. LTD.

152, HAMMERSMITH ROAD
LONDON, W. 6

Telephone: RIVerside 7387

PROOPS of KINGSTON



The only "walk-around" radio shop in Surrey

ALWAYS AVAILABLE

A large and varied stock of
RADIO VALVES, COMPONENTS
RECEIVERS, TRANSMITTERS
TEST EQUIPMENT, Etc.

at competitive prices.

New Additional Premises
OPENING

SATURDAY 2nd OCTOBER, 1954

AT

52 Tottenham Court Road
LONDON, W.1

(Walk around facilities as at Kingston)

*Pay us a
visit without
any obligation*

PROOPS BROS. LTD.

52 Tottenham Court Road, London, W.1

Tel.:

LANGHAM 0141

Cables:

PROOPLIM, LONDON

OPEN ALL DAY SATURDAY

TV TRANSFORMER TROUBLES?

With Direct TV Replacements you need never be at a loss for a TV Transformer—no matter for what set it is needed. Order direct from us. We despatch by return. When out of stock we rewind faulty components. (Time Base transformers in 48 hours. Mains types 10 days.) This unique service means the end of replacement worries.



Left: L1115 line output—with E.H.T. Winding to give 7 KV using EY51—fitted with width control. EXACT replacement for over 40 models. Supplied with list of models and diagram, 65/6.
Right: L1065 BUSH TYPE line output transformer. Replacement for TV11, TV12 and TUG12, 35/-.



THE MOST COMPLETE TV SERVICE IN GT. BRITAIN



Left: W1065 E.H.T. coil for the above models, Polystyrene impregnated and supplied with silicon-rubber covered leads. If the old core and container is sent to us, we will fit free of charge, 14/-.



Right: L1196E TRONIC HV203 and TV KITS improved line output transformer. Redesigned and improved by our research department, 45/-.

To facilitate speedy handling of your order, terms of business are C.W.O., C.O.D. or Pro Forma. Please add postage and packing (1/6 up to 10/-; 2/- up to £1; 2/6 up to £2).

Send trade heading and 9d. for trade manual.

direct TV REPLACEMENTS
134-136 LEWISHAM WAY · NEW CROSS · S.E.14
TIDeway 3696-2330

GRAMPIAN

'531'



A range of 100 WATT high power amplifiers of advanced design and infinite adaptability



With the Gram pian '531' range of multiple-working amplifiers, installations may be built up to any power output to great economic advantage by avoidance of high anode voltages, costly output and rectifier valves. Advance developments in technique combine with first class constructional skill for dependability under all conditions.

The range includes rack mounting and portable types; models with and without pre-amplifying stages.

GRAMPIAN SOUND EQUIPMENT

Full details on request

GRAMPIAN REPRODUCERS LTD., FELTHAM, MIDD. Tel: Feltham 2657 181D

YOUR TIME IS VALUABLE—DON'T WASTE IT!

The famous Practical Wireless "Coronet" series of AC, AC/DC and Battery pre-aligned superhets, designed by the eminent radio authority Mr. F. J. Camm, were built around our famous R.L.30 Tuning Unit. So if you want FIRST-TIME SUCCESS in home superhet construction without test gear be guided by this lead. Send NOW for latest



I CAN'T FIND WHAT'S WRONG—GUESS I'VE WASTED MY TIME AND MONEY ON JUNK!

HOW TO AVOID THIS?



I'M CERTAINLY GLAD I BUILT THIS RODING 5 VALVE SUPERHET. — IT'S GREAT!

RODING'S 2'6 — HERE'S THE ANSWER! "HOME CONSTRUCTOR'S HANDBOOK"

of Blueprint circuits, parts lists, etc. of these guaranteed outfits: 3V. 3 Band FEEDER ★ 4V. 3 Band FEEDER (Norm/HiFi/Gram) ★ 5V. 3 Band SUPERHET A.C. ★ 5V. 3 Band SUPER. AC/DC ★ 6V. 3 Band SUPERHET A.C. ★ 6V. 3 Band SUPER. AC/DC ★ SIGNAL TRACER ★ FEEDER AMP./POWER PACK ★ MAGIC EYE UNIT ★ 4V. 3 Band SUPERHET A.C. ("CORONET") ★ 5 W. Quality AMP. A.C. ★ 10 W. p/p quality AMPLIFIER ★ SIGNAL GENERATOR ★ 3V. 2 Band "local" HiFi FEEDER, with bass/treble boost, etc. FREE Full Size A.B.C. construction sheets available (see HANDBOOK).

* Also obtainable from leading Booksellers and component stockists
RODING LABORATORIES
(Dept. WW10) BOURNEMOUTH AIRPORT, CHRISTCHURCH

HANNEY of BATH offers:

ALL COMPONENTS for:- OSRAM 912 AMPLIFIER and MULLARD 5 VALVE 10 WATT HIGH QUALITY AMPLIFIER.
Send for priced parts list.

WILLIAMSON AMPLIFIER. Wooden potted components. Output trans. WOT 25 (1.70), 130/-; P1M 14 a. mains trans. 87/6; PCF.12 150 mA. choke, 44/-; PCF.22 30H 20 mA. choke, 30/-; P1M 23 (mains trans. for pre-amp.), 47/6. Resistor (8K and Condenser kits (CK) available, RK, main amplifier, 29/6; RK, figs 13 and 27, 12/6; RK, fig. 15, 28/6; RK fig. 19, 38/-; RK fig. 29, 29/3; CK fig. 13, 15/-; CK fig. 15, 47/-; CK fig. 19, 54/6; CK fig. 27, 19/-; CK fig. 29, 54/6. 12 1% silver micas (fig. 19), 15/-; 7 5%, 7/-; Elastone output trans., 90/-; mains trans., 57/6; 1 OH 150 mA. choke, 20/-; 30H, 20 mA. choke, 10/-.

FREQUENCY MODULATION. For Wrotham high fidelity transmissions. Denco technical bulletin giving circuit and point to point wiring diagram for building an F.M. Feeder unit, 1/6. We have all components available. Priced parts list on application.

W.B. STENTORIAN. High Fidelity Speakers. HF610, 50/6; HF810, 60/6; HF912 67/-; HF1012 (3 or 15Ω), 73/6.

ACOS Hi-g. Pick-ups. HGP 20-1 std., or LP, 68/8. Heads only, std. or LP, 42/3.

COLPACKS. Denco, CP 4/LM and CP 4/M, 33/4; CP 3/700 pf. and CP 3/500 pf. 42/8. OSROR "Q" HO, 48/-; Batt., 50/-; TRF, 40/-; HF stage for HO pack, 20/-; ETA 4-station pack, 43/8. We stock COILS by Weymouth, Osmor, Wendite, Denco, Teletron and R.E.P.

VIEWMASTER. WIDE ANGLE VIEWMASTER CONVERSION. Complete set of parts for converting existing Viewmaster to W.A., less valves, tube and mask, 214/18/6. W.A. Conversion Instructions, 3/8; WB113, 48/6; WB114, 23/6; WB115, 42/-; WB116 and WB117, 7/6 each; WB118, 22/6; WB119, 28/6; WB121, 3/8; WB124, 10/6; Westinghouse 36/EHT/30, 17/-; Plus condensers and resistors as per our general list.

MULLARD "UNIVERSAL" LARGE SCREEN A.C./D.C. TELEVISOR. Denco drilled chassis with all mechanical parts, 53/6; FD12/4 duonag focaliser, 37/6; 144/342 rectifiers, 37/2; Goldsmen droppers DK37/6, 8/8; DK35/6, 7/6. VAI008 varite res., 4/6. Other Denco parts, please see below.

WIDE ANGLE COMPONENTS. ALLEN. Telexing Chassis, 50/-; Collets (TK and Super-visor), 44/6; LO.308, 40/-; FO.305, 21/-; DC.300c., 39/6; FC302, 31/-; GL16 and 18, 7/6 each; SC.312, 21/-; AT.310, 30/-; OP.117, 9/-; BT.314, 15/-; Denco Chassis Magnavision, 37/6; Chassis, Super-visor, 51/6; Collets, Magnavision, 41/2; WA/DCAL, 43/-; WA/FCAL, 31/-; WA/LCI and WCI, 7/6 each; WA/FMAL, 21/-; WA/LOT1, 42/-; WA/FBT1, 16/-.

Send 6d. stamps for our General List of components for Viewmaster, Soundmaster, Williamson Amplifier, Telexing, Magnavision (Brimar and English Electric large screen TV), Super-visor, Mullard Universal, Close tolerance Silver Micas, etc., etc. Please add 1/- postage to orders under £2.

L. F. HANNEY

77 LOWER BRISTOL ROAD, BATH

Tel.: 3811

WE PAY TOP PRICES

FOR
AMERICAN SURPLUS
ELECTRONIC EQUIPMENT

LOOK AT THESE EXAMPLES

For equipment in good condition

Receiver, R54/APR4, complete.....	£200
Transmitter, ET4336.....	£110
Test Set, TS13.....	£100
Frequency Meter, TS175/U.....	£80
Frequency Meter, BC221.....	£28
Receiver, BC348R.....	£25
Receiver, R89/ARN5.....	£25

We pay similar remarkable prices for—

- RECEIVERS.** R111/APR5, R5/ARN7, AR88D, BC348.
TRANSCEIVERS. ARCI, TCS, BC800, RT1/APN2.
TRANSMITTERS. T11/APN3, ART13.
INDICATORS. ID17/APN3, BC1151, BC1152.
TEST SETS. Any unit with prefix "TS" also IE19, I-208, I-100.
MODULATORS. BC1091, BC1142.
SYNCHRONISER. BC1148.
POWER UNITS. RA34, RA42, RA62, RA88, RA90, MGI49, PE158, DM28.
TUNING UNITS. TN17, TN18, TN19, TN54, TU57, TU58, TU59.
CONTROL GEAR. BC1150, BC1145, JB91, JB95, JB98, JB102, C45-ARCI.

And almost every American made unit even if not mentioned above.

Phone us immediately, transfer charge.

TO HAMS WHO PURCHASED BC348, BC342, BC312, etc. Post to us all the bits and pieces which you removed, i.e., plugs, sockets, dynamotors, etc. We will pay you several pounds for this junk. You need not write; just send it.

TO OVERSEAS BUYERS

We have the largest stock in Europe of American Government surplus electronic equipment and we would be pleased to quote by return of post against your enquiries. The following are a few examples only of the equipment which we can supply from stock.

ET4336	Transmitter
SCR720C	Search Radar, complete
BC348	Receiver
ART13	Transmitter

Deal with the firm that has been established for twenty-five years.

ALTHAM RADIO CO.
 JERSEY HOUSE, JERSEY STREET
 MANCHESTER 4

Telephone: Central 7834/5/6

TRUVOX

TAPE RECORDING AMPLIFIER

TYPE **C**




APPLICATIONS

Expressly designed to correctly operate the TRUVOX Tape Deck Mk. III—for Recording and Playback through a 3 ohm speaker, also supplying power for erasure and biasing. Additional facilities are as (a) a pre-amplifier to feed a power amplifier for the playing of recordings at greater than normal volume (for auditorium purposes etc.); (b) a pick-up amplifier to operate a loudspeaker direct from a gramophone pick-up; (c) a two-station radio receiver for direct listening or recording with a TRUVOX Radio Jack.

TECHNICAL SPECIFICATION

- (a) **Inputs:** At Jack No. 1 (i) during recording 1-2 mV (crystal microphone) at 1 megohm Impedance. (ii) for use as microphone amplifier 1-2 mV at 1 megohm. At Jack No 2 (i) during recording 0.5 v. at impedance of 1/2 megohm suitable for pick-ups and radio connection. (ii) for replay 0.5 v. at 1/2 megohm. At Jack No 3 for replay 0.5 v. suitable for pick-up connection at 1/2 megohm.
- (b) **Output:** 4 watts output at impedance of 3 ohms suitable for direct connection to moving coil speaker.
- (c) **Oscillator:** Brought into circuit on record Fixed frequency at approximately 45 Kcs. at high impedance to suit Truvox Tape Deck. Erase voltage at least 150 v. Bias 80 v. approx.
- (d) **Level indication by Magic Eye Indicator:** Taken out of circuit during replay.
- (e) **Hum level:** 50 db down at 4 watts.
- (f) **Frequency Response:** Fixed recording characteristic. Variable reply characteristics in accordance with setting of tone control. Fixed level response as pre-amplifier when switch in neutral position. Combined with characteristics of the Truvox heads and modern tapes, this gives a substantially level response from 70-10,000 cps.
- (g) **Valves:** 1 EF.86 or Z.729, 1 ECC.83, 1 EL.84, 1 5Y3GT, 1 EM.34, HT line voltage not in excess of 300 v.

The amplifier is designed to operate from AC supply mains 110-250 v. List price 16 gns.



TRUVOX LIMITED
 HARROW MIDDLESEX

Sales Office: 15 Lyon Road, Harrow, Middlesex. Telephone: Harrow 9282
 Technical & Service Depts.: 328 The Broadway, Station Road, Harrow, Middlesex. Telephone: Harrow 4455

INSIST ON HIFI plus

for Precision Instruments



PA 28W GIVING 25 WATTS OUTPUT
 PA 75W GIVING 75 WATTS OUTPUT

- + 2 Microphone Faders
- + 2 Gramophone Faders
- + Bass and Treble Controls
- + High output and low distortion factor
- + Standard Low and High Output Impedances

Look for the Registered Trade Mark.


HiFi Ltd. DERRY ST., BRIERLEY HILL, STAFFS. Telephone: Brierley Hill 7604

STL

TRANSFORMERS

for POWER SUPPLIES and AUDIO FREQUENCY Chokes for A.C. and D.C.

Suitable for use in all electrical and electronic equipment, to Ministry, B.S.S. or commercial standards. Tropical or standard finish.



Enquiries from manufacturers and the trade only.
 Quotations sent upon receipt of specifications or drawing.

STEWART TRANSFORMERS Ltd.
 75 KILBURN LANE, LONDON, W.10
 Tel.: LADbroke 2296/7



METERS

LARGE AND VARIED STOCKS AVAILABLE FOR IMMEDIATE DELIVERY

EXAMPLES FROM OUR RANGE OF 2 1/2" FLUSH PATTERN MOVING COIL INSTRUMENTS (as illustrated)

AMPERES D.C. 0-1, 2, 3, 5, 10, 15, 20, 25, 30, 50.

MILLIAMPS. 0-1, 1-0-1, 0-5, 10, 15, 20, 25, 30, 50, 100, 250, 500.

MICROAMPS. 0-50, 100, 200, 250, 400, 500, 750, 50-0-50, 100-0-100, 250-0-250, 500-0-500.

MILLIVOLTS. 0-10, 25, 50, 75, 100, 500.

VOLTS D.C. 0-1, 5, 10, 15, 25, 50, 100, 250, 500, 750, 1,000.

VOLTS A.C. 0-5, 10, 15, 25, 50, 100, 250, 500, 750, 1,000.

We can supply meters with NON-STANDARD, CURRENT and VOLTAGE RANGES to any specification. DELIVERY 7-14 days. MOVING IRON, THERMO & ELECTROSTATIC INSTRUMENTS ALSO AVAILABLE.

ANDERS ELECTRONICS LTD.
 91, HAMPSTEAD ROAD, LONDON, N.W.1.
 Telephone: EUSton 1639
 Suppliers to Government Departments, B.B.C.,
 Leading Manufacturers & Research Laboratories

AN IMPORTANT BOOK

TELEVISION RECEIVING EQUIPMENT

By W. T. COCKING, M.I.E.E.

Now in its third edition, TELEVISION RECEIVING EQUIPMENT has become known to television engineers throughout the world as an authoritative guide to British practice.

The volume starts with an explanation of fundamental theory and then describes each stage of the normal receiver. There are also notes on special circuits, and attention is given to practical details of receiver design. Other chapters are devoted to faults and their remedies, servicing of modern sets and the problems of obtaining selectivity.

Mathematical data of particular value to the designer have been collated and appear in appendices.

18s. net. By post 18s. 8d.




Obtainable from booksellers or from:
 ILIFFE & SONS LTD., DORSET HOUSE,
 STAMFORD STREET, LONDON, S.E.1

LAMINATIONS IN BULK PROMPTLY

PROTOTYPES TOO

We supply all types of Lamination in bulk promptly. All metals and specifications in most cases immediately available, including High, Medium and Low Silicon Iron, and also in Nickel Iron Alloys. All Nickel Iron Alloy Lamination heat treatment is guaranteed. We also supply prototypes for all new designs in the shortest possible time that size, type and circumstances permit. Send us a sample or sketch of your requirements, together with the specification, which will receive immediate attention.

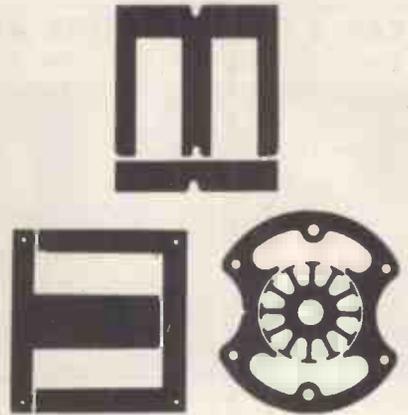

ELECTRONIC LAMINATIONS


Telephone : Slough 25171

LIMITED

Telegrams : Lamination, Slough

OXFORD AVENUE, SLOUGH, BUCKINGHAMSHIRE

Announcing an Entirely New TAPE UNIT

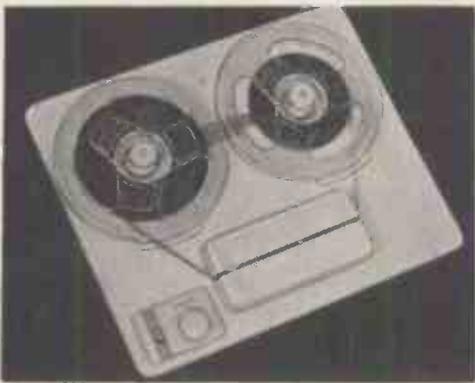


£18 · 10 · 0

Attractive discounts to quantity buyers.

Beautifully finished and engineered, this new model offers unequalled value.

THE

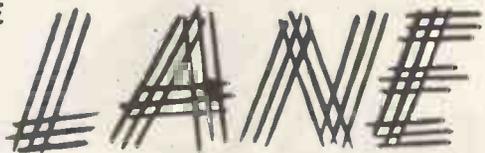

2 SPEED MARK VI

- ★ Three high grade motors.
- ★ Single knob control electrically and mechanically interlocked.
- ★ Drop-in tape loading.
- ★ Automatic brakes.
- ★ 2 speed. $7\frac{1}{2}''$ /sec. $3\frac{3}{4}''$ /sec.
- ★ Automatic speed change.

Write for full details to

VERDIK SALES LIMITED

8, RUPERT COURT

WARDOUR STREET


LONDON, W.1.

GERrard 8266

EAP 3 TAPE RECORDER AMPLIFIER

For use with the TRUVOX Mk. III Tape Deck

£15

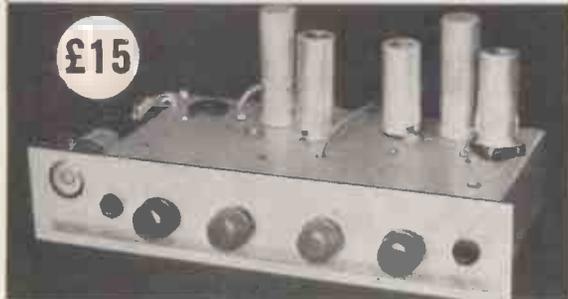

TECHNICAL SPECIFICATION :
 Frequency range 90-9,000 c/s. 3 watts output on Playback. Separate High and Low Gain inputs with Mixer Control. "Magic Eye" Record Level Indicator. Variable tone control. Amplifier can be used for high-fidelity reproduction from gramophone or Radio Feeder Unit. Separate Power Pack, supplying instantaneous braking voltage. Miniature Valves. Size (main chassis): 10½ in. x

5½ in. x 2 in.; (power pack): 5½ in. x 3½ in. x 2½ in. **PRICE £15.**
 Model EAP 2, with similar specification, is available for use with the MOTEK and LANE Tape Units. Streamlined two-tone portable cabinet, with concealed microphone compartment, specially designed to house the EAP 3 and TRUVOX Tape Deck. **PRICE £4/10/-.** High-flux Elliptical Speaker to suit **£1/5/1** (inc. P.T.).

All items sent CARRIAGE FREE

Write for full details to:

(Tape Recorders) LIMITED
 548 KINGSLAND ROAD, LONDON, E.8. Tel: CLISSOLD 7588

EAP

SOLDERING

SAFE—SIMPLE—SPEEDY

with the sensational new



70/-
 Post free (less trade discounts)

PRIMAX—

- ★ **BALANCED GRIP SOLDERING GUN** Specially designed for easy soldering on hard-to-reach jobs TRIGGER CONTROL.
- ★ **EXCLUSIVE ALLOY TIP**—never needs re-tinning, last indefinitely under normal use.
- ★ **INSTANT HEATING**—Ready for soldering in 6 seconds.
- ★ **COMPACT LIGHTWEIGHT**—slips into your pocket or tool-kit, weighs only 23 ounces.

The PRIMAX-SOLDERER is the ideal tool for any RADIO-TV-TELEPHONE mechanic or amateur. Just the tool for service calls and small jobs on the bench. The Primax-Solderer works on a different principle from that of commonly known soldering irons. A current of high amperage produced in the transformer will heat the soldering tip within 6 seconds. Available 110, 200/220, 220/250v. 50 cycles, 60w.

ONE YEAR'S GUARANTEE

Sole Distributors:—

S. KEMPNER, 19 Ebury Street, London, S.W.1


Tel.: SLOANE 3586 • Through wholesalers & retailers

REDUCE YOUR PRESS TOOL COSTS

THE HUNTON UNIVERSAL BOLSTER OUTFIT FOR SHEET METAL PIERCING AND BLANKING ON FLY PRESSES

Bolster Frame with 2 adjustable gauges and insertable steel Holders for Dies ½ in. to 3½ in. bore diameter.

Two Punch Holders with detachable positive-action Strippers take the complete range of Punches ½ in. to 3½ in. diameter.

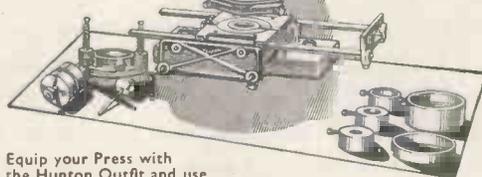

Equip your Press with the Hunton Outfit and use inexpensive standardised Punches and Dies ½ in. to 3½ in. diameter, obtainable from stock—in ½ in. sizes—when required.

Standardised Tools also available at short notice for Square, Oblong and other shapes, Louvre Forming (up to 8 in. long), Corner Notching, Corner Radiusing, Angle Iron Notching and Piercing, etc.

Get the Outfit now—Buy Punches, Dies and Tools as you need them

Descriptive brochure and prices on request.

HUNTON LIMITED

Phoenix Works, 114-116, Euston Road, London, N.W.1

Telephone: EUSton 1477-8-9

Telegrams: Untonexh, London

start a new life in New Zealand

The Royal New Zealand Air Force has a limited number of vacancies for skilled radio mechanics and other good craftsmen. Free passages to New Zealand and excellent conditions of service.

Write for full information to Department WW, Royal New Zealand Air Force Headquarters, Adelphi Building, John Adam Street, London, W.C.2 or telephone TRAfalgar 8030.

AUDIO OSCILLATOR UNIT

This compact, pre-calibrated unit is eminently suitable for incorporation in any equipment requiring an accurate source of frequency covering the range 20 ~ to 20 kcs. Its power requirements are small and it is supplied complete with drilling template and all accessories required for fitting. When fitted to a high-fidelity amplifier it enables rapid checks of performance to be carried out. At a small additional cost it can be supplied with frequency coverage up to 200 kcs. Send for full details of this and other instruments, which include:

SIGNAL GENERATOR TYPE 10, price £7/10/- (postage, etc., 3/6).

PATTERN GENERATOR TYPE 4, price £8 (postage, etc., 3/6).

LOW FREQUENCY OSCILLATOR, price £15/15/- (postage, etc., 5/-).

CHECKTEST, price £1/17/6 (postage, etc., 2/-).


CALIBRATED VARIABLE CONDENSER, price £3/3/- (postage, etc., 2/-).

Easy Payments Terms Available

TRADE AND EXPORT ENQUIRIES INVITED.

HOMELAB INSTRUMENTS LIMITED, 615-617, High Road, London, E.10

Phone: LEY 5651

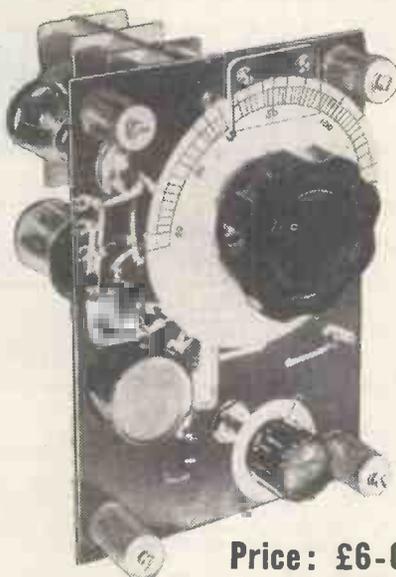

Price: £6-0-0
(Postage & packing 3/6)

ACCLAIMED... BRITAIN'S FINEST AUDIO REPRODUCER



Type T.P.I. **£96** as illustrated. Finished walnut or light oak. Ex works.

Have YOU heard the Lowther Corner Reproducer?—a truly memorable experience,

★ Built as a musical instrument, sounds like a musical instrument.

★ Entirely new development in electrical-mechanical-acoustical system.

★ The most efficient reproducer of audio frequencies in the world with a single drive unit/compound horn housing.

★ Indispensable for studio monitoring, or where definition and quality of reproduction is required.

COME with LOWTHER'S -towards perfection-

THE LOWTHER MANUFACTURING COMPANY, LOWTHER HOUSE, ST. MARKS RD., BROMLEY, KENT, ENGLAND
Tel.: RAVensbourne 5225

YOU'RE SURE TO GET IT AT STERN'S

Constructors everywhere are amazed!

AT THE EXCELLENCE OF

The "TELE-VIEWER"

5 CHANNEL TELEVISOR
DESIGN OF A COMPLETE 12" SUPERHET T.V. RECEIVER

PERFECT PICTURE QUALITY
SIMPLE DIAGRAMS MAKE CONSTRUCTION EASY

PERFECT FRINGE AREA RECEPTION
BETTER RECEPTION AT HALF COMMERCIAL COST

Here are some of the features which combine to make this such a fine receiver.

- The Superhet circuit easily tuned to any of the five channels, i.e., LONDON, SUTTON COLDFIELD, HOLME MOSS, WENVOE and KIRK-O-SHOTT'S. (The extreme ease of tuning is accomplished by the provision of pre-aligned I.F.T.s.)
- A lifelike, almost stereoscopic, picture quality made possible by the following factors:
 - a. Excellent band width of I.F. circuits.
 - b. A really efficient video amplifier.
 - c. C.R.T. Grid modulated from low impedance source.
 - d. High E.H.T. voltage (approx. 10 kV.).
 The picture brilliance is also much above the average and enables comfortable viewing with normal room lighting or daylight.
- FIRM picture "HOLD" circuits (Frame-Line) ensure a steady picture, free from bounce or flicker even under the most adverse conditions met with in "fringe" areas and excellent "interlace" ensures the absence of "liney" effect.
- Negative feedback is used in the audio frequency circuits which provide 2/3 watts of High Quality Sound.
- Entire receiver built on two chassis units each measuring 14 1/2 in. x 6 1/2 in. x 3 1/2 in.
- Rigid C.R.T. mounting enables entire receiver to be safely handled with tube in position.

● All pre-set controls are mounted on side of chassis, enabling all adjustments to be carried out whilst facing the C.R. Tube.

This complete TELEVISOR, including all Valves, can be built for only
(Plus cost of C.R.T.) **£28/16/4**

As no hire purchase terms are available the receiver can be bought in five separate stages (practical diagrams and circuits are provided for each stage) thus enabling hire purchase interest rates to be avoided. The complete set of ASSEMBLY INSTRUCTIONS is available, price 5/-. The instructions include really detailed PRACTICAL LAYOUTS, WIRING DATA AND COMPONENT PRICE LIST. ALL COMPONENTS ARE AVAILABLE FOR INDIVIDUAL PURCHASE.

NOW AVAILABLE
AT
STERN'S

The "WIDE ANGLE" TELE-VIEWER

- A design that retains all the distinctive features of the 12in. Televisor but with increased Time Base efficiency, producing 15 to 16 kV. E.H.T., with ample scanning power for C.R. Tubes up to 17in.
- It can be completely built including supply of all valves for **£33** (plus cost of C.R.T.) and is as simple to construct as the 12in. model.
- This is the most efficient "WIDE ANGLE" large screen design yet offered to constructors, and yet it can be built for almost half the cost of similar designs.
- Complete assembly instructions, diagram, etc., available for 5/.

A COMPLETE KIT OF PARTS TO BUILD A 3-4 WATT HIGH GAIN AMPLIFIER

for operation on A.C. or D.C. Mains, 200-250 volts.
This amplifier will give 3 watts output for the small input voltage of only 75 millivolts, and is therefore suitable for use with any type of pick-up from the crystal type to the miniature H/F Magnetic type.
A tone control is incorporated and the quality produced is excellent. The overall size of chassis is 9in. x 5in. x 7in. and valve line-up 25Y5-68H7-25L6.
Price of complete kit, including drilled chassis and valves, £4/2/9, plus 6in. P.M. (which fits on chassis), 16/-. of 8in. P.M., 13/9.
Price of fully assembled chassis ready for use, £5/5/- (plus cost of speaker).
Copy of assembly instructions and components price list available for 1/3.



The DENCO M.T.O.I. Modulated Test Oscillator £3/15/-

(Plus 2/- carr. and Ins.)
Has Frequency range continuously variable from 170-475 Kc/s. and 530-1,600 Kc/s. Battery operated and thereby completely self-contained.

SELENIUM RECTIFIERS
6 or 12 volt 1 amp. rating 7/6
6 or 12 volt 2 1/2 amp. rating 12/6
6 or 12 volt 4 amp. rating 17/6
6 or 12 volt 6 amp. rating 21/6

WE HAVE IN STOCK . . . THE DENCO F.M. FEEDER UNIT

Consisting of a 4 valve Superhet design incorporating R.F. (6AM6) and F/O (12AH8) stages followed by Two I.F.s. (6BA8's) and Ratio Discriminator, the coverage provided being 88-100 mc/s.
THE COMPLETE KIT including VALVES and DRILLED CHASSIS is available for £6/13/6
It is suitable for use with any type of High Fidelity Amplifier.
The descriptive manual, including circuit and Component Layout etc., is available for 1/6.

THE NEW DENCO ULTRA MIDGET SUPERHET COIL PACKS

MODEL CP4/L. A 4-station "Pre-set" unit providing any 3 stations on medium waveband and one station on long wave, price £1/13/4.
MODEL CP4/M. A 4-station "Pre-set" unit which provides any 4 stations on medium waveband. Price £1/13/4. The above are supplied fully wired leaving only four connections to be made.
MODEL CP3/50PF and **CP3/500PF.** Completely wired 3 waveband Coil Packs for use with either 350PF or 500PF condensers. Coverages 190-550 metres, 800-2000 and 16-50 metres. Price £2/2/8.
An attractive Dial and Drive Assembly is available for 25/-. Overall size of each unit 3 1/2 in. x 2 1/2 in. x 1 in. deep.

BATTERY CHARGER KITS


All kits are for A.C. Mains 200-250 volts. They comprise a Metal Rectifier and Transformer, tapped for 6 or 12 volt charging, and a tapped Resistor, with Selector Switch, to enable the charging rate to be varied. A M/coil meter 5 amp. max., 13/6 extra.
For 6 or 12 volt batteries at max. 1 amp. £1/17/6
For 6 or 12 volt batteries at max. 2 1/2 amp. £2/5/3
For 6 or 12 volt batteries at max. 4 amp. £3/2/6
An easily followed Wiring Diagram is included with each kit.

WE CAN SUPPLY EX-STOCK

- (a) The Editor Tape Recorder complete... 247/5/0
 - (b) The Truxov Tape Deck... 223/2/0
 - (c) The Grundig Model TK9 Tape Recorder, complete... £88/5/0
 - (d) The Grundig Model 700L Tape Recorder, complete... 284/0/0
- Each is available on Hire Purchase and descriptive leaflets are available—send S.A.E.

FILAMENT TRANSFORMER

- 6.3 v. 1 1/2 a. 5/9
- 4 v. 1 1/2 a. 5/9

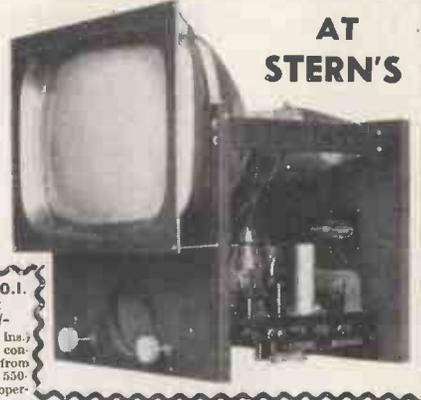

NEW C.R.T.s.

Unused 12in. C.R.T.s by one of the leading manufacturers. 6.3 volt heater, 7-9 kV standard size. Supplied in maker's sealed cartons.
(Plus 13/- Carr. & Ins.) **£12/19/6**

BRAND NEW C.R.T. MASKS

Latest aspect ratio for 12in. "Round" tubes, finished Ivory (plus 1/- postage) **12/6**

SPEAKER BARGAINS

- PLESSEY, 10in. 3 ohm V/coil £1/5/0
 - TRUXOV 12in. 3 ohm V/coil £2/9/6
 - ROLA, 12in. 3 ohm V/coil £3/19/6
 - BAKERS, 12in. 10 ohm V/coil £4/15/0
 - GOODMANS, 12in. 15 ohm V/coil £5/5/0
- (Carriage and Ins. 1/6 extra.)

THE NEW W.B. "STENTORIAN" HI FI SPEAKERS ARE IN STOCK

- Model H.F. 6-inch £2/10/6
 - Model H.F. 9-inch £3/7/0
 - Model H.F. 8-inch £3/0/6
 - Model H.F. 10-inch £3/13/6
- These speakers are of the very latest design and provide quality reproduction for the lower-price range, 3 or 10 ohm models are available.

When submitting orders, please include postage and packing.

STERN RADIO LTD.



CONSTRUCTORS say
"IT'S STILL THE BEST MAINS or
BATTERY PORTABLE SET"

A Midget 4 - valve Superhet Portable covering medium and long wavebands. Designed to operate on A.C. mains 200/240 volts or by an "Aldry" battery. The set is designed so that the main section can be supplied as a separate unit, and can be added at any time. The set supplied as an "Aldry" battery Superhet can be accommodated in the attaché case illustrated (size 9 1/2 in. x 4 1/2 in. x 7 in.). This is attractively finished in lizard, maroon, dark green or blue velveteen. As a combined Mains/Battery Superhet Portable a polished cabinet is available to accommodate both Mains Unit and Batteries. Circuit incorporates delayed

A.V.C. and pre-selective Audio Feedback. The Set is complete in every detail and includes ready-wound frame aeriols, fully aligned I.F. transf. and drilled chassis etc. Overall size of assembled chassis 8 in. x 4 in. x 2 1/2 in. This receiver as illustrated, can be completely built for £5/10/3 (plus Mains Unit if required). Send 1/6 for the fully descriptive Assembly Book which includes Practical Layouts and complete Price list of Components. Attaché case available separately. 3/7/6.

BATTERY PORTABLE

THE "MINI TWO-THREE"

An "Aldry" Battery Portable of midget size, 6 1/2 in. x 4 1/2 in. x 3 1/2 in. designed to cover medium waveband 190-550 metres, with use of short trailer aerial. The simple design of this Receiver is so arranged that either a 3-valve set or a 2-valve (afterwards easily converted to the 3-valve) can be made. Consists of a T.R.F. circuit using a regenerative detector with H.F. stage and a high gain output pentode. Valve line up 1T4-1T4-D1E94. The 2-valve set can be completely built for £4/3/6 (less case) and the 3-valve for £5/3/- (less case). Each price includes valves, speaker and drilled chassis.



Send 2/- for the assembly instructions; they include simple and complete practical component layouts and diagrams which enable the most inexperienced constructor to successfully build either set. All components are available for separate sale, a price list being supplied with assembly instructions.

"PERSONAL SET" BATTERY ELIMINATOR

A complete Kit of parts to build a Midget "Aldry" Battery Eliminator, giving approx. 60 volts and 1.4 volts. This eliminator is for use on A.C. mains and is suitable for any 4-valve Superhet Receiver requiring H.T. and L.T. voltage as above, or approx. to 60 volts. The Kit is quick easily and quickly assembled and is housed in a light-aluminium case size 4 1/2 in. x 3 1/2 in. Price of complete Kit with easy-to-follow assembly instructions, 42/6. In addition we can offer a similar COMPLETE KIT to provide approx. 90 volts and 1.4 volts. Size of assembled unit 7 in. x 2 1/2 in. x 1 1/2 in. Price 47/6.



A COMPLETE "CAR RADIO" FOR THE HOME CONSTRUCTOR

A design of a complete 5-VALVE SUPERHET RECEIVER employing an R.F. Stage, and incorporating a separate VIBRATOR PACK size 4 1/2 x 2 1/2 x 6 1/2 in. for use on 6 or 12 volt D.C. supplies. We can supply all components to build this complete Receiver and Vibrator Pack including a Metal Case, Valves, Drilled Chassis and 5 in. P.M. Speaker for £12/19/6. (Carr. and Ins. 5/6 extra.) Or the Receiver Components for £9/19/6 and the Vibrator Components for £3. This is NOT an EX-GOV'T. Receiver, it is a new design employing new Components. Send 2/8 for the complete set of ASSEMBLY INSTRUCTIONS, CIRCUITS and PRACTICAL LAYOUTS, including a complete individual Component Price List.



!!! CONSTRUCTORS !!!

A NEW SUPERHET TRANSPORTABLE THE "SUPER THREE"

Designed for local station reception without the use of an external aerial. This design provides for a 3 valve (plus Metal Rectifier) Superhet Receiver incorporating a Frame Aerial for "room to room" use, provision is also made for a short external aerial, if required, for the reception of Continental Stations. Briefly the features are as follows:-

- For use on A.C. Mains 200-250 volts.
- This set includes a Mains Transformer and Chassis is NOT live to mains (as in many other sets of this type are) and consequently the Receiver can safely be used in the Kitchen, etc.
- Valve line up 6K8-6J7-KT61, plus Metal Rectifier.
- The I.F. Transformer is supplied "pre-aligned" and thereby ensures extreme simplicity of Tuning—in fact, more simple than most T.R.F. Receivers.
- Compact and easy to build simple "point to point" practical diagrams are supplied with a completely drilled chassis.

The complete Receiver Chassis can be built to cover the Medium Waveband only for **£6.6.6**
 Or to cover both Long and Medium Waves for **£6.16.3**
 If the Receiver is first built to cover the Medium Waveband, Long Waves can be added at any time, separate diagrams are provided for this purpose. The attractive Polished Wood Cabinet 14 inches wide, 8 1/2 inches high and 6 inches deep (illustrated above) is available for **£1.1.0**. THE CONSTRUCTOR'S MANUAL is available for 1/-, this shows the component prices, which are all available for separate purchase.



FOR HOME CONSTRUCTORS

A 5 VALVE 3 WAVEBAND SUPERHET RECEIVER for £10'10'/-

For use on A.C. Mains 200 to 250 volts. The following are outstanding features:

- A superhet circuit designed for high efficiency on all three wavebands.
- A 3 in. P.M. speaker accurately matched for good quality reproduction.
- The latest range of new 6-volt B.V.A. miniature valves.
- Built-in frame aerial with provision for external aerial for distant stations.
- A white plastic cabinet of very attractive appearance, overall size 7 1/2 in. x 5 1/2 in. x 5 1/2 in.

Send 2/6 for the fully descriptive stage by stage assembly and wiring diagrams with which complete price details are given.



DUAL-CHANNEL PRE-AMPLIFIER and TONE CONTROL UNIT

This comprehensive PRE-AMPLIFIER and TONE CONTROL UNIT provides a full control of bass and treble in conjunction with a main Volume/Mixer Control.

It can be used with any amplifier and with any pick-up, the range of frequency control provided by the unit affording ample compensation for all types of pick-up and all natures of recordings, i.e., English, American and long-playing, without recourse to pick-up correction. The extreme flexibility of the bass and treble control is such that the level of bass and treble can be set to suit any conditions irrespective of the volume output of the amplifier. Response characteristics are given in 12-watt amplifier advt. The unit measures only 7 in. x 4 in. x 2 in., including self-contained power supply and can be accommodated either on or away from the main amplifier, i.e., on the front panel of a cabinet or any other position. Price including drilled chassis, valves (68N7 and 6J5), £3/16/9. Complete assembly data are available separately for 1/-. Completely assembled and ready for use. 25/5/-.



"MINI-TWIN" 1-VALVE BATTERY SET

A design of a simple 1-valve 2-stage Battery Receiver, giving excellent results on medium and long wavebands and having exceptionally low battery consumption. Drilled chassis and practical diagrams make it the ideal set for the beginner to build.

The complete chassis, including valve, can be built for 37/6, plus 8/11 P/Tax, the attractive plastic case is 9/6, and suitable headphones, 14/9. The complete assembly instructions, layouts and a component price list are available for 1/6. This Receiver also performs excellently, without modification, as a tuning unit, and, in addition, with simple modifications for which a complete diagram is provided, makes a first-class pre-amplifier for pick-up or microphone.



AN AMAZING OFFER!
A COMPLETELY ASSEMBLED

4 VALVE T.R.F. CHASSIS
 Including a 5 in. P.M. SPEAKER and VALVES FOR ONLY

£6'9'6
 (Plus 7/6 carr. and Ins.)

This receiver is of the very latest design and is for use on A.C. or D.C. Mains. It covers both Long and Medium Wavebands, and includes the modern BVA miniature valves. The line up being 12 BA6-12AT6-12A6-25B4. It incorporates Permeability Tuned Coils, thus ensuring excellent selectivity and sensitivity. The overall size of the complete chassis including speaker is 10 1/2 in. x 4 1/2 in. x 6 1/2 in. An attractive Bakelite Ivory-finished Cabinet size 11 1/2 in. x 5 1/2 in. x 6 1/2 in. is available for 18/6 (plus 2/6 carriage and insurance).



109 and 115 FLEET ST.
LONDON, E.C.4 Phone: CENTRAL 5812-3-4

"Hi-Fi" EQUIPMENT and KITS TO SUIT ANY BUDGET

TWO COMPLETE "Hi-Fi" AMPLIFIER KITS

**A HIGH QUALITY
8-10 WATT AMPLIFIER
THE IDEAL AMPLIFIER
FOR GENERAL HOME
USE AND FOR SMALL
HALLS, ETC.**

Price of COMPLETE KIT
including Valves and Drilled
Chassis, etc. **£7/10/0**



(Plus 2/6 Carr. & Ins.)
We will supply it Completely Built for
£9/0/0 (Plus 3/- Carr. & Ins.)

Designed for high quality reproduction up to an output level of 10 watts, having 6V6s in Push-Pull and incorporating negative feedback. It is suitable for use with all types of Pick-ups and most types of microphones and the output transformer provides for use of 3 and 15 ohm speakers.

BRIEF FEATURES

- Valve line up 6J5, 6SN7, 6Z4, with 6V6s in push-pull.
- The undistorted output level of up to 10 watts is produced from an input of '25 volts.
- First class reproduction of Radio (where a Tuning Unit is used) and Record Playing.
- Separate Bass Boost and Treble Controls provide an excellent range of frequency control.
- Very satisfactory results are obtained with an average type of high impedance Moving Coil or Crystal Microphone, a clear speech level of approx. 3 watts output being obtained.
- Power supplies (HT and LT) are available for a Tuning Unit.
- For operation on A.C. Mains 200-250 volts 50 cycles.

THE ASSEMBLY MANUAL is available for 1/- and includes detailed layouts and component Price List.



**A 12 Watt "HIGH FIDELITY"
Push-Pull AMPLIFIER**

Comprising a Main Amplifier Chassis and a Remote Control Pre-Amplifier-Tone Control Unit. The remote control unit measures only 7 1/2" x 4 1/2" x 2 1/2" and contains four controls, being: Bass-Treble-Volume and a Radio, Gram, Microphone Switch control. It incorporates its own feedback circuit on the Bass Channel. Loop negative feedback is employed on the Main Amplifier which has a valve line up of 6J5-6N7-5U4 with two PX25's in push-pull and 6J5 and 6SN7 are used in the remote control unit. **THE COMPLETE KIT IS AVAILABLE FOR £14/0/0**

(Carr. & Ins. 3/- extra).

THE COMPLETE UNIT ASSEMBLED

AND READY FOR USE £17/0/0 (Carr. & Ins. 5/- extra).

H.P. Terms £4/5/- Deposit, 12 Months at £1/3/11.

The measured frequency range of the amplifier with this unit shows an excellent response from 14,000 cycles down to 20 cycles, the bass and treble controls allowing independent control of gain at both ends of the frequency range from zero to a gain of 50. It can be seen, therefore, that ample correction is provided to suit any type of pick-up with any type of recording. Input voltage for maximum output is 70 mV. 6.3 volts at 2 amps, and 30 mA. H.T. is provided for tuning unit, etc. This Amplifier compares well with the Williamson and similar designs at a fraction of their cost. The complete set of assembly instructions are available for 2/-.

**A 4-VALVE QUALITY
"PUSH-PULL" 6-8 watt
AMPLIFIER**

for use on A.C. mains. Incorporating Negative Feedback. Filter Input Circuit and employing 6V6s in Push-Pull. A simple arrangement is provided to enable either a magnetic, crystal or



lightweight pick-up to be used, and is suitable for use with Standard or long-playing records. A tone control is incorporated, and the 10-watt output transformer is designed to match 2 to 15 ohm speakers. The overall size of the assembled chassis is 10 1/2" x 8 1/2" x 7 1/2" high, and full practical diagrams are supplied. Price, including drilled chassis and valves, of complete kit, **£6/17/8**. Price of assembled chassis, available separately for 1/-.

**The NEW "LEAK"
TL/10 AMPLIFIER and
"POINT ONE" PRE-AMPLIFIER**

27 GNS. COMPLETE
H.P. Terms £7/2/- Deposit and 12 months at £2.

This Amplifier has a maximum output of 10 watts and maintains in every respect the world renowned LEAK reputation for precision engineering, fine appearance and fastidious wiring. The Pre-Amplifier will operate from any make or type of pick-up. A continuously variable input attenuator at the rear of the Pre-amp. permits the instantaneous use of crystal, moving iron and moving coil pick-ups.

H.T. and L.T. supplies are available for a Radio Tuning Unit. An input attenuator is fitted. S.A.E. for descriptive leaflet.



**A BULK PURCHASE ENABLES THIS
SPECIAL PRICE REDUCTION
OF THE FAMOUS**

SHAFESBURY PORTABLE AMPLIFIER

Suitable for home use and small Halls. Has matched inputs for both Record Players and Microphone. Also provides for the "mixing" and "fading" of both Gram, and speech as requested.



COMPRISING

- A 4 Valve High Gain Amplifier for use on A.C. or D.C. mains 200-250 volts with 5 watts output. Incorporating independent Volume Controls for Mike and Gram, either of which can be faded at will, a variable Tone Control and independent Input sockets for Mike and Gram.
- A Transverse Carbon microphone which obtains its polarizing current from the amplifier—no batteries are necessary.
- An 8 in. Goodmans P.M. Speaker with the "Triodal" magnet for first-class reproduction.

**THE COMPLETE EQUIPMENT is all contained in the
PORTABLE CARRYING CASE £18/0/0**

Having been reduced from £30/9/-. **HIRE PURCHASE TERMS:**
DEPOSIT £4/10/0 and 12 monthly payments of £1/5/4.
● Light in weight ● Easy to CARRY ● GENUINELY PORTABLE.
An illustrated leaflet containing free data is available on receipt of S.A.E.

**WE HAVE IN STOCK THE NEW COLLARO
"TRANSCRIPTION" RECORD PLAYERS**

Model 2000 comprises the Transcription Motor and Turntable complete with 3-speed Gear and Switch mounted on a banjo type unit plate. Price £13/8/6. H.P. terms—Deposit £3/7/- and 12 monthly payments of 19/-. Model 2010 has the same specification as the Model 2000 except that it is mounted on a rectangular unit plate and is equipped with the STUDIO "P" HIGH FIDELITY PICK-UP HEAD. Comprising a special low resonance arm and special bearings. Price £18/4/8. H.P. Terms—Deposit £4/14/9 and 12 monthly payments £1/5/4. An illustrated leaflet is available on receipt of S.A.E.

**RODGERS—RD BABY de Luxe Mk II
AMPLIFIER with RD JUNIOR Mk II
PRE-AMPLIFIER COMPLETE FOR**

£23/0/0 (Plus 7/6 Carr. & Ins.)

H.P. Terms: £5/15/- Deposit and 12 months at £1/12/4.

A medium-priced 8-10-watt push-pull de Luxe Amplifier of very attractive appearance and embodying a high standard of workmanship. Complete performance data is available. Please send S.A.E.



THE COLLARO MODEL 3/514 3-Speed Non-Auto Change Unit

£7/19/6 (Plus 6/- Carr. and Insur.) Normal Price £12/17/6

- Complete with High Fidelity Crystal "TURNOVER" Head which incorporates a separate stylus for L.P. and Standard Records.
- Will play 7 inch, 10 inch and 12 inch Records.
- Brand New and Complete with mounting instructions.



When submitting orders, please include postage and packing.

**STERN RADIO
LTD.**

RECEIVER CHASSIS

Modernise your old Radiogram

RECORD PLAYERS

COMPLETE RADIOGRAM EQUIPMENT—QUALITY AT LOW COST

STERN'S DESIGN FOR HOME CONSTRUCTORS
The "SUPER-SIX"

A compact and highly efficient superhet Radio-Radiogram chassis of outstanding quality.


YOU CAN BUILD IT FOR £10/7/6 Including the OCTAL VALVE LINE-UP.

(£12/7/6 with the miniature valves)
We will supply it assembled and **READY FOR USE** for **£13/13/0** (Plus 7/6 Carr. & Ins.)

H.P. Terms £3.10.6. deposit and 12 months at 19/.

Incorporating the new B.V.A. Miniature Valve Line-up.
This receiver is designed to the very latest specification and provision is made to incorporate either the standard Octal Valve Line-up or the new B.V.A. range of miniature valves. Great attention has been paid to the quality of the reproduction of both Radio reception and Record playings, and excellent clarity of speech and music is obtained.

- A few brief details:
- Covers 3 wavebands 18-50 metres, 190-550, and 800-2,000 metres.
 - Employs 6 valves having PUSH-PULL for 5-6 watts output.
 - Incorporates delayed A.V.C. on all wavebands and pre-selective feedback.
 - A 4-position Tone Control operates on both Radio and Gram.
 - Has independent mains supply socket for a Record Player.
 - Size of Assembled Chassis 12in. x 8in. x 6in. Dial aperture 8 1/2in. x 4 1/2in.
 - For operation on A.C. mains 200-250 volts 50 cycles.
- THE INSTRUCTION AND ASSEMBLY MANUAL is available for 2/-, it contains very detailed practical drawings and circuit diagrams and a complete Component Price List.




THREE COMPLETELY ASSEMBLED ALL-WAVE SUPERHET CHASSIS

- Model B.3. A 5-valve 3-waveband Receiver.
 - Model B.3.P.P. A 6-valve 3-waveband Receiver with PUSH-PULL OUTPUT.
 - Model B.3.P.P./R.F. A 7-valve 3-waveband Receiver incorporating an R.F. stage with PUSH-PULL OUTPUT.
- The three Receivers are for operation on A.C. mains 100/110 volts and 200/250 volts, and employ the very latest miniature valves. They are designed to the most modern specification, great attention having been given to the quality of reproduction which gives excellent clarity of speech and music on both gram. and radio, making them the ideal replacement chassis for that "old Radiogram," etc.

Brief specifications: Model B.3.—Valve line-up, 6BE6, 6BA6, 6AT6, 6BW6, 6X4—waveband coverage short, 16-50, medium 187-550, long 900-2,000 metres. Controls: (1) volume with on/off; (2) tuning (flywheel type); (3) wavechange and gram; (4) Tone Control (operative on gram. and radio), Negative feedback is employed over the entire audio stages. Chassis size: 11 x 7 1/2 x 8 1/2 in. high. Dial size 8 1/2 x 4 1/2 in. Price complete and **READY FOR USE**, excluding speaker £12/12/- (carr. and ins. 7/6 extra).
H.P. Terms: £3/4/- deposit, 12 months at 17/6.

Model B.3.P.P. This model is the B.3 Receiver but incorporates two 6BW6 VALVES in PUSH-PULL, resulting in really excellent quality reproduction up to approximately 6 watts. Price £15/15/- (plus 7/6 carr. and ins.) or £3/19/- deposit, 12 months at £12/2/-
Model B.3. P.P./R.F. This model is similar in appearance and has same waveband coverage as the Model B.3, but in addition it incorporates an R.F. STAGE together with PUSH-PULL OUTPUT, employing a total of 7 valves with two type 6BW6 in Push-Pull. This makes for a really sensitive receiver with genuine quality reproduction. Price £18/18/- (plus 7/6 carr. and ins.) or £4/13/- deposit, 12 months at £16/9.



AN OUTSTANDING OFFER—A BULK PURCHASE ENABLES US TO OFFER THIS "PUSH-PULL" 7 VALVE SUPERHET RECEIVER

For only **£12/19/6** (Carr. and Ins. 7/6 extra).
H.P. Terms £3/4/6 Dep. 12 months at 18/4.
These receivers Model AW3-7 are made by a well-known set manufacturer and incorporate the latest Oram Valve Line-up of X79—W77—DH77—W77—U78 and two N78's in Push-Pull for approx. 7 watts output.
They cover 3 wavebands 18-50 metres, 190-550 and 800-2,000 metres, and are for operation on A.C. mains 200-250 volts. They make an excellent replacement Radiogram Chassis having a P.U. connection on the chassis. Extension speaker connection is also provided. (Overall size of chassis: 12in. long x 7 1/2in. x 6 1/2in. high, dial aperture 8 1/2in. x 4 1/2in. (Dial Escutcheon available for 4/9). THESE RECEIVERS ARE BRAND NEW AND FULLY GUARANTEED.

300-2,000 metres, and are for operation on A.C. mains 200-250 volts. They make an excellent replacement Radiogram Chassis having a P.U. connection on the chassis. Extension speaker connection is also provided. (Overall size of chassis: 12in. long x 7 1/2in. x 6 1/2in. high, dial aperture 8 1/2in. x 4 1/2in. (Dial Escutcheon available for 4/9). THESE RECEIVERS ARE BRAND NEW AND FULLY GUARANTEED.

109 and 115 FLEET ST.,
London, E.C.4. Phone: **CENTRAL 5812/3/4**

This AUTOCHANGE UNIT by a famous Manufacturer is offered for £11'10'0 (Plus 7/6 Carr. and Ins.)

Hire Purchase Terms **£2/17/6** Dep. and 12 Months at 16/4. (Normal price is £16/10/-).

- These units will autochange on all three speeds, 7in., 10in. and 12in.
- They play MIXED 7in. 10in. and 12in. records.
- They have separate saphires for L.P. and 78 r.p.m., which are moved into position by a simple switch.
- Minimum baseboard size required 14in. x 12in., with height above 5 1/2in. and height below baseboard 2 1/2in. A bulk purchase enables us to offer these BRAND NEW UNITS at this exceptional price.



The COLLARO 3RC/521 3-SPEED AUTO CHANGE UNIT
£9'19'6 (Plus 7/6 Carr. and Ins.) H.P. Terms **£2/10/0** Deposit and 11 months at 15/9.

Normal price £18/10/-.

- Complete with High Fidelity Crystal "Turnover" Head which incorporates separate stylus for L.P. and 78 r.p.m. Records.
- Will autochange on 7in., 10in. and 12in. records not intermixed.
- Minimum Baseplate size 15in. x 12 1/2in., with height above 4 1/2in. and below baseplate 3in.
- Brand new in Maker's Cartons, complete with Mounting Instructions.



A Replacement RADIO-RADIOGRAM CHASSIS

● **MODEL AW3-5.** A 5-Valve Superhet Receiver covering the standard 3 wavebands, 16-50, 190-550, 900-2,000 metres. PRICE COMPLETELY ASSEMBLED AND READY FOR USE **£10'10'0** (plus 7/6 carr. and ins.)
H.P. Terms £2/12/6 Deposit and 12 Months at 15/- This receiver is for operation on A.C. Mains 200-250 volts. It contains the latest MULLARD VALVE LINE-UP, being ECH42 (Freq. Ch.), EP41 (I.F.), EBC41 (Det. 1st Audio), EL41 (Output) and EZ41 (Rect.). It incorporates Negative Feedback and delayed A.V.C., the four controls being (1) Tuning, (2) Wavechange and Gram. switch, (3) TONE, (4) VOLUME-OFF. It provides really good reproduction on both Gram. and Radio and gives an exceptionally good range of station selection. Overall size 13 1/2in. x 7in. high x 6in. deep. Dial aperture 10in. x 4 1/2in.



SPECIAL REDUCTIONS FOR COMPLETE EQUIPMENT

SUMMARY

Select a **RECORD PLAYER** and **CHASSIS** and we will supply it **TOGETHER WITH AN 8-inch or 10-inch P.M. SPEAKER** as follows:—

THE £11.10.0 AUTOCHANGER WITH A SPEAKER AND—			
	Cash Price	Deposit	Monthly
(a) With Model B3 chassis	£24 15 0	£6 4 0	12 of £1 14 10
(b) " " B3PP	£28 0 0	£7 0 0	12 of £1 19 5
(c) " " B3PP/R.F.	£31 2 0	£7 15 0	12 of £2 3 9
(d) " " Super six (assemb. chassis only)	£25 15 0	£6 9 0	12 of £1 16 2
(e) " " AW3-5	£22 15 0	£5 10 0	12 of £1 12 4
(f) " " AW3-7	£25 5 0	£6 7 0	12 of £1 15 5

THE COLLARO AUTOCHANGER MODEL 3RC/521 WITH A SPEAKER AND—			
	Cash Price	Deposit	Monthly
(a) With Model B3 chassis	£23 6 0	£5 16 0	12 of £1 12 10
(b) " " B3PP	£26 9 0	£6 11 0	12 of £1 17 4
(c) " " B3PP/R.F.	£29 12 0	£7 9 0	12 of £2 1 6
(d) " " Super six (assemb. chassis only)	£24 8 0	£6 0 6	12 of £1 14 5
(e) " " AW3-5	£21 4 0	£5 6 0	12 of £1 9 10
(f) " " AW3-7	£23 14 0	£6 0 0	12 of £1 13 2

An additional charge of 10/- is made in each case to cover Carriage and Insurance.

Special Purpose VALVES

CV309	7/6	CV71	1/-
VR54	2/6	VR137	5/-
7Q7	3/6	VR55	7/3
6G6G	6/6	ATP4	6/9
9004	6/3	VU111	3/6
VR136	7/-	9001	6/3
VR66	3/9	VU39	8/6
VU120A	3/6	VR95A	3/6
9002	6/3	966	3/6
VR53	7/6	9003	6/9
VR91	6/-	2X2	5/6
807	8/-	VR65	3/9
5Z3	8/6	6887	8/-
935	4/-	1A5GT	7/3
TT11	6/6	220V8G	6/9
VR116	4/-	2A7	6/-
VR56	7/-	6A3	6/-
954	2/-	7475	4/9

Flex Mains Type. Twin 14/0076, P.V.C. covered 3d. per yd.
 Screened Cables
 Single Type 6d. per yd.
 Twin Core 7d. per yd.
 Three Core 9d. per yd.

TRIMMERS

200/200 PF 2 Bank Midget Ceramic 10d. each
 150/150 PF 2 Bank Ceramic 10d. each
 50 PF Ceramic 8d. each
 2 Bank Trimmer 50 PF each section 1/- each
 Philips 0/10 PF Concentric type 10d. each
 Philips 0/30 PF Concentric type 1/- each
 12/15 PF Pre Set Type 5d. each
 Cydon Trimmer Pre 46st Type 2,500 PF Nom. cap. 1/8 each

ENGRAVED KNOBS

Control Knobs, clearly engraved in gold. Size "A" diameter 1 1/4". Size "B" diameter 1 1/2". Both in two colours. Walnut or Cream. Inscriptions available:

RADIO: "Volume," "Vol./On/Off," "Wavechange," "On/Off," "Tuning," "S.M.L. Gram.," "Radiogram," "Tone," TELEVISION: "Contrast," "Brilliance," "Brilliance On/Off," "Focus," "Brightness,"
 AMPLIFIER: "Trebble," "Bass" (Plus any above).
 TAPE RECORDER: "Record Play." Prices: Size "A," 1/8; "B," 1/2. Plain knobs can be supplied in either size, 1/- each and 3d. each respectively.

CONDENSERS SILVER MICA

PF SIZES Available	1	2	3	6	7.5	8	9	10	13		
18	47	190	300	20	50	200	610	25	58	245	680
27	68	300	750	30	100	350	1,000	33	120	360	1,200
35	150	370	1,000	39	175	375	10,000	45	180	470	

All by well-known makers, 3/4d. each.
ARMOUR PLATED GLASS
 Size: 1 1/2" x 10 1/2", rounded corners, 4/- each. Fit a piece in front of your tube to avoid accidents.

WIRE WOUND RESISTORS
 Available in the following values—25Ω, 50Ω, 100Ω, 150Ω, 200Ω, 250Ω, 350Ω, 500Ω, 1,000Ω, 1,500Ω, 2,000Ω, 2,500Ω, 3,500Ω, 5,000Ω, 6,800Ω, 10,000Ω.
 Tolerance ±10%.
 Ratings 5 watt 1/- ea., 10 watt 1/3 ea., 15 watt 1/9 ea.

POCKET TEST METER
 Ex. Govt. robust construction, two range 0-15 volts and 0-250 v. D.C. scale, 19/8 ea.
 Vibrator clips, 4d. ea.

ALPHA

CATALOGUE

HUNDREDS OF BARGAINS FOR EVERY CONSTRUCTOR SEND 6d. IN STAMPS FOR YOURS NOW

BUILD THIS 4 VALVE PORTABLE FOR 6 1/2 GNS.

Cabinet available in the following colours:
 ● LIZARD GREY ● BLUE
 ● MAROON ● BROWN

complete with fascia board and removable insert in lid for frame aerial (can be separately purchased).

PRICE 36'6 ONLY

Detailed list of components and circuit diagram 2/- ea.

00035 MFD. 2-GANG CONDENSER, complete with trimmers and dust cover 8/3 ea.

DIAL BULBS.		M.B.C.T. Types.	
M.E.S. Types.			
6.3 v. 15 A.	6jd. ea.	6 v. 3 A.	5d. ea.
6.3 v. 3 A.	8jd. ea.	6.5 v. 3 A.	5d. ea.

30 AMP. ROTARY SWITCH, 4 position, complete with knob, 4/- ea.
 TRUYOX MODEL BXII. Lightweight type 12in. Loudspeaker, 49/6 ea.
 HAND MICROPHONE by "REGENT," complete with screened lead and plug. Crystal insert, nickel chrome plated head. Listed at 2 gns. Our price 21/- ea.
 SOLDERING IRONS. 964 Solon oval bit type, 19/- each, 968 Solon pencil bit type, 21/- ea.

ATTRACTIVE LOUDSPEAKER CABINETS

Available for 6 1/2in. and 8in. speaker units. Polished walnut finish. A very attractive cabinet at quarter of today's prices. Price, 6 1/2in. Type Cabinet, 15/6 each. Price, 8in. Type Cabinet, 19/6 ea.

HEADPHONES. Type CLR Low Resistance Headphones, 120 ohms, 7/6 pair. Type CHR High Resistance Headphones, 4,000 ohms, 11/- pair.
 Type DHRA. Super Quality Headphones, 13/9 pair. Headbands, Wide type, 1/9 ea.

MAINS TRANSFORMERS. 3-Way Mounting Type.
 MT1. Primary 0-210-230-250 v. Secondary 275-0-275 v. 80 M/A. 6.3 v. 4 amps. 5 v. 2 amps., with taps at 4 v. on Filament Winding. Price 17/6 ea.
 MT2. Primary 0-210-230-250. Secondary 350-0-350 v. 80 M/A. 6.3 v. 4 amps. 5 v. 2 amps. Both filament windings tapped 4 v. 17/6 ea.

FILAMENT TRANSFORMERS.		All 220 to 240 v. Input.	
2 volts 1/2 amp.	4/6	5 volts 2 amps.	10/-
2 volts 3 amps.	7/9	6.3 volts 1 1/2 amps.	6/-
4 volts 1 1/2 amps.	5/-	6.3 volts 1/2 amp.	5/-
4 volts 3 amps.	10/-	6.3 volts 3 amps.	9/-

BULLDOG CHARGER CLIPS. 3in. long, 6d. ea.

THE IDEAL CABINET FOR BUILDING T.R.F. OR SUPERHET

Complete with drilled chassis, dial, back plate, pointer, dial drive and drum, etc. Price 27/6, post 2/-.

SET OF VALVES. Ten VR91 (EF50) valves. Ex-Brand new unit., 6/- ea., 45/- set.

★ **SPECIAL OFFER. CO-AXIAL CABLE.** Best quality Grade "A" Cable: Solid 1/022 70 ohms, 7 1/2d. yd. Stranded 7/0076, 8jd. yd. Air spaced 1/036, 1/- yd.

GRAMOPHONE MOTORS. etc. Collaro AC37 Gramophone motor suitable for 100/120 v. 200/250 v. A.C. variable speed, complete with 10in. E.I.M. type turntable felt cover. Price, 46/- ea., plus 2/- post.

GOLDRING PICK-UP HEADS. Pick-up head type No. 112 (2,000 ohms.) complete with lead. Price 20/- ea.

THE ALPHA AMPLIFIER—3 valves (6B9G, 6V6GT, 6X5GT)
 A.C. mains fully isolated, neg. feed back (voltage and current), controlled volume and tone, dual input network, for modern crystal or Hi-Fi mega. Less than 1 per cent. total 2nd and 3rd harmonic distortion at 3 watts output from 1,000 C.P.S. Complete, ready for use, 79/8. Post extra.

CONDENSERS

The following is a selection from our stocks of manufacturers' surplus condensers, all by well-known makers. Aluminium Can types. Clip fixing.

8 x 8 mfd. 450 v.	4/-
8 x 16 mfd. 450 v.	4/-
8 x 24 mfd. 350 v.	3/-
8 x 32 mfd. 475 v.	3/9
12 x 4 mfd. 450 v.	2/-
12 x 8 mfd. 450 v.	3/-
16 x 8 mfd. 350 v.	4/-
16 x 16 mfd. 350 v.	3/3
20 x 20 mfd. 500 v.	4/9
24 mfd. 450 v.	2/9
25 x 16 mfd. 350 v.	3/6
32 x 8 mfd. 350 v.	3/8
32 x 16 mfd. 350 v.	4/6
32 x 32 mfd. 450 v.	6/11
32 x 32 x 8 m.A. 350 v.	5/6
32 x 32 mfd. 350 v. 25 mA. 25 v.	5/9
64 mfd. 350 v.	2/-

RR Range		
BR-550 8 mfd. 500 v.	ea.	2/9
BR-1650 16 mfd.	ea.	3/8
BR-2050 20 mfd. 500 v.	ea.	3/8
8 x 8 mfd. 500 v.	ea.	4/-
BR-301 50 mfd. 12 v.	ea.	1/9

Midget Metal Types

2 mfd. 350 v.	1/9
8 mfd. 350 v.	1/1
8 x 8 mfd. 450 v.	4/-
16 mfd. 350 v.	2/9
16 x 8 mfd. 450 v.	4/-
16 x 16 mfd. 450 v.	4/6
16 x 24 mfd. 350 v.	4/9
24 mfd. 350 v.	1/9
32 mfd. 350 v.	2/3
32 x 32 mfd. 350 v.	4/8
250 mfd. 12 v.	1/9

Wire ended Types
 8 mfd. 450 v. Carboard covered 1/11
 30mfd. 450 v. 3/9

Bias Condensers

Tag ended metal types

12 mfd. 50 v.	1/-
25 mfd. 25 v.	1/3
50 mfd. 12 v.	1/-
50 mfd. 50 v.	2/6
100 mfd. 12 v.	1/9
100 mfd. 25 v.	1/9

Wire ended Types. Carboard covered
 25 mfd. 25 v. 1/9
 50 mfd. 12 v. 1/9
 50 mfd. 50 v. 2/3

PENCIL RECTIFIERS
 K3/25, 5/8; K3/40, 7/8; K3/45, 8/2; K3/50, 8/8; K3/60, 9/8; K3/100, 14/8.

SENTERLEC RECTIFIERS
 RM1, 3/10 ea.; RM2, 4/2 ea.; RM3, 5/- ea.; BM4, 15/- ea.

METAL RECTIFIERS
 12 v. 1/2 amp., 1/8 ea.; 12 v. 1 amp. 4/6 ea.; 2 v. 1 amp., 3/- ea.; 250 v. 45 mA., 6/3 ea.; 250 v. 75 mA., 7/6 ea.; 300 v. 60 mA., 7/6 ea.

FULL WAVE TYPES
 12 v. 1 amp., 4/9 ea.; 12 v. 2 amp. 8/- ea.; 12 v. 3 amp., 13/- ea.; 12 v. 5 amp., 18/- ea.
 Wire Wound Volume Controls.
 5Ω; 20Ω; 1,000Ω; 2,000Ω 5KΩ; 10KΩ; 20KΩ; 25KΩ; 50KΩ; all 2/4 ea.

LOUDSPEAKERS
 Plessey 3in. Round type... 12/9 ea.
 Goodmans 6 1/2" unit... 15/11 ea.
 Plessey 5in. 13/6 ea.
 Elac 6 1/2in. 14/8 ea.
 Elac 5in. 17/8 ea.
 R. & A. 8in. 19/6 ea.
 Truvox B 11. 49/6 ea.
 Goodmans 10in. Speaker, with output transformer. 28/6 ea.
 Less output transformer. 25/- ea.

FILAMENT TRANSFORMER
 Primary 200/250 v. Secondary 6.3 v., 1.5 amps., tapped at 4 v. and 2 v., 7/6 ea.
 Mallory .1 mfd. 600 v. condensers, 1/- ea.
 Pentode Output Transformer, 2/9 ea.

MAINS DROPPERS
 Dubilier type HY 71228 135QQ with 5 taps, 2/6 ea.
 945Ω Dropper with 5 taps, 2/6 ea.

TERMS: Cash with order or C.O.D. Postage and Packing charges extra, as follows: Orders value 10/- add 9d; 20/- add 1/-; 40/- add 1/6; 25 add 2/- unless otherwise stated. Minimum C.O.D. fee and postage 2/3.

MAIL ORDER ONLY

ALPHA RADIO SUPPLY CO.

5/6 VINCES CHAMBERS, VICTORIA SQUARE, LEEDS 1.

WHEN ORDERING PLEASE QUOTE "DEPT. W.W."

R.115 5 RECEIVERS

BRAND NEW AERIAL TESTED BEFORE DESPATCH

These well-known Ex-Air Ministry Receivers need no further introduction. Supplied complete with 10 valves and full circuit data.

LASKY'S PRICE £11/19/6

BRAND NEW £9/19/6

Secondhand. Specially Selected. Grade 1 £7/19/6

Secondhand. Grade 2 Carriage 17/6 per receiver extra. including 10/- returnable on case.



ASSEMBLED POWER PACK/OUTPUT STAGE FOR R.1155 RECEIVER

For use on 200-250 v. A.C. mains. Complete with 2 valves. In metal case size: 12 x 7 x 5 1/2 in. **LASKY'S PRICE, 79/6.** Carr. 5/-. Power Pack as above. Fitted with 6 1/2 in. p.m. speaker. **LASKY'S PRICE £5/5/-.** Carr. 5/-. (H.P. Terms available)

WE NOW HAVE PLEASURE IN OFFERING YOU HIRE PURCHASE TERMS ON CERTAIN ITEMS

A FEW EXAMPLES.

	List	Deposit
Baker's	£5.10.0d.	£1.10.0d.
Selhurst	£6.10.0d.	£2.3.6d.
Speakers	£8.10.0d.	£2.17.0d.
De Luxe, 12 & 16in. cabinets:	£8.10.0d.	£2.17.0d.
R.1155 Receiver:		
Grade 1	£9.19.6d.	£4.0.0d.

Balance plus charges may be spread over any period to suit yourself up to 12 months.

Special Clearance Lines. Callers Only.

TAPE RECORD AMPLIFIERS. Fully wired but untested. With 6 valves: 2-617, 2-6V6, 1 each 5Z4 and 6J5. **PRICE £4/19/6.**

DINGHY AERIALS. WIRE MESH. 3/11.

MICROPHONE FLOOR STANDS. 2 Section Chrome. Heavy Base. 35/-.

TABLE MICROPHONE STANDS. 2 Section Chrome. Heavy base. 12/6.

J/R/A3 AMPLIFIERS As previously advertised, complete with all valves, but less output transformer. **LASKY'S PRICE £7/10/-.**

P.M. LOUDSPEAKERS

All with 3 ohm speech coil. 3 1/2 in., 14/6. 5 in., 14/6. 8 in., 19/11. 4 in., 12/6. 6 1/2 in., 15/- 10 in., 19/6.

ENERGISED SPEAKERS

8 in. with O/T 600 ohm field 15/6
8 in. less O/T 600 ohm field 12/6
8 in. less O/T 1,200 ohm field 12/6
6 1/2 in. with O/T 600 ohm field 14/-

I.F. TRANSFORMERS 445-520 Kc/s.

Miniature 1 x 1 x 1 1/2 in. 10/6 pair
Wearite 500 and 550 8/6 pair

CAR RADIO SPECIAL—PARTLY ASSEMBLED CAR RADIOS



Small size case, 12 x 4 x 6 in. Will fit most cars. For either 6 or 12 volts, depending on vibrator. Chassis supplied with 5 octal valve holders, medium wave aerial and oscillator coils output transformers, volume control, sundry resistances and condensers, dial and knobs. Case finished in brown crackle. Dial calibrated 150-550 metres, 5 valves to suit. One each, either GT or metal: 6SA7, 6R7, 6V6, 6K7, 0Z4. **LASKY'S PRICE £5/5/-.** Carriage 5/- extra. Or less valves, 69/6. Carriage 5/- extra Other chassis in various conditions of completion are available for personal callers only. **CIRCUIT** for 5 valve car radio, using above chassis. **PRICE** 1/6.

MAGNETIC RECORDING TAPE. SPECIAL OFFER Plastic. 600 feet reels. 6/11. Paper Base. 1,200 feet reels. 17/3. Postage 1/6. per reel extra.

TANNOY PRESSURE UNITS

10 watts. 7.5 ohms impedance. Last few only.

PRICE 59/6

AERIAL ROD SECTIONS

Steel, heavily copper plated. 12in. long, 1/4 in. diameter. Any number may be fitted together. **PRICE 2/6 per doz. POST FREE.**

300 PF. FEED THROUGH CONDENSERS

Ceramic. 6d. each. 4/6 per dozen.

20 PF. AIR SPACED TRIMMERS

9d. each. 7/6 per dozen.

RADIO CABINETS

Size: 12in. wide, 6 1/2 in deep, 8in. high. Finished in medium walnut veneer, with high polish. Complete with back, chassis, and dial, calibrated L., M. and S. **LASKY'S PRICE 16/11** Carriage 2/6 extra.

L. AND M. DUAL WAVE SUPERHET COILS

Aerial and Oscillator. 5/11 pair. L. AND M. WAVE T.R.F. COILS With circuit 4/6 pair.

INTERCOM. UNITS

4-station operation. For use on A.C./D.C. mains. 200-250 volts. Complete, with 3 valves. Fitted in attractive plastic cabinet. **MASTER UNIT £5/19/6.** Carr. 5/- extra. **Extension Units.** Price 21/- each complete. Carriage 2/- each extra.



TRIMMERS

Paxolin. Up to 100pf. 6d. each, 5/- per doz. Ceramic. Up to 100pf. 9d. each. 7/6 per doz.



THE UNIVERSAL A.C./D.C. TELEVISOR AND RADIOGRAM

A 30-page booklet giving full instructions for building a large 17 inch screen T.V. receiver, and a 3-speed auto-change gram. as an extra.

- * A.C./D.C. Mains.
- * Table T.V.
- * P.M. Focusing.
- * Mullard valves and C.R.T.
- * 5 Channel Superhet.
- * Gram and T.V. entirely separate.

PRICE 3d. POST FREE.

TELESCOPIC PORTABLE AERIAL MASTS

Lightweight but extremely strong alloy. Extends to 15 feet. Guyed at top and centre complete with all guys.



LASKY'S PRICE 25/-.

Carriage 2/6 extra.

GANGED TUNING CONDENSERS .0005 MFD.

Standard 2-gang. Size: 2 1/2 x 1 1/2 x 2 1/2 in. Spindle. 5/-.
Standard 3-gang. Size: 2 1/2 x 1 1/2 x 3 1/2 in. spindle. 7/6.
Midget 2-gang with trimmers. Size: 1 1/2 x 1 1/2 x 2 1/2 in. Spindle. 7/6.
Midget 3-gang with trimmers and Perspex cover. Size 1 1/2 x 1 1/2 x 2 1/2 in. Spindle. 12/6.

TAPE RECORD AMPLIFIERS. Fully wired but untested. With 6 valves: 2-617, 2-6V6, 1 each 5Z4 and 6J5. **PRICE £4/19/6.**

DINGHY AERIALS. WIRE MESH. 3/11.

MICROPHONE FLOOR STANDS. 2 Section Chrome. Heavy Base. 35/-.

TABLE MICROPHONE STANDS. 2 Section Chrome. Heavy base. 12/6.

J/R/A3 AMPLIFIERS As previously advertised, complete with all valves, but less output transformer. **LASKY'S PRICE £7/10/-.**

CAR RADIO AERIALS

2 section, chrome, 75 inches. Side fitting. 15/-.
Post 3/6.

STANDARD 5-VALVE SUPERHET RECEIVER

For use on 110-250 volts A.C. mains. Uses latest all glass valves: 1 each ECH42, EF41, EBC41, EZ40, EL41. In walnut veneer cabinet, illuminated dial. P-U sockets fitted. Coverage: 200-550 metres; 31-92 metres; 10-32 metres. Cabinet size 16 1/2 x 7 1/2 x 15 in.

SUPPLIED IN PERFECT WORKING ORDER COMPLETE WITH VALVES. LASKY'S PRICE, BRAND NEW, £9/19/6 SOILED, £7/19/6. Carriage 10/6 extra.

BY FAMOUS MANUFACTURER FRUSTRATED EXPORT ORDER

6 VOLT D.C. RADIO RECEIVER. Uses 4 valves, vibrator and metal rectifier. Valve line up: ECH35, EF39, EBC33, EL32. 8in. P.M. Speaker fitted. In walnut veneer cabinet. Size 19 x 8 x 15 in. Full vision dial, battery cmcy. switch, p.-u. sockets, tone control. Superhet. Wavebands: 200-500 metres; 50-120 metres; 20-50 metres; 10-20 metres.

BRAND NEW AND UNUSED. COMPLETE WITH VALVES. LASKY'S PRICE £9/19/6. Carriage and packing 10/6 extra.

SOLO SOLDERING IRONS

220-250 volts
Latest model instrument iron..... 19/8
Standard model..... 19/-
1-lb. REELS OF RESIN CORED SOLDER. **LASKY'S PRICE 7/6.**

SUPERHET COIL PACKS

With Circuit.
No. 1. L.M.S.G. Size: 4 1/2 x 5 x 2 1/2 in. With 1 in. spindle. 19/6.
No. 2. M.S.S. Size: 4 x 4 x 3 in. With 1/2 in. spindle. 16/-.
Both for use with 465 Kc/s. I.F.

"THE HARROW" Baffle Radio Cabinet



Build a second set to be proud of. Pleasing design cabinet, with drilled chassis, dial, drive and back. Finished in satin mahogany veneer. Outside dims.: 17 1/2 in. wide, 11 1/2 in. high, 5 in. deep. **LASKY'S PRICE 36/6** Carriage 2/-.
Receiver design uses 2-6K7, 6V6 and 5Z4. Total cost to build is less than £5/10/-.
Circuit for receiver 1/6.

BAKER'S SELHURST SPEAKERS

"Stalwart." 12in. 15 ohms impedance. Frequency response 30-13,500 c.p.s. Power handling capacity 15 watts, peak A.C. **PRICE £5/10/-.**
"Standard." 12in., 15 ohms impedance. Frequency response 30-14,500 c.p.s. Power handling capacity 20 watts, peak A/C. **PRICE £6/10/-.**
"De-Luxe." 12in., 15 ohms impedance. Re-entry cone. Frequency response 18-17,000 c.p.s. Power handling capacity 15 watts, peak A/C. **PRICE £8/10/-.** CARRIAGE 3/6 per speaker extra. (H.P. Terms available)



A LASKY'S RADIO ADVERTISEMENT. SEE OVER.



BY FAMOUS MANUFACTURER. 3-SPEED AUTOMATIC RECORD CHANGER. Mixer type. With turn over crystal pick-up. Incorporates the latest "Magdisk" record selector mechanism.

LASKY'S PRICE £10/10/- Carriage Free.

PLESSEY AUTO RECORD CHANGER. 3-speed mixer type, with turn over crystal pick-up. **LASKY'S PRICE £9/19/6.** Carriage Free.

LASKY'S T.V. CONSTRUCTORS' PARCELS.

No. 1. WIDE ANGLE PARCEL. Containing ferroxcube line E.H.T. transformer, ferroxcube scanning coils, frame output transformer, p.m. focus unit, frame blocking osc. transformer, 14, 16 or 17-inch mask and glass, width and linearity controls. Also the following valves:—6U4gt, 6CD6, 6AL5, 2-6AM5 (N78), 3-12AU7. Full circuit.

LASKY'S PRICE COMPLETE £8/15/11

Carriage 3/6 extra.

No. 2. THE WIDE ANGLE PARCEL AS ABOVE, but less valves.

LASKY'S PRICE 94/11

Carriage 2/6 extra.

VIEWMASTER TYPE TIME BASE PARCEL

Comprising scanning coils, line E.H.T. transformer, p.m. focus magnet, width control, frame output transformer, and 12in. mask and glass.

LASKY'S PRICE FOR THE COMPLETE PARCEL. 62/6 POST FREE.

All Viewmaster components available from stock. Price list available on request.

No. 3. All brand new components by Igranic. Comprises E.H.T. flyback line transformer, 7-10 Kv. with ferroxcube core and rectifier heater winding; scanning coils; frame output transformer; Elac focus unit with vernier adjuster, U37 or K3/100 E.H.T. rectifier, 12in. mask and glass.

LASKY'S PRICE FOR THE COMPLETE PARCEL, 79/6

Carriage and packing 3/6 extra.

No. 4. Complete set of metal-work. Unassembled. Comprising main chassis, tube supports and valve-holders. (Less sound-vision chassis.) **PRICE 25/-.** Carriage 3/6 extra.

No. 5. SPECIAL PARCEL. Comprising line output transformer (Non E.H.T.) frame output transformer, scanning coils, line and frame blocking oscillator transformers, large 250 m/a. smoothing choke.

LASKY'S PRICE 44/6 POST FREE.

COLLARO 3-SPEED AUTO CHANGERS. Model 3RC/521. New and unused in maker's carton.

Cream or fawn finish. Complete with hi-fidelity "studio" turn over crystal pick-up.

LASKY'S PRICE £9.19.6 Carriage Free.



CRYSTAL DIODES. Glass type, wire ends. 1/6 each. Higher Grades Available. 12 Assorted for 30/- Post Free.

TEST SET TYPE 28

P.R.F. Output Meter. Contains 0-50 microamp—2½ inch moving coil meter. Mounted in strong metal case, size 6in. high, 3½in. wide, 3in. deep. Complete with all plugs and cables. Supplied in wood transit case, hinged lid (ideal for tool box) size 11 x 9½ x 5½ inches. Rubber padded fittings.

IDEAL FOR CONVERSION INTO MULTIRANGE TESTMETER

LASKY'S PRICE £1.19.6 Carriage 3/6.

STAFF HOLIDAY.

All departments will be closed all day Thursday, October 7th. Open October 8th as usual.

12 VOLT-4 WATT MOBILE AMPLIFIERS

BRAND NEW AND UNUSED. KT.61 output. Complete with power unit and synchronous vibrator (Wearite type QFA/12), and all valves. Fitted with rubber covered heavy duty battery lead.

By famous manufacturer, in handsome metal cabinet, grey crackle finish. Size: 10in. x 6½in. x 8in. Output impedance 3 ohms. With the addition of a suitable loudspeaker, this is ready for operation. Finest quality components throughout. Robustly constructed for rough handling. Complete with carbon hand-microphone with screened lead.

Can also be used as a power pack and output stage for a car radio.

LASKY'S PRICE, £7.19.6 | OR LESS COMPLETE MICROPHONE £6.19.6

Carriage 5/- per unit extra.




3-WATT AC/DC MIDGET AMPLIFIERS

Push pull, very high gain

4 valves: 2 UL41 in push pull, 1 UCH42 and 1 UAF42. Input voltage 100/110 AC/DC. Very easily converted to 230 volts.

Supplied with circuit diagram and full details. Size:—9 x 4 x 4 inches. Uses 2 metal rectifiers, 1 each RM2 and RM3. Ideal for ships' record players, tape recorders, home record players, baby alarms, etc., etc. Supplied complete, fully assembled and wired, with 4 valves.

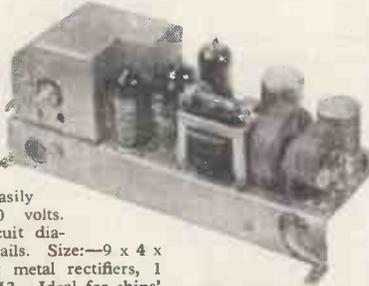

65/- CARRIAGE FREE

R.1132A. RECEIVERS. Tested. SOILED CONDITION. Grade 1, 79/6, specially selected. Grade 2, 59/6. Carriage 10/- per receiver extra.

EX-GOVERNMENT MAINS POWER UNITS, for R.1132A Receivers, 200-250 v. A.C. working order. 59/6. Carriage 7/6 extra.

OUTPUT TRANSFORMERS. Midget Pentode 3/6. Miniature Personal, 3S4, etc. 3/6. Standard pentode 3/11. Push-Pull 6V6 9/6. Multi Ratio, P.P. 12/6. Heavy Duty, P.P. 14/11

R.F. OSC. COIL KITS.

Consisting of R.F. oscillator E.H.T. coil with EY51 heater winding, EY51 rectifier, 6V6 valve and base. All necessary condensers and resistances. Full circuit and data supplied. 6-9Kv. PRICE.....45/- 6-18Kv. PRICE.....50/-

E.H.T. OSCILLATOR COILS

6-9 Kv. PRICE.....17/6 6-18 Kv. PRICE.....21/6

This cabinet is now supplied complete with mask, glass, castors, shelf, bearers, c.r.t. neck end protector, back, speaker fret and baffle board. Finished in beautiful figured medium, light or dark walnut veneer, with high polish. Suitable for most home constructor T.V. receivers, including the "Viewmaster," "Practical Television," "Tele-King," "Magniview," "Wireless World," etc. Can be supplied with cut-out for 14in., 16in. and 17in. c.r. tubes at no extra cost.

An allowance of 4s. 6d. will be made if the mask is not required. Inside Dimensions: Depth 16½in.; width 17½in.; height 28in. Overall height 32in. and width 18½in.

WHY NOT CONVERT YOUR TABLE RECEIVER TO A CONSOLE MODEL.

Adaptor frames for fitting 9in. or 10in. c.r. tubes can be supplied if required.

LASKY'S PRICE £8.10.0 Carriage 12/6 extra

H.P. TERMS AVAILABLE



ELECTROLYTIC CONDENSERS. ALL BRAND NEW.

8 mfd. 450 v.w.	1/9	400 mfd. 150 v.w.	2/6
16 mfd. 350 v.w.	2/6	8 + 8 mfd. 450 v.w.	3/6
16 mfd. 500 v.w.	3/6	8 + 16 mfd. 450 v.w.	4/3
20 mfd. 500 v.w.	3/6	12 + 12 mfd. 350 v.w.	2/6
30 mfd. 450 v.w.	3/3	16 + 16 mfd. 350 v.w.	3/6
60 mfd. 350 v.w.	3/11	16 + 16 mfd. 450 v.w.	4/6
64 mfd. 450 v.w.	3/11	20 + 20 mfd. 275 v.w.	2/-
150 mfd. 350 v.w.	3/6	6000 mfd. 6 v.w.	2/6
		8000 mfd. 3 v.w.	2/6

MANY OTHER SINGLE AND MULTIPLE CONDENSERS IN STOCK.

THE TELE KING

5 CHANNEL 16 or 17 INCH SUPERHET RECEIVER

WIDE ANGLE — LARGE SCREEN

This famous and well tried home constructor set can now be built for **£29'10'** - including valves. Only tube and cabinet extra.



A MULTI CHANNEL TUNER FOR THE TELE KING WILL BE AVAILABLE SHORTLY.

EVERY COMPONENT CAN BE SUPPLIED SEPARATELY.

Full constructional data, wiring diagrams and circuits.

Price 6/- POST FREE.

WRITE NOW FOR OUR NEW TELE KING PRICE LIST. WE CAN SAVE YOU MONEY.



Co-axial Cable. 75-80 ohms impedance. Single Core. 8d. per yard. Twin Core, 1/- per yard. Twin Balanced Feeder, 6d. per yard.

CHOKES

40 m/a. . . 3/3 120 m/a. 7/3
60 m/a. . . 3/11 200 m/a. 12/6
80 m/a. . . 4/11 250 m/a. 14/-

SPECIAL TRANSFORMER
Secondary tapped as follows:
3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24 and 30 volts at 2 amps.
PRICE 17/6.

HIGH VOLTAGE E.H.T. CONDENSERS

1 + 1 mfd. 3.5 Kv. 5/11
.1 mfd. 7 Kv. 15/-
.001 mfd. 12.5 Kv. 7/6
.001 mfd. 15 Kv. 10/-
.0005 mfd. 10 Kv. 3/6
.0005 mfd. 15 Kv. 6/6
.04 mfd. 12.5 Kv. 5/-

SPECIAL T.V. CONDENSERS

64 mfd. 450 v.w. 3/11
100 mfd. 450 v.w. 4/11
32 + 100 mfd. 450 v.w. 7/6
100 + 200 mfd. 350 v.w. 5/11



CYLDON 5 CHANNEL T.V. TUNERS

Uses two valves, BF80 (6BW7), as R.F. amp. and ECC81 (12AT7) as frequency changer. Instant and positive selection of any channel by switching incremental inductances. Power gain 24dB, I.F. frequency output 9.5-14 Mc/s. or 15.5-22 Mc/s. With full details and circuit diagram. Supplied less valves. Size: 4 1/4 x 2 1/2 x 2 1/2 in.
LASKY'S PRICE WITH VALVES 37/6.
Post free

12/6
LESS VALVES
POST FREE

ARMOUR PLATE GLASS
16in. Actual size 17 1/2 in. x 15 1/2 in. x 1 in. 7/11
15in. Actual size 16 1/2 in. x 13 in. x 1 in. 6/11
12in. Actual size 13 in. x 10 1/2 in. x 1 in. 4/-
9in. Actual size 9 in. x 8 in. x 1 in. 3/-

SPECIAL OFFER. 12 INCH CATHODE RAY TUBES.
Standard types, suitable for T.V. LIMITED QUANTITY
LASKY'S PRICE £12/19/6.
Carriage and insurance 15/- extra.

ION TRAPS. All types, 3/-.

TRIPLEX DARK SCREEN FILTERS
14 x 12 1/2 x 3/8 in. 7/6
15 1/2 x 13 1/2 x 3/8 in. 9/6
Postage and packing 5/- per piece extra. (This charge is necessary owing to extra packing required).

C.R.T. Neck Protectors 2/6.

MANUFACTURERS SURPLUS T.V. COMPONENT BARGAINS

WIDE ANGLE 38mm.

Line E.H.T. trans., ferroxcube core. 9-16 Kv. 25/-
Scanning Coils, low imp. line and frame 25/-
Frame Output Transformer 10/6
Scanning Coils low imp. line and frame 17/6
Frame blocking osc. transformer 6/6
Line blocking osc. transformer, caslam cored 6/6
Focus Magnets Ferroxdure 25/-
P.M. Focus Magnets. Iron Cored 19/6
Duomag Focalisers 29/6
300 m/a. Smoothing chokes 15/-
Electromagnetic focus coil, with combined scan coils 25/-

STANDARD 35mm.

Line Output Transformers. No E.H.T. 12/6
Line Output Transformers. 7-9 Kv. E.H.T. and 6.3 v. winding 19/6
Scanning coils. Low imp. line and frame 12/6
Scanning Coils. Low imp. line and frame, by Igranac 14/6
Line blocking oscillator transformer 4/6
Frame blocking oscillator transformer 4/6
Frame output transformer 7/6
Focus Magnets: Without Vernier 12/6 With Vernier 17/6
Focus Coils. Electromagnetic 12/6
200 m/a. Smoothing chokes 10/6

PERSPEX IMPLOSION GUARDS, incorporating escutcheon and filter plate.
12in. 12/6
12in. de Luxe 15/-
16in. de Luxe 17/6

PORTABLE RECORD PLAYERS
Single speed auto changer, with amplifier. In case. A FEW LEFT AS PREVIOUS ADVT. £10.19.6d. Carriage 10/6d.

MAINS TRANSFORMERS
All 200-250 v. 50 c.p.s. primary. Finest quality, fully guaranteed.
MBA/3. 350-0-350 v. 80 mA. 6.3 v. 4 a. 5 v. 2 a. Both filaments tapped at 4 volts. An ideal replacement trans. Price 18/-.

TELEVISION SELENIUM RECTIFIERS
The very latest "Sentercell" S.T.C. range.
K3/40, 3.2 kV 6/-
K3/45, 3.6 kV 8/2
K3/50, 4.0 kV 8/8
K3/100, 8.0 kV 14/8
K3/160, 12.8 kV 21/6
K3/200, 16 kV 26/-

MBA/6. 325-0-325 v. 100 mA. 6.3 v. 3 a., 5 v. 2 a. With mains tapping board. Price 22/6.

FILAMENT TRANSFORMERS
200-250 v. primary 50 c.p.s. 6.3 v. 1.75 a., 6/6. 6.3 v. 3 a., 9/6.

MBA/7. 250-0-250 v. 80 mA. 6.3 v. 3 a., 5 v. 2 a. Both filaments tapped at 4 volts. Price 18/-.

C.R.T. MASKS. Brand New LATEST ASPECT RATIO
9in. 7/-
10in. 7/6
12in. 15/-
12in. Flat Face 15/-
12in. Old Ratio 9/6
12in. Escutcheon mask with Perspex filter 12/6
14in. Rectangular 12/6
15in. Cream rubber 17/6
16in. Plastic, white 12/6
17in. Rectangular 15/-

MBA/8. SPECIAL OFFER
Drop through type. 235-0-235 v. 60 mA. 6.3 v. 3 a., 12/6.

MBA/9. 400-0-400 v. 60 mA. 6.3 v. 1 a., 4 v. 2.5 a. Price 12/6.

AT/3. Auto transformer. 0-10-120, 200-230-240 volts 100 watts. Price 17/6.

LASKY'S RADIO

LASKY'S (Harrow Road) Ltd.,
370 HARROW RD., PADDINGTON, LONDON, W.9

(Opposite Paddington Hospital)

Telephone, all departments: CUNningham 1973/7214.

Please Add a Reasonable Amount For Postage.

SELENIUM RECTIFIERS

L.T. Types	H.T. Type H.W.	
2/6 v. 1 a.h.w. 1/9	120 v. 40 mA.....	3/11
6/12 v. 1 a.h.w. 2/9	250 v. 50 mA.....	5/9
	250 v. 80 mA.....	7/9
	RM2 125 v. 100 mA.....	
F.W. Bridge Types		
6/12 v. 1 a. 5/9		3/11
6/12 v. 2 a. 9/9	RM3 125 v. 120 mA.....	
6/12 v. 4 a. 14/9	MA.....	5/9
6/12 v. 6 a. 19/9	RM4 250 v. 250 mA.....	
6/12 v. 10 a. 29/9	MA.....	11/9
	300 v. 275 mA. 12/11	

CO-AXIAL CABLE. 75 ohms $\frac{1}{2}$ in., 7d yard. Or in 20yd. lengths, 6d. yd. Twin screened feeder, 9d. yd.

RHEOSTATS (VARIABLE RESISTORS)
2 ohms 5 amps, 6/9; 7.5 ohms 5 amps, 8/9; 0.4 ohm 25 a., 8/9; 10 ohm 3 amps, 8/9; 80 ohms 1.5 amps, 14/9. All complete with control knob.

SILVER MICA CONDENSERS. 5, 10, 15, 20, 25, 30, 35, 50, 100, 120, 150, 180, 200, 230, 300, 330, 400, 470, 500, 1,000 pfd. (.001 μ F), .002 mfd. (2,000 pfd.). All at 5d. each, 3/9 dozen one type.

DIAL BULBS, M.E.S., 8 v. 0.15 a., 6/9 doz.; 6.5 v. 0.15 a., 6/9 doz.

ECELTROLYTICS (Current production)
NOT ex-Govt.

Tubular Types	Can Types	
8 μ F 450 v. 1/11	16mfd. 350 v. 1/11	
8 mfd. 500 v. 2/6	16 μ F 450 v. 2/9	
16 μ F 350 v. 2/3	24 μ F 350 v. 2/11	
16 μ F 450 v. 2/9	32 μ F 350 v. 2/11	
16 μ F 500 v. 3/9	32 mfd. 450 v. 4/9	
24 μ F 350 v. 3/3	8-8 μ F 350 v. 3/9	
32 μ F 350 v. 3/9	8-8 μ F 450 v. 3/11	
32 mfd. 500 v. 5/9	8-8 μ F 500 v. 4/11	
8-16 μ F 500 v. 4/11	8-16 μ F 450 v. 2/11	
2 μ F 25 v. 1/3	16-32 mfd. 450 v. 4/9	
50 μ F 12 v. 1/3	16-32 μ F 350 v. 4/9	
50 μ F 50 v. 2/3	16-32 μ F 450 v. 5/11	
	32-32 μ F 500 v. 6/11	
Can Types		
8mfd. 350 v. 1/3		
8mfd. 450 v. 2/3		
8mfd. 500 v. 2/9		

AMPLIFIER OR CHARGER CASES. Size 14 $\frac{1}{2}$ x 5 $\frac{1}{2}$ x 7 $\frac{1}{2}$ ins. high. Strongly made in perforated steel. Grey enamel finish. Only 9/6.

VOLUME CONTROLS with long spindles, all values less switch, 2/9; with S.P. switch, 3/9.

WIRE WOUND POTS: 20 ohms, 500 ohms, 5K, 20K, 50K, 100K (medium length spindles), 2/9. 220 ohms, 2K, 10K, 20K, 50K, Preset type, 1/9 ea.

AMMETERS. Moving coil. G.E.C. 0-5 amps., 2in. scale, 11/9.

EX-GOVT. E.H.T. SMOOTHING CONDENSERS

.02 mfd. 8,000 v. Cans	1/11
.25 mfd. 4,000 v. Blocks	4/9
.5 mfd. 2,500 v. Blocks	3/9
.5 mfd. 3,500 v. Cans	3/3
1 mfd. plus 1 mfd. 8,000 v., large blocks (common negative isolated)	9/6
1.5 mfd. 4,000 v. blocks.	5/9

EX-GOVT. ACCUMULATORS with non-spill vents. Unused and guaranteed. 2 v. 10 A.H., 5/9 each. or 3 in wood carrying case 9 x 7 x 5 in., 14/9, plus 3/6 Carr.

EX-GOVT. BLOCK PAPER CONDENSERS

2 mfd. 800 v. 1/9	4 mfd. 2000 v. 6/9
4 mfd. 500 v. 2/9	6-6 mfd. 500 v. 5/9
4 mfd. 730 v. 3/9	8 mfd. 500 v. 5/9
4 mfd. 1500 v. 4/9	8-8 mfd. 500 v. 7/9
	15 mfd. 500v. 7/9
4 mfd. 1500 v. plus 2 mfd. 250 v. 1/11.	

EX-GOVT. AUTO TRANSFORMERS 50 c/s.

Double Wound 10-0-220-200-240 v. to 10-0-270-200-310 v. 200 watts	25/9
0-110-190 230 v. 1,400 watts	49/6
Double Wound 220/240 v. input. Output 57.5 v. to 230 v. 21 amps in steps of 11 v.	£6/15
Double Wound 10-0-200-220-240 v. to 10-0-275-295-315 v. 500 watts	69/6

M.E. SPEAKERS. All 2-3 ohms, 6 $\frac{1}{2}$ in. Rola-field 700 ohms, 11/9. 10in. R.A. field, 1,500 ohms, 23/9. 10in. R.A. field 1,000 ohms, 23/9.

R.S.C. TRANSFORMERS

FULLY GUARANTEED, INTERLEAVED AND IMPREGNATED

MAINS TRANSFORMERS

Primaries 200-230-250 v. 50 c/s.

FULLY SHROUDED UPRIGHT MOUNTING

250-0-250 v. 60 mA., 6.3 v. 2 a., 5 v. 2 a., Midget type, 21-3-3in.	16/9
350-0-350 v. 70 mA., 6.3 v. 2 a., 5 v. 2 a., 0-4-5 v. 3 a.	18/9
300-0-300 v. 60 mA., 12 v. 1.5 a., c.t.	18/11
250-0-250 v. 100 mA., 6.3 v. 4 v. 4 a., c.t., 0-4-5 v. 3 a.	22/9
250-0-250 v. 100 mA., 6.3 v. 6 a., 5 v. 3 a., for R1355 conversion	29/6
300-0-300 v. 100 mA., 6.3 v. 4 v. 4 a. c.t., 0-4-5 v. 3 a.	22/9
350-0-350 v. 100 mA., 6.3 v. 4 v. 4 a. c.t., 0-4-5 v. 3 a.	22/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	31/6
350-0-350 v. 150 mA., 6.3 v. 2 a., 6.3 v. 2 a., 5 v. 3 a.	33/9
350-0-350 v. 250 mA., 6.3 v. 6 a., 4 v. 8 a., 0-2-6 v. 2 a., 4 v. 3 a., for Electronic Eng. Television	69/6
425-0-425 v. 200 mA., 6.3 v. 4 a. c.t., 6.3 v. 4 a., c.t., 5 v. 3 a., suitable Williamson Amplifier, etc.	47/9
425-0-425 v. 250 mA., 6.3 v. 5 a., 6.3 v. 6 a., 5 v. 3 a.	69/6

TOP SHROUDED DROP THROUGH TYPE

250-0-250 v. 70 mA., 6.3 v. 2.5 a.	12/11
280-0-280 v. 70 mA., 6.3 v. 2 a., 5 v. 2 a.	15/9
350-0-350 v. 80 mA., 6.3 v. 2 a., 5 v. 2 a.	17/6
275-0-275 v. 80 mA., 6.3 v. 3 a., 4 v. 2.5 a.	14/11
250-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	21/9
300-0-300 v. 100 mA., 6.3 v. 4 v. 4 a., c.t., 0-4-5 v. 3 a.	21/9
350-0-350 v. 100 mA., 6.3 v. 4 a., c.t., 5 v. 3 a.	21/9
350-0-350 v. 150 mA., 6.3 v. 2 a., 6.3 v. 2 a., 5 v. 3 a.	29/11
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	26/9

E.H.T. TRANSFORMERS. 2,500 v. 5 mA., 2-0-2 v. 1.1 a., 2-0-2 v. 1.1 a., for VCR97, VCR517 or ACR2X 36/6
5,000 v. 5 mA., 2 v. 2 a. 39/6

FILAMENT TRANSFORMERS

Primaries 200-250 v. 50 c/s.	
6.3 v. 1.5 a. 5/9	0-4-6.3 v. 2 a. 7/9
6.3 v. 3 a. 9/6	6.3 v. 6 a. 17/6
12 v. 1 a. 7/11	0-2-4-5-6.3 v. 4 a. 18/9
0-2-4-5-6.3 v. 4 a. 18/9	12 v. 3 a. or 24 v. 1.5 a. 17/6
6.3 v. 2 a. 7/6	1.5 a. 17/6

CHARGER TRANSFORMERS

All with 200-230-250 v. 50 c/s Primaries: 0-0-15 v. 1.5 a., 12/9; 0-0-15 v. 3 a., 16/9; 0-0-15 v. 6 a., 22/9; 0-4-0-15-24 v. 3 a., 22/9.

ELIMINATOR TRANSFORMERS

Primaries 200-250 v. 50 c/s. 120 v. 40 mA.	7/11
120 v. 40 mA. 5-0-5 v. 1 a.	14/9

OUTPUT TRANSFORMERS

Midget Battery Pentode 66: 1 for 3S4, etc.	3/6
Small Pentode, 5,000 Ω to 3 Ω	3/9
Standard Pentode, 5,000 Ω to 3 Ω	4/9
Standard Pentode, 8,000 Ω to 3 Ω	4/9
Standard Pentode, 10,000 ohms to 3 ohms	4/9
Multi-ratio 40 mA. 30:1, 45:1, 60:1, 90:1, Class B Push-Pull	5/6
Push-Pull 8 Watts 6V6 to 3 ohms	8/9
Push-Pull 10-12 Watts 6V6 to 3 Ω or 15 Ω	15/9
Push-Pull 10-12 Watts to match 6V6 to 3-5-8 or 15 Ω	16/9
Push-Pull 15 Watt 6L6s, KT66s, etc. to 3 or 15 ohms	19/9
Push-Pull 20 Watts high-quality sectionally wound 6L6, KT66, etc., to 3 or 15 Ω	47/9
Williamson type, exact to author's spec.	85/-


SMOOTHING CHOKES

250 mA., 3 H. 50 ohms	11/9
150 mA., 7-10 H. 250 ohms	11/9
100 mA., 10 H. 200 ohms	8/9
80 mA., 10 H. 350 ohms	5/6
60 mA., 10 H. 400 ohms	4/11
50 mA., 40 H. 1,000 ohms Potted	10/9
20 mA., 30 H. 1,000 ohms	4/9

MICROPHONE TRANSFORMERS

100:1	5/9
-------	-----

THE SKY CHIEF T.R.F. RECEIVER

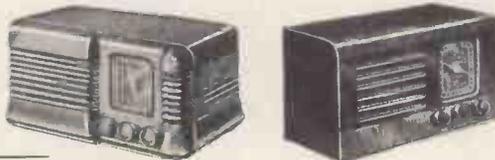

A design of a 4-stage, 3 valve 200-250 v. A.C. Mains receiver with selenium rectifier. For inclusion in any of cabinets illustrated above. It consists of a variable Mu high gain H.F. stage followed by a low distortion grid detector triode. The next stage is a further triode amplifier with tone correction by negative feedback. Finally comes the output stage consisting of a parallel connected double triode giving ample output at an extraordinary low level of distortion. Point to point, wiring diagrams instructions, and parts list, 2/6. This receiver can be built for a maximum of £4/16/- including cabinet.

P. M. SPEAKERS. All 2-3 ohms, 2 $\frac{1}{2}$ in. Celestion, 14/9. 3 $\frac{1}{2}$ in. Goodmans (Ex New Units), 10/9. 5in. Goodmans, 15/8. 6 $\frac{1}{2}$ in. Goodmans, 16/9. 8in. Plessey, 15/9. 10in. Rola, 27/9. 10in. Plessey, 18/6. 10in. Rola with Trans., 29/6.

R.S.C. BATTERY CHARGER KITS. For mains input 200-250 v. 50 c/s. To charge 6 v. accumulator at 2 amps., 25/9. To charge 6 v. or 12 v. battery at 2 a., 31/6. To charge 6 v. or 12 v. battery at 4 a., 49/9.



FORMER FULL WAVE METAL RECTIFIER, FUSES, FUSE-HOLDERS AND CIRCUIT. Any type assembled and tested for 6/8 extra.

H.T. ELIMINATOR AND TRICKLE CHARGER KIT with case, Mains input 200-250 v. Output 120 v. 40 mA. and 2 v. $\frac{1}{2}$ a. Price with circuit 29/6. Or in working order, 37/6.

EX. GOVT. MAINS TRANSFORMER

All 230 v. 50 c/s input.	
250-0-250 v. 40 mA., 6.3 v. 2 a., 5 v. 2 a.	9/11
8.8 v. 4 a.	9/9
48 v. 1 a.	9/6
175 v. 200 mA.	9/9
0-11-22 v. 15 a.	35/9
0-11-22 v. 30 a.	72/6
16/20 v. 35 a.	79/6
7.7 v. C.T. 7 amps 4 times	25/9
460 v. 200 mA., 6.3 v. 5 a.	27/9
365-0-365 v. 150 mA.	8/9
300-0-300 v. 80 mA. 5 v. 3 a.	8/11
278-0-278 v. 100 mA.	8/9
300-0-300 v. 150 mA., 610-0-610 v. 150 mA., 1,220 v. 350 mA.	29/9
400 v. C.T. 150 mA. 4 v. 6 a., 6.3 v. 6 a., 6.3 v. 0-6 a., 4 v. 6 a., 4 v. 3 a., 4 v. 3 a., 5 v. 2 a.	22/9

EX-GOVT. SMOOTHING CHOKES

250 mA., 10 H. 50 ohms	14/9
250 mA. 10 H. 100 ohms	14/9
250 mA. 3 H. 50 ohms. Potted	8/9
150 mA. 10 H. 50 ohms	10/11
100 mA. 10 H. 100 ohms, Tropicalised	6/9
100 mA. 5 H. 100 ohms, Tropicalised	3/11
50 mA. 50 H. 1,000 ohms, Tropicalised	3/11
90/100 mA 10 H. 100 ohms. Potted	8/9
50 mA. 5-10 H.	2/9
L.T. type 1 amp.	2/9

EX-GO-T. TRANSMITTER-RECEIVER TYPE TR9D, complete with all valves, only 47/9, plus carr. 5/-

CHASSIS

18 s.w.g. undrilled alu-16 s.w.g. aluminium, minimum amplifier type.	
(4-sided).	
12in. x 9in. x 2 $\frac{1}{2}$ in. 6/11	12in. x 8in. x 2 $\frac{1}{2}$ in. 5/3
14in. x 9in. x 2 $\frac{1}{2}$ in. 6/11	16in. x 8in. x 2 $\frac{1}{2}$ in. 7/6
14in. x 10in. x 3in. 7/11	20in. x 8in. x 2 $\frac{1}{2}$ in. 8/11
16in. x 10in. x 3in. 8/3	
18 s.w.g. aluminium receiver type.	16 s.w.g. aluminium, amplifier type, 4-sided.
6in. x 3 $\frac{1}{2}$ in. x 1 $\frac{1}{2}$ in. 1/11	12in. x 8in. x 2 $\frac{1}{2}$ in. 7/11
7 $\frac{1}{2}$ in. x 4 $\frac{1}{2}$ in. x 2in. 2/9	16in. x 8in. x 2 $\frac{1}{2}$ in. 10/11
10in. x 5 $\frac{1}{2}$ in. x 2in. 3/3	20in. x 8in. x 2 $\frac{1}{2}$ in. 13/6
11in. v. 6in. x 2 $\frac{1}{2}$ in. 3/11	14in. x 10in. x 3in. 13/6

R.S.C. 25 WATT "PUSH-PULL" AMPLIFIER

Now firmly established, and proving extremely popular, our A11 Quality Amplifier we consider to be the best value in amplifiers offered to-day. The volume of its high fidelity reproduction is completely controllable, from the sound of a quiet intimate conversation to the full glorious volume of a great orchestra. Its sensitivity is so high that in areas of fair signal strength it can be operated straight from a crystal receiver. Entirely suitable for standard or long-playing records in small homes or in large auditoriums. For electronic organ or guitar or for garden parties or dance bands.

The kit is complete to the last detail, and includes easy to follow point-to-point wiring diagrams.

Twin volume controls with twin input sockets allow SIMULTANEOUS INPUTS for BOTH MICROPHONE and GRAM, or TAPE and RADIO. SEPARATE BASS and TREBLE CONTROLS giving both LIFT and CUT. FOUR NEGATIVE FEEDBACK LOOPS with 15 db in the main loop from output transformer to voltage amplifier. Frequency response ± 3 db 50-20,000 c.p.s. Hum and distortion LESS THAN 0.5 per cent. measured at 10 watts. This is comparable with some of the highest priced amplifiers. Six B.V.A. valves, Marconi-Osram KT series output valves. A.C. only, 200-230-250 v. 50 c/s. input. 420 v. H.T. LINE. Paper reservoir condenser. Compact chassis. Matched components. OVERALL SIZE 12 x 10 x 9in. approx. Output impedances for 3 and 15 ohms speakers.



Available in kit form at the amazingly low price of **9 gns.** carriage 5/- Or ready for use 50/- extra.

W.B. "STENTORIAN" High fidelity P.M. Speaker, HF1012, 10 watts. 15 ohm (or 3 ohm) speech coil. Where a really good quality speaker at a low price is required we highly recommend this unit with an amazing performance. **£3/13/6.**

CONNOISSEUR HIGH FIDELITY LIGHTWEIGHT MAGNETIC PICK-UP COMPLETE WITH MATCHING TRANSFORMER. A fortunate purchase enables us to offer limited supplies. Brand New, Boxed and Perfect at a fraction of normal price. Buy Now at only 26/6.



COLLARO 3-SPEED AUTOMATIC RECORD CHANGERS (brand new), type 3RC/521, complete with 2 plug-in Crystal P.U. heads for long playing or standard records 7, 10 or 12in. Not intermixed. Mains input 200-250 v. Limited number available at only **£9/19 6**, plus carr. 5/-.

COLLARO 3-SPEED MIXER AUTOCHANGER, Type 3RC/522 with 2 plug-in Crystal P.U. Heads with Sapphire Stylus for long playing or standard records. Plays 7, 10 and 12in. records intermixed. Limited number, Brand New, Cartoned. **£10/19/6** (approx. half price). Carr. 5/- extra.

COLLARO TAPE DESK MOTORS. Shaded pole type. Clockwise or anti-clockwise. Mains input 110-200-250 v., 31/6.

H.M.V. LONG PLAYING RECORD TURNABLE COMPLETE WITH CRYSTAL PICK-UP (SAPPHIRE STYLUS). Speed 33 $\frac{1}{3}$ r.p.m. BRAND NEW, CARTONED. Only **£3/19/6** (approx. half price). Carr. 5/- (For 200-250 v. A.C. Mains).

A PUSH-PULL 3-4 WATT HIGH-GAIN AMPLIFIER FOR £3/12/6

For mains input 200-250 v. 50 c/s. Complete kit of parts including point-to-point wiring diagrams and instructions. Amplifier can be used with any type of feeder unit or pick up. This is not A.C./D.C. with "live" chassis but A.C. only with 400-0-400 v. Trans. Output is for 2-3 ohm speaker. (We can supply a very suitable 10in. unit by Rola at 27/9.) The amplifier can be supplied ready for use for 25/- extra. Full descriptive leaflet, 7d.


R.S.C. MASTER INTERCOM. UNIT, with provision for up to 4 "Listen-Talk Back Units" individually switched. A high gain amplifier enables speech and other sounds emanating from the rooms containing remote control units to be heard at the master control. The unit is in kit form and point-to-point wiring diagrams are supplied. A walnut veneered wood or Brown Bakelite cabinet is included. Mains input is 200-250 v. 50 c/s H.T. line 300 v. CHASSIS IS NOT "ALIVE." Ideal also for use as "Baby Alarm." Sound amplification 4 watts. Price only 25/19/6. "Listen-Talk Back Unit" in bakelite or walnut veneered cabinet, can be supplied at 30/- each. Full descriptive leaflet 10d. The Master Unit can be supplied assembled and tested for 30/- extra.

PERSONAL SET BATTERY SUPERSADER KIT.

All parts for an "All Dry" Battery Eliminator. Complete with case. Supplies 90 v. 10 mA. and 1.4 v. 250 mA. fully smoothed, from normal. 200-250 v. 50 c/s mains. For 4-valve superhet receivers. Price with circuit, 35/9. Or ready for use, 42/6. Size of unit 5 $\frac{1}{2}$ x 4 $\frac{1}{2}$ x 1 $\frac{1}{2}$ in.

BATTERY SET CONVERTER KITS. All parts for converting any type of battery receiver to all mains. A.C. 200-250 v. 50 c/s. Kit will supply fully smoothed H.T. of 120 v. 90 v. or 60 v. at up to 40 mA., and fully smoothed L.T. of 2 v. at 0.4 a. to 1 a. Price complete with circuit and instructions only 48/9. Supplied ready for use for 3/9 extra.

R.S.C. 10-watt "Push-Pull" HIGH-FIDELITY AMPLIFIER A3



Complete with integral pre-amp. Tone control stage (as A11 amplifier), using negative feedback, giving humproof individual bass and treble lift and cut tone control. Six Negative Feedback Loops. Completely negligible hum and distortion. Frequency response ± 3 db. 30-20,000 c.p.s. Two independently controlled inputs. Six B.V.A. valves. A.C. mains 200-230-250 v. input only. Outputs for 3 or 15 ohm speakers. Kit of parts complete in every detail, **£7/19/6**, plus 5/- carriage, or ready for use, 45/- extra. Descriptive leaflet 1/-.

FOUR STAGE RADIO FEEDER UNIT. Design of a HIGH FIDELITY, L. and M. wave T.R.F. Unit with self-contained heater supply and thorough H.T. decoupling. Only 250-400 v. 15-20 mA. H.T. required from main amplifier. Three valves and Low Distortion Germanium Diode Detector. Flat topped response characteristic. Loaded H.F. coils. Two variable Mu controlled H.F. stages, 3 gang condenser tuning. Cathode follower output stage. Switch position for Gram. and Gram. input and output sockets. Performance comparable with the best in Feeder Units. For A.C. mains 200-230-250 v. operation. Size 11-6-7 $\frac{1}{2}$ in. Illustration, full set of easy-to-follow wiring diagrams and instructions and individually priced parts list 2/6. This unit can be built for only **£3/15/-**, including Dial and Drive Knobs and every item required.

R.S.C. TONE CONTROL-PRE-AMP. UNIT. A complete set of parts for the construction of a very efficient but simple pre-amplifier and tone control unit. For use with any amplifier and pick-up. Fil. supply self-contained. Size 7 $\frac{1}{2}$ x 5 $\frac{1}{2}$ x 1 $\frac{1}{2}$ in. approx. Descriptive leaflet 9d. Price, inc. wiring diagrams, 37/6. Ready for use, 15/- extra.

Radio Supply Co. (LEEDS) LTD.

32 THE CALLS. — LEEDS, 2.

Terms C.W.O. or C.O.D. No C.O.D. under £1. Postage 1/- extra under 10/-, 1/6 extra under £2, 1/11 extra under £3. Full Price List 6d. Trade List 5d. Open to Callers: 9 a.m. to 5-30 p.m. Saturdays until 1 p.m.

CLYNE RADIO LTD.

18, TOTTENHAM COURT ROAD, LONDON, W.1

MUSEUM 5929/0095.

All goods specially selected for quality and value. Prompt Service—Money-back guarantee—It will pay you to visit our new rebuilt shop premises. Situated 50 yds only from Tottenham Court Road Tube (Genuine).

F.M.!! (Frequency Modulation)

We are pleased to announce our complete Kit for the "Deneco" F.M. Feeder Unit. This unit provides an A.F. output suitable for feeding into the audio section of a standard broadcast receiver where triode/pentode output are available. Within an average of 30 miles from a V.H.F. transmitter one I.F. stage should be adequate, but our complete Kit supplied includes all components and valves for an extra I.F. stage if necessary, or if the unit is used at greater distances. Full Constructional details, theoretical circuit, and point-to-point wiring diagram can be supplied for 1/6 post free, or the complete Kit right down to the last nut and bolt, at only £3/7/6, plus 2/6 packing and postage. This unit can be supplied if desired, ready assembled, aligned and tested, at £3/10/- plus 2/6 p. & p.

If required we shall be pleased to align this unit for constructors not possessing the necessary equipment, for a charge of 7/6. N.B.—Valve line-up is 6AM6, 12AH5, 2-4BA8 and 6AL5. Chassis measures only 6 1/2in. x 5 1/2in. x 1 1/2in. Demonstrations at 18, Tottenham Court Road.!!



HIRE PURCHASE
We are pleased to announce advantageous hire purchase facilities on any single item over £10. Ask for details, mentioning what you are interested in.

TAPE RECORDING EQUIPMENT. We can offer a well constructed cabinet handsomely finished in grey or brown rexine inside specifically to take Truvox or Wearite Tape Decks. Measures 22in. x 14in. x 9 1/2in. deep. Completely portable, shows attractive speaker grill at one end, to take 8in. speaker. This cabinet is especially made to take in addition to the above decks, the very latest ELPICO tape amplifier (Mk. V) at £16/16/-. Price of cabinet 79/6, plus P. and P.

N.B.—We can supply from stock the latest Truvox and Wearite Tape Decks at 22 guineas and £35 respectively. Reduction of 20/- on cabinet if purchased at the same time as either of these tape decks!! N.B.—We can also supply from stock the astounding Truvox Radio Jack. Overall length 4 1/2in. x 2 1/2in. x 2 1/2in. Just plug into your tape recorder or any suitable amplifier to receive direct reception from any two local stations, or to make recordings (in the case of tape recorder) of any of the programmes radiated by the selected stations. Price only £3/19/11 tax paid, or send stamp for illustrated leaflet.



"CONTEMPORARY." A well made Cabinet in light wood, made especially to blend with this type of furniture. The motor board is uncut, and will accommodate most Radio Chassis and Auto-change units. Size: 30in. x 15in. x 29in. high. Price £9/15/-, plus 10/- post and packing.



VERY SPECIAL HIGH-QUALITY RADIOGRAM CHASSIS. We have purchased a limited quantity of these chassis by Britain's leading manufacturers of quality radiograms. Circuit is a 3-waveband five-valve superhet with A.V.C. Valves 6K8G frequency-changer 6B8G I.F. amplifier, detector and A.V.C. 6EL7GT. Combined pick-up amplifier and A.F. Amplifier on Radio and Gram. 6V6G beam-power output tetrode; 5Z4G full-wave rectifier—Employing a special circuit for gramophone pre-amplification—A continuously variable tone-control provides ample treble correction without accentuating the bass. Large glass dial, horizontal tuning measuring 1 1/2in. x 3 1/2in. Chassis measurement: 14 1/2in. x 9in. x 8in. This is a superior chassis designed to sell originally in a Radiogram costing £79. Our price is £11/19/6 only, tax paid, plus 5/- packing and carriage. We will gladly demonstrate this chassis or any other working item from our stocks, to personal callers!



Carrying cases in black leatherette finish. An extremely well-made case with chrome brackets and corner pieces for extra strength. This cabinet will house any 12in. E.I.T. speaker, but can be put to a number of uses. Front panel and lid are removable, and the cabinet is packed in a strong cardboard container for carrying purposes. Size: 18 1/2in. x 10 1/2in. x 16 1/2in. high, 55/-, plus 5/- post and packing.

EX-W.D. CATHODE RAY TUBES. Guaranteed full picture. VCR97 at 40/-, VCR17C at 35/-. Also VCR138A—ideal for oscilloscope 2 1/2in. screen at 35/-. We also have VCR97 with slight cut-off, very suitable for oscilloscope, testing purposes, etc., at 16/6 only. All these tubes are brand new, in original packing, and tested before despatch. Please add 2/6 packing and carriage for any of the above tubes.

B.F. UNITS. All new condition and complete. Case size 9 1/2in. x 7 1/2in. x 3in. Type 24—20-30 Mc/s, 15/- Switched Tuning. Type 25—40-50 Mc/s, 19/6. Switched Tuning. Type 27—65-85 Mc/s, 45/- Variable Tuning.

We have a limited supply of RP27 new condition and complete, but tuning dial damaged. Price 30/- each only. ALL these units Post Free!!

METER SPECIAL! We have a limited quantity of aircraft electrical thermometers. Brand new, by Weston. 2in. moving coil meter, flush square fitting. These meters have a luminous scale graduated 40-140 degrees centigrade, but the full scale deflection is approximately 150 microamps! Price 12/6 each only, plus 1/- P. & P.

VIBRATOR PACK. Brand new, by Mallory. 12 volt input, 150 v. 40 mA. output. Complete with synchronous vibrator, 27/6.

"REGAL" This handsome French-Polished walnut finished Cabinet has very pleasing lines. The lid is Felted inside, and a very generous record storage space is provided. The motor board is undrilled and will accommodate a variety of Radio, Gramophone, or Tape Recorder apparatus. Size: 31in. x 15in. x 30in. high. Price £10/17/6, plus 10/- post and packing.

LIGHTWEIGHT CRYSTAL HEADPHONES. Brand new, by Rothenel. List price 70/-. Our Price 25/-!! Limited supply.

HEADPHONES. Brand new, ex-Govt., by S. G. Brown. Type CLR. Low resistance. 7/6 per pair. Type CHR high resistance, 12/6 per pair. We can also supply very special brand new American ex-Govt. lightweight high resistance phones by Trimm at 15/- per pair.

F.S.D.	Size	Type	METERS	Price
50 microamp	D.C. 2 1/2in.	M.C.	R.P. Fitting	50/-
250 microamp	D.C. 2 1/2in.	M.C.	F.R.	40/-
500 microamp	D.C. 2in.	M.C.	B.P.	13/6
500 microamp	D.C. 2in.	M.C.	F.R.	18/6
500 microamp	D.C. 2 1/2in.	M.C.	F.R.	35/-
1 mA.	D.C. 2in.	M.C.	F. Sq.	17/6
1 mA.	D.C. 2in.	M.C.	F. Sq. (scale calib. 1.5 k.v.)	15/-
1 mA.	D.C. 2 1/2in.	M.C.	F.R.	32/6
1 mA.	D.C. 2 1/2in.	M.C.	Desk Type	27/6
3 mA.	D.C. 2in.	M.C.	F. Sq.	7/6
10 mA.	D.C. 2 1/2in.	M.C.	R.P.	8/-
10 mA.	D.C. 2 1/2in.	M.C.	F.R.	10/-
15 mA.	D.C. 2in.	M.C.	P.R.	7/6
20 mA.	D.C. 2in.	M.C.	F.R.	7/6
50 mA.	D.C. 2in.	M.C.	F. Sq.	8/6
150 mA.	D.C. 2in.	M.C.	F. Sq.	7/6
200 mA.	D.C. 2 1/2in.	M.C.	R.P.	10/-
500 mA.	D.C. 2in.	M.C.	R.P.	6/6
500 mA.	D.C. 2 1/2in.	M.C.	F.R.	8/6
0.5 amp.	R.F. 2in.	Thermo	F. Sq.	4/6
1 amp.	R.F. 2 1/2in.	Thermo	R.P.	10/-
3 amp.	R.F. 2in.	Thermo	F. Sq.	6/-
5 amp.	D.C. 2in.	M.C.	F. Sq.	13/6
6 amp.	R.F. 2 1/2in.	Thermo	F.R.	7/6
20 amp.	D.C. 2in.	—	R.P. (with abunt)	10/6
50-0-50 amp.	D.C.	M.C.	F. Sq.	7/6
15 volt	A.C. 2 1/2in.	M.C.	F.R.	10/-
20 volt	D.C. 2in.	M.C.	F. Sq.	7/6
15-0-15 volt	D.C. 2 1/2in.	M.C.	F.R.	17/6
150 volt	D.C. 2in.	M.C.	F.R.	15/-
300 volt	D.C. 2in.	M.C.	F. Sq.	8/6

ALL-PURPOSE TEST METERS. We also offer very limited supply of Ex-Naval All-purpose test meters by Everett, Edgcombe. These instruments are not brand new, but all have been serviced and guaranteed 100 per cent. condition. Complete in strong wooden case. Size 9in. x 6in. x 5 1/2in. Leather carrying handle. 3 1/2in. Scale—1,000 ohms per volt—Measures 0-1,000 volts AC/DC—Capacity .02 mfd.-16 mfd.—Resistance to 10 meg. —While stocks last—Price £7/19/6 only! Plus 2/6 packing and carriage.

TEST METER—EX-ARMY. Direct-readings 15 v. and 3 v. D.C., 6 mA. and 60 mA. D.C. current, 500 ohms and 5,000 ohms resistance ranges. Complete in bakelite case with web carrying strap. 19/6 plus 1/6 P. & P.

T1154 TRANSMITTER UNIT. Medium/high powered for C.W.-M.C.W. B.T. 3 ranges, 10-5.5 Mc/s., 5-3.3 Mc/s. 500-200 Kc/s. Absolutely complete; 4 valves, 2 meters, hundreds of resistors, condensers, etc., in wooden transit case. Price 39/6, plus 7/6 carriage and packing.

D.C. TEST METER EX-AIR MINISTRY TYPE E, BY AVO. Instrument size 4 1/2in. x 3 1/2in. x 1 1/2in. Black Bakelite case. Meter scale length 3in. D.C. volts, 3 v., 4 v., 20 v., 40 v., 200 v., 400 v., 1,000 v., 2,000 v. D.C. current; 20 mA., 100 mA., 200 mA., 2 amp., 20 amp. Resistance scale, 0-10,000 ohms. These meters have all been reconditioned, and are guaranteed perfect. Supplied complete in leather carrying case at £3/19/6, plus 2/- P. & P. Limited quantity.

R1155A RECEIVERS guaranteed serviceable in original packing cases. £7/19/6. Fully assembled Power Pack and output stage, to plug straight into R1155 for A.C. 200/250 volts at 79/6. We have a few brand new R1155A at 11/19/6, also in original packing cases—Deduct 10/- if purchasing either receiver together with power pack. Plus 10/- packing and carriage.

45 Mc/s **PYE STRIP**—Brand new complete with 6 valves type EF50 and one EA50, 70/- only.

L.T. TRANSFORMER—ADMIRALTY. Heavy duty type, 180/230 v. Input, 4.2 v. plus 4.2 v. at 10 amp. 25/- only, plus 1/6 P. & P.

HEATER TRANSFORMERS. Special Manufacturers' surplus. Brand new, tropicised by Woden, for instrument work: Primary 0/10 v./20 v./30 v./60 v./240 v. at 30 mA., 6.3 v. 45 A., 6.3 v. 0.9 A. 7/6 ea. only plus 1/6 P. & P. Limited quantities.

Please add postage under £1. C.O.D. or Cash with order. C.O.D. charge extra—open 9 a.m.-6 p.m., Monday to Friday. Sorry but we close at 1.0 p.m. on Saturday.

The R.C. RAMBLER ALL-DRY PORTABLE KIT

Full assembly details with practical and theoretical diagrams can be supplied at 1/6 post free. This is a truly professional 4-valve superhet all dry for medium and long waves. A cream plastic top panel, with dial engraved in red and green, adds to the very imposing appearance of this model which is housed in an attractive cream and grey leatherette covered attaché-case type cabinet, measuring 6 1/2 in. x 7 in. x 5 1/2 in. Weight (less batteries) 4 1/2 lb., with batteries 6 1/2 lb. This set really has everything! Built-in frame aerial, high quality, extremely sensitive, and very adequate volume from the 5 in. speaker. Valve line-up: 3V4, 1R5, 1S5, 1T4. All the required components, exactly as specified, including cabinet, can be supplied from stock at the special inclusive price of £7/7/- plus 2/6 P. & P. (less batteries). Uses Ever-Ready 90 v. H.T. type B126 at 9/3. Also L.T. 1.5 v. AD.35 at 1/4. N.B. When batteries are removed there is adequate space for mains unit which will shortly be made available.




THE "SUPERIOR FOUR" KIT. Our new four-valve receiver. A.C. mains, 200/250 v. M. and Long Waves. As with our very successful "Economy Four" all required components are supplied. Valve line-up: 2 6S07, 6X6GT and 6V6GT. Chassis ready drilled. Cabinet size: 10 1/2 in. x 10 in. wide. Maximum depth at base, 5 in., tapering to 3 1/2 in. at top. Sloping front. Very attractively finished in light walnut and peach. Each component brand new and tested prior to packing. Complete instruction booklet with practical and theoretical diagrams is provided. Booklet available at 1/6 post free. Our price for complete kit, £6/9/6. Please add 2/6 packing and carriage. If preferred, we can supply Cabinet, Assembly only, comprising Cabinet and bracket wavechange switch, dial, pointer, drum pulleys, drive spindle, drive spring and knobs, at 45/- plus 2/6 packing and carriage. N.B.—Our Kits are often supplied with sufficient solder for the job!



THE R.C. GRAM REPLACEMENT CHASSIS KIT

To meet the very great demand for this type of receiver, we have produced this unit. For Long, Medium and Short Waves. Valve line-up: 6K8 Frequency changer, 6K7, I.F. Amplifier, 6Q7, 1st. Audio, Detector and A.V.C., 6V6 Output, 6X5 Full-wave rectifier. For A.C. mains 200/250 volts. 4 watts output. Excellent quality. High sensitivity. Provision for gram. Attractive illuminated black, red, green and gold dial, for horizontal tuning. Four controls are: Tuning, L/M/S/Gram. Vol./on/off, Tone (variable). Chassis size: 13 1/2 in. x 5 1/2 in. x 2 1/2 in. Dial size: 10 in. x 4 1/2 in. Assembly is simplified by the use of a 3 waveband coil pack, and pre-aligned 465 Kc/s. I.F. transformers—high-grade drop-through half-shrouded Mains Transformer, with voltage adjuster panel. This chassis can easily be assembled in one evening. Illustrated pamphlet with full assembly instructions, practical and theoretical wiring diagrams and itemised price list, 1/6 post free.

The main items for this receiver can be supplied separately, as under. Drilled chassis, complete with valve-holders, A/D panel, FIU panel, tuning condenser and ready-assembled dial and drive at 39/6. 3 waveband coil pack with gram position, 39/6 tax paid. Pair of 465 Kc/s. I.F. Transformers, 9/6 pair. Half-shrouded drop-through Mains Transformer, 22/6. The total cost of ALL items purchased separately is nearly £10, but we shall be pleased to supply all the required components right down to the last nut and bolt, at a special inclusive price of £9/3/-, plus 2/6 packing and postage. A set of four small brown or cream engraved knobs to suit is available at 1/2 each knob. This chassis is a professional job in every respect and can be seen and heard at our premises. This chassis can also be supplied, ready assembled, in very limited quantities, at £9/19/6 plus 5/- carriage and packing.



Illustrated instruction booklet is the most comprehensive available for this type of receiver—Booklet available at 1/6 post free—This is allowed if kit is purchased later—Please, 2/6 packing and carriage for complete kit.

THE R.E.P. ONE-VALVE BATTERY RECEIVER KIT. Simple one-valve all-dry battery receiver for headphones, easily built in one evening. All required components including headphones, can be supplied at inclusive cost of 42/- plus 2/- p. & p. Operated by Ever-Ready B114 type battery available at 7/9. Full assembly details available separately at 9d. plus 3d. post.

CO-AXIAL CABLE. Standard 80 ohms. brown, stranded centre conductor, 6d. per yard only! Not Govt. surplus. Min. 12 yds. We stock Microphones by Lustraphone, Ronette, etc., and have available, ex-stock, the New ACOS Crystal Microphone Type MIC 33-1 at 25/- and MIC 33-1 at 50/-.

BRANDBURG E.H.T. UNITS. 6-9 kV., 6 gns.; 13-16 kV., 9 gns.; 6-9 kV. coil, 39/-; 10-15 kV. coil, 55/- Wiring diagram supplied.

SPECIAL !!

DECCA LIGHTWEIGHT PICKUPS. Complete with either Standard or L.P. Crystal Cartridge Inset. Complete with Res. and Tracking Instructions. 32/6. Plus 2/6 P. & P.

TWO GANG .0005 mfd. Absolutely standard, with feet by Wingrove & Rogers. Long spindle, 6/6 ea.

THREE GANG DITTO, less mounting feet, 6/6 only.

22 SET POWER UNIT NO. 4MKI 2A10478— Complete with 4 metal rectifiers each 250 v. 60 m/a. 2-12 v. 4 pin Mallory Vibrators, transformers, condensers, resistors, signal 1 amp. indicator, etc., etc., in good condition. Complete in metal box size 10 1/2 in. x 6 in. x 8 in. Weight 19lb. 27/6 plus 5/- P. & P.


VALVES. We have a very comprehensive stock of special purpose surplus valves at competitive prices. A stamp will bring Valve Price List.

L.T. RECTIFIERS TYPE R.K. A newly manufactured range, guaranteed 12 months. 6 or 12 v. 1 a. F.W. bridge type ... 7/6
6 or 12 v. 2 a. F.W. bridge type ... 11/3
6 or 12 v. 4 a. F.W. bridge type ... 15/-
6 or 12 v. 6 a. F.W. bridge type ... 23/6

COIL PACKS. MANUFACTURERS' SURPLUS. Few only, iron-cored, 7 wavebands (2 medium, 5 short waves), comprising 14 coils, trimmers, wave-change switch, etc., etc., complete with copy of manufacturers' original circuit, 50/- only, tax paid. Completely assembled.



PORTABLE CABINETS. Manufacturers' surplus. Well made brown rexine covered. Will take any standard single player with bottom clearance of 3 in. Total size closed 15 in. x 13 1/2 in. x 5 1/2 in., fitted with snap catches and carrying handle. 22/6 only, plus 2/6 p. & p. **ELPICO 4-WATT AMPLIFIER. A0/34.** A small 3-valve 3-stage audio amplifier. AC 200/250 v. Output 4 watts. 2 1/2 ohm. Suitable for Radio, Microphone or Gramophone Input. Volume and Tone Controls—Valve line up. 68L7, 6V6, 573—Engraved front panel. Size of chassis only—7 in. x 5 in. x 2 in. Overall height—5 1/2 in. Price £7/10/-

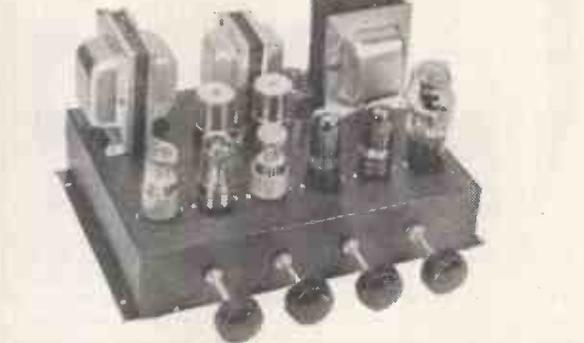

THE NEW R.C. HIGH-FIDELITY AMPLIFIER. P.P. 6V6 output. Freq. 25—18,000 cps.—60db at 61 watts. Treble boost and cut—Bass boost—L.F. correction. Provision for Feeder Unit Max. UNDISTORTED OUTPUT 8 1/2 watts. Price 14 gns. plus 7/6. NOW AVAILABLE. Kit of Parts, complete with fully illustrated instructions £11/19/6, plus 5/- carriage. Illustrated booklet available separately at 2/6. Attractive metal cover, now available. With built-in carrying handle, 19/6.

24 VOLT ROTARY CONVERTER. Input 24 v. D.C. Output 200/250 v. A.C. 100 watts. Complete in black steel box 18 1/2 in. x 11 1/2 in. x 8 1/2 in. Weight approx. 30 lb. Completely smoothed, incorporates Sodium Lamp transformer. Brand new. 92/6. **I.F. TRANSFORMERS. SPECIAL OFFER.** All iron-cored 465 Kc/s. Plessey—Iron-cored 2 1/2 in. x 1 1/2 in. x 1 in. 7/6 pr. Philips, size 2 1/2 in. x 1 1/2 in. diameter (cylindrical) 7/6 pair. By Invicta—Cylindrical, 2 1/2 in. x 1 1/2 in. diameter, 8/6 pr. Also our own special ultra midget, size 1 1/2 in. x 1 3/16 in. x 1 3/16 in. Only 9/9 per pair. By Wearite, Type 501 and 502, 12/6 per pair.

SPECIAL OFFER.—Garrard AC/DC model "E" centre drive motor—Auto-stop and start for 78 r.p.m.—Speed regulator—Few only at £7/19/6, plus 2/6 packing and carriage. We also have in stock—Connoiseur 3-speed motors, pick-ups. Pick-ups and heads, by Garrard, Decca, Collaro, Acos, Chancery, etc., etc., at current prices. **CABINETS.** We can supply a cabinet for every requirement, Table Model, Extension Speaker, Portable Player, Console, even for Projection T.V! Why not call and see us?

SPECIAL PURCHASE!
DECCA THREE-SPEED GRAM UNITS. A three speed quality single player motor complete with 10 in. turntable and pickup, with the two famous 11r magnetic plug-in heads type C and D, fitted with sapphire styli. Latest Decca cantilever type counter-balanced pickup arm. Matches the circuit of almost any radiogramophone or record reproducer. The first step towards the achievement of high-fidelity reproduction when used with amplifiers specially designed for this purpose. Automatic stop of entirely new design. Base-plate measures 12 1/2 in. x 11 in. Height above motor board 2 1/2 in. and 3 in. clearance required below. List price £13/19/6, our price only £7/19/6 tax paid, plus 5/- packing and post. Available at the moment in brown or cream!

4-WATT 2-STAGE AMPLIFIER. Valve line-up: 6L6, EF37 and GZ32, complete with 10 in. Mains Energised Speaker, £8/19/6. plus 5/- packing and carriage.

STUPENDOUS HALF-PRICE OFFER!!
DECCA SINGLE SPEED RECORD PLAYING DESKS 33A. Easily converted to either standard or L.F. Price with one crystal cartridge of either type, £4/19/6; or with both cartridges, £5/19/6. Plus 5/- P. & P.

WHIP AERIALS. All copper, 3 sections each of 4ft. Screw in 7/6 complete.

8 MFD. 1,200 v. PAPER BLOCK CONDENSERS. Size: 5 in. x 4 1/2 in. x 3 1/2 in. 15/- each. Many others in stock.




CLYNE RADIO LTD.
18, Tottenham Court Road, London, W.1.

D. COHEN


RADIO AND TELEVISION COMPONENTS

23, HIGH STREET, ACTON, W.3
(Opposite Granada Cinema)

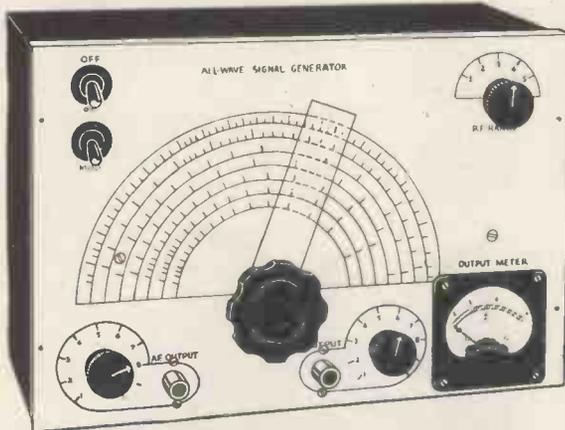

COMPLETELY BUILT SIGNAL GENERATOR

Coverage 120 Kc/s-320 Kc/s., 300 Kc/s-900 Kc/s., 900 Kc/s.-2.75 Mc/s., 2.75 Mc/s.-8.5 Mc/s., 8.5 Mc/s.-25 Mc/s., 17 Mc/s.-50 Mc/s., 25.5 Mc/s.-75 Mc/s. Metal case 10 x 6½ x 4½ in. Size of scale 6½ x 3½ in., 2 valves and rectifier. A.C. mains 230-250 v. Internal modulation of 400 c.p.s. to a depth of 30 per cent., modulated or unmodulated, R.F. output continuously variable 100 milli volts. C.W. and mod. switch, variable A.F. output and moving coil output meter. Black crackle finished case and white panel. Accuracy plus or minus 2%. £4/19/6, or 34/- deposit and 3 monthly payments 25/- P. & P. 4/- extra.

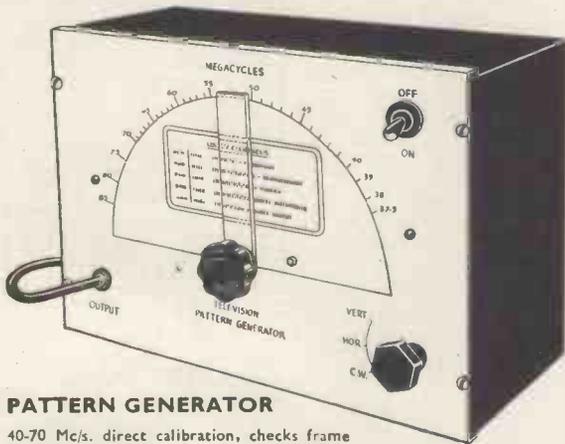

PATTERN GENERATOR

40-70 Mc/s. direct calibration, checks frame and line time base, frequency and linearity, vision channel alignment, sound channel and sound rejection circuits and vision channel band width. Silver plated coils, black crackle finished case 10 x 6½ x 4½ in. and white front panel. A.C. mains 200/250 volts. This instrument will align any T.V. receiver, accuracy plus or minus 1%. Cash price £3/19/6 or 29/- deposit and 3 monthly payments of £1. P. & P. 4/- extra.

EXPORT ENQUIRIES INVITED


(N.B. Post and packing charges stated apply to British Isles only.

★ Both generators guaranteed for 12 months ★

RELAYS

PROMPT DELIVERY

P.O. TYPES TO YOUR SPECIFICATION

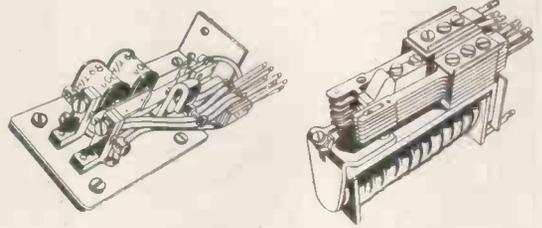

3,000 TYPES


1Ω to 80,000Ω COILS 1 Make to 8 c/o CONTACTS

600 and HIGH-SPEED TYPES also Supplied

LARGE STOCKS

OF

KEYSWITCHES



THE

KEYSWITCH CO.

ALL POST OFFICE EQUIPMENT


SEND ALL YOUR ENQUIRIES TO

191 KENSAL ROAD, LONDON W.10
LAD. 0666

BELCLERE


MINIATURE

STANDARD INPUT TRANSFORMER



Small, efficient, low priced, size 1in. x ½ in. x ½ in. overall as illustrated. Uses : For coupling inputs of 3-150 ohms to normal type pentode valves. Specification : Ratio 1-50, Primary 3.5 ohms. Secondary inductance 160 H. at 1,000 c.p.s. Range 6½ octaves ± 2 db. Finish varnish dip, encapsulated block or mu-metal screening can. Quick delivery—low price—maximum efficiency
JOHN BELL & CROYDEN, 117 HIGH STREET, OXFORD
Telephone : 47072. Cables: Belclere, Oxford.

PARKER'S SHEET METAL FOLDING MACHINE

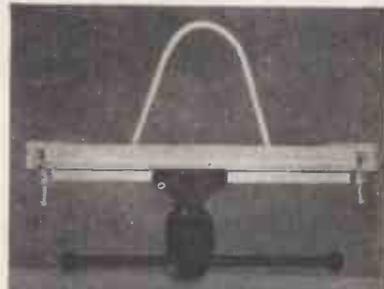

Heavy Vice Model. Capacity 18 gauge M.S.x2ft. wide. Loose Attachments for Radio Chassis Making Weight 22 lb. Price 50/-, Attachments 1/6 per ft. Carriage 4/-, with attachments 5/8. Also Parker's Square Type Drill Vice. Machined table 7in. x 6in. x ½ in. Laws of Bright Steel. Admits stock of 4in. Complete with stand. Heavily constructed. Wt. 13½ lb. Price 37/6. Carriage 2/6. Machines guaranteed. Send for details.

A. B. PARKER WHEATCROFT WORKS, WELLINGTON STREET, BATLEY, YORKSHIRE. Tel.: Batley 428

MAINS TRANSFORMERS

Primary, 200-250 v. P. & P. 2/-
 300-0-300 100 mA., 6 v. 3 amp.,
 5 v. 2 amp., 22/6.
 Drop thro' 350-0-350 v. 70 mA., 6 v.
 2.5 amp., 5 v. 2 amp., 14/6.
 Drop thro' 250-0-250 v. 80 mA., 6 v.
 3 amp., 5 v. 2 amp., 14/6.
 280-0-280, drop through, 80 mA.,
 6 v. 3 amp., 5 v. 2 amp., 14/6.
 250-0-250 80 mA., 6 v. 4 amp., 14/-
 Drop thro' 280-0-280, 200 mA., 6 v.
 5 amp., 5 v. 3 amp., 27/6.
 Drop thro' 270-0-270, 80 mA., 6 v.
 5 amp., 4 v. 1.5 amp., 13/6.
 Drop thro' 270-0-270 80 mA., 6 v.
 3 amp., 11/6.
 Auto Trans. Input 200/250. H.T.
 350 v. 350 mA. Separate L.T. 6.3 v.
 7 a., 6.3 v. 1 1/2 amp., 5 v. 3 amp., 25/-
 P. & P. 3/-.

Heater Transformer. Pri. 230/250 v.,
 6 v. 1 1/2 amp., 6/-; 2 v. 2 1/2 amp., 5/-
 Pri. 200/250. Secondary 9 v. 3.5 amp.,
 9 v. 3.5 amp., 12/6.

Pri. 200/250. Secondary 9 v. 3.5 amp.,
 6.3 v. 3 amp., 12/6.

Pri. 230 v. Sec. 500-0-500 and 500-0-500
 250 mA. both windings. 4 v. 3 amp.,
 4 v. 3 amp., 39/6. P. & P. 5/-.

Mains Transformer, fully impregnated,
 Input 210, 220, 230 and 240. Sec.
 600-0-600, 275 mA., and 200 v. at
 30 Hz., complete with separate heater
 transformer. Input 210, 220, 230, 240.
 Sec. 6.3 v. 2 amp. three times, 0.4,
 6.3 v. at 3 amp. and 5 v. 3 amp., 45/-
 P. & P. 5/-.

Mains Transformer, fully impregnated,
 Input 210, 220, 230, 240. Sec. 350-0-350,
 100 mA., with separate heater trans-
 former. Pri. 210, 220, 230, 240. Sec.
 6.3 v. 2 amp., 6.3 v. 3 amp., 4 v. 6 amp.,
 and 5 v. 2 amp., 30/- P. & P. 3/-.

MAINS TRANSFORMERS, chassis, mounting, feet and voltage panel.

Primaries 200/250.
 350-0-350 75 mA. 6.3 v. 3 a. tap 4 v.
 6.3 v. 1 a., 13/6.
 350-0-350 70 mA. 4 v. 4 a., 4 v. 2.5 a.
 C.T., 18/6.
 500-0-500 125 mA. 4 v. C.T. 4 a., 4 v.
 C.T. 4 a., 4 v. C.T. 2.5 a., 27/6.
 500-0-500 250 mA. 4 v. C.T. 5 a., 4 v.
 C.T. 5 a., 4 v. C.T. 4 a., 39/6.

9in. T.V. Cabinet, front in contrasting
 walnut veneers, size 16 1/2in. long, 11 1/2in.
 high, by 12 1/2in. wide. Complete with
 two pieces expanded aluminium in gold,
 12 1/2in. and 5in. speaker baffle, 18/-
 post paid.

P.M. SPEAKERS with less trans. trans.

2 1/2in. 15/6
 3 1/2in. 13/6
 5in. 16/6
 6 1/2in. 16/6
 8in. 18/6
 10in. 19/6

6 1/2in. M.E. Speaker. 1,000 ohm field,
 15/-

R. & A. T.V. Energised 6 1/2in. Speaker,
 field coil 175 ohms. Requires a minimum
 150 mA. to energise maximum
 current 250 mA., 9/6. P. & P. 2/6.

Extension Speaker Cabinet, in contrasting
 walnut veneer, size 15 x 10 1/2in.
 Will take 6 1/2 or 8in. speaker 17/6.

Completely built All-Dry Mains Unit
 by famous manufacturer, 200/250 v.
 Metal case size 8 x 6 x 3 1/2in., incorporating
 Westinghouse metal rectifiers, 2 500
 mfd. 16 x 24 mfd., mains trans., 3
 smoothing chokes, output 90 v. 10 mA.,
 1.4 v. 0.25 amp., 39/6. P. & P. 2/6.

Volume Controls. Long spindle less
 switch, 50K, 500K, 1 meg., 2/6 each.
 P. & P. 3d. each.

Volume Controls. Long spindle and
 switch, 1/2, 1 and 2 meg., 4/- each:
 10K and 50K, 3/6 each. 1/2 and 1 meg.,
 long spindle double pole switch, mini-
 ature, 5/- P. & P. 3d. each.

Trimmers, 5-40 pf., 5d. 10-110, 10-250,
 10-450 pf., 10d.

Twin-gang .0005 Tuning Condenser, 5/-
 With trimmers, 7/6.

Line Cord, 2-way 0.3 amp., 60 ohms
 per foot, 1/3 per yard.

Twin-Gang .0005, with feet, size
 3 1/2 x 3 1/2in., 6/6.

3-gang .0005, with feet, size 4 1/2 x 3
 1/2in., 7/6.

T.V. Coils, moulded former, iron-cored,
 wound for re-winding purposes only
 All-can 1 1/2 x 1 1/2in., 1/- each, 2 non-cores
 all-can 2 1/2 x 1 1/2in., 1/6 each.

Used Metal Rectifier, 250 v. 150 mA.,
 6/8.

Metal Rectifier, 250 v. 250 mA., 12/8.

Metal Rectifier, 230 v. 45 mA., 6/-.

Metal Rectifier, RM2, 125 v., 100 mA.,
 3/8.

D. COHEN RADIO AND TELEVISION COMPONENTS

Terms of Business: Cash with order. Despatch of goods within 3 days from receipt of order. Where post and packing charge is not stated please add 1/6 up to 10/-, 2/- up to £1, and 2/6 up to £2. All enquiries, S.A.E., lists 5d. each.

SPECIAL NOTE: NO GOODS SENT WHERE CUSTOMS DECLARATION IS APPLICABLE.

23 HIGH STREET (Uxbridge Road) ACTON, W.3. Telephone: ACOrn 5901.

Hours of Business: Saturday 9—5 p.m. Wednesday 9—1 p.m. Other days 9—4.30 p.m.

T.V. CONVERTER for the new commercial stations: complete with 2 valves. Frequency:—can be set to any channel within the 186-196 Mc/s. band. I.F.:—will work into any existing T.V. receiver designed to work between 42-68 Mc/s. Sensitivity:—10 Mu/v with any normal T.V. set. Input:—arranged for 300 ohm feeder. 80 ohm feeder can be used with slight reduction in R.F. gain. Circuit EF80 as local oscillator. ECC81 as R.F. amplifier and mixer. The gain of the first stage, grounded grid R.F. AMPLIFIER 10 db. Required power supply of 200 v. D.C. at 25 mA. 6.3 v. A.C. at 0.6 amp. Input filter ensuring complete freedom from unwanted signals. 2 simple adjustments only. £2/10/- P. & P. 2/6.

HIGH-IMPEDANCE PLASTIC RECORDING TAPE, by famous manufacturer. 600ft. on aluminium spool, 8/-; 1,200ft. on aluminium spool, 17/6 post paid.

PLASTIC CABINET, as illustrated, 11 1/2 x 6 1/2 x 5 1/2in. in Walnut, Cream and Green, also in polished Walnut complete with T.R.F. chassis, 2 wave-band scale, station names, new wave-band, back-plate, drum, pointer, spring, drive spindle, 3 knobs and back, 22/6. P. & P. 3/6.

AS ABOVE, with superbet chassis, 23/6. P. & P. 3/6.

AS ABOVE, complete with new 5in. speaker to fit and O.P. trans., 35/- P. & P. 3/6. With superbet chassis, 36/- P. & P. 3/6. Used metal rectifier, 230 v. 50 mA., 3/6. gang with trimmers, 6/6; M. & L. T.R.F. coils, 5/-; 3 obsolete ex-Govt. valves, 3 v/6 and circuit, 4/6; heater trans., 6/-; volume control with switch, 3/6; wave-change switch, 2/6; 32 x 32 mfd., 4/-; bias condenser, 1/-; resistor kit, 2/-; condenser kit, 4/-; M. & L. Superhet Coils with circuits, 6/6; Iron-cored 465 I.F.s, 7/6; min. gang, 5/6; volume control with switch, 4/-; wave-change switch, 2/6; heater trans., 7/6; 4 v/6, 1/6; 4 obsolete ex-Govt. valves, metal rectifier and Xtal diode with circuit, 14/6; 25 x 25 mfd., 1/-; 16 x 16 mfd., 3/3; condenser kit (7), 7/6; resistor kit (14), 3/6.

Cydon 5 channel T.V. Tuner, uses EF80 and 12AT7, less valves, 12/6, post paid.

Radiogram Chassis, 5 valve A.C./D.C. 3 wave-band superbet 195-255 v., 19-49, 200-550 and 1,000-2,000 metres, I.F. 470 Kc. size of chassis 13 x 6 1/2 x 2 1/2in. valve line-up 10C1, 10P9, 10LD11, U404 and 10P14. Twin mains filter input, 2 dial lights and 8in P.M. £8/17/6. P. & P. 5/-.

CONSTRUCTOR'S PARCEL No. 1, comprising chassis 12 1/2 x 8 x 2 1/2in., cad. plated, 18 gauge, v/h, I.F. and trans., cut-outs, backplate, 2 supporting brackets, 3 waveband scales, new wave-length station names. Size of scale 1 1/2 x 4 1/2in., drive spindle drum, 2 pulleys, pointer, 2 bulb holders, 5 paxolin International octal valve holders, 4 knobs and pair of 465 I.F.s, 16/6. P. & P. 3/-.

AS ABOVE, but complete with 16 x 16 mfd. 350 wkg. and semi-shrouded drop thro' 250-0-250 60 mA., 6.3 v. 3 a., 5 v. 2 a., twin gang, and 6 L.M., S. superbet coils complete with trimmers and tracking condensers with circuit. 22/5/- P. & P. 3/6.

CONSTRUCTOR'S PARCEL. As No. 1 plus 16 x 16 mfd. 350 wkg., semi-shrouded drop thro' 250-0-250 60 mA., 6.3 v. 3 a., 5 v. 2 a., twin gang, and 6 L.M., S. superbet coils complete with trimmers and tracking condensers with circuit. 22/5/- P. & P. 3/6.

OUTPUT TRANSFORMERS. Standard type, 5,000 ohms imp., 4/9; 42-1 with extra feed-back windings, 4/3. Miniature 42-1, 3/3. Multi-ratio 3,500, 7,000 and 14,000, 5/6. 10-watt push-pull, 8V6 matching, 7/- 90-1 3 ohm speech coil, 6/6.

PUSH-BACK CONNECTING WIRE. Doz. yds., 1/6, post paid.

STANDARD WAVE-CHANGE SWITCHES 4-pole 3-way, 1/9; 5-pole 3-way, 1/9; 3-pole 3-way, 1/9; 9-pole 3-way, 3/6; Miniature type, long spindle 3-pole 4-way, 4-pole 3-way and 4-pole 2-way, 2/6 each. P. & P. 3d.

POTATO AND VEGETABLE PEELER

By famous manufacturer, capacity 4 1/2 lbs., complete with water pump. All aluminium construction, white stove-enamel finish. Originally intended for adaption on an electric food-mixer, can be easily converted for hand operation. 39/6. P. & P. 3/-.

PERSONAL SHOPPERS ONLY. 9 in. Enlarger, 17/6; 12in., 27/6.
 Germanium Crystal Diode, 1/6, post paid.
 Used 9in. Tube, with ion burn, 17/6, post paid.
 Line O.P. Transformer in aluminium can mounted in rubber, 12/8.
 CR100 I.F.s, 465 Kc/s, types 3, 4 and 5, 7/6 each. CR100 B.F.O., 7/6. 465 Kc/s. Xtal., 12/6.
 Crystal Set, medium and long wave, in plastic cabinet, 16/-.
 Headphones, per pair 8/-.
 Speaker Matching Unit on aluminium chassis, 3-15 ohms, reversible, 12/6.
 Line and E.H.T. Transformer, 14 v., using ferrocoat core, complete with line and width control, and corona shields, U37 rectifier windings, 35/-.
 Line and E.H.T. Transformer, 9 Kv., using ferrocoat core, complete with built-in line and width control. Mounted on small all-chassis. Overall size 4 1/2 x 1 1/2in. EV61 rec. winding, 27/6.
 Line and E.H.T. Transformer, 9 Kv., ferrocoat core, EY51 heater winding, complete with scan coils and frame output transformer, and line and width control., 22/5/- P. & P. 3/-.
 Scan Coils, low line, low impedance frame, complete with frame transformer, to match above, 27/6. P. & P. 2/-.
 Valve Holders, moulded octal Mazda and local, 7d. each. Paxolin, local Mazda and local, 4d. each. Moulded BTG, B8A and B9A, 7d. each. BTG moulded with screening can, 1/6 each.

32 mfd., 350 wkg.	2/-
16 x 24, 350 wkg.	4/-
4 mfd., 200 wkg.	1/3
40 mfd., 450 wkg.	3/9
16 x 8 mfd., 500 wkg.	4/6
16 x 16 mfd., 500 wkg.	5/9
16 x 16 mfd., 450 wkg.	3/9
32 x 32 mfd., 350 wkg.	4/-
32 x 32 mfd., 350 wkg., and 25 mfd., 25 wkg.	6/6
25 mfd., 25 wkg.	11/4
250 mfd., 12 v. wkg.	1/-
16 mfd., 500 wkg., wire ends	3/3
8 mfd., 500 v. wkg., wire ends	2/6
8 mfd., 350 v. wkg., tag ends	1/6
50 mfd., 25 v. wkg., wire ends	4/6
100 mfd., 350 wkg.	1/6
100 mfd., 450 v. wkg., 280 mA. A.C. ripple	3/11
100-200 mfd., 350 wkg.	4/6
16 x 16 mfd., 350 wkg.	8/6
60 mfd., 180 wkg.	1/9
65 mfd., 200 wkg.	1/6
8 mfd., 150 wkg.	7/6
60 + 100 mfd., 280 wkg.	1/6
50 mfd., 12 wkg.	11d.
32 x 32 mfd., 275 wkg.	4/-
50 mfd., 60 wkg.	1/8
Miniature wire ends moulded, 100 pf., 500 pf., and .001 a. ca. 7d. TV Filter in lightly tinted Perspex size 13 1/2 x 11 1/2 x 1 1/2in., 4/6.	

Combined 12in. mask and escutcheon in lightly tinted Perspex. New aspect, edged in brown. Fits on front of cabinet, 12/6. As above for 15in. tube, 17/6.
 Frame Oscillator Blocking Trans., 4/6.
 Line Osc. Blocking Trans., 4/6.
 Tube Mounting Bracket, size 9 1/2 x 4 1/2in., 12in. tube clamps, 2/-.

CHOKES:
 2-20 Hen., 150 mA., 15/- P. & P. 3/-
 6 Hen., 275 mA., 15/- P. & P. 3/-
 100 Hen., 40 mA., 15/- P. & P. 3/-
 2 heavy 160 mA., 3/6; 250 mA. 10 Henry 10/6; 5 Henry 250 mA., 60 ohms 8/6.

P.M. Focus Unit for any 9 or 12in. tube except Mazda 12in., with Vernier adjustment, 15/-.

P.M. Focus Unit for Mazda, 12in., with vernier adjustment, 17/6.

Wide Angle P.M. Focus Units, Vernier adj., state tube, 25/-.

Energised Focus Coil, low resistance mounting bracket, 17/6.

Ion Traps for Mullard or English Electric tubes, 5/-, post paid.

465 Kc. I.F.s, size 2 1/2 x 1 1/2in. Q.110 removed from American equipment, 5/- per pair. Standard 465 Kc. Iron-cored I.F.s, 4 x 1 1/2 x 1 1/2in., per pr. 7/6. Weirite standard, Iron-cored, 465 Kc. I.F.s 3 1/2 x 1 1/2in., per pr. 9/6.

Iron-cored 465 Kc. Whistle Filter, 2/8.

465 Kc. MIDGET I.F.s. Q.120 size 1 1/2in. long, 1in. wide, 1in. deep by very famous manufacturer. Pre-aligned adjustable iron-dust cores, per pair 12/6.

Mains Droppers. 0.3 amp., 460 ohms tapped 280 and 410, 1/6; 0.2 amp. 717 ohms, tapped at 100 ohms, vitreous, 1/6; 0.3 amps. 350 ohms, tapped 700 and 825, 2/8; 0.2 amp., 1,000 ohms, vitreous, tapped, 2/6; 0.3 amp., 825 amp., 700, tapped 850, 640, 800, 3/6. P. & P. on each 3d.

T.V. Field Controls, 3/6.

RADIO TELEVISION

MONEY BACK GUARANTEE
GOODS OF QUALITY
PROMPT DESPATCH

BARTON'S (Radio) LIMITED
42 · TOTTENHAM COURT ROAD,
LONDON · W.1.

AMPLIFIERS
RECORD PLAYERS

TERMS OF BUSINESS: Cash with order or C.O.D. Post items only; all orders for small items totalling over £2 post free unless otherwise stated.

NOW OPEN ALL DAY SATURDAYS 9-6 p.m. WEEKDAYS 9-6 p.m. except THURSDAYS 9-1 p.m. Telephone: LANGHAM 1151/2

BUILD YOUR OWN RADIO!



We can supply all the parts (including valves, 5in. moving coil speaker, cabinet, chassis and everything down to the last nut and bolt) to enable YOU to build a professional-looking radio. The chassis is punched and drilled ready to mount the components. There is a choice of any of three attractive cabinets 12in. long, 6in. wide by 6in. high, as follows; either Ivory or Brown Bakelite, or wood, finished in walnut. Complete and easy-to-follow point-to-point circuit wiring diagrams supplied.



MODEL 1 T.R.F. RECEIVER

This is a 3-valve plus metal rectifier T.R.F. receiver with a valve line up as follows: 6K7 (HF), 6J7 (Det.) and 6V6 (Output). The dial is illuminated and when assembled the receiver presents a very attractive appearance. Coverage is for the Medium and Long Wave Bands. Operates on 200/250 volts A.C. Mains.

Plus 2/6 Packing Carriage, Insur.

£5 . 10 . 0

MODEL 2 SUPERHET RECEIVER

This is a powerful midget 4-valve plus metal rectifier Superhet Receiver with a valve line-up as follows: 6K3, 6K7, 6J7, 6V6. The dial is illuminated and coverage is for the Short Wave bands between 16-50 metres, the Medium Wave bands between 190-450 metres, and the Long Wave bands between 1,000-2,000 metres. Operates on 200/250 volts A.C. mains.

Plus 2/6 Packing Carriage and Insur.

£7 . 19 . 6

T.R.F. RECEIVER We can supply this Receiver ready built at 26/15/6, plus 3/6 p.c.
ALL COMPONENTS SUPPLIED ARE GUARANTEED FOR ONE YEAR

NOTE: We would respectfully suggest to those interested in building this receiver that they send for OUR Instruction Booklet. Intending constructors can then judge for THEMSELVES how comprehensive this Booklet is. Instruction Booklet and priced Parts List available separately at 1/-. This money will be refunded if circuit diagram is returned as NEW within 7 days.

MAINS NOISE SUPPRESSOR KIT

Consisting of 2 specially designed chokes and 3 condensers. Extremely effective, cuts out all mains noise. Can be assembled in existing receiver or separately as desired. Complete with circuit diagram, 4/11, plus 1/1-p.c.

BATTERY CHARGER KIT

Incorporates metal rectifier. Transformer is suitable for A.C. mains 200/250 volts. Charges either 12, 6 or 2 volt accumulator at 1 amp. Complete with circuit diagram. Price 19/11, plus 1/6 post and packing.

THE LATEST RANGE OF W.B. H.F. SPEAKERS

Incorporating the NEW Composite Cone
W.B. 6in. H.F., 10,000 lines, 3 ohms £2 10 6
W.B. 8in. H.F., 10,000 lines, 3 ohms £3 0 6
W.B. 9in. H.F., 12,000 lines, 3 ohms £3 7 0
W.B. 10in. H.F., 12,000 lines, 3 ohms £3 13 6
(Also available 16 ohms imped.)

ELECTROLYTIC CONDENSERS
BRAND NEW!

8 mfd. 500 volt. Aluminium Container, Height 2 1/2in. x 1 1/2in. dia. Price 1/2 each, 12/- per doz., 140/- per gross.

4 watt AMPLIFIER KIT

This is a 3-valve 3-stage Amplifier for use with Gramophone, Microphone or Radio. Valve line-up is as follows: 6SL7, 6V6, 5Z4. Negative feedback. Tone control. Voltage adjustment panel incorporated. 4 watts output. For operation on A.C. Mains 200/250 volts. The complete Kit, which includes every item down to the last nut and bolt, drilled and punched chassis, and comprehensive point-to-point wiring circuit diagram.

ALL COMPONENTS SUPPLIED ARE GUARANTEED FOR ONE YEAR



PRICE

£4 . 5 . 0

Plus 2/6 PACKING, CARRIAGE & INSUR.

The Output Transformer supplied is for use with a loud-speaker of 3 ohms impedance, and we would suggest that the output of the completed amplifier justifies the use of one of the latest W.B. H.F. Speakers which can be supplied as follows: 8in., 60/6; 9in., 67/-; 10in., 73/6. All plus 2/6 pkg., carr. ins. Circuit Diagrams only, available separately at 1/-. To those who require this Amplifier ready-built we can supply it at £5/1/-, plus 3/6 pkg., carr., ins.

WE CARRY LARGE STOCKS OF COMPONENTS AND WELCOME YOUR ENQUIRIES

MIDLAND INSTRUMENT CO.

ELECTRO-MAGNETIC COUNTERS, 0-9999 repeating, 3-ohm coil, operates down to 11-v. G.P.O. subscribers type, fitted cover, size 1 1/2in. x 1 1/2in. long, an exceptional bargain, 5/- post 1/-; 48/- doz., post 2/4.

VENNER TIME DELAY SWITCHES, 24-v. operation, consists of a high grade clock-work movement, with external press button wind. 2 electro magnets with 5-pole cam operated contacts, in smart metal case size 3 1/2in. x 2 1/2in., fitted 4-way terminal block, new boxed, fraction of original cost, 7/6, post 1/3.

HOOVER BLOWER MOTORS, dual voltage, with terminations for 12 or 24-v. D.C., otherwise suitable for 20 or 40-v. A.C., length 5 1/2in., dia. 3in., fan casing 4 1/2in. dia. Inlet and outlet ports 1 1/2in. dia., the most useful and versatile blower offered, suitable for car heaters, air conditioning and cooling purposes, new, unused, 25/-, post 1/6.

ELECTROLYTIC CONDENSERS, 32-mfd. 450-v. D.C., by Zenith, Micamoid, etc., new and guaranteed, cartons of 25 condensers, 20/-, post paid.

PROJECTION UNITS, consists of an optical mount, fitted with a bloomed f/2.2 Achromatic lens, 3 1/2in. focal length, at one end, also a convex/concave ground glass at the other, attached to an enclosed lamphouse, fitted with a 24-v. 16-watt lamp, and polished reflector, fraction of original cost, 10/-, post 1/4.

PERMANOID (P.V.C.) covered connecting wire, single 1/032 tinned copper. .030 insulator, brand new 250-yd. coils, in red, yellow, green, brown or purple, 12/6 coil, post 2/-; 5 coils one of each colour, 50/-, carriage 6/- Samples on request.

VARIABLE RHEOSTATS, wire-wound on ceramic, 50-ohms at 1-amp, laminated wiper arm, bakelite knob control, in least cases size 3 1/2in. x 4 1/2in. x 2 1/2in., fitted on/off toggle switch and 2 cannon plugs, new, boxed, 7/6, post 1/6.

V.H.F. SWITCHES, an ideal switch for use when aerial feeds two T.V. etc., sets, 4-position switch gives the following conditions, both off, No. 1 on only, No. 2 on only, both on, in base mounting metal cases size 4in. x 2 1/2in. x 1 1/2in., fitted 3 Pye sockets, new, unused, worth 20/-, our price 3/6, post 1/4.

Many other bargains: send 3d. with S.A.E. for current lists.

SELVY TRANSMITTERS (Masstile), 8in. type, pure synchro x-y-1-2-3, suitable as master or slave, 50 v. 50-cycle single phase A.C. operated. When two or more of these are wired up, the rotation by hand (or other means) of one, will result in a 100 per cent. follow in the other(s), both clockwise or anti-clockwise, supplied brand new with test report, in tropicalised sealed cartons, value £8 each, our price 25/-, post 2/-, 2 for 50/-. Post paid with wiring diagram. **SIEMENS'S HIGH SPEED RELAYS,** coil res. 145 ohms, single pole changeover platinum contacts, adjustable contact tension and contact gap, well worth 35/-, our price, new, unused, 5/-, post 6d., 50/- doz., post 2/-.

DEWAR FLASKS (vacuum flasks), 10-litre capacity, internal dia. 8in., depth 24in. fitted metal base, German manufacture, for storing liquid oxygen, etc., 50/- each, callers only, we cannot dispatch.

TELEPHONE SETS, consists of 2 combined receivers and microphones, connected by 20ft. twin flex, provides perfect 2-way conversation up to 12 miles (extra flex), self-energised, no battery required, complete ready for use, new, boxed, 12/6, post 1/-.

CRYSTAL SET COILS, high-gain dual range med. and low., complete with crystal set circuit, 2/6, post 4d.; Variable cond., .0005 mfd., bakelite dielectric, complete with pointer knob, 3/6, post 4d.; Germanium detector, latest wire-ended type, 2/-, post 3d.; Wavechange switches, 6d., post 3d.; Clix plugs with sockets, 4 sets 2/-, post 4d. All items to construct a crystal set, 10/-, post paid. **D.G. SERIES MOTORS** 12-24 v. 15/20 amps., size 6 1/2in. long 3 1/2in. dia., fitted fin. dia. shaft, weight 9lb., a very superior motor, originally cost £10, our price, new, unused, 7/6, post and packing 2/6.

MAINS MOTORS, 200/250 v. A.C./D.C., one end fitted enclosed fan blower, the other fitted enclosed reduction drive gearbox, with 2 final drive shafts giving 30 and 175 r.p.m., also another drive revolves in 4 steps at 8 r.p.m., length 1 1/2in., width and height approx. 4in., perfect condition, 20/- post 2/4.

MIDLAND INSTRUMENT CO., MOORPOOL CIRCLE, BIRMINGHAM, 17

Tel.: HAR 1308

20 WATT AMPLIFIER FOR 50/-

20 WATT AMPLIFIER FOR 50/-, less valves. Front panel 19in. wide for rack mounting 18in. deep. This unit is divided into 2 sections, the top section containing the amplifier and consisting of output transformers, valve-holders, etc., tone control, volume control. Valve line-up 2 FX 25's, MH14 and a U14. Contains also a 3in. 0-200 milliammeter, complete with input and loudspeaker sockets. The bottom portion contains the power supply unit for 200-250 v. mains and consists of mains transformer 500-0-500, 120 milliamper 3-4 volt heater windings, smoothing choke, condensers, variable resistances, etc., also power output for providing H.T. and heater voltages for a pre-amplifier. Indicator light and on and off switch. Sold less valves, believed to be in working condition at our NEW PRICE of £2/10/-, carriage 15/6. The weight of this amplifier is approximately 50 lb.

AERIAL COUPLING UNIT. Type G. Ref. ZA.0943. Containing large inductances, variable transmitter type condensers, 0-1 mA., M.C. meter 2in. dia., indicator light, etc., with controls brought out to front panel 15 x 1 1/2in. Contained in metal box 15 x 11 x 1 1/2in. deep with 2 1/2in. hinged lid, complete with circuit. In new condition, apart from external scratches to case. Price 27/6, carriage 6/6.

WIRE WOUND POTS. 10,000 ohms, 4in. dia., 2 1/2in. deep with wiper arm and 8in. spindle, new condition, dismantled from units, price 8/6, postage 2/-.

UNSELECTORS. Siemens miniature 3 banks of 10 contacts. 3 sets of wipers set at 120 degrees. Coil resistance 10 ohms. Stripped from new equipment. Price 27/6, postage 1/6.

ARTHUR T. SALLIS (W.W.),
93, North Road, Brighton, Sussex. Tel.: Brighton 25806

PRATTS RADIO

1070 Harrow Road, London, N.W.10

(Nr. Scrubs Lane) Tel. LADbroke 1734



AMPLIFIERS
College general-purpose units. MODEL AC10E, 4 valve, 10 watts. Neg. feedback. £10/7/6. MODEL AC15E, 6 valve, 14-15 watt P/P output. Feedback over 3 stages. £19/15/- MODEL UI0E, for D.C./A.C. mains, 6 valve, P/P output. Feedback over 3 stages, £12/19/6. All are COMPLETE WITH CASES and chrome handles.

MODEL AC10E £10/7/6.
THEY HAVE A SEPARATE MICROPHONE STAGE and gram. inputs allowing MIXING of speech and music. Outputs match 3, 8, 15 ohm speakers. MODEL 29C, 6-valve unit with Bass and Treble controls. P/P output of 9 watts. This amplifier incorporates an 18 section O/Transformer. Variable feedback from zero to 25 db. Output impedance 3.6 to 23V ohms. Complete chassis, £14/14/-. Complete range of accessories available, also tape recorders, amplifiers, etc. Stamp for list. All amplifiers ready for use and carriage paid. Terms available.

Best Buy at Britain's



E.M.I. OUTPUT METER. Desk type incorporating a 2 1/2 in. 1 mA. meter together with instrument rectifier, etc. 2 ranges 0-500 milli-watts and 0-5 watts and decibel scale. Brand new in original manufacturer's boxes with instructions. Price 35/-, post 1/6.

METER BARGAINS, ALL BRAND NEW
 15 v. (50 ~) mov. iron 2 1/2 in. pnl. mtg. ... 8/6
 20 volt moving coil 2 in. sq. pnl. mtg. ... 7/6
 3,500 volts moving coil 3 1/2 in. projection 10/-
 150 milli-amp. 2 in. sq. pnl. mtg. 7/6
 5 milli-amp. moving coil 2 in. sq. pnl. mtg. 7/6
 20 amp. moving coil 2 1/2 in. dia. 7/6
 1 mA. 2 1/2 in. barrel flush pnl. mtg. 22/6
 1 milli-amp. 2 1/2 in. barrel desk type 25/-
 100 micro-amps. barrel pnl. mtg. scaled 0-1,500 in 15 clear divisions. Only ... 42/6
 500 mA. Thermo Couple 2 in. sq. pnl. mtg. 5/-

METER RECTIFIERS. 1 mA. Salford Instruments, 8/9. 5 mA. Salford Instruments, 6/9. 2 mA. S.T.C. as used in E.M.I. Output Meter, 5/6. All are full wave bridge and brand new.

METAL RECTIFIERS. Heavy duty Selenium 10 1/2 in. long with 3 1/2 in. square plates. Two are required for a full wave bridge giving 48 volts at 10 amps. Brand new and ridiculously cheap at only 57/6 per pair plus 2/6 post. R.M.4 250 volts 250 mA. Only 12/6. R.M.2. 4/3 each or 2 for 8/-. Selenium 300 volts 100 mA. Brand new, ex-W.D., 6/9 each.

X'TALS
 465 kc/s S.T.C. λ n. pins suitable for crystal gates, if checking, etc. Brand new, boxed, 10/- each.
 200 kc/s American G.E.C. λ n. pins suitable for crystal calibrators, etc. Brand new, boxed, 10/- each.

6 VOLT H.R.O. VIBRATOR PACK. Gives 165 volts at 80 mA. smoothed D.C. Uses Mallory Vibrator, 6 x 5, heavy duty smoothing choke, etc. In black crackle cabinet size 7 in. x 7 in. x 6 in. Brand new, only 29/6.

POWER UNIT TYPE 285. A.C. mains input 230 v. 50 cps. Outputs E.H.T. 2 kV @ 5 mA., H.T. 450 volts @ 200 mA., L.T. 6.3 v. @ 17 amps., fully smoothed, 2 chokes, paper condensers, etc., complete with valves 5U4G, VU 120 and EF 50. This was the ground power unit for the "Gee" equipment and should be very useful for T.V., etc. A REAL BARGAIN AT ONLY 69/6.

RACKS. 6ft. "U" channel P.O. type for 19 in. panels, heavy angle base. Price 79/6, plus carriage at cost.

RECEIVER TYPE R.1359. This is a superhet type receiver covering 130 to 520 Mc/s in two ranges. The local oscillator is type CV 52 and the I.F. frequency is 13.5 Mc/s with a band width of 3.5 Mc/s or 420 Kc/s. IN FIRST-CLASS CONDITION. Price £20.

TRANSFORMER BARGAINS. Brand new ex-manufacturer's surplus drop through. Primary 200/250 volts 50 cps. Secondary 310-0-310 v. 70 mA., 6.3 @ 3 a., 4 v. @ 2 a. Can be used with either 4 v. or 6.3 v. rectifier. Only 9/6 plus 1/6 post. A similar type transformer 325-0-325 100 mA., 6.3 4 a., etc., can be supplied to callers only at 14/6. Filament transformers, standard tapped primary, 12 v. 1 1/2 a. and 4 v. 1 1/2 a. secondary. Only 7/6.

COMMUNICATIONS RECEIVER ADMIRALTY TYPE B.28 (MARCONI CR.100). Valve line up 2 RF, F.C. separate local Osc., 3 I.F.'s, 2nd Det., Output, B.F.O., and rectifier. Self contained power supply 200/250 volts A.C. 5 cps. Variable Selectivity (crystal filter), 6,000, 3,000, 1,200, 300 and 100 cycles. Frequency coverage 60 kc/s to 30 Mc/s in six ranges, continuous except for gap between 420 to 500 kc/s. Size 16 in. x 13 1/2 in. x 12 in. Weight 82 lb. The set for the serious operator. Thoroughly overhauled and in good condition, complete with new valves and air tested prior to despatch. A real bargain at only £27/10/- plus £1 carriage.

RECEIVER 25/7 (TR.1196). This is a six-valve superhet receiver with 465 kc/s I.F.s. Complete with all valves—2 EF39, 1 EK32, 2 EF36, 1 EBC33. In good condition with full conversion data. Price 27/6 plus 2/6 carriage.

COMMUNICATIONS RECEIVER TYPE R.1155. For world-wide reception. WE ARE ONCE AGAIN ABLE TO OFFER THESE FINE RECEIVERS ABSOLUTELY BRAND NEW IN ORIGINAL TRANSIT CASE AT £11/19/6 plus 10/6 carriage. This delivery is in really fine condition. If you are contemplating the purchase of one of these receivers in the near future, we advise you not to delay in order to secure a really "MINT" receiver.

SLIGHTLY USED MODELS STILL AVAILABLE. Price £7/19/6 plus 10/6 carriage. All receivers gladly demonstrated to callers and air tested prior to despatch. Send 1/3 for full details and circuit, which is supplied free with each receiver.

A.C. MAINS POWER PACK OUTPUT STAGE. Enable the R.1155 to be used to operate speaker from 200/250 volts A.C. without ANY MODIFICATION WHATSOEVER. All our power packs have heavy duty transformers, are complete with leads and Jones plugs and are guaranteed for 6 months. Type A. In smart black metal case, size 8 1/2 in. x 4 1/2 in. x 6 1/2 in., less speaker, price £4/10/- plus 3/6 carriage.

Type B. With built in 5 in. speaker in black metal case size 13 1/2 in. x 5 1/2 in. x 7 1/2 in. Price £5/5/- plus 3/6 carriage.


Type C. With an 8 in. speaker in specially designed beautiful black crackle cabinet speaker to match receiver, size 11 1/2 in. x 10 1/2 in. 6 in. A de Luxe job. Price £6/10/- plus 3/6 carriage.

NOTE: 10/- REDUCTION WHEN PURCHASING ANY OF THE ABOVE POWER PACKS WITH RECEIVER.

TRANSMITTER TYPE 12. Frequency coverage 1.2 to 17.5 Mc/s in four bands. M.O., Buffer, P.A., 2 stage Modulator, built in stabilised A.C. mains power pack, P.A. Anode current meter M.C.W., C.W., and R.T. operation. Can be crystal controlled. Super "Table Topper" size 24 in. x 12 1/2 in. x 17 1/2 in. weight 134 lb. Complete with all valves ready for operation. In first-class condition and tested before despatch, with circuit and full instructions. Only £16/16/- plus 14/- carriage. Can be demonstrated to callers.

ROTARY POWER UNIT TYPE 104. Input 12 v., Output 230 volt 60 mA. and 6.3 v. at 2.5 amp. Fully filtered and smoothed and noise suppressed. Ideal for car radio, etc. Only 15/- each.

HEAVY DUTY SLIDING RESISTORS. 250 watts rated to carry 25 amps., resistance 0.4 ohms, suitable for physics labs, charging board, etc. Laboratory type with worm drive, on metal stand, size 9 in. x 4 in. x 6 in. high. Price 7/6 each. BRAND NEW.



INDICATOR TYPE 182A

Indicator contains 3 EF50, 1 5U4G, 4 SP61 and a 6 1/2 in. C.R.T. Type VCR 517, complete with Mu Metal-screen, 9 wire wound pots, with large assortment of resistors and condensers. Can be converted to Oscilloscope (as described in "Radio Constructor"). Circuit supplied. Tubes have no "Cut Off" and can be demonstrated to callers. BRAND NEW (less relays). In original transit case, 67/6 plus 7/6 carriage.

INDICATOR UNIT TYPE 95. Exactly the same as the 62 indicator unit but is 50 cycle version. Double decker chassis, containing loads of components, 16 SP61, 2 EB34, 4 EA50, etc., etc. Brand new condition (less VCR97). Only 45/- plus 7/6 carriage.

U.S.A. DYNAMOTOR

12 volts D.C. input, 250 volts 60 mA. output, weight 2 1/2 lb., size 4 1/2 in. x 3 in. diameter. Ideal for car radio, mobile amplifiers, small transmitters, etc. All tested prior to despatch. Only 22/6 post paid.

45 Mc/s PYE STRIP. Vision unit for London frequency complete with 6 EF50 and EA50. Circuit provided. Ex-brand new units. Price £3/10/-.

E.H.T. TRANSFORMER. For VCR97, etc. Mains input, output 2,500 volts, 4 volts at 2 amps, and 2-0-2 volts at 2 amps. Fully guaranteed at 35/- plus 1/- post.

NITROGEN CONDENSERS. With ceramic insulating terminals. 8 mfd. 2 kV. wkg. size 5 in. x 3 1/2 in. x 4 1/2 in. at 12/6 each. 4 mfd. 2 kV wkg. size 3 1/2 in. x 2 1/2 in. x 4 1/2 in. at 7/6 each. 1.4 mfd. 1.25 kV. wkg. size 3 1/2 in. x 2 1/2 in. x 4 1/2 in. at 5/6 each. Block Condensers. 40 mfd. 450 v. wkg. metal case paper insulation size 4 1/2 in. x 5 1/2 in. x 4 1/2 in. Weight 5 1/2 lb. for power factor correction, etc. Price 15/- plus 2/- post.

U.S.A. BLOWER MOTOR for 105 volts A.C. operation. Outlet 2 1/2 in. diameter, extremely powerful. Snip for only 22/6 plus 2/- post.
BAND III TEST SET. Covers 160 to 220 Mc/s and incorporates 5 Mc/s crystal Oscillator. Complete with 4 VR 91 (EF50) and 1 VR135 and 5 Mc/s crystal, circuit diagram and instruction booklet. See March issue for full details. A REAL BARGAIN at only 59/7 plus 5/6 carriage.

CABLE. Heavy duty twin polythene weather-proof, suitable for extension mains, lead, etc. SPECIAL CLEARANCE OFFER, 39/6 per 100 yd. coil, plus 3/6 carriage. S.A.E. for sample.

3 CENTIMETRE TEST SET. Type 205A. In brand new condition. £17/10/-.

R.1355 RECEIVER. Complete with all valves. Good condition. SUPER BARGAIN AT ONLY 22/6 plus 7/6 carriage.

BARGAINS, BARGAINS, BARGAINS, HUGE STOCKS OF COMPONENTS, RECEIVERS, VALVES, AT SPECIAL REDUCED PRICES FOR CALLERS.

CHARLES BRITAIN (Radio) Ltd.

11 UPPER SAINT MARTIN'S LANE LONDON, W.C.2. TEMple Bar 0545

One Minute from Leicester Square Station (up Cranbourn Street)

Shop Hours : 9-6 p.m. (9-1 p.m. Thursday)

Open all day Saturday



GEE Plus RADIO

AMPLIFIERS BY SAVAGE AND PARSONS. Output 50 watts. With 4-KT66's in parallel push-pull. Standard 200-250 v. Mains input. A.C. Output Impedance 600 ohms line. High Imp., Gram and microphone input. Bass Boost control fitted. This excellent quality amplifier is housed in a strong metal case and is ready for use. Our price £25, carriage £2.

MOTOR GENERATOR. D.C. input 24-28 v. 62 amps., 8,000 r.p.m. A.C. output, 115 v. 7 amps. at 800 cycles single phase. Made by Eclipse Aviation, U.S.A. Price, £4/10/-, carriage 10/-.

VARIABLE SLIDER RESISTOR, 17.5 ohm at 8 amps. 12/6, p.p. 2/6.

MASTERADIO VIBRATOR UNIT. H.T. 150 v. at 85 m/a., L.T. 6 v. Complete in metal case, size 10 x 5½ x 3in. 37/6, p.p. 2/6.

HIGH VOLTAGE CONDENSERS. .0045 mfd., at 30 kv. D.C. working. 12/6, p.p. 2/6.

VARIABLE CONTROL on ceramic formers. 200 ohms at 50 watts. Dia. 2½ in. spindle 1½ in. 7/6, p.p. 1/6.

BATTERY CHARGERS. Up to 15 v. at 5 amps. Complete with meter and variable resistor. Input 200-250 v. A.C. £4/10/-, carriage 7/6. Battery Chargers, ditto, with glass rectifier, £3/15/0, carriage 7/6.

VALVE TESTER, TYPE 4. 200-230 v. A.C. input. Ex-Govt., in good condition, with descriptive book containing circuit diagram of instrument and how to test valves from 1.4 v. to 40 v. With valve-holders for Brit., 4, 5, 7 pin and Octal, U.S., 5 and 7 pin, 1/Octal, side contact, large Brit., 4 and 9 pin. Acorn and diode. Housed in substantial wooden case. Price £7/19/6, carriage 10/- extra.

WESTON ALL-PURPOSE A.C./D.C. TEST METER, MODEL E.665. New and unused, complete with leads and batteries. £8 each only, pp. 3/6.

WESTON BATTERY OSCILLATOR, MODEL E.692, TYPE 2. Also new and unused. Coverage 100 kc/s-26 Mc/s. Audio output approx. 400 c/s. Available at the ridiculously low price of only £5/19/6, p.p. 4/6. (Oscillator complete with instruction booklet.)

42in. EXPONENTIAL HORNS. 1½ in. fitting. These horns have a 28in. square flare, weight approx. 25 lb., and measure 44in. from top to bottom. £2/19/6, carriage 7/6.

VITAVOX PRESSURE UNITS. Heavy duty, P.M. 20 watts. To fit the above horns. £4/9/6, carriage 5/-.

ROTARY CONVERTERS. 12 v. D.C. Input, 230 v. A.C. output, at 100 watts. Brand new. £4/17/6. Ditto, 24 v., same price, carriage 7/6.

AN/APA-I CATHODE RAY INDICATOR AMPLIFIER UNIT. Complete, comprising OF. 3BP1 C.R.T., 7-6SN7GT, 1-6H6, 1-6G6, 1-2X2, 1-6X5 valves. Bargain value, £4/9/6, plus 10/- carriage.

PHOTO-ELECTRIC MULTIPLIER CELLS, TYPE 931A. £2/10/-, p.p. 1/-.

VARIABLE VOLTAGE REGULATOR TRANSFORMERS. Input 230 v. A.C. at 21 amps. Output 57.5 in 16 equal steps to 230 v. at 21 amps. Ex-Govt. In perfect condition. £15, carriage 5/-.

TRANSFORMERS PUSH-PULL OUTPUT (BY PARMEKO). 25 watts for 6L6 valves. To match, 3, 8 and 15 ohms. New and unused. 29/6, p.p. 3/6.

RECEIVER TYPE 3121, I.F.F. New and unused, complete with all valves and relays, etc., £4/19/6, carriage 7/6.

HALF MILE OF TWIN DON "8" TELEPHONE WIRE. Brand new, on wooden drums, £2/12/6 per drum, carriage 10/-, England only.

CAMERA CONTROL UNIT, TYPE 35. 24 v., 25/-, p.p. 2/6.

HIGH-VOLTAGE TRANSMITTING CONDENSERS. Hank Pot Type (25 pf. 8 kV) (400 pf. 9.6 kV.) (500 pf. 15 kV.) (600 pf. 9.6 kV.) (750 pf. 15 kV.). Any type, 3/6 each, p.p. 1/-.

CHROMIUM PLATED EXTENDABLE AERIALS. Min. length 12in. Max. length 48in. Suitable for car radio aerials. 8/6 each, p.p. 9d.

CATHODE RAY TUBES. Type 3BP1, new and unused, with base and screen. 42/6, p.p. 2/-.

CATHODE RAY TUBES. Type VCR 138 (ECR 35) with screen and base, in new and unused condition, 42/6, plus p.p. 2/- VCR 97, ex-equip., in good order, 20/-, p.p. 3/6.

CATHODE RAY TUBES. Type CV 1526, 2½ in., 4 v. filament, 3,000 v. anode, complete with base and mu-metal screen. 20/- Ea. p.p. 2/6.

POWER UNITS. Type 3, made for use with the R.1132A, this is a standard rack mounting job to match the receiver and is for 200/250 v. 50 cycle mains with output of 250 v. D.C., 100 mA. at 6.3 v. 4 amps. £3/10/-, carriage 5/-.

VARIABLE RESISTORS. 152 ohms at 2 amps., twin tubes, precision controlled. 21/-, p.p. 2/6. 20 ohms at 7½ amps., 21/-, p.p. 2/6.

CARBON HAND MICROPHONES. No. 4A, with switch, lead and plugs. New and unused, 8/6 each, p.p. 1/-.

15 LITTLE NEWPORT ST., LONDON, W.C.2.

GERrard 6794/1453.

G2AK *This Month's* Bargains G2AK

GERMANIUM DIODES, 2/- each or 6 for 9/-.
METERS. 2½ in. Flush mounting M.C. 100 mA., 0-10 mA., 0-30 mA., 12/6 ea.; 2in. Flush square 0-5 mA., 10/-; 0-15 A. proj. thermo. 2½ in. 7/6; 0-9 A. hot-wire, 5/-; 0-1 mA. 2in. Flush, 20/-.
TEST METER. 7 ranges as follows: 1.5 v., 3 v., 150 v. 6 mA., 60 mA., 5,000 ohms; 25,000 ohms 2½ in. dia. scale M.C. meter. Rotary selector switch. Black bakelite case, 6 x 4½ x 4½ fitted with removable lid, also provision for internal battery, ranges can be easily extended. Bargain price 30/-, plus 1/6 post.

SPECIAL OFFER, AR88 SPARES. Cabinets, complete with base, feet and side strips, £4/15/- each. Pkg. and Carr. 5/- Set of 14 valves for "D" or "LF" model receivers, £5/10/- Panel escutcheons, 22/6 each. "D" type I.F.S., 12/6 each. Good selection of Spare Coils available for "D" Model, 7/6 each. Matching Speakers by R.C.A., fitted rubber feet and 6ft. lead, 65/- Output Transformers to Govt. specification, 37/6 each.

DEAF AID CRYSTAL MIKE UNITS, 12/6 each, post 9d.
CRYSTAL HAND MICROPHONES. Complete with lead and plug. High quality, very sensitive, chrome finish. List price 2 gns. Our price 25/- Few only.

COPPER WIRE. 14g H.D. 140 ft. 15/-, 70 ft. 7/6, postage and packing 2/- Other lengths pro rata.

SPECIAL VALVE OFFER. 866A, 17/6 each, or 30/- pair. 807's, 10/- each or 17/6 pr. 931A, 45/- 829B, 60/- TZ 40 35/- 832 at 25/-

STREAMLINED BUG KEYS. By famous manufacturer. List over £4. Our price 45/- AIR SPACED COAXIAL CABLE, 150 ohm (normal price 3/11 per ft.), 20 yd. coils only. £1 per coil, post free.

SHADED POLE MOTORS. For Tape Recorders, etc. Voltage tapping plate 200/250 v. 3-hole fixing. Our price 12/6 ea. or 21/- pr., P. & P. 1/6 either.

Carriage paid on all orders over £1 except where stated. Please include small amount for orders under £1. Please print your name and address.

CHAS. H. YOUNG, G2AK

Mail orders to 102 HOLLOWAY HEAD, BIRMINGHAM 1

Phone: MIDLAND 3254

All callers to 110 DALE END, BIRMINGHAM 4

Phone: CENTRAL 1635

Television • Radio • Record CABINETS MADE TO ORDER

ANY SIZE OR FINISH


CALL OR SEND DRAWINGS FOR QUOTATION

B. KOSKIE (DEPT. E.)

72-76 Leather Lane, Holborn, E.C.1

Phone: CHAncery 6791/2

RELAYS



BUILT TO SPECIFICATION.

Types 3,000 and 600.

COIL WINDING AND TROPICALIZING.
KEY SWITCHES AND TELEPHONE EQUIPMENT.

Send for Price List or quotation.

KAYE ELECTRICAL MANUFACTURING CO.

Havelock Works, Havelock Place,
Harrow, Middlesex.

HAR. 1432.



5 Harrow Road, Paddington, W.2
 PADDINGTON 1008/9 and 0401
 OPEN MONDAY to Sat. 9—6. THURS. 1 o'clock.
 SEND STAMPS FOR NEW 1954 28-PAGE CATALOGUE

DENCO F.M. FEEDER UNIT
 SUPPLIES FINEST QUALITY AUDIO OBTAINABLE TODAY.
 Complete Kit obtainable at £6-7-6
 or built and aligned at £8-10-0
 All parts obtainable singly as per Dencos' F.M. Catalogue (D.T.B. 8.) Price 1/6.
 Requires 230 v. at 50 m/a. 6.3 v. at 1.5 amps.
 Will work into P/U sockets or amplifier.

TRI196 RECEIVER
 Receiver 25/73. This is a six-valve superhet receiver with 465 kc/s I.F.'s. Complete with all valves—2 EF39, 1 EK32, 2 EF36, 1 EB33. In brand new condition with full conversion data. 27/6, plus 2/6 post and pkg.

6 WATT AMPLIFIER (UNDISTORTED)
 Manufactured by Parmeko and Sound Sales for Admiralty. 4 valves, PX25, MS/PEN, AC/HL, MU14. Output Matching and 3Ω and 15Ω, 100/250 v. A.C. COMPLETE IN STEEL GREY AMPLIFIER CASE, £9/10/-. Call for Demonstration.

STROBE UNITS. Brand New, in sealed cartons, these contain 6EF50s, 5EA50s, 18P61, a host of condensers, resistors, transformers, chokes, relays, switches, 7 pots, and 5 smoothing condensers, size 1 1/2in. x 6 1/2in. x 7 1/2in. Only 67/6.

ROA 931A PHOTO-ELECTRIC CELL AND MULTIPLIER. For facsimile transmission, flying spot telecine transmission and research involving low light-levels, 9-stage multiplier. Brand new and guaranteed, only £2/10/-. Special 11-pin base 2/- . Data sheets supplied.

RADIO-GRAM CHASSIS
 3 Wave-band Superhet. Med., long and short.
 5 Latest Type MULLARD Valves.
 4 Position Switching. Gram., med., long and short.
 Provision for Extension Speaker. A.C. Mains. 110/250 volts.
 Chassis 1 1/2in. x 7in. x 2 1/2in. Scale 8in. Square. Or Chassis 1 3/4in. x 6 1/2in. x 2 1/2in. Dial 10in. x 5 1/2in. PRICE £10/5/-.
 BRAND NEW AND GUARANTEED, CARR., PACKING AND INS. 10/-.

BOWTHORPE CONTINUITY METER
 Dual scale 0-500 ohms and 100-200,000 ohms moving coil operated from 41-volt internal battery. Size 6in. x 3in. x 4in.
 Original price, £3/19/-.
 Our price, brand new, £3/5/-.

MORSE PRACTICE KIT
 Complete with buzzer, morse tapper and battery compartment on baseboard, 6/-, post paid.

CRYSTALS
 200 kc/s, 2 pin, U.S.A. 10/-
 465 kc/s, 2 pin, U.S.A. 10/-
 500 kc/s, 2 pin, British 15/-

SPECIAL OFFER
 Our Tape-Deck Amplifier and Power Unit (List £16/16/-) and TRUVOX Tape-Deck Mark III (List £23/2/-). £36. Call for Demonstration or send for full details.

T.C.C. 1 mfd. 5/7,000 v. wkg., type CP88QO, bakelite case, 7/6 each.

EF50 (VR91A)
 The selected EF50, Red Sylvianum, original boxes 10/- each, 90/- for ten.

INDICATOR UNIT TYPE 182A
 Unit contains VCR517 Cathode Ray 6in. tube, complete with Mu-metal screen, 3 EF50, 4 8P61 and 1 5U4G valves, 9 wire-wound volume controls and quantity of resistors and condensers. Suitable either for basis of television (full picture guaranteed) or Oscilloscope. offered BRAND NEW (less relay) in original packing cases at 67/6. Plus 7/6 carr. "Radio-Constructor" 'scope circuit included. Complete kit of parts for this scope, £8/18/6.

RECORD CHANGERS
 COLLARO RCS 531. Latest model 3-speed. Brand new maker's carton, cream finish. £10/10/-, carr. free.
 Latest model 3-speed, by very famous manufacturer, plays mixed records. £10/10/-, carr. free.

PYE 45 MC/S. STRIP. TYPE 3583 UNITS
 Size 1 1/2in. x 8in. x 2in. Complete with 45 Mc/s. Pye Strip, 12 valves 10 EF50, EB34 and EA50, volume controls and hosts of Resistors and Condensers. Sound and vision can be incorporated on this chassis with minimum space. New condition. Modification data supplied. Price £25. Carriage paid.

ROTARY POWER UNIT TYPE "87"
 Input 24 v. Output 230 volts 65 mA. and 6.3 volts 2 amps. Fully filtered and smoothed and noise suppressed. Ideal for car radio, etc. BRAND NEW ONLY 15/- (postage, etc., 2/6).

METRO-VIC (METROSIL) PENCIL TYPE E.H.T. REGULATOR up to 10 k.v.
 Particularly suitable for regulating E.H.T. Fly-Back. 5/-.

G.E.C. RECORDING TAPE
 600ft. Reels..... 10/-
 1,200ft. Reels 17/6
 BUY NOW—UNREPEATABLE BARGAIN.

R.F. OSCILLATOR COIL UNIT
 6—18 kV., including EY51 valve, 37/-.

VOLTMETERS

6 v.	M.C.	2 1/2in.	Projection	10/-
15 v. (50 c.)	M.I.	2 1/2in.	Flush	10/-
20 v.	M.C.	2in.	Square	7/6
150 v.	M.C.	2 1/2in.	Flush	10/-
300 v.	M.C.	2in.	Square	12/6
300 v.	A.C.	Projection 5in. Dial		50/-

AMP-METERS

1 A.	M.C.	2 1/2in.	Projection	10/-
3 A.	T/C	2in.	Square	6/-
6 A.	T/C	2 1/2in.	Flush	7/6
15 A.	M.I.	4in.	Projection	21/-
20 A.	M.I.	2 1/2in.	Flush Mtg.	12/6
30 A.	M.C.	2in.	Square	7/6

MILLIAMMETERS

500 uA.	M.C.	2in.	Round	15/-
1 mA.	M.C.	2in.	Square	17/6
1 mA.	M.C.	2 1/2in.	Flush	22/6
1 mA.	M.C.	2 1/2in.	Desk Type	25/-
5 mA.	M.C.	2in.	Square	7/6
10 mA.	M.C.	2 1/2in.	Flush	10/-
30 mA.	M.C.	2in.	Round	7/6
30 mA.	M.C.	2 1/2in.	Flush	10/-
60 mA.	M.C.	2in.	Square	7/6
150 mA.	M.C.	2in.	Square	7/6
200 mA.	M.C.	2 1/2in.	Flush	10/-
300 mA.	M.C.	2 1/2in.	Round	10/-
500 mA.	M.C.	2 1/2in.	Flush	10/-
G.E.C.	1 mA.	Meter	Rect.	10/-

M.C. = Moving Coil. M.I. = Moving Iron.
 T.C. = Thermo-Coupled.
 All Meters are Brand New and in original cartons.

R.F. UNITS
 Type 24
 20-30 Mc/s.
 Switched Tuning.
 With 3-SP61
15/- EACH
 BRAND NEW
 Type 25
 40-50 Mc/s.
 Switched Tuning.
 With 3-SP61.
19/6 EACH
 BRAND NEW.



R.F. UNITS
 Type 26
 50-65 Mc/s.
 Variable Tuning.
 2—VR136. 1—VR137
35/- EACH
 BRAND NEW.
NEW
 R.F.24's 12/6
 R.F.25's 15/-
 R.F.26's 35/-

No. 38 "WALKIE-TALKIE" TRANSMITTER-RECEIVER, complete with Throat Mike, phones. Junction Box and Aerial Rods in canvas bag. Freq. range 7.4 to 9 Mc/s. Range approx. 5 miles. All units are as new and tested before despatch. £24/10/-.

T.V. PRE-AMPLIFIER FOR LONDON AND BIRMINGHAM. Complete with 6AM6. Ready to plug into your set, 27/6. P.P. 2/6.

CATHODE RAY TUBES
 VCR139A. 2 1/2in. C/R. Tube. Brand new in original cartons (carr. free) £1 15 0
 VCR97. Guaranteed full T/V picture (carr. 2/-) £2 0 0
 VCR517G. Guaranteed full T/V picture .. £1 15 0
 MU-METAL SCREENS for VCR97 or 517. P.P. 1/6 10 0
 6in. ENLARGER for VCR97 or 517. P.P. 1/6 17 6

CRYSTAL MICROPHONE INSERTS

8/6 POST FREE  **8/6** POST FREE


Ideal for tape recording and amplifiers. No matching transformer required.

VCR97. 15/-, carr. 2/-. Brand new and crased—slight cut-off—ideal for 'Scopes. Limited quantity.

"426" CONTROL UNIT
 Containing 4-EF50, 2-SP61, 2-EA50, 1-EB34, 2-single-gang, .0005 tuning condensers. W/W volume-controls, switches, condensers and resistors. Size 1 1/2in. x 9in. x 5in. New condition, 35/-, carr. 3/-.

PHOTO CELLS G.S.18. Brand new, 25/-.

PLEASE ADD POSTAGE. ARTICLES UP TO 10/-, 1/-, £1, 1/6, £2, 2/-.

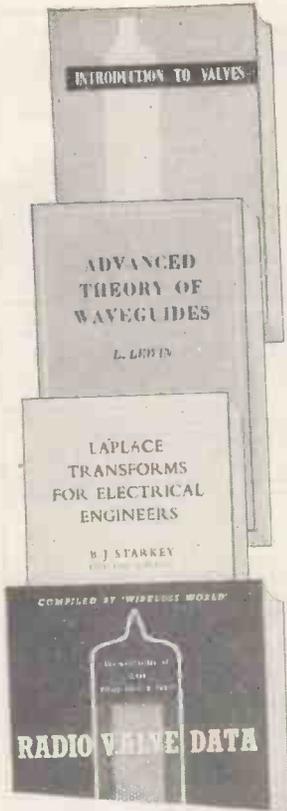

invaluable references

Introduction to Valves

By R. W. Hallows, M.A.CANTAB., M.I.E.E., and H. K. Milward, B.Sc.LOND., A.M.I.E.E. Describes the principles of operation of the radio valve and its uses in circuits of various types. Following an explanation of the fundamental thermionic valve, the book deals with diodes, triodes, tetrodes and pentodes, multiple-grid valves, power-output valves, and valves for v.h.f. and c.h.f. operation. Special-purpose types and the construction of modern miniature and sub-miniature valves are also covered.

8s. 6d. net. By post 8s. 10d.

Laplace Transforms for Electrical Engineers

By B. J. Starkey, DIPL.ING., A.M.I.E.E. A presentation of the theory of Laplace transformation in which a physical vocabulary rather than a purely mathematical one is used as far as possible. This method of analysis has become of increasing importance to electrical engineers in many fields, and the work is designed to provide a thorough treatment of the subject in a language with which they will be familiar.

30s. net. By post 30s. 8d.

Advanced Theory of Waveguides

By L. Lewin.

Sets out various methods of treating waveguide problems—the author selecting for discussion a number of topics as representative of the field in which the centimetre-wave engineer is now engaged. Many of these examples are concerned with the rectangular waveguide, but the reader will be able to apply the general principle to most of the cases encountered in practice.

30s. net. By post 30s. 7d.

Radio Valve Data

Characteristics of 2,000 Receiving Valves and C.R. Tubes. Compiled by the Staff of "Wireless World." 4th Edition.

Gives the main characteristics and base connections of over 2,000 types of British and American radio valves, and over 150 cathode-ray tubes. This latest edition, the largest yet published, also contains comprehensive lists of valve equivalents. 11" x 8½" 100 p.p.

3s. 6d. net. By post 3s. 10d.

Obtainable from all booksellers or direct from:

Iliffe & Sons Limited, Dorset House, Stamford Street, London, S.E.1

BC610 TRANSMITTERS with speech amplifier, aerial tuning unit, etc. Brand new.

RCA TRANSMITTERS. Type ET-4336. Complete with original speech amplifier, crystal multiplier and VFO units. Unused and re-conditioned. Can be supplied with very large quantity of spares.

RCA TRANSMITTERS. Type ET-4332 modified by R.A.F. for use on crystal or master oscillator. Complete with speech amplifier.

T.C.S.6 EQUIPMENT complete with antenna loading unit, remote control, microphone, etc. Brand new.

MAGNETO 10 LINE U.C. TELEPHONE SWITCH-BOARDS (complete).

SCR510's, complete with Power Pack and telescopic aerial.

SCR536 (BC611) in excellent condition.

A.R.88D's, A.R.88LF's, A.R.77's, S27's, HRO, R.109 and others.

METAL RECTIFIERS Type 1B, D.C. output 10 amps at 22 v, input 220/250 v., 50 c/s.

All above items in excellent working condition. Working demonstration upon request.

SPARES A large selection available for SCR399 (BC610), ET4336, SCR610, EEB Telephones, and Teleprinters type 7B.

TX VALVES 805, 807, 813, 861, 866A, 100TH, 250TH, and many others.

Large stock of Tx condensers, crystals and other components. Alignment and repair of communication receivers and all other short-wave equipment undertaken.

P.C.A. RADIO

New Address, Offices and Works

BEAVER LANE, HAMMERSMITH, LONDON, W.6

Telephone: RIV 8006/7

POLYTHENE

H. F. EQUIPMENT

(AMBYTHENE BRAND)

COIL FORMERS
CHOKES
STAND-OFFS
FEED-THROUGHS

Send for particulars and Samples

AMPLEX APPLIANCES (KENT) LTD.

19 DARTMOUTH ROAD, HAYES, BROMLEY, KENT

(RAVensbourne 5531)

All export enquiries to

ANTEX LTD., 3, TOWER HILL, LONDON, E.C.3

H. WHITAKER G3SJ.

10, YORKSHIRE STREET, BURNLEY

Manufacturers of precision Quartz Crystals, for frequency control, in a wide variety of bases, covering all Aircraft, Shipping and Amateur frequencies. All are made to extremely fine tolerances, and have an activity pass figure as good or better than Government standard for the frequency. In addition we can undertake the calibration of your own crystals and supply certificates at nominal cost. Regrind service: Your redundant crystals can be regrind to new frequencies at an average cost of 7/6 to 10/-, depending on tolerance, or taken in part exchange. Early deliveries can be given on all types. Regrind service 7 days approx.

H. Whitaker G3SJ. Contractors to the War Office, Air Ministry, Post Office and Government Departments the world over.




G.W. SMITH & CO.

(RADIO) LIMITED

3-34 Lisle Street, London, W.C.2

Telephone: Gerrard 8204/9155



1 min. Piccadilly
Tube Station.

1 min. Leicester
Square Tube Station

FOR ALL RADIO BARGAINS



DESK TYPE METERS. Fitted with 0/1milliamp. first grade moving coil meter, with 2 1/2 in. scale, resistance 100 ohms. Brand new, 25/-.

CRYSTALS. R.C.A. 100 kc/s frequency, 3 pin plug in type. 15/- each.

CRYSTAL DIODES. Wire Ended G.E.C., 1/6 each.

METER RECTIFIERS. Full Bridge 2 mA. S.T.C. Brand new, 5/6 each.

MIDGET 18 WAY PLUGS AND SOCKETS non reversible, size 2in. x 1/2in., 3/6 pair.

MICRO SWITCHES. Universal Change-over Type, size 2in. x 1/2in., 2/6 each, many other types available.

AMERICAN (SPRAGUE) CONDENSERS. Wire ended, .1 mfd., .01 mfd., .02 mfd., .05 mfd., .005 mfd., all at 9d. each.

NITROGOL CONDENSERS, 4 mfd. 4,000 volt working, size 9in. x 5in. x 3 1/2in., brand new, 22/6 each. Mansbridge Paper Condensers, 4 mfd. 2,000 volt working, size 5in. x 5in. x 2 1/2in., 7/6 each.




MULTI WAY TOGGLE SWITCH BOXES. Fitted with 16 Toggle type switches, brand new and boxed, 9/6 each.

AMERICAN ROTARY TRANSFORMERS. 12-volt D.C. input, output 255 volt 65 mA. size 4 1/2in. x 2 1/2in. Suitable for car radios or electric shavers. 22/6.

MUIRHEAD PRECISION BUILT KEY SWITCHES with Heavy Contacts. 8 pole 2-way. Brand new, 4/6 each, cost £2/15/- to make. Wonderful bargain.

CERAMIC TRANSMITTER SWITCHES. Extra heavy duty silver contacts, 3in. dia., 1 pole 6 way, 3 bank, 9/6. 1 pole 6 way 2 bank, 6/6 each. 1 pole 4 way 1 bank, 5/6 each.



H.R.O. 6-VOLT VIBRATOR POWER SUPPLY UNITS. Output 165 volt 80 mA. 6.3 volt @ 3 amps., 6X5 Rectifier, Choke and Condenser smoothed, cabinet size, 7in. x 7in. x 6in. supplied with clips and leads, brand new, 29/6 each.

CHOKES ALL EX-W.D. 20 Henry 120 mA. size 4in. x 3in. x 2 1/2in., 10/6 each.

15 Henry 275 mA. size 4 1/2in. x 4in. x 3in., 125 ohm, 10/6 each.
Swinging chokes, 150 mA 4/20 Henry, size 3 1/2in. x 3in. x 3in., 7/6 each.
20 Henry 300 mA. 2,000 v. Insulation. Will pass 500 mA. 13/6 each.

TELEPHONE HANDSETS, Ex-American, Standard P.O. type, wonderful instruments, 12/6 each.

R.1155 2-SPEED SLOW MOTION CONDENSER DRIVES "A" type with double knobs, 3/6 each.

MICROAMP METERS. 0/100, 2 1/2in. flush panel mounting, scaled 0/1500 yards, first-grade instruments, brand new and boxed, 42/6 each.

ROTARY CONVERTORS. 12 volt D.C. input or 24 volt D.C. input, output 230 volt A.C., 50 cycle at Ministry rating of 100 watts, 92/6 each.

UNISELECTOR SWITCHES. 4 Bank Double Wipers, coil resistance 25 ohm., 25 position, 32/6 each. Brand new.

HEADPHONES. Brand new, Canadian, "Northern Electric," finest ever produced, 50 ohm coils, complete with P.O. Jack Plug, 10/6 pair.

MAINS TRANSFORMERS. ALL EX-W.D. 500 x 500 volt 170 mA. 4 volt 4 amp. C.T. Insulation test 3,000 volts with ample room for additional windings If required, 22/6 each.
670 x 670 volt 200 mA. 6.3 volt 4 amp., 5 volt 3 amp., 49/6 each.

WELDING TRANSFORMER, output 11/13 volts at 70/100 amps., 72/6 each.

FILAMENT TRANSFORMERS, 6.3 volt 1 1/2 amp., 230 primary, 5/9 each.

FILAMENT TRANSFORMERS, 6.3 volt 3 amp., 230 primary, 9/6 each.

WANTED. Good class Communication Receivers and test gear, send yours stating reasonable price, cash by return.



PUSH PULL AMPLIFIERS, 6V6 output, standard mains 200/50 A.C. input, variable tone control, matched output 3 or 15 ohm, £6/10/- complete.

METERS. All Brand New and Boxed. Milliamps. 0-1 mA., 2in. round, F/M M/coil, 12/6; 0-1 mA. 2 1/2in. round, F/M M/coil, 22/6; 0-1 mA. 3 1/2in. round, F/M M/coil, open scale, 39/6; 0-5 mA. 2in. square, F/M M/coil, 7/6. 0-10 mA. 2 1/2in. round, F/M M/coil, 10/-; 0-100 mA., 2 1/2in. round, F/M M/coil, 9/6; 0-150 mA. 2in. square, F/M M/coil, 7/6; 0-200 mA. 2in. square, F/M M/coil, 7/6; 0-200 mA. 2 1/2in. round, F/M M/coil, 10/-.

AMP METERS. 0-1 amp. 2 1/2in. projecting, R.F., 7/6; 0-5 amp. 2 1/2in. round, F/M, R.F., 7/6; 0-10 amp. 2in. square, F/M, M/coil, 8/6; 20/20 amp. 2in. round, F/M, centre zero, 6/6; 0-30 amp. 2in. square F/M M/coil, 7/6.

VOLTMETERS. 0/20 volt 2in. square, F/M, M/coil, 7/6; 0/40 volt 2in. square, F/M, M/coil, 7/6.

A.C. VOLTMETERS 50 CYCLE. 0-15 volt 2 1/2in. round, F/M, M/I, 8/6; 0-20 volt 2 1/2in. round, F/M, M/I, 10/-; 0-300 volt, 2 1/2in. round, F/M, M/I, 25/-; 0-300 volt 5in. projection, M/I, 50/-.

SPEAKER TRANSFORMERS. 6V6 Push Pull to 15 ohm output, 7/6 each. Single ended 6V6 to 3 ohm, 3/6 each. Midget Speaker Transformers 1 1/2in. x 1in. x 1in., 3/6 each.

CERAMIC SWITCHES. 4 pole 3 way 3 bank, boxed, new, 6/6 each.

TRADE ENQUIRIES INVITED.

CERAMIC SWITCHES. 3 pole 4 way 4 bank, boxed, new, 10/6 each.

METER SWITCHES. Standard Yaxley type, 8 bank, single pole, 9, 11 or 12 way, size 2 1/2in. diameter, switch length 5 1/2in. plus spindle 2 1/2in., 7/6 each.



PYE 45 MEG I.F. STRIPS. Complete Television Strip with 6 EF50 valves and 1 EA50 valve. Size 14in. x 3 1/2in. x 3 1/2in. Finest strip ever produced, 69/6 each complete. Brand new.

PYE 45 MEG 2 VALVE PRE AMPLIFIER, as above, with 2 EF50 valves, size 6in. x 3 1/2in. x 3 1/2in. 15/6 each. Brand new.

TEST SETS TYPE 109. Brand new and boxed, fitted with 2in. 0/5 mA. M/C meter also 0-40 volt 2in. M/C meter, with mains plugs and leads and many other useful parts, size 6in. x 6in. x 3in., 12/6 each.

PLEASE PRINT YOUR NAME AND ADDRESS CLEARLY, ALSO INCLUDE POSTAGE OR CARRIAGE ON ALL ITEMS.



EX A.M. SWITCH BOXES fitted with 3 independent 5 amp. switches, size 3 1/2in. x 2in. x 2in. Ideal for cars, boats and caravans, 1/9 each.

Ditto, 5 way, 3/6 each.

RELAYS. 50 volt A.C. with 2 pole change-over heavy duty silver contacts, size 4in. x 3in. x 2 1/2in., 10/6 each. Polarised Relays Twin, 600 ohm coils, 6/6 each. We stock all types of relays, 600 and 3,000 types heavy and light contacts including platinum. Send us your enquiries, we are the cheapest in the Trade.

P.O. MAGNETIC COUNTERS. Supplied with 3 ohm or 2,300 ohm coils, 5/6 each.

P.O. KEY SWITCHES, 2 pole change over, 2/9 each.



TYPE 4 WAVE METERS. Cavity Tuned Absorption wave-meter covering 200-220 Megacycles, Brand New and Boxed, supplied with V.U.39, S.P.61, E.A.50, and C.V.51 M/Eye Tuner 39/6 each.

AUTO TRANSFORMER. Heyberd 200/250 A.C. — 110 A.C. @ 750 watts, Ex W. D. brand new in strong metal carrying case. Size 9" x 8" x 6". £4.10.0 each.

VALVES. VU.111, VR.65a, 6H6, 7193, CV6, VR.78, all at 2/3 each.

TELEVISION POWER PACKS TYPE 285. Input 200/250 v. A.C. Output 2,500 volts, 5 mA., 350 volts 200 mA. L.T. 6.3 volts, 15 amps. Supplied complete with all valves. The cheapest T.V. Power Pack on the market. Note the price. 69/6.

RECEIVERS. 25/7 (R1196) complete with 6 valves: 2 EF.39, 1 EK.32, 2 EF.36, 1 EBC.33. I.F. frequency 465 kc/s. Simple conversion for complete superhet receiver. 27/6 each.

P.O. RACKS, Standard "U" channel 6ft. 79/6 each.

HOURS OF BUSINESS: 9 a.m.-6 p.m., Thursday 1 p.m. Open all day Saturday.

HUGE CLEARANCE SALE

OF UNUSED RADIO COMPONENTS AVAILABLE TO MANUFACTURERS & EXPERIMENTERS

1,000 CERAMIC VARIABLE CONDENSERS, split stator, plated vanes, spaced .035 ball bearings butterfly 15/15 P.F. extended spindleEA. **2/6**



2,500 CERAMIC TRIMMERS, air spaced silver-plated vanes, 22 pF. Packed in 10's and singles, screwdriver adjustmentDOZ. **5/-**



2,500 VARIABLE CONDENSERS, 100 pF. ceramic insulationEA. **2/-**

2,000 VARIABLE CONDENSERS, 50 pF., in screening case, 3 1/2 x 1 1/2 x 2 1/2. Spacing .040in. **1/-**

200 A.M. CHOKES, 60/100 mA. Core 1 1/2in. 10/15 HenriesEA. **5/-**

100 Type 1154 POWER UNITS, less Converter. Contains 2 relays, smoothing choke, 4 H.F. chokes wound 10 g. copper wire and oddments **5/-**

POWER UNITS, Type 87, for 1196 TX/BX. Stock-rolled, but perfectEA. **10/-**

EF50 VALVES, ex equipment, but perfect EA. **4/-**

AIRCRAFT NAVIGATION Mk. III COMPONENTS, boxedEA. **7/6**

200 VOLTAGE REGULATORS, VS.110/30 mA., 4-pin baseEA. **6/-**

250 TRANS-MITTER TANK CONDENSERS, split stator 250 pF. each section. Heavily silver-plated vanes rounded and polished, air gap .096, sealed cartonsEA. **10/-**



100 POWER UNITS, Type 309, 24 v./27 v. in-out-volt 250 v. and 12 v. Contains filter panel with chokes, relay, metal rectifier, octal plug and lead, etc.EA. **15/-**

5,000 STAND-OFF INSULATORS only miniature 1 inch..... DOZ. **2/-**

1,000 POTS 100K, 1 spindleEA. **1/-**

500 POTS, 1 meg.EA. **1/-**

1,000 POTS, 3 gang each, 70KEA. **1/-**

1,000 HUMDINGER POTS, 100 ohm. Miniature wire woundEA. **2/-**

1,000 POTS COLVERN. 200 ohms 5 watts. Wire wound, N.P. caseEA. **2/-**

1,000 WIRE WOUND POTS, 2,000 ohm 5-watts, E. caseEA. **1/6**

250 100K MINIATURE POTSEA. **1/-**

MINIMUM ORDER 5/-. ADD EXTRA FOR POSTAGE.

500 RECEIVING CONDENSERS 4 gang, .0005-cellophane packed (1,000 OSC) ea. **2/-**



5/8,000 gross yds. SLEEVING, various colours, 1 mm. and 1.5 mm. Perma-oxid, Peribald and Systoflex. Minimum order 100 yds. **6/-**
Per 100 yds.

1,000 30-AMP. 1-WAY DOUBLE POLE Charging Switches on 1/2in. Ebonite Base, ex Admiralty (scrap copper and brass, worth 2/-) EA. **9d.**



5/6,000 COILS MICRO FLEX SLEEVING. 1 mm., per 100 yds. **6/-**

10,000 YAXLEY TYPE 1-pole 6-way Switches, complete, less screws, with knobsEA. **6d.**

1,500 WAVE CHANGE, 2-water 6-pole 3-way switchesEA. **1/3**

7,500 VALVEHOLDERS B9G, Paxolin, DOZ. **4/-**

2,000 VALVEHOLDERS, UX5. Amphenol, DOZ. **5/-**

10,000 ERIE RESISTORS, 47K, 2-watt, boxed in 50's and 5's. ERIE RESISTORS, 1,200 ohm, 1/2 watt. Boxed in 50's. Also 33K 2 watt, 150K 1 watt, 22K 1 watt 70K 1-watt; price 2 watt, 3d.; 1 watt, 2d.; 1/2 watt, 1d.EA. **9d.**

800 Wire-wound Vitreous 10-watt wire ends, 500EA. **9d.**

500 JUMBO 4-PIN UX CERAMIC VALVE-HOLDERS, individually boxedEA. **2/6**

NOTE OUR NEW ADDRESS WHERE WE HAVE A LARGE, WELL STAFFED DESPATCH DEPT.

WOOLLEYS RADIO & ELECTRICAL SUPPLIES LTD.

615 BORDESLEY GREEN, BIRMINGHAM, 9. Phone: VIC 2078

WE HAVE HUNDREDS OF OTHER ITEMS. SEND S.A.E. FOR 4-PAGE LIST.

ARP12/VP23 VALVES, new, 4 for £1, 5/6 each.
PLESSEY T.V. PRE-AMPLIFIER. London band. Valve 6F13. Complete, 25/6.
TYPE 6C OSCILLOSCOPE UNIT with VCR I38/ECR35 3 1/2in. tube. Valves—2-EF50, 2-EB34. Conversion circuit to standard scope supplied. Price 58/6.
VALVES. Lists supplied.
CYLON 5 CHANNEL PRE-TUNER. Gives 26 D.B. gain. Fit one of these to your T.V. for better pictures. I.F. Output 9.5-14 Mc/s., 15.5-22 Mc/s. With valves EF80, ECC81, 52/6. Less valves, 15/-.
NEW 0-100 MICRO-AMP. METERS. 4 1/2in. Round flush mounting. Made by Ernest Turners. £3/12/6.
MAINS TRANSFORMERS. Input 200/240 v. Output 350-0-350 or 250-0-250 volt 80 mA., and 4 and 6.3 v. 4 a. and 4 and 5 v. 2 a. Price 21/6. Input 200/240 v. Output tapped 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30 volts, 2 amp., 21/6. Output 17-11-5 volts 5 amp., 22/6. Output 17-11-5 volts 1 1/2 amp., 16/6. 6.3 v. 2 1/2 a., 8/6. All with one year's guarantee.
D.P.D.T. RELAYS. Operate at 200/300 volts D.C. 8/6. We can supply any type of voltage and contacts at varying prices.
NEW SELENIUM RECTIFIERS. F.W. 12/6 volt 3 amps., 14/6; 4 amp., 22/6; 6 amp., 30/-; 1 amp., 8/6; 12 v. 100 mA., 3/-; 24 v. 2 amp., 30/-; H.W., 250 v. 100 mA., 9/-; 250 v. 275 mA., 17/6; 250 v. 60 mA., 6/6.
GERMANIUM or SILICON CRYSTAL DIODES, 3/9.
M/C MICROPHONES with matched Trans., 15/6.
FL8 FILTER UNITS, 8/6. Same as FL8 but less switch.
TR1196 TRANSMITTER SECTION. New and complete but less valves. 4.6-6.8 Mc/s. Easily converted, 15/- With valves, £2.
L.R. ARMY HEADPHONES, 9/6.
TIME DELAY RELAYS. We specialise in units giving varying time constants. Please send us your requirements or problems.
FISHING ROD AERIALS. Set 3—12ft., 7/6.
RUBBER MOUNTING BASES, 3/6.
P.O. VEEDER COUNTERS 0-9999, 24/50 volts D.C., 15/6.
19in. x 10 1/2in. x 10in. RACK MOUNTING STEEL CASES, with 1/2in. ali. panels and two handles, 16/6.
All Carriage paid in the U.K. from Dept. W.W.

AR88LF in tip-top condition, £55.
B.S.R. AUDIO OSCILLATOR TYPE 800A. 0-50,000 cycles, £17/10/-.
Ditto 0-25,000 cycles, £15.
U.S. ARMY FIELD TELEPHONES. TYPE EE8, £5/10/- each. Carriage extra on above items.

The RADIO & ELECTRICAL MART

253B PORTOBELLO ROAD, LONDON, W.11.

Phone: PARK 6026

TRANSFORMERS COILS LARGE OR SMALL QUANTITIES CHOKES TRADE ENQUIRIES WELCOMED

SPECIALISTS IN FINE WIRE WINDINGS

MINIATURE TRANSFORMERS, PICK-UP, CLOCK AND INSTRUMENT COILS, ETC. VACUUM IMPREGNATION TO APPROVED STANDARDS

ELECTRO-WINDS LTD.

CONTRACTORS TO G.P.O., M.O.S., L.E.B., ETC.

123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY

LIVINGSTONE 2261

EST. 1933

We specialize in

CABINETS

The "Empress" (ex Luxe Console Cabinet)

Here is a cabinet to delight the eye of the connoisseur. Beautifully styled, elegantly veneered in medium full grain walnut, highly polished finish. Interior finished in light polished sycamore. Ample storage space is provided. Designed to our own specification, it will accommodate the largest tape desk on the market. It has many applications, good quality amplifier, etc. O.A. dimensions 30" x 11 1/2" 6 1/2" x 28" 10in. high with lid closed.
£12 10s.

Plus 15/- Carr., Pkg. and Ins.

Have you received a copy of our General Trade Catalogue? Also our Bulletin, issued each month.



TRADE ONLY SUPPLIED
V.E.S. WHOLESALE SERVICES LTD.

11 GUNNERSBURY LANE, ACTON, W.3. Telephone: ACOrn 5027

Prices slashed at Clydesdale

PLEASE NOTE. Carriage and Postal charges refer to the U.K. only. Overseas freight, etc., extra.

TI154B TRANSMITTER UNIT
Medium/High-powered for C.W.-M.C.V. R/T 3 ranges, 10-5.5 mc/s., 5.5-3 mc/s., 500-200 kc/s. Complete with 4 valves, etc., in metal case 14in. x 16½in. x 8½in. External power supply required.
ASK FOR **39/6** each PLUS 7/6 CARRIAGE X/E5A

VISUAL INDICATOR TYPE 1, Ref. 10Q/2
Dual reading left/right D.F. meter for R1155, 2½in. Scale overall dim., 3½in. x 2½in. In used condition.
ASK FOR **12/6** each POST PAID X/H862A

SUPPLY UNIT RECTIFIER FOR NO. 43 TRANSMITTER
Ex Canadian Army, in original wood case. Input 110 v. A.C. 50/60 c/s. 1.7KVA. Output (HT1) 2,100 v. 375 mA. (HT2), 500 v. 400 mA., plus H.T. lines, 450 v. 265 v., also 383 v. regulated and neg. bias, 250 v., 150 v., 80 v. Making three complete power supplies all fed via double choke condenser, input circuits. Valves are 4/866A/866, 5Z3, 6S17, 2/6A3, VR150/30 (Stab.) and 1V (time delay). The complete unit mounted in metal case with lid shock mounted. Dim., 2ft. 6in. x 1ft 6in. x 1ft. Finish olive drab. Weight, 420 lbs.
ASK FOR **£25.0.0.** CARRIAGE PAID X/H26

INDICATOR UNIT TYPE 166
With VCR-97 tune and valves, 7/VR91 (EF50), 4/VR54 (EB34), 1/VR116, 1/VR92 (EA50), etc. Dim., 20in. x 18½in. x 9½in. Used, good condition.
ASK FOR **79/6** each CARRIAGE PAID X/H885

INDICATOR UNIT TYPE 166
As above, but less tube and valves.
ASK FOR **32/6** each CARRIAGE PAID X/H885A

DINGHY TELESCOPIC MAST
Aluminium Telescopes from 14½in. to 7½ft. Seven sections, base dia ½in. Weight, 4 oz.
ASK FOR **4/6** each POST X/H489

MAINS TRANSFORMER
Primary 0-230-250 v. A.C. 50 c/s. Sec. 6.3 v. 5 a., 0-210 v., 14 mA., 0-460 v., 200 mA. Size, 5½in. x 5in. x 5½in., or 5in. x 4½in. x 4in.
ASK FOR **13/6** each POST X/E527

GLASS DOME INSULATORS
With threaded terminal top and metal lead-through rod. Dome dim. 2½in. x 1½in. high, lead-through projects 6½in. Overall length 9½in.
ASK FOR **2/-** each POST X/H54

CERAMIC ARCADE SPREADERS. Individually boxed
Length overall 11in., between centres 9½in.
ASK FOR **1/-** per pair POST X/H718

SUITABLE AS UNIVERSAL ELECTRIC MOTORS
For 200-250 v. A.C. or D.C. mains. By simple external wiring, full data supplied. New method gives better than 1/6th h.p. with M.G.29 or approx. ½ h.p. with M.G.30.

Motor Generator type 29. As generator. Input 24 v. 16 a. Output 1,200 v. 200 mA. Dim., 11in. x 5½in. x 5½in.
ASK FOR **17/6** each CARRIAGE PAID X/H880

Motor Generator type 30. Ref. 10K/21. Input 9.3 v. 23 a., Output 7.2 v. 13 amps., 255 v. 110 mA. Size, 12in. x 5½in. x 5in.
ASK FOR **15/-** each CARRIAGE PAID X/H488

AIR POSITION INDICATOR Mk.1, Ref. 6B/248

Contains 4 rev. counters with reset knobs, each reading 0-9999 revs., also small Selsyn motor. Dial lamp 24 v. 6 w. D.B.C. with holder. ON/OFF Toggle Switch, Push Switch, plus a host of gears and worm drives. Unit mounted on diecast aluminium frame with metal casting. Overall size, 12in. x 8in. x 6in.
ASK FOR **22/6** each CARRIAGE PAID X/H913

GUN SIGHT PROJECTOR UNIT, type 30, Ref. 10D/16431
With spiral-slide focussing, 24 v. 12 w. lamp. This device projects images on to an opaque glass screen and then on to a 45 degree reflector mirror, viewing at right angle through rubber eyepiece.
ASK FOR **19/11** each POST X/H882

SELECTOR DRIVE UNIT, Ref. 10D/373
With platinum points, used on T/R 1106. Comprises 24 v. relay, drive mechanism to operate yaxley switch, 2½ w. 10 ohm resistors, 1 mfd. 250 v. condenser, etc. Dim., 4½in. x 4½in. x 1½in. Weight, 8 oz.
ASK FOR **3/-** each POST X/H490

5 PUSH BUTTON UNIT
Controller electric type 1A, ref. 10J/7. 4-5P/ST and off position ket switch 4M/4B, 5 P.B. holders, etc., terminating in 12-pin Jones type chassis plug in metal case. Dim., 5½in. x 4in. x 1½in.
ASK FOR **3/-** each POST X/E133

PLEASE NOTE.
Carriage and Postal Charges refer to the U.K. only. Overseas freight, etc., extra.

Order direct from:—
CLYDESDALE SUPPLY CO. LTD. 2, BRIDGE STREET, GLASGOW · C.5
Phone: South 2706/9.

RECEIVERS · TEST EQUIPMENT · AMPLIFIERS · RECORDERS, ETC.

Britain's most comprehensive Suppliers of Electronic Equipment for "Hams" and Industry.

All readers are cordially invited to call and inspect our stocks.

BRITISH TEST EQUIPMENT

AVO Model 7 as NEW, £15. Model 40, £12. AC/DC minor, £6/15/-.
Roller panel valve testers, £12. Electronic test meter by AVO, £30.
Wide range signal generator, £22. AVO valve characteristic meter, £50.
AVO signal generator, £9. Taylor 65C signal generator, £13. 90A test meter, £10. 260A TV Wobulator, as NEW, £30. Evershed Wee meggers 500 v., £14. Bridge type and others in stock. Marconi: Signal generator types TF144G, TF517, TF390/G. Valve voltmeters, output meters. Marconi BFO type L0800A, etc. Cossor Double Beam oscilloscopes, type 3339, 339 from £35.

TRANSMITTERS

U.S.A. 1953 Harvey Wells, type TBS50. Phone CW. 80, 40, 20, 15, 10, 6 and 2 metres. Crystal Oscillator VFO switching. AS NEW. Less power supply, £45. ELMAC transmitter 50 w. Phone or CW. VFO or crystal control, 75, 20, 11, 10 bands. Dual scale meter, less power supply mobile or fixed, £50.

RECEIVERS

All receivers are in good working order and condition unless stated.
5X28, 550 kc/s-42 Mc/s., £45. 5X24, 550-42 Mc/s., £28. 5X42 540 kc/s-108 Mc/s. 520R, 550-42 Mc/s., £25. 520, £20. 529, AC/DC portable, battery 550-32 Mc/s., £25. 538 AC/DC 110-250 v. 550-30 Mc/s., £25. Also in stock 527, 30 Mc/s-150 Mc/s., 527CA, 150-230 Mc/s., HT11 A Marine 12 v. radiotelephones. HRO receivers junior and senior types with all coils and power supplies from £27, complete. National NC44, NR100 NC81X, NC200. Marconi CR100, 60 kc/s-30 Mc/s., £32. RME 69, £35. Edystone receivers: Types 640, £22/10/-; 740, £35; 750, £50; 680, £65; 670, £35; 504, £25. RCA receivers, AR88D and LF from £55. Set of three dials for model D, £11/10/- Many other makes in stock.

WE ARE ALWAYS PREPARED TO PURCHASE EQUIPMENT SIMILAR TO THE RANGE NOW OFFERED

UNIVERSAL ELECTRONICS

27 LISLE STREET, LEICESTER SQ., LONDON, W.C.2
Shop hours, 9.30 a.m. to 6 p.m. Thursday, 9.30 a.m. to 1 p.m.

Write, Call or Telephone
GERrard 8410 (Day)
MEAdway 3145 (Night)

MANUALS for the following receivers: AR88D-LF, AR77E, Marconi CR100, 520, 520R, 5X24. B2 Transmitter/Receiver, H.R.O.s. Photostatic copies of originals £1/7/6.

DISPLAY AND DEMONSTRATIONS

To enable us to display and demonstrate our full range of electronic apparatus we are, early in September, taking over **ADDITIONAL LARGE PREMISES** at 22, LISLE STREET, W.C.2. We shall also be able to give even better service to all who visit us or send their orders by post.

U.S.A. MICROWAVE TEST GEAR

No technical manuals for sale. Please write for prices
TS3. S band power frequency meter. TS10. APNI Test set. TS14 AP. X band signal generator. TS14. S band signal generator. TS14. Radar Synchroscope. TS36. X band power meter. TS62. X band echo box. TS69. 300-100 Mc/s. frequency meter. TS127. 300-700 Mc/s. frequency meter. TS226. 300-1,000 Mc/s. power meter. BC221. Frequency meter (Bendix). BC1277. S band signal generator. TS45/AP. 3 cm. signal generator. I-222A. 8-15 Mc/s. 150-230 Mc/s. signal generator. IE-19 signal generator. TS89 Pulse voltage divider. TS47. 40-500 Mc/s. signal generator. TS174. (V.H.F. version of BC221) 20-250 Mc/s. TS175. 80-1000 Mc/s. FERRIS. 22A signal generator. GENERAL RADIO 804B. 30-300 Mc/s. signal generator.

RECEIVERS · KLYSTRONS · MAGNETRONS

American Receivers. APR4 and tuning units. 30-1,000 Mc/s. APR5, 1,000-6,000 Mc/s. Klystrons 723/AB, 707A, 707B, 2K28, 2K33, CV64, CV129. Magnetrons 725A, 2132, 2K33, 2K25, 2136, 2139, 2154, 2122, TR cells 1B24, and many other items of equipment covering HF, VHF, UHF and centimetric bands.

SPECIAL OFFER of Constructors parcel of 100 assorted resistors comprising $\frac{1}{2}$, 1 and 2 watt from 10 meg.-22 ohms. 12/6.

"AVO" MINORS, D.C. "E" type, also reconditioned and perfect order, £2/17/6.

ADVANCE SIGNAL GENERATORS. Type E.I. £20.

MEGGER SAFETY OHMMETERS. Perfect, £3/10/0.

H.R.O. SENIOR RECEIVERS. With A.C. P.P., 5 coils, £28.

D.S.T. 100 RECEIVERS, as new. Coverage is 7 bands from 30-Mc/s. to 50 Kc/s. £20 each.

HAMMERLUND H.Q.120. Mint condition, rack mtg., £40.

HALLICRAFTERS SX28, S27, S41, S38, etc. Perfect cond.

AR88L, AR88D, CR100, from factory. **RI155 RECEIVERS** and "N" models available, new.

CANADIAN R.103 RECEIVERS, as new, modified for A.C. working. £18/10/-.

B.C.348 AND B.C.342 RECEIVERS from £22/10/-.

HAMMERLUND SUPER PRO RECEIVER, complete with original A.C. power pack type S.P.-200-LX, perfect order, £40.

LELAND R.F. WOBBLATOR, perfect order, £12/12/-.

A.C./D.C. MOTORS, suitable for sewing machines, 47/6 each.

A.C./D.C. 12 v.-15 v. MOTORS, long spindle for models, 15/- each.

NEW M/C MICROPHONES, hand type, with 12 yds. heavy duty screened cable, £3/15/- each.

TEST EQUIPMENT. We hold a comprehensive stock. Multi-range meters at 1,000 and 20,000 o.p.v., valve testers, signal genes, 10,000 OHMS POTENTIOMETERS, large size, by Colvren, enclosed 8/6 each. 100k, 15w., 9/6 each.

MAINS TRANSFORMER. 350-0-350 v. Ellison at 120 mA., 6.3 v. 5 a., C.T. 5 v. 3 a., 37/6. Full range of all types of Ellison products in stock.

COSSOR DOUBLE BEAM OSCILLOSCOPE, type 339A. Perfect, £32.

6 VOLT (3 at 2 v.) BOXED ACCUMULATORS, 14/-.

.1 μ F350 v. METAL CASED TUBULARS, U.S.A., at 4/6 doz. (minimum 2 doz.).

H.R.O. COILS. 46-.96 Mc/s., etc., at £2/5/- per coil.

LARGE STOCKS OF MOTORS. A.C./D.C. and A.C., 1/16, 1/12, $\frac{1}{2}$, $\frac{1}{4}$ h.p.

Your post enquiries welcomed. S.A.E. for reply, please. Orders, C.W.O. or Pro-forma Invoice, no C.O.D. Prices quoted do not include carriage and packing.

All types of equipment purchased. Top prices paid.

SERVICE RADIO SPARES
4, LISLE STREET, LONDON, W.C.2

Telephone: GERrard 1734.

SAMSON'S SURPLUS STORES

CANADIAN NO. 58 MK.I* TRANS-RECEIVER. Freq. 6 mc/s.-9 mc/s. Complete station comprises of trans-receiver, vibrator power supply unit, rod aerials, telescopic aerial, wire antenna, two sets of headphones and microphones, complete set of spare valves and vibrator. Supplied new in maker's cartons with instruction manual. £17/10/- Carr. 7/6.

BRAND NEW A.M. METERS. 0-500, 0-100, 0-50, 0-30 mA. 2 1/2 in. D.C. M.C. flush mounting, 15/- P.P. 1/-.

500-0-500 Microamp Blank scale 2 1/2 in. flush 25/- P.P. 1/- Charge and Discharge 20-0-20 amp. M.C. D.C. 2 1/2 in. square flush, 8/6. P.P. 1/- 3.5 amp R.F. 2 1/2 in. sq. flush 7/6. P.P. 1/- 0.5 amp R.F. 2 1/2 in. sq. flush, 7/6. P.P. 1/- 0-20 v. A.C. 50 CY. M.I. MASTER VOLTMETERS, 6in. Mirrored scale 27/6. P.P. 1/6. 0-20 v. A.C. 50 cy. M.I. 2 1/2 in. flush blank scale, or calibrated 0-20 v., 10/6. P.P. 1/-.

0-14 AMPS M.I. A.C. 4 1/2 in. PROJECTING TYPE, 17/6. P.P. 2/-.

0-750 MICROAMPS 2 1/2 in. PROJECTING, 12/6. P.P. 1/-.

0-50 M.A. M.C. 2 1/2 in. SQ. FLUSH, 8/6. P.P. 1/-.

0-1 MA. METER RECTIFIERS, 10/6. P.P. 6d.

ADVANCE COMPONENTS LTD. CONSTANT VOLTAGE TRANSFORMERS. Input 190-260 v., 50 cy. Output 230 v. E.M.S. 150 watt, £4/17/6. Carr. 7/6.

S.T.C. HEAVY DUTY TRANSFORMER, Pri. 100-250 v., Sec. tapped 28, 29, 30, 31 volts, 21 amps. £4/15/- Carr. 7/6.

BRAND NEW A.M. CONDENSERS BY FAMOUS MAKERS. 6 mfd. 1,500 v. wkg. Tropical, 5/-, Carr. 1/6. 2.25 mfd. 2,000 v. wkg. tropical, 5/-, P.P. 1/6. 4 mfd. 800 v. wkg. 160 deg. F. 5/6. P.P. 6d. 4 mfd. 400 v. wkg. at 160 deg. F. 3/6. P.P. 6d. 4 mfd. 350 v. wkg. at 160 deg. F. 3/6. P.P. 6d. Sprague 1 mfd., 750 v. wkg., tropical, 2/6. P.P. 6d. 2 mfd. 1,000 v. wkg., 140 deg. F. 2/9. P.P. 6d. 0.01 mfd. tubular 5,000 v. wkg. 80 deg. C. 2/- P.P. 6d.

BULGIN 3 PIN 5 AMP PANEL TYPE PLUGS AND SOCKETS. 3/- Heavy duty type 4/6. P.P. 6d.

ARROW 2 POLE ON/OFF 10 AMP PANEL MOUNTING TOGGLE SWITCHES, 4/6. P.P. 6d.

WESTINGHOUSE 6-12 v. 1 amp. Rectifiers, 8/6. P.P. 9d. S.T.C., 72 v. 1 amp. Rectifiers, 32/6. P.P. 1/- 6-12 v. 10 amp., 37/6. P.P. 1/6.

SPECIAL OFFER !! 230 volt low wattage heaters, comprises high grade element built in brass cylinder 350 watt, length 8in., dia. 1in., 8/6. P.P. 1/- 250 watt, length 8 1/2 in., dia. 1in., 5/6. P.P. 1/- Ideal for drying cupboards, garage heaters, hot houses, photographic purposes, etc., etc.

BRAND NEW COMMAND TELEPHONE CABLE, single P.V.C. Ideal for the garden, 1,000 yard drums, 15/- P.P. 2/-.

D3 SINGLE TELEPHONE CABLE. 1 mile drums, 55/- Carr. 5/-.

169/171 Edgware Road,
London, W.2. Tel. PAD 7851

125 Tottenham Court Road, W.1.
Tel: EUS 4982

All orders and enquiries to our Edgware Road branch, please.
This is open all day Saturday.

ENGINEERS!

Whatever your age or experience, you must read "ENGINEERING OPPORTUNITIES." Full details of the easiest way to pass A.M.I.Mech.E., A.M.I.C.E. C. & G. (Electrical, etc.), General Cert., etc., on 144 PAGES **Free!** terms and details of Courses in all branches of Engineering—Mechanical, Electrical, Civil, Auto., Aero., Radio, etc., Building, etc. If you're earning less than £15 a week, tell us what interests you and write for your copy of "ENGINEERING OPPORTUNITIES" today—FREE

B.I.E.T.

387 Colledge House, 29-31, Wright's Lane, London, W.8.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY



THE SERVICE ENGINEER'S FIRST CHOICE

WEBB'S RADIO ARE EXPANDING

and require more staff!

Young men as technical salesmen. Also a learner aged about 17 years. Good wages and luncheon allowance. Every prospect for advancement.

Write to the Manager
WEBB'S RADIO,

14, SOHO STREET, LONDON, W.1

A BOON TO THE DC AREA


"THE METEOR III"

UNIVERSAL AG-DC MAINS SET

COMPLETE KIT **97/6**
Plus 2/6 post & pkg.

Only screwdriver, pliers and soldering iron required to make this attractive 3 valve all mains set (2 wavebands).

COMPLETE PARTS INCLUDING VALVES, READY TO USE CHASSIS, MOULDED CABINET, BROWN OR IVORY.



SEND NOW FOR EASY POINT-TO-POINT WIRING DIAGRAM, FULL INSTRUCTIONS, PARTS LIST, ETC. **1/-** POST FREE

AC VERSION.....**95/-**

MONEY BACK GUARANTEE.

NORMAN H. FIELD (Dept. M), 68 HURST ST., B'HAM, 5

RADIO MECHANICS

wanted for testing communications receivers and transmitters.

Apply with full particulars to:-

REES MACE MARINE LTD.,

OULTON WORKS, LOWESTOFT, SUFFOLK.

COMMUNICATIONS RECEIVER R1155. The famous ex-Bomber Command Receiver known the world over to be supreme in its class. Covers 5 wave ranges 18.5-7.5 Mc/s, 7.5-3.0 Mc/s, 1,500-500 kc/s., 500-200 kc/s., 200-75 kc/s., and is easily and simply adapted for normal mains use, full details being supplied. Aerial tested before despatch. **BRAND NEW.**
IN MAKER'S ORIGINAL TRANSIT CASES, ONLY £11/19/6.
A factory made Power Pack, Output Stage and Speaker, contained in a black crackled cabinet to match the receiver, can be supplied at **ONLY £5/10/-.** Operates receiver immediately. **DEDUCT 10/- IF PURCHASING RECEIVER AND POWER PACK TOGETHER.**
 Please add carriage costs of 10/6 for receiver, and 5/- for power pack.

CONSTANT VOLTAGE TRANSFORMERS. Manufactured by SOLA of CHICAGO, U.S.A. Primary 90-125 v. or 190-250 v. Secondary 115 v. precisely at 2 KVA. Can be adjusted for 50 or 60 cycles operation. Primary and secondary are completely isolated, and for 230 v. output two can be used in series. Fully guaranteed. **ONLY £21 each, or £40 per pair.**

F.S.D.		SIZE AND TYPE		PRICE
1	milliamp	D.C.	2½in. Flush square	15/-
1	"	D.C.	2½in. Flush circular	22/6
1	"	D.C.	2½in. Desk type	25/-
5	"	D.C.	2in. Flush square	7/6
100	"	D.C.	2½in. Flush circular	12/6
150	"	D.C.	2in. Flush square	7/6
500	"	D.C.	2½in. Flush circular	12/6
500	"	thermo	2in. Flush square	5/-
500	"	thermo	2in. Proj. circular	5/-
20 amps.	D.C.	2in. Proj. circular	7/6	
40 amps.	D.C.	2in. Proj. circular	7/6	
30-0-30 amps	D.C.	Car type moving iron	5/-	
15 volts	A.C.	2½in. Flush, circ., mov. iron	8/6	

All meters Brand New in Maker's Cartons.
100 MICROAMPS METER. 2½in. circular flush mounting. Widely calibrated scale of 15 divisions marked "yards" which can be rewritten to suit requirements. These movements are almost unobtainable to-day and being **BRAND NEW IN MAKER'S CARTONS** are a snip at **ONLY £4/2/6.**

R.F. UNITS TYPES 26 and 27. For use with the R.1355 or any receiver with a 6.3 v. supply. These are the variable tuning units which use 2 valves EF54 and 1 of EC52. Type 26 covers 65-50 Mc/s. (5-6 metres), and Type 27 covers 85-65 Mc/s. (3.5-5.0 metres). Complete with valves and **BRAND NEW IN MAKER'S CARTONS.** **ONLY 35/- each.**

AMERICAN LORAN INDICATOR UNIT APN.4

The unit recommended as a basis for the "WIRELESS WORLD" TELEVISION OSCILLOSCOPE, copy of which is supplied, contains 5CPI CRT and screen. 14 valves 6SN7, 3 of 6SL7, 8 of 6H6, 1 of 6SJ7, 100 kc/s crystal, and hundreds of condensers, resistors, etc., etc. **BRAND NEW IN MAKER'S TRANSIT CASES. ONLY £6/19/6 (carr. etc. 15/6).**

AMERICAN ROTARY TRANSFORMERS. 12 v. D.C. input, Output 255 v. 60 m/a. Ideal for car radio or running electric shaver from car battery. **ONLY 22/6.**

CRYSTALS. British Standard 2-pin 500 kc/s., 15/-; Miniature 200 kc/s. and 465 kc/s., 10/- each.

V.H.F. RECEIVER R.1132.A. An 11-valve receiver, covering 100-124 Mc/s. Has large tuning dial with slow motion drive. R.F. and L.F. gain controls, phone and line output sockets, and 0-5 mA., tuning meter. In grey enamelled metal case with plated handles, size 18in. x 10in. x 11in. Complete with valves, circuit diagram, and calibration chart. **IN BRAND NEW CONDITION IN MAKER'S TRANSIT CASES, ONLY 79/6 (carriage 7/6).**

POWER UNIT TYPE 3. Made for use with the R.1132.A, this is a standard rack mounting job to match the receiver, and is for 200/250 v. 50-cycle mains with outputs of 250 v. D.C. 100 mA., and 6.3 v. 4 amps. Fitted with H.T. current meter and voltmeter, this is a first-class unit, and can be used for a variety of receivers. Used, but tested working before despatch. **ONLY 90/- (carriage etc., 5/-).** Connecting Cable with Jones Plugs for receiver and power unit, 10/-.

RECEIVER 2573. Another purchase of these very popular receiving sections of the TR 1196. Makes an ideal basis for a mains operated All Wave Superhet, full modification data being supplied. Complete with 6 valves, 2 ea. EF36 and EF39, and 1 ea. EK32 and EBC33. **BRAND NEW. ONLY 27/6 (postage, etc., 2/6).** Or a few less valves, but complete with the 465 kc/s. I.F.s., etc., 8/6 (post, etc., 2/6).

OSMOR H.O. COIL PACK. The 3 wave superhet pack recommended for the TR1196 Receiver conversion. **ONLY 48/-.** 1196 conversion data supplied with coil pack, or separately 1/-.
VACUUM PUMPS. For Handymen and Model Makers. Ex-R.A.F. Type B3-Mk. III. **BRAND NEW IN MAKER'S CARTONS, ONLY 22/6 (post 2/-).**
TRANSFORMERS. Manufactured to our specification and fully guaranteed. Upright mounting, fully shrouded, normal primaries 425 v.-0-125 v. 250 mA., 6.3 v. 4 a., 6.3 v. 4 a., 5 v. 3 a., 50/-; 350 v.-0-350 v. 150 mA., 6.3 v. 6 a., 6.3 v. 3 a., 5 v. 3 a., 42/6; 350 v.-0-350 v. 100 mA., 6.3 v. 5 a., 5 v. 3 a., tapped at 4 v., 32/6; 250 v.-0-250 v. 100 mA., 6.3 v. 6 a., 5 v. 3 a., 32/6.
 Please add 2/- per transformer postage.

Cash with order please, and print name and address clearly. Amounts given for carriage refer to inland only.

U.E.I. CORPORATION
 Radio Corner, 138, Gray's Inn Road, London, W.C.1.
 Phone: TERMINUS 7939
 (Open until 1 p.m. Saturdays. We are 2 min. from High Holborn (Chancery Lane Station) and 5 min. by bus from King's Cross).

RADIO TRADERS LTD.

23 WARDOURST, LONDON, W.1. (Coventry Street end)
 Phone No. GERard 3977/8
 Grams: "Radiotrade"

PAXOLIN SHEET
 18in. x 4½in. x ½in. ... 1/- each 10in. x 10in. x ½in. ... 1/6 each
 20in. x 10in. x ½in. ... 1/6 each 20in. x 10in. x ¼in. ... 3/- each

CONDENSERS Per doz.
 2 Mfd. 150 v. Tubular Paper (aluminium tubes), 1/6 each ... 15/-
 8 Mfd. 450 v. Electrolytic, 1/9 each ... 18/-
 16 Mfd., 350 v., Electrolytic, 2/- each ... 21/-
 24 Mfd., 350 v., Electrolytic, 2/- each ... 21/-
 32 Mfd., 450 v., Electrolytic, 2/6 each ... 27/-
 8 x 16 Mfd., 350 v., 1/6 each ... 15/-
 20 x 20 Mfd., 275 v., Electrolytic, 2/9 each ... 30/-
 16 x 16 Mfd., 350 v., Electrolytic, 2/6 each ... 27/-
 16 x 24 Mfd., 350 v., Electrolytic, 2/6 each ... 27/-
 16 x 8 Mfd. Metal Cans Electrolytic, 350 v., 1/6 each ... 15/-
 32 Mfd. Metal Cans Electrolytic, 350 v., 1/6 each ... 15/-
 32 x 8 Mfd. Metal Cans Electrolytic, 275 v., 1/9 each ... 18/-
 64 Mfd. Metal Cans Electrolytic, 350 v., 2/6 each ... 24/-
 Condenser clips for above ... 3/-
 .1 Mfd. 400 v. Metal Cans, 1/- each ... 10/6
 50 Mfd. 12 v., 1/- each ... 10/6
 12 Mfd. 50 v. Tubular Paper (aluminium tubes), 1/- each ... 10/6
 100 Mfd. 6 v. Tubular Paper (aluminium tubes), 1/- each ... 10/6
 .00005 Tubular, 4/- doz. .02, 500 v., 4/- per doz., .001, 350 v., 4/- per doz.
 .05, 350 v., 4/- per doz. .005, 200 v., 4/- per doz.

MIDGET MICA CONDENSERS: .0001, .0002, .0003, .0004, .0005 4/-
 200 Assorted Moulded Micas. Popular Values ... £2 10 0
 200 Assorted Silver Micas. Popular Values ... £2 10 0
 200 Assorted Carbon Resistors: ¼, ½ and 1 watt. Good selection ... £1 10 0
CARBON RESISTORS: ¼ watt 2/6; ½ w. 3/-; 1 w. 4/-; 2 w. 6/- per doz.
EX-GOVT. 60 mA. 10 HENRY CHOKE, new ... 4/6 each

HIGH STABILITY RESISTORS:
 Tolerance: 1% 2% 5%
 ¼ watt 1/- 9d. 6d. each
 ½ watt 1/3 1/- 9d. each
 1 watt 1/9 1/6 1/3 each
 8-40 MEG 2 watt ... 2/6 each

ALL CINCH COMPONENTS IN STOCK

PYE PLUGS AND SOCKETS ... 1/6 pair

WW AND VITREOUS RESISTORS. 5 watt, 1/6; 10 watt, 2/6; 15 watt, 3/-; 20/30 watt, 3/6 each.

WW V/CONTROLS. COLVERN and B-NSF. 5K PRESET and other values, 2-3 watt, 2/- each. 10K Isolated Spindle ... 2/- ..
 500 ohms, 1K, 20K, 25K, 50K, with spindle ... 3/- ..
V/CONTROLS WITH SWITCH: most values, B-NSF ... 2/6 ..

V/CONTROLS: Less Switch, Preset and Spindle. MOST VALUES ... 1/9 ..

TWIN MIDGET GANGS, .0005, with trimmers, PERSPEX COVER ... 5/6 ..

4-WAY PUSH BUTTON UNITS, 1/6 each ... 15/- doz.
PUSH BUTTON KNOBS. ... 3/- ..

TAG STRIPS: 3-way 2/- doz.; 4-way 2/6 doz.; 5-way 3/- doz.; 7-way 4/- doz.; 28-way 10/- doz.

ASSORTED PILOT LAMP HOLDERS ... 4/- ..
FUSES ½in. Most values from 750 mA. to 10 amp. ... 2/- ..
POINTER KNOBS. Small black, with line, ½in. hole ... 7/6 ..

STANDARD ROUND KNOBS: Small, ½in. hole, 6/-; Large, ½in. hole, 7/6; with spring clip, ½in. hole ... 4/6 ..

WANDER PLUGS, Red and Black ... 2/- ..

PHILIPS TRIMMER TOOLS ... 1/- each

BELLING & LEE. P/M FUSE HOLDERS. Type L356 ... 2/6 ..

WEARITE COILS: Types PA4, PO4, PA5, PO5, 1/3 each ... 12/- doz.

VALVE HOLDERS: Moulded. B9A, 7/6; B7G, 6/-; EF50, 6/-; ENGLISH OCTAL, 3/- per doz. **SCREEN CANS** for B9A, B7G, 6/- doz.; **PAXOLIN**—B7G, MAZDA 4-pin UX ... 3/- ..

BELLING & LEE. PLUGS AND SOCKETS. Ex-Govt. BRAND NEW 5-pin, Chassis and Cable, 7-pin ... 1/6 pair

BULGIN. P74, Plug and Socket, 2/6; P200, Plug and Socket, 2/-; Rotary Switches, S.255, 2/-; Dolly Switches, S.267, 2/-; Standard Switches, Ex-Govt., On-off ... 1/6 each

POST OFFICE LAMP JACKS, No. 10, 1/- each ... 9/- doz.
 Lamp Covers for same ... 3/- ..

L.F. CHOKES, 300 w., 60 mA. CH5 ... 4/6 each

OUTPUT TRANSFORMERS. Multi Ratio, 5/-; Pentode or Power ... 4/- ..

VALVE SCREEN CANS for Standard Valves, 1/- each ... 10/6 doz.
DRUM DRIVES, 4½in. ... 1/- each

WESTECTORS. WX6, WX12, W1, W12, W4, 1/- each ... 9/- doz.
ARCOLECTRIC (Whitney Lamp), Red, green, clear, 1/6 each ... 15/- ..

SIGNAL LAMP HOLDERS P/M, complete with adjusting lamp holders, 1/9 each ... 18/- ..

AIR SPACE TRIMMERS. Preset and spindle types, 5PL, 10PF, 15PF, 20PF, 25PF, 50PF, 75PF, 15/-; 100PF Preset, 1/6 each ... 15/- ..

JONES PLUG AND SOCKETS. 4-pin, 2/6; 6-pin, 3/-; 8-pin, 3/6; 10-pin, 4/-; 12-pin ... 6/- pair

NUTS, 8BA, 3/-; 6BA, 2/6; 4BA, 3/-; 2BA ... 4/- gross
SOLDER TAGS, 2/6 gross. **SHAKEPROOF WASHERS** ... 2/- ..
WASHERS, 2, 4 and 6BA ... 1/- ..
SHAKEPROOF SOLDER TAGS, 4BA and 6BA, 2/6; 2BA ... 2/9 ..

CASH WITH ORDER OR C.O.D. ALL ORDERS DEPT. W1
ALL ORDERS FOR LESS THAN £2 ADD POSTAGE
REDUCED PRICES FOR GROSS LOTS

We invite your enquiries for items not listed.
Trade Counter open 9.30 to 5.30 Monday to Friday.
Callers Welcomed.
WHOLESALE, MANUFACTURERS' AND EXPORT ENQUIRIES INVITED

Opportunities for Engineers with the Guided Missiles Division of 'ENGLISH ELECTRIC'

The Guided Missiles Division of The ENGLISH ELECTRIC Company Limited, Luton, now wishes to fill a wide variety of vacancies. In particular, the following are required:

- Radio and Radar systems Engineers
- Circuit Development Engineers (including work on transistors)
- Engineers to design & engineer micro-wave equipment
- Instrumentation Engineers with transducer design experience
- Engineers for Field Trials Radar and Communications equipment (including some vacancies for Australia)

Houses are available for some of the Senior Engineers. There are also vacancies for Intermediate and Junior Engineers and Laboratory Assistants.

All these offer splendid opportunities for promotion in this new Industry.

Engineers should be Honours Graduates or have technical qualifications to H.N.C. or equivalent standard together with relevant experience.

Applications, quoting SA54, should be sent to Dept. CPS, 336/7 Strand, WC2.

'ENGLISH ELECTRIC'

'ENGLISH ELECTRIC' MARCONI NAPIER

THE BRITISH NATIONAL RADIO SCHOOL ESTD. 1940

NOW IN OUR FIFTEENTH YEAR
AND STILL

NO B.N.R.S. STUDENT HAS EVER FAILED

to pass his examination(s) after completing
our appropriate study course.

Our Secret ?

*Sincerity, Long Experience, Family
Ownership, Pride of Service and a
genuine attempt to mould the "Course"
to the student.*

A.M.Brit.I.R.E. and CITY and GUILDS Radio and
Telecommunications Exams., etc., etc.

PRINCIPAL, M.I.E.E., M.Brit.I.R.E.
BRITISH NATIONAL RADIO SCHOOL
2, CANYNGE ROAD, CLIFTON, BRISTOL, 8
Tel. BRISTOL 34755

FOR EXPORT and to H.M. GOVT. CONTRACTORS ONLY

AVAILABLE FOR IMMEDIATE DELIVERY

RADAR

EARLY WARNING RADAR (mobile on trailers)—LORAN &
GEE RADAR.
NIGHT-FIGHTER RADAR — REBECCA EQUIPMENT.

RADIO TRANSMITTERS

R.C.A. ET-4336—(2-20 Mc/s 350 watt).
HALLICRAFTER BC-610 (2-20 Mc/s, 350 watt). (New.)
WESTINGHOUSE GO-9 (300-18,100 Kc/s—CW and MCW only).
TECHRAD Model T-350XM (2-20 Mc/s, 350 watt). (New.)
R.C.A. 5 kW Transmitters. (New.)
Large quantities of spares for above.

TEST EQUIPMENT

PULSE GENERATORS (Model 79-B—current production by
Measurements Corporation).
MODEL 79-B generates pulses of continuously variable width
and repetition rate (RR 60-100,000 pps., pulse width variable from
0.5-40 microsec.).

The instrument may be used for checking the response of video
and r.f. amplifiers and investigation of peak measuring equipment.
It will also simulate ignition and other types of interference for
radio noise elimination research.

MICROWAVE FREQUENCY METERS (Model 105SM—
Lavoie Laboratories). Frequency Range 375-725 Mc/s. Self-
contained, battery operated, high precision instruments.
BC-221 Frequency Meters, TS-10A/APN, and a large range of
TS instruments.

VALVES, MAGNETRONS & KLYSTRONS. (Surplus—
guaranteed and current production.)

AIRCRAFT ELECTRICAL EQUIPMENT AND ACCESSORIES

All our equipment is either new or rebuilt to original
specification, including latest modifications.
All Airborne equipment can be released in our works to
A.I.D. and/or A.R.B. Standard.

High Precision Electronic Development and Production Contracts
undertaken.

BRITISH SAROZAL LTD.
1-3, Marylebone Passage, Margaret Street, W.1.
Telephone: LANGham 9351 (3 lines).
Cables: Sarozal, London. Telegrams: Sarozal, Wesdo, London.

Wireless World Classified Advertisements

Rate 7/- for 2 lines or less and 3/6 for every additional line, part thereof, average lines 6 words. Box Numbers 2 words plus 1/-. (Address stamps: Box 0000 of "Wireless World" Dorset House, Stamford St., London, S.E.1.) Trade discount details available on application. Press Day: November, 1954 issue, Tuesday, October 5th. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components and valves which may be offered for sale through our columns carry no manufacturers' guarantee: Many of these items will have been designed for special purposes making them unsuitable for civilian use, or may have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such items purchased.

NEW RECEIVERS AND AMPLIFIERS

R.C.A. speech amplifiers, type MI-11220, immediately available, in quantity. **M C E L R O Y - A D A M S MANUFACTURING GROUP, Ltd.**, 46, Greyhound Rd., London, W.6. [0195]

ALL types of audio equipment designed and built to order, tone compensation units, Williamson's, etc., 50-amp, electronic mixers, and all amplifiers, up to few, extended payments available above £20.—**Bernard J. Brown**, 33, Goldhawk Rd., London, W.12. [0024]

C. J. R. ELECTRICAL & ELECTRONIC DEVELOPMENT, Ltd., Bickford Rd., Witton, Birmingham, 6 (Eas. 0435), the Midlands specialist manufacturers of high fidelity s and reproduction equipment for the home. Williamson amplifier and associated accessories, including tone control stages, loudspeaker crossover units, distortionless contrast expanders and radio feeders; send for details and prices. [0105]

VHF-FM; a new combination receiver, the CB4 long range FM, and sensitive MW reception; obtainable as feeder, or with push-pull output stage and mains driven; superhet 5v chassis (p.u.s diodes) with JB tuning scale; designed for best fidelity on both systems; will suit any amplifier, tested at 60 miles range; all on a 6X11in chassis; obsolete feeders are easily convertible to radio set with our 300w power unit/output stage chassis; the WW FM unit; complete kits, using latest valves and vhf-type components, elegant stoved chassis, wound and pre-aligned coils, circuits, layout; this design is ultimate with zero background, unique am reactor, and oscillator; many have been built by beginners, and we align the completed set; kit, £7/5; we are pioneers and have quite a range of FM products; trade supplied; sets of literature 1/-.

SOUND PRODUCTS Co., Marlborough Yard, London, N.19. Day and evening demonstrations, ring Arc. 5078. [0184]

RECEIVERS, AMPLIFIERS—SURPLUS AND SECONDHAND

RECEIVERS 1132A 100/140 m/c, good condition but less valves; 57/6, c.p. **TYPE 3** power packs for same, few only; 90/-, c.p.

T.R.9 transmitter/receivers, battery operated, 7/3.5 m/c, easily modified to neighbouring frequencies, splendid beginner's station; 47/6, c.p.; or in mint condition; 7/7/6, c.p. **R.F. units** type 24 20/30 m/c, new; 15/-, c.p. **THE famous R.A.F. T1154 transmitter**, complete with valves; from 30/-, c.p.

SIGNAL generators and test equipment, most British and U.S. types; by quotation. **SEND us your enquiries; we hold large stocks STARAVIA (Disposals Division)**, Blackburth Airport, Camberley, Surrey. [3404]

R.C.A. receivers, type AR.88D, immediately available in quantity, fully reconditioned **M C E L R O Y - A D A M S MANUFACTURING GROUP, Ltd.**, 46, Greyhound Rd., London, W.6. [0194]

SX28, perf., hdbk., £45; 9-tube H/crafter, 20-80 megs, £20.—42, Sislova Rd., S.W.12. [3429]

R.C.A. amp. 11209-E, 2 6L6 with manual; £7/10.—13, Windmill Rd., Thame, Oxon. [3417]

CR100, good condition; £20.—Mill Farm, St. Mary's Rd., Hayling Island, Hants. [3290]

ARMSTRONG 8-valve all-wave chassis with Rola 1/s, perfect; £6 cash, collect Bayswater.—Box 7142. [3316]

SOUND sales, 12-watt amplifier with preamp and tone control unit, good condition; £10.—Apply Cae sea Polytechnic, S.W.3. [3291]

W.S.19 Mark III, complete with power unit, in good condition; best offer over £27/10.—Box 7517. [3405]

G.E.C. BRT 400D communication receiver, mint condition; accept first offer £130.—164, Charing Cross Rd., W.C.2. Tem. 7587. [3445]


R1155 receiver, complete with power pack, speaker, etc., in cabinet; 9gns o.n.o.—Nelson, Rex House, Longwood Drive, S.W.15. [3226]

PARTRIDGE... and the Osram 912

Partridge Transformers and chokes were employed by the General Electric Co., Ltd., Technical Valve Department, for the prototype of the Osram 912 High Quality Gramophone Amplifier.

The three specified Partridge components are available in alternative mounting styles detailed below.

- ★ **MAINS TRANSFORMER (T.1)**
Partridge Type No. P.3591 B.
Mounting style DN/404B 52/6
Mounting style DL/404B employing loose lead terminations 43/-
- ★ **SMOOTHING CHOKE (L.1)**
Partridge Type No. C10/135
Mounting style DN/401B 34/3
Mounting style DL/401B 28/6
- ★ **OUTPUT TRANSFORMER (T.2)**
Partridge Type No. P.3591 A
Mounting style DN/404B 85/-
Mounting style DL/404B 75/-

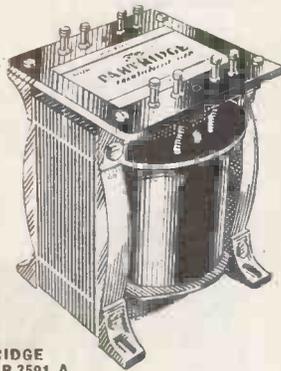

PARTRIDGE TYPE P.3591 A

If performance down to 30 c/s is required it is essential to employ an output transformer of this calibre.



Write for illustrated brochure giving full details of these Partridge components.

PARTRIDGE TRANSFORMERS LTD TOLWORTH SURREY

PHONE: ELMbridge 6737-8

RECEIVERS, AMPLIFIERS—SURPLUS AND SECONDHAND

HRO Rx's and coils in stock, also AR58, BC348R, CR100, etc.—Requirements please to R. T. & I. Service, 25d, Grove Green Rd., London, E.11. Lev. 4986. [0022]

R.F. units, types 26 @ 32/6, 25 @ 16/6, 24 @ 12/6, brand new in original cartons, with valves; postage 2/6.—E.W.S. Co., 69, Church Rd., Moseley, Birmingham [3395]

TANNOY 25w amplifier, 5 loudspeakers, mike, gramophone playing desk, H.T. supply unit, good condition; £75 the lot.—9, Southdown Rd., W.-on-T., Bristol 65779. [3354]

AMPLIFIERS, 4-channel 20w, 5w each channel frequency response flat 40 cycles to 12kc/s input and output 600ohms; 4 amplifiers in one case, gain control and monitoring input and output chokes price without valves £5/10/8 carr. extra; as new cost £40 ea.—Leslie Dixon & Co., 214, Queenstown Rd., Battersea, S.W.8 [3265]

RECEIVERS, AMPLIFIERS—SURPLUS AND SECONDHAND WANTED

WANTED, quality amplifier, remote control, 15w.—Fishpond Hotel, Mallock Bath, Derbys. [3428]

NEW LOUDSPEAKERS

LIMITED numbers new G.E.C. metal cone speakers, ex stock; £8/15.—Henniker & Kerr, 15, Bonaly Rd., Edinburgh. [3394]

SPEAKERS 5in, new, well-known manufacturer's surplus, 17/6, also 8in new Celestion with transformer, 19/6, carriage and packing 1/3 extra.—G.R., Ltd., 185, Stockwell Rd., Brixton, S.W.9. Tel. Brixton 9895. [3407]

LOUDSPEAKERS—SURPLUS AND SECONDHAND

WHARFEDALE 10in Golden E.S.B., excellent condition; £7, or best offer.—Dr. Bannister, 11, Litcham, King's Lynn. [3295]

TEST EQUIPMENT—SURPLUS AND SECONDHAND

AVO wide range signal generator, new, completely crystal checked; £20.—Box 7216. [3339]

ONE Cossor 343 ganging oscillator; one Cossor 339 oscilloscope; £45 the pair.—C. A. Duckitt, 4, Queen St., Thorne, nr. Doncaster. [3307]

AVO 7, Avo oscillator, 500v Evershed and Vignoles bridge megger, as new; offers.—Rodgers, 1, Rodgers Villas, Omagh, Co. Tyrone, N. Ireland. [3392]

MARCONI signal gen'r. TFS17F, 150/300 Mc/s, c/w, handbook, etc.; £18; buyer collects.—Woodhams, 14, Claremont Hill, Shrewsbury, Shrops. [3430]

TAYLOR equipment valve tester 45B £14; electronic testmeter 170A, £12; bridge 110A £6; testmeter 90, £7; testmeter 90A, requires attention, £5.—A. F. C. Williams 101, Frederick Rd., Cheam, Surrey. [3327]

SIGNAL generators, oscilloscopes, output meters, valve voltmeters, frequency meters, multi-range meters in stock; your enquiries are invited.—Requirements to R. T. & I. Service, 25d, Grove Green Rd., London, E.11. Lev. 4986. [0056]

SOLAR Cap Res. Analyzer, £8/10; Scope, £12; 3-circuit Heayberd, charges 96 accs. £16/10; multimeters, Taylor 90 £9/10, V.T. W.M. 33 range £17/10, Pullin 100 £4/10; valve-testers, AVO £8/10, U.S.A. 1-177, takes all midgets, £8/10; Xtl sig. tracer, £4/15; Pye Life Test alarm, N.5; offers for lot.—Morran, 87, Boundary Rd., N.W.8. Mal. 4964-Wil. 4612. [3451]

METERS WANTED

WANTED 2 Ferris mode 32A noise and field strength meters, must be in good condition.—Box 7210. [3356]

We urgently require meters of all types, any quantity, large or small; prompt cash offer by return.

ANDERS ELECTRONICS, Ltd, 91, Hampstead Rd., London, N.W.1, Euston 1639 [3071]

NEW DYNAMOS MOTOR, ETC.

WARD rotary converters for radio, television, amplifiers, etc.


ALSO, rotary transformers, alternators, D.C. generators, etc.

WARD, 75, South St., Bishop's Stortford, Herts. Tel. Bishop's Stortford 1694. [0039]

BATTERY chargers 4 models, 2-6-12V, 1-2-4 amp D.C., any mains voltage; also larger types special transformers, chokes, test gear, interior car heaters, etc.—The Banner Electric Co., Ltd., Hoddesdon, Herts. [0112]

FOR SALE AND WANTED ADVERTISEMENT FORM
TURN TO
PAGE NO. 173

This UNIQUE BENDER

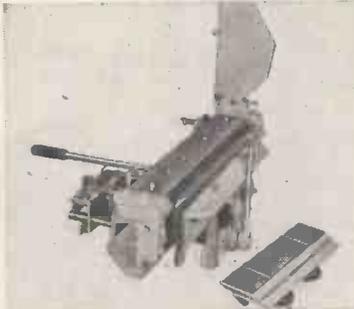

QUICKLY AND ACCURATELY FORMS ANGLES, CHANNELS, SECTIONS, BOXES, LIDS, TRAYS, TANKS, CHASSIS BRACKETS, CLAMPS, CLIPS, SHROUDS. CHEMICAL, ELECTRONIC AND ELECTRO MEDICAL APPARATUS. INVALUABLE TO SERVICING ENGINEERS, HOSPITALS, UNIVERSITIES, AND RESEARCH WORKERS.

A.A. TOOLS are used by:—

Admiralty, W.O., R.A.Est., A.E.R.E., N.P.L., Foreign Office, Home Office, Govt. Communications (England, Africa, Malaya etc.), G.P.O. Telephones, Union Observatory, Johannesburg, Aircraft and Air Transport, P.M.S., Brit. Railways, Electricity Boards, National Coal Board, Imperial Smelters Ltd., I.C.I. Ltd., Medical Research Council and many Hospitals, Universities, Tech. Colleges, leading Radio Manufacturers and Research Units both here and abroad.



For 6 page Folder write to:—

A. A. TOOLS (W)

197a Whiteacre Rd., Ashton-u-Lyne

Every genuine A.A. tool bears this mark.

SURPLUS

AERIAL MASTS. American Yagi 5 element array AS-46/APG. 30ft. one piece 4in. dia. hollow wood masts. 36ft. 3 section 2in. dia. tubular steel masts. 45ft. 9 section 1 1/2 in. dia. American steel masts MS-44. 50ft. Bendix plywood masts MT-7A. 70ft. American plywood masts. 50ft. Trylon lattice ladder towers. 20ft. American tripod base aluminium masts AS/TPX. 9ft. one piece American police whips. 18ft. BC-610 6 section whips.

TELEPHONE AND TELEGRAPH APPARATUS. 1 + 1 terminals and by pass filters; 1 + 3 terminals; 1 + 4 terminals and repeaters, 5 and 5X, 5 and DX power bays; repeaters; V.F. fingers; perforators; Wheatstone transmitters; teleprinters; undulators; switchboards; rectifiers; EE-6S, TG-10, etc., etc.

AUDIO EQUIPMENT. R.C.A. squadron announcers (12-25 watt speakers), R.C.A. 25 watt high power speakers. Portable megaphones PA-4. BC-1016 recorders (morse up to 400 w.p.m.).

CONTROL UNITS. RM-6, 7, 12, 13, 21, 25, 29, 42.

AMERICAN TRANSMITTING TRANSFORMERS AND CHOKES. A large variety by Amertran, Kenyon, R.C.A., Thordason, etc., etc.

TRIPLE DIVERSITY RECEIVERS. 1.5 to 30 mc/s. Self contained on rack with all refinements. Full details available.

100 WATT BROADCASTING TRANSMITTERS by Woden. Self contained in 4ft. 6in. cabinet £22/10/- with valves.

RACKS, de luxe, 19 inches wide channel iron sides, 3 x 2, 5ft. 6in., 70/-; 3ft. 6in., 40/-; both car. 10/-.

Many other items too numerous to mention. Send your requirements. Lists available. All packing and shipping facilities.

P. HARRIS

ORGANFORD DORSET

Telephone: Lychett Minster 212.

NEW DYNAMOS, MOTORS, ETC.
ALTERNATORS, 230/1/50, 400VA, self-energised 3,000rpm, ball bearing, £24/5; also special television model same price; voltage regulator, £1 extra.
J.A.P. No. 2A 12hp petrol engine, air-cooled, 4-stroke, starting rope, tools; £17/10 delivered for above alternators.

SPECIAL rotary converters, guaranteed interference free, fitted radio and television filters, wt 50lb, d.c. input 12v, 200va out 24v, 50v, 110v, d.c. to 230v, out 250va, £28/10 del.; also converters for general use, inputs, outputs, prices as above; also supplied without smoothing, £25 del. immediate despatch; trade supplied.

AT a purchaser's home 60mils. S.W. of Sutton Coldfield a 24v.

TELEVISION converter was tested on Ekco television 12in tube, stated consumption 135 watts d.c. current from battery only 9amps, picture and sound were perfect and completely free of interference or flutter.

THE above are the latest products of British manufacture, and are guaranteed; fullest details of 400VA alt. or rotary converters, by return post; state which required; terms c.w.o. pro forma invoice c.o.d. (post goods only)—T. W. PEARCE, 66, Great Percy St., W.C.1 (near Angel). (0013

ROTARY converters, output 230v A.C. 50c/s, 125watts; input 12v D.C.; ball bearings, leading maker; suitable for operating TV, radio, tape recorder, etc., where mains unavailable; special offer, guaranteed perfect, instructions supplied; only 75/- carriage 10/-, 5/- refunded on case.

LAWRENCE, 3, Slater Place, Liverpool, 1.

DYNAMOS, MOTORS, ETC.—SURPLUS AND SECONDHAND

EX Air Ministry rotary transformers, permanent magnet field, windings, 20v, 6.5v, 3.3 amps, and 30.6v, 1.65 amp, each post paid; rotary transformers, input 12v D.C., output 470v at 90ma, £2 each post paid.

NEW Brooks 415v, 1,425 r.p.m., 15 h.p. motor with double-ended shaft and starter. £38 ex works; secondhand Allis-Chalmers 400v 10 h.p. motor, start-coil, £15, ex works.

NEW Turner 2V95, 15-16 b.h.p. diesel engines, with electric starters, £125 each; two new galvanized diesel engine cooling tanks, approximately 120 gallons, £7 each; one unused Petter B2, 18 b.h.p. engine, £140.

WARD, 75, South St., Bishop's Stortford, Herts. Tel. 1694. (10040

NEW GRAMOPHONE AND SOUND EQUIPMENT

FERROGRAPH magnetic tape recorder, 76gns.
WEARITE tape decks and component parts.
DISC recording machines and blank discs.
LEAK amplifiers, 10w £17/7, preamp £10/10.
GOODSELL, 5w £13/10, preamp £10/10.
RESLO ribbon microphones and stands.
EVERYTHING for the professional recording studio and quality dealers.

SOUND DISCS (SUPPLIES), Ltd., 178, Blenheim Rd., Southampton, Lancs. Tel. 88153. (3169

BUYING a new amplifier or rebuilding the present one? See Bernard J. Brown's adverts under New Receivers and Amplifiers, also Repairs and Service. (10029

TRUVOX Decks—Amplifier to suit, 8min. T valves, 10w P.P., Latest design. Sep. Power Unit; Treble lift choke; Var. Bias, Mic. and Radio inputs. Mixer control. M. Eye indicator, 30-10Kc/s response, 19gns.

PRE-AMP/REC. Units (Meter ind.) from £16.

AMPS. for Wearite Decks; 21gns.

HARDING ELECTRONICS, 120a, Mora Rd., London, N.W.2. (10032

TAPE recorders for sale, exchange, or hire in Greater London, good quality tape recorders wanted for cash, all types of repairs, mechanical and electronic, carried out by specialists, all accessories available, we deal exclusively in magnetic recording equipment.

THE MAGNEGRAPH RECORDING Co., Ltd., 1, Hatway Place, London, W.1. Tel. Lang 3596 2156.

TAPE decks.—Due to cancelled South American export order we have been able to purchase, on very favourable terms, a limited quantity of a very well-known tape deck in kit form which we are offering at a knock-out price of £6/19/6; full details by return of post from.

HOTAX PRODUCTS, Ltd., 59, Gray's Inn Rd., London, W.C.1. (3408

CINE-VOX disc recording equipments, type C7J for high-quality recordings from existing microphone equipment; price from 22gns; also available as a complete channel inclusive of mic., amplifier and playback equipment, at 70gns; type C7, for highest quality professional requirements—recorder mechanism at 48gns, or complete channel at 110gns; demonstrations arranged in London.

PLEASE write for details to K.T.S., Ltd., "Coplow," Park Rd., Braunton, N. Devon. Tel. Braunton 224. Callers by appointment only.

GRAMOPHONE AND SOUND EQUIPMENT—SURPLUS AND SECONDHAND


BRADOMATIC tape desk, model 5B, slightly used, offers—Box 7363. (3369

GARRARD pick-up model TA, unused; £8. Laycock, 16, St. John's Sq., Wakefield. (3300

VORTEXION recorder, as brand new, not now required; £65.—Cryer, Princes Way, Fleetwood. (3509

B.A.S.F. recording tape, slightly used; 7/6 per 1,200ft spool, 40/- per 1,000 metres.—Box 7359. (3361

RECORDING wire, stainless steel, 3,600ft reels; 5/6.—Griffiths, 12, Rosendale Ave., Blackley, Manchester. (3318

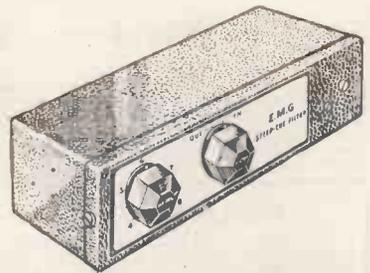

E.M.G. INFINITELY VARIABLE STEEP-CUTTING FILTER

No other filter combines all the advantages of this model which are, briefly, to cut response above any desired level between 4,000 and 8,000 c.p.s. at an average steepness of 30 db per octave, easy fixing (connects between 15 ohm speaker and amplifier output), robust construction, no distortion or appreciable loss of volume and cannot introduce hum. Recommended for reducing surface noise on '78' records, cutting 'edge' on some L.P. records, and eliminating high pitched interference on radio.

Price £4/10/-. Leaflet on request
Trade Enquiries Invited.

E. M. G. HANDMADE GRAMOPHONES LTD.
6, Newman St. London W.1. Museum 9971

THE INSTRUMENT MODEL

Specially designed for soldering operations in the compact assemblies used in present day radio, television and electronic industries. Weight 3 1/2 oz. excluding flexible. Length 9 in. 25 Watts—220/240 volts

LIST No. 625

19'8d



Write for Folder

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.
51/53, Hatton Garden, London, E.C.1.

GRAMOPHONE AND SOUND EQUIPMENT

SURPLUS AND SECONDHAND
M.S.S. recorders, 220V, 60 m/a, 6.3v TL/10 and pre-amp. £22; Ferrograph tape recorder, £65, as new (Lancashire).—Box 7622. [3427]

GRUNDIG tape recorder, one month old, as new, model 700L, cost £84; take £60 o.n.o.—Atkinson, 16, Albemarle St., London, W.1. Hyoc parts 2952. [2433]

FOR sale—Ferrograph tape recorder, walnut veneer cabinet, perfect condition; £50 or near offer.—A. O. Watkin, 116 Shortmead St., Biggleswade, Beds. Tel. 2217. [5342]

GRUNDIG tape recorder console model 700G beautiful figured walnut cabinet, cost £99/15, only 3 mths. old; £75, or reasonable offer.—290, Lynnmouth Ave., Morden, Surrey. [3519]

B.B.C. type A.C. disc recorder, 1500hms imp. motor scroll, for professional standard. £58; also M8S machine, complete with head, in good condition. £2; Ferrograph Model 2A, perfect. £62.—Box 7629. [4448]

BASS reflex cabinet by C. T. Chapman (Producers), Ltd., finished in light oak, and fitted with 12in. Goodman's Audiom 60 speaker, excellent condition. £15.—Milne 169, Barry Rd., E. Dulwich, London, S.E.22. Tel. For. 9796. [3394]

TRANSMITTING EQUIPMENT

WILCOX-GAY V.F.O. and crystal multiplier units; small quantities.
McELROY-ADAMS MANUFACTURING GROUP, Ltd., 46, Greyhound Rd., London, W.6. Cables: Hallcraft, London. Tel. Fulham 1138-9. [3115]

SCR522, ET4332B T.U.s for BC375, T1131, TR1430, TR1143A offered.—E.W.S. Co., 69, Church Rd., Moseley, Birmingham. [3115]

TRANSMITTING EQUIPMENT—SURPLUS & SECONDHAND

COMPLETE Pye 80 Mcs. radiotelephone, master station, 3 mobiles with P.A. equipment, guaranteed; £280.
McELROY-ADAMS MANUFACTURING GROUP, Ltd., 46, Greyhound Rd., London, W.6. Cables: Hallcraft, London. Tel. Fulham 1138-9. [0197]

R.C.A. transmitters, type ET.4332 and ET.4336, fully reconditioned to maker's spec., complete with V.F.O. crystal multiplier, etc.
McELROY-ADAMS MANUFACTURING GROUP, Ltd., 46, Greyhound Rd., London, W.6. Cables: Hallcraft, London. Tel. Fulham 1138-9. [0196]

COMPONENTS—RADAR

1.—723AB Klystrons; available in quantity.
2.—Magnetrans type CV.292, complete with cavities.
3.—Large quantity long length 3cm wave guides, junctions, cavities, projectors, radiators, spinners, etc.; immediately available.
ALSO 3cm echo boxes and oscilloscopes.
McELROY-ADAMS MANUFACTURING GROUP, Ltd., 46, Greyhound Rd., London, W.6. Cables: Hallcraft, London. Tel. Fulham 1138-9. [0036]

NEW COMPONENTS

CRYSTAL microphone inserts (Cosmocord Mic-6), guaranteed brand new; 15/6, post free.—Radio-Aids, Ltd. (Retail Dept.), 29, Market St., Watford. [0036]

FLUORESCENT 80w chokes 16/6, glow starter; lamps 2/-; transformers, 10,000v 25mA 230v a.c., 32/6; metal rectifiers, 6/12v 2amp 8/6, 4amp 12/6, 6amp 18/6; battery chargers, 6/12v lamp, 39/6; complete 5ft 80w fluorescent fittings, 75/-; heavy duty battery chargers, 24V 50amp, 2/5; car 24V 12v £5/10; 2 years' guarantee.—Malden Transport Supplies, 2a, Cambridge Rd., & 134, London Rd., Kingston-on-Thames. Kingston 7534. [0038]

COMPONENTS—SURPLUS AND SECONDHAND

SUPREME RADIO, 746b, Romford Rd., Manor Park, London, E.12. Tel. III. 1260. Est. 19 yrs.
"SUPREME" for seasonal radio and TV component bargains:—
SHEROUD upright mounting mains trans. with base connections.—290-0-290v 60 m/a, 6.3v 1.5a and 4v 2a with screen, input 200-220-240v, size, H 3 1/2in x 3 1/4in x 2 1/2in d, a real bargain at 12/6 ea. plus 1/- p/post.
WIRE wound vol./controls with S/P switch and L/spindle, 50K ohms, our price 4/9 ea.; 20K ohm W/W V/controls, less switch, 2/8 ea.
SMALL speaker out/trans for 5K ohms to 2 ohms, again a bargain at 3/11 ea.
28-wag tag strip, break it as required, 1/- ea.
VOL. controls, small type with S/P switch and L/spindle, 1 meg., 1/2 meg., or 1/4 meg., 2/6 ea.
ELLIPTICAL P.F. speakers, 7in x 4in, 2 to 3 ohm /coil, our price 15/11 ea.
ONLY a few left! Crystal sets, in brown bakelite case, 3 1/4in x 2 1/2in x 1 1/4in, wired ready for use, with crystal diode as detector, 7/6 ea.
DUAL range T.R.F. coils, 200 to 2,000 M., with cores, 5/6 per pair.
STEEL chassis, grey finish, ready punched for S/het layout, 14in x 6in x 3in, 2/6 ea.
NEW stocks electrolytics, small metal can type: 16mf 350v, 1/11 ea., 16+24mf, 350v, 2/6 ea., 32mf, 350v, 2/6 ea. Special Bargain, 32+8+8mf, 275v, 3/3 ea.
STEEL chassis, grey end cond, 8mf, 450v, our price 1/11 ea., or 8mf, 500v, 2/9 ea. Metal can tag end bias cond., 25mf 25v, our price 1/3 ea.
JUST arrived: 60+150mf, 275v D.C. wkg. 1 1/2in dia., bargain price 4/11 ea. Popular value, 1/4 and 1/2 watt resistors, 3/- doz.
CRYSTAL diodes, with crystal set circuit, 1/6 ea.
TERMS: c.w.o., no c.o.d.
SEND 9d extra for postage orders under £5, 2/6d s.a.e. all enquiries and lists. [6021]


FOR OVER 20 YEARS THERE HAS BEEN AND STILL IS ONLY ONE

Armstrong
Specialists in the manufacture of the HIGHEST QUALITY CHASSIS



"Twin" Radiogram Price 57 Gns (inc. tax)

RADIOGRAMS As introduced last month the "Twin" Radiogram is now much in demand. This unique and compact Radiogram incorporates a superb 8 valve, all wave radio chassis, the very latest 3 speed Record Changer and twin elliptical 10in. loudspeakers. The novel arrangement of Record Changer and record storage above the radio which is housed in a hopper, makes this Radiogram unique in its class.
Also in our range:—
The "Standard"—at 69 gns. (inc. P. Tax).
The "Special"—at 79 gns. (inc. P. Tax).
The "Super"—at 125 gns. (inc. P. Tax).

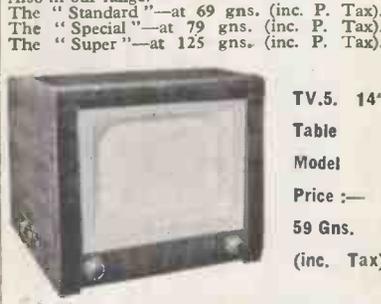

TV.5. 14" Table Model Price:— 59 Gns. (inc. Tax)

TELEVISION The TV.5 Range is available in many forms and incorporates all the most up-to-date improvements such as 5-channel selector switching and aluminium flat faced tube, and tinted filter.

● PROVISION IS NOW MADE FOR A 13-CHANNEL ADAPTOR, WHICH WILL BE AVAILABLE AT A NOMINAL CHARGE WHEN REQUIRED.

The TV.5 Range really gives the TRUE BLACK AND WHITE PICTURE.

- TV.5 14in. Chassis, £54/13 (inc. P. Tax).
- TV.5 14in. Table Model £61/19 (inc. P. Tax).
- TV.5 14in. Console, £72/9 (inc. P. Tax).
- TV.5 17in. Chassis, £64/15/11 (inc. P. Tax).
- TV.5 17in. Console £82/19 (inc. P. Tax).

● SEE PAGE 89 FOR DETAILS OF OUR NEW RADIOGRAM CHASSIS.

Our Showroom at the address shown below is open daily from 9 a.m. to 6 p.m. (Saturdays 5 p.m.) and we are always delighted to demonstrate any of our Models or supply any information regarding them. If unable to visit us please send for the specifications you may require.

ARMSTRONG WIRELESS & TELEVISION CO. LTD.
WALTERS ROAD, HOLLOWAY, LONDON, N.7
Telephone: NORTH 321/34

COMPONENTS—SURPLUS AND SECONDHAND

RADIO CLEARANCE, Ltd., 27, Tottenham Court Rd., London, W.1. Tel. Museum 9188.
ELECTROLYTICS, capacity, voltage, size, type of mounting, price post paid: 400, 6v, 1x2in, lug, 1/9; 250+250, 6v, 1x2in, lug, 2/-; 40+40, 150v, 1 1/2x2, clip, 2/9; 40, 150v, 1x2, clip, 2/6; 20+20, 275v, 1x2, lug, 3/3; 16+32, 275v, 1x2, lug, 3/3; 16+16, 275v, 1x2, clip, 3/3; 60+100, 275v, 1 1/2x3, lug, 4/6; 100, 275, 350v, 1 1/2x2, clip, 5/6; 32+12, 350v, 1 1/2x2, clip, 4/-; 16+16+16, 350v, 1 1/2x2, clip, 1 1/2; 4/9, 15, 350v, 3/4x2, lug, 40+40, 300v, 1x3, lug, 3/6; 10, 450v, 3/4x2, lug, 1/6; 16, 450v, 3/4x2, tag, 2/9; 20, 450v, 1x2, 3/3; 32, 450/525v, 1 1/2x2, clip, 3/9; 30+30, 450v+20mV 25v, 1 1/2x3, lug, 5/-; 15+15, 450v+20mV 25v, 1 1/2x3, lug, 4/6; 200, 6v, 5/4x1 1/2, clip, 1/6; 100, 12v, 3/4x1 1/2, clip, 1/9; 8, 450v, 1x2, clip, 2/-; 50, 12v, 3/4x1 1/2, tag, 1/6; 150, 25v, 3/4x1 1/2, clip, 2/-; 250, 12v, 3/4x1 1/2, wire 2/3; 16+16 450v, 1 1/2x2, clip, 4/-; 40+40, 275v, 1 1/2x2, clip, 3/3; 3/3, 275+16, 350/425v, 1 1/2x2, clip, 4/9; 60+200, 275/350v, 1 1/2x2, clip, 6/6; 4, 150v, 3/4x1 1/2, clip, 1/1; 50, 12v, 1 1/2x2 1/2, clip, 2/-; 8, 350v, 3/4x2, clip, 1/9; 32+32, 350/425v, 1 1/2x2, clip, 5/-; 8+16, 450/525v, 1x2, clip, 4/-; 2, 450/525v, 3/4x1 1/2, tag, 1/2; 350v, 3/4x1 1/2, tag, 1/3; 8, 450v, 3/4x2, clip 1/9; 32+32, 450/525v, 1 1/2x3in, wire ended, 5/6; all all cans, some with sleeves, all voltages, W.K.G. surge where marked new stock, guaranteed.

TELEVISION! Set of 3 components, comprising line output trans with E.H.T. winding to give 7kV, using EY51 (heater winding for EY51 also included), and fitted with width control scanning coils, low impedance line and frame, focus coil (res. 10,000), current approx. 20 mA); the set of 3 for 42/-, plus 2/- post. diagram of line trans. supplied.

UNIVERSAL amplifiers, 8-valve 20watt A.C./D.C. black crackle chassis, and black and chrome cover, overall size 15 1/2in x 7 1/2in x 7in. First-class components (Partridge O.F.T. and driver, Gardner choke, A.E.E. Mu-Metal input trans for mike) Valves, 2XEF37, 4XC133, 2XUR3C. Switched input for high or low imp. top cut and bass cut switcher. V.C. mains switch, mains plug and socket, 220-250v, iso. chassis, 15ft output. Wired and tested, ready for use, with valves, brand new, £10/19/6, carr peld 5ma meters, moving coil, bakelite case, 2in square, flush mounting, new, boxed; 7/- post paid.

MAINS trans., 250-0-250v, 80ma, 6.3v, 2.5A, 6.3v, 0.6A, Pri. 0-210-230-250v, 12/- post paid.
MAINS trans., Pri. 200/250v, sec., 305-0-305v, 80mA, 800v 5mA, 6.3v 4.2A, 6.9v 0.4A, 2v 2A, 4v 1.1A, 5v 2.3A. The parts have been taken from ex-Govt. equip.; some may have tag panels broken, but guaranteed O.K.; 13/- post paid; ideal for scopes.

RADIO CLEARANCE, Ltd., 27, Tottenham Court Rd., London, W.1. Tel. Museum 9188 10015

FREE list; sensational prices; valve components.—Jack Porter, Ltd., College St., Worcester. [3296]

SOUTHERN RADIO SUPPLY, Ltd., 11, Little Newport Street, London W.C.2. See our displayed advertisement, page 161. [0016]

UNUSED Partridge EHT/HT oscilloscope transformers 22/6; 500 watt 110/115-230/230 auto 70/-; 005in Presspahn, var. widths, 2/9th; new 117P7 15/-.—Box 7542. [3419]

SPECIAL television and U.H.F. chassis offer!!! We have been very fortunate to secure a limited number of R.1426 chassis (R.155 test power pack) which form the basis of any U.H.F. receiver; all are new and include 7-SP61 and 1-EA50 valves, 14 Mcs/I.F. strip and a host of resistors, condensers, etc.; our special price, while they last, 15/- plus 5/- carriage and packing; amazing value! These don't last long!—Walter's Wireless Stores, 48 Stalford St., Wolverhampton. [0010]

WANTED. EXCHANGE. ETC. VHF test equipment.

TS47AP, TS174, TS175/U, TS148 or TSX-45E; analyzers; BC221 freq meters, TS69, and any U.K.A. test gear; Klystrons type 723/AB, 2K32 2K39 2K41; receiver, APR4 and units TN16 17-18-19; RCA AR88D, S27 and SX28s and S27CA; microwave equipment; highest offers given by return.—Ger. 8410, Universal Electronics, 27, Lisie St., Leicester Square, London, W.C.2. [0229]

ALL cables and flexes bought.—B.D.C., 591, Green Lanes, London, N.8. [4152]

WANTED: receivers A.P.R.4, also T.N.16, 17, 18, 19, etc. and any radio test gear.
LESLIE DIXON & Co., 214, Queenstown Rd., Battersea, S.W.8. Macaulay 2159. [0176]

WANTED: Tuning units, TN17, TN18, TN19, for R54/APR4; £50 each offered.—Box 4963. [0261]

WANTED, electromechs R.C.7 twin-track tape recording panel and C.J.R.E. A.1 amplifier.—Secretan, Old Forge, North Lancing, Sussex. [3568]

WANTED.—BC610 Hallcrafters, ET4356 transmitters, AR88s receivers and spare parts for above; best prices.—F.C.A. Radio, Beavor Lane, Hammersmith, W.6. [0079]

WANTED. HRO coils, Rxs, etc. A.R.86s, BS348s, S27s, etc.—Details to R.T. & I. Service, 654, Grove Green Rd., London, E.11. [0163]

WANTED:—Wireless World. Dec., 1946, new, unused sapphire needles for Lexington pick-up.—H. Vernon, 54, Seaton Rd., Hayes, Middx. [3341]

HIGH - FIDELITY F.M.


We have been producing "W.W" design receivers for two years. It is now amply proven in sensitivity and stability. The basic unit, with additions are available for ex stock delivery. Valved kits with prealigned coils, stoved steel chassis, up-to-date components, are available. We align the kit-sets. Trade enquiries are also invited. Evening demonstrations.

- Basic receiver..... £11 17 6
- With added I.F. stage (4-vlv. xtals)..... £14 0 0
- Front panel, magic eye, tuning scale..... £2 0 0
- Power unit..... £3 0 0
- Flex aerial (20 mile).... 5 0
- Outdoor aerial, 20ft. coax..... £1 10 0
- Kits (postage 1/2) £7 5 0
- Leaflets, with circuit.. 1 0

BEL SOUND PRODUCTS CO.,
Marlborough Yard, Archway,
London, N.19. ARC. 5078.
25 mins. West End, Northern Line.

"AUTOMAT" CHARGERS and D.C. from A.C. POWER PACKS

as supplied to Ministries, Airline Co's., etc., up to 350 watts output. Correct design, best materials and workmanship.
Selenium Rectifier Stacks, S.T.C., Westallite, G.E.C., etc. 40 ma. to 10 amp., 2 v. to 400 v.
STANDARD CHARGERS. Truck battery booster compact, automatic semi-constant voltage battery charger specially designed to keep truck, car or tractor batteries fully charged, operates on A.C. 220/245 v. line, damp-proof, ultra reliable, 6 v./12 v. model output 5 amp. weight 13lbs., £25/5/-, carr. 3/-. Ditto 24 v./12 v. £11/10/-. 12 v. 3 amp., 65/-, carr. 2/3. Ditto, 6 v. 3 a./12 v. 2 a. 65/-, also original 6 v./12 v. 2 amp., 59/6. p.p. 2/- Wt. 8lb.
FOOLPROOF CHARGER KITS. Genuinely trouble free and ultra reliable. As sold for 11 years through "W.W." with full data sheet and instructions. No. 1 Kit (as list). Westallite 3 amp. rectifier, 65 watt tapped, impregnated trans., ballast bulb, for 2 v., 6 v., 12 v. charger, all rectifier troubles eliminated, 42/-, p.p. 1/10. Handsome steel case, ready punched, louvered, enamelled. 12/6. No. 1A Kit, 3 amp. rectifier, 65 watt trans., ballast bulb, for 2 v., 6 v., 12 v. charger, all rectifier troubles eliminated, 42/-, p.p. 1/10. Handsome steel case, ready punched, louvered, enamelled. 12/6.



res., ammeter for 2 v., 6 v., 12 v., 3 a., 52/6. p.p. 1/10. No. 2 Kit, 12 v. 2 amp. rect., 45 watt trans., ballast/indicator bulb for 2 v., 6 v., 12 v. charger, 36/6. Case 12/6. p.p. 1/10. Wt. 8 lb. W. case. 1 to 20 cell 1 amp. kit for small radio store, 78/6. p.p. 2/-. Senior Model, for 6 v./12 v. at 4 to 5 amp., 12 v. 5 amp. S.T.C. rect., 85 watt trans., ballast bulb, 64/-, p.p. 2/-. Slider Kit, 120 watt trans., 14 v. 6 amp., large fanned type rect., slider res., high grade ammeter, wt. 17 lb., for 6 v./12 v. charger, 24/13/-, carr. 4/-.
SELENIUM RECTIFIERS, new stock not surplus, best makes 2 v./6 v. 0.5 a., 2/6, 1 a., 4/-, 2 a., 7/6, 4 a., 15/-, 12 v. 0.5 a., 5/-, 1 a., 7/6, 2 a., 9/6 all p.p. 6d. 12 v./14 v. 3 a. to 3.4 a., 15/6, 5 a., 27/-, Large fanned Ga., 32/-, p.p. 10d. 24 v. 50 ma., 2/9. 24 v. 0.3 a., 9/-, 1.5 a., 15/-, 3 a., 27/-, 5 a., 42/-, 8 a., 62/-, all p.p. 10d. 50 v. 1 a., 24/-, 2 a., 47/-, 230 v. 1 a., 97/-, all p.p. 1/8. H.T. rectifiers, 120 v. 80 ma. B.M. 2, 3/4, 135 v. 30 ma. elim., 5/3, 250 v. 60 ma., 7/-, 250 v. 100 ma. bridge, 14/6, all p.p. 6d. Many other H.T. and H.T. types in stock.

CHAMPION PRODUCTS

43, Uplands Way, LONDON, N.21. Phone LAB. 4457.

WANTED, EXCHANGE, ETC.
WANTED, set manufacturers of ex-Government radio equipment, large or small quantities of valves, electrolytics, speakers, meters, also components.
LOWE BROS., 5, Fitzrov St. London, W.1
Tel. Museum 4389 [2703]

URGENTLY wanted, manuals or instruction books, data, etc., on American or British Army Navy or Air Force radio and electrical equipment.—Harris, 93, Wardour St., W.1. Tel. Gerrard 2504. [3351]

WANTED—RCA speech amplifiers type MI-11220 J or K, and ariel tuning units BC939a.—Offers, stating quantity and price, to P.C.A. Dadlo, Beaver Lane, Hammersmith, W.6. [0080]

QUANTITIES requires of the trans/receiver 3/Mark II, commonly known as the Type B 2, must be complete and in perfect working order and condition as new.—Please reply direct to: Posen Electrical & Radio Co., P.O. Box 1186, Bulawayo, Southern Rhodesia.

WANTED, good quality communication RYS tape recorders, test equipment, domestic radios, record players, amplifiers, valves, components, etc., estab. 18 years.—Call, send or phone Ger. 4638, Miller's Radio, 38a, Newport Court, Leicester Sq., W.C.2. [3416]

WANTED, good quality communication rx... domestic radios, test equipment, etc., top prices paid, established since 1937.—Miller's Radio, 38a, Newport Court, 1 min. from Leicester Sq. Tube. Tel. Ger. 4638. Call, write or send. Hours of business 10-6 p.m. Open all day Saturday. [0199]

WANTED, signal generators types 30, 31, 51, 53, 54, 65 and any other American test equipment with prefix TS or BC; American receivers types AR88, APR4 or similar.—Send price and details to Hatfield Instruments, Ltd., 175, Uxbridge Rd., Hanwell, W.7. Tel. Ealing 0779/9857 [0037]

VALVES WANTED
ALL types of valves required for cash; state quantity and condition.—Radio Facilities, Ltd., 38, Chalcot Rd., N.W.1. Primrose 9090. [3373]
45s paid for 813; also wanted 723, A/B, 805, 803, 2J32, 2K33, 7Z40, 808, etc., any quantity.—Write, Fyfe Hayes Radio, 606, Kingsbury Rd., Birmingham, 24, Erdington 4942. [2456]

CABINETS
LEWIS RADIO have the best selection and finest finish.—See page 171. [0224]
WALNUT radiogram cabinets; details.—Cabinetware, la Heyes St., Blackburn [0091]

WALNUT radiogram and television cabinets, soundly constructed; stamp for details.—R. Shaw, 69, Friarip Rd., Leytonstone, E.11. [3193]

CABINETS made to order, send details for quotations, bass reflex cabinets, see display advertisement page 165; open till 5.30 Saturdays.—A. Davies & Co. (Cabinet Makers), 3, Parkhill Place, off Parkhill Rd., Hampstead, N.W.3. Gulliver 5775. [3228]

REPAIRS AND SERVICE
Mains transformers rewound, new transformers to any specifications.
MOTOR rewinds and complete overhauls; first-class workmanship; fully guaranteed.
F.M. ELECTRIC Co., Ltd., Potters Bldgs., Warser Gate, Nottingham, Est. 1917. Tel. 47898. [0113]

LOUDSPEAKERS repaired promptly.—Model Loudspeaker Service, Bullingdon Rd., Oxford. [3192]

MAINS transformers, E.H.T. line outputs, chokes and field coils, etc. promptly and efficiently rewound or manufactured to any specification; 12 months' guarantee.
LADBROKE REWIND SERVICE, Ltd., 820a Harrow Rd., Kensal Rise, N.W.10. Lad. 0914. [0222]

ELECTRICAL test instruments repaired and standardized, all types British or American, ammeters, voltmeters, ohmmeters, DC/AC multi-range meters, etc.; meters converted to any specification
THE ELECTRICAL INSTRUMENT REPAIR SERVICE, 329, Kilburn Lane, London, W.9. Tel. Lad 4168. [2821]

AUDIO Equipment repaired/rebuilt or modified, disk or tape recorders/amplifiers/sound projectors, quotations without obligation, extended payments available also £15.—Bernard J. Brown, 33, Goldhawk Rd., London, W.12. [0025]

REWINDS and conversions to mains and output trans, pick-ups, fields, clock coils, etc., from 4/6; PP equipment a speciality; all work guaranteed.—N.L. Rewinds, 173, High Rd., Willesden Green, N.W.10. Tel. Wordsworth 7791. [3406]

24-HOUR service, 6 months' guarantee, any transformer; rewind, mains outputs and i.f.s., etc.; all types of new trans., etc., supplied to specification; business heading or service card for trade prices.—Majestic Winding Co., 180, Windham Rd., Bournemouth [2526]
RMATURE rewinding service to the trade, A vacuums, drills, rinders hood dryers, dental motors, vacuum cleaner armatures replaced from stock, 24 hours service; every job guaranteed; we also specialise in complete overhauls and rebuilds of vacuum cleaners; all vacuum cleaner parts, hoses, bearings, fans, brushes, for any make in stock.—Regam Electric, 95, Park Lane, Leeds. 1. [0028]

Most types of coil winding undertaken. Very quick deliveries, small or large quantities. Transformers, Chokes, Solenoids, Relay Coils, etc., wound on your own bobbins or formers for your own assembly. Impregnating (varnish) on all work done if required. Best quality material used. Single prototypes made to high standards, regulation and cool running, etc.

FOR CATHODE RAY TUBE FAILURES
Special low capacity secondary winding for Heater/Cathode shorts to restore picture after this fault has occurred. All Primaries tapped, framed and cat panelled. 200/250, 2 v. at 2 a., 4 v. at 2 a., 6.3 v. at 2 a., 10.8 v. at 0.3 a., at 2/6 each.
(Discount to trade)

EMISSION REJUVENATORS. 200/250 tapped output tapped in steps. 2 v. to 2 1/2 v. to 2 1/2 v. at 2 a., at 35/6 each.
Output 200/250 tapped in steps 6.3 v. to 7 v. to 8 v. up to 9 1/2 v. at 2 a., at 37/6 each.
(Discount to trade)

Both space wound for Heater/Cathode shorts also

T.V. HEATER TRANSFORMERS. 200/250 6.3 v. at 7 a., 0-2-6.3 v. at 2 a., at 19/6 net.

T.V. AUTO TRANSFORMERS. 0-190-210-230-240 at 6.3 v. at 7 a., 0-2-6.3 v., at 2 a., at 27/6 net.

T.V. FRAME TRANSFORMER. 60 H magnetic deflection, suitable for most home constructed sets at 15/6 net.

FULLY SHROUDED, 200/250 input, 350.0/350 v. at 150 mA., 6.3 v. 5 a., 5 v. 3 a. 49/6 net.

NORTHERN TRANSFORMER CO.
215 BARKEREND ROAD
BRADFORD, YORKS

18

CIRCUITS

for **2/6** only

SHOW BUMPER NUMBER!

Enlarged again!
Sales Now Breaking All Records!

Our Super-Handbook, "The Home Constructor" with its supplements (64 pages altogether) now incorporates all the above PLUS supra-simplified layout and point-to-point wiring diagrams and FULL variety of superhets plus building & structural details for building a Superhet Coil Pack PLUS full connection, Resistance Colour Code, Formulae, lists for all our circuits PLUS priced parts structural details for building a Superhet Car Radio PLUS Radiogram supplement PLUS Radio Control supplement PLUS of Feeder Units, Superhets, Amplifiers, TRF sets, Test Equipment, etc., etc.

YOU CAN'T GET BETTER VALUE! IT'S TOPS!

"The most helpful book in the Trade."

SEND FOR A COPY TODAY

SUPACOILS

(DEPT. W.10)
21, Markhouse Road, London, E.17

NOW
A TRIO OF
DUODE
12" SOUND UNITS
TO CHOOSE FROM



We have received many requests for an up-to-date version of the original Barker 150 Sound Unit, so widely considered the pre-eminent high quality unit of its day. We have also been asked for a Duode to bring the unique performance of the Barker drive into the average commercial price range. Well, we have done both, and this month sees the release of this unequalled trio of Duode Units.

DUODE 12A

A full 12 inch unit with the famous dual drive, built-in-crossover, feed back and individual care which have made the Barker and Duode names so world known for NATURAL sound. Fitted with a magnet system giving about 12,000 gauss. List price £10. Full value—no tax.

DUODE 12B

The same cone and drive assembly with a better magnet giving about 15,000 gauss and similar performance to that of the standard Duode of the past two years. List price £14. Full value—no tax.

DUODE 12C

A very special unit, similar to the well-known 150 but now fitted with a cloth outer suspension and selected cone. Its bass range extends well down to 25 cps., almost sub-sonic, and the extreme top, to over 16,000 cps.—almost ultra-sonic. The large magnet gives about 17,000 gauss, which, with the Duode built-in damping, holds all transients and the bass register in the firmest grip. Definition throughout the entire range is superb. We believe the Duode 12C is the finest high quality Sound Unit available at any price to-day. List price £20. Full value—no tax.

Any recognised music or radio dealer can, if he wishes, buy Duode Units from us for his stock and demonstration. If yours will not do this for you, we will help by offering you the facility of trying a Duode at home, under very fair and reasonable conditions.

Write for details today.

Barker Sound Reproducers
3, Newman Yd., London, W.1

REPAIRS AND SERVICE

TRANSFORMER rewind service, mains, E.H.T. transformers and chokes, prompt delivery, range of replacement types ex-stock or manufactured to your specification.

METROPOLITAN RADIO SERVICE Co., 75, Kilburn Lane, London, W.10. Ladbroke 2296. [0200]

SERVICE sheets for hire or sale over 2,000 models, radio and television; list 1/-; s.a.e. enquiries.—W. Gilbert, 24, Frithville Gardens, London, W.12. Tel. She. 3052. [3515]

AS professional sound recordists and members of the Association of Professional Recording Studios, we are particularly well qualified to give advice and service on all aspects of sound recording and reproduction. Design of tape equipment a speciality. Circuits designed, repairs and modifications carried out quickly. Advice freely given. See also below:—

COMPREHENSIVE service to trade and amateur; design, manufacture and repair of electronic equipment carried out by specialists; equal attention given to small or large orders. See also below:—Autochargers, 48-hour service, cleaning and adjusting at fixed price of 45/-, plus carriage; also all repairs carried out; enquiries invited; callers by appointment only please.—Ariel Sound, 57, Lancaster Mews, London, W.2. Tel. Paddington 5092 (2 lines). [0026]

PAINTS, CELLULOSE, ETC.

PAINT spraying handbook, 5/6 post free, cellulose and synthetic paints and all spraying requisites supplied; catalogues free.—Leonard Brooks, 53, Harold Wood, Romford [0207]

MACHINERY FOR SALE

UNUSED and as new, 5kW G.E.C. high frequency induction heating and melting set, complete with various accessories, owner selling due to reorganisation at one-third cost; can be inspected working at—Davisons Eng. (M/Gr.), Ltd., Garratt St., Manchester, 10. Tel. Collyhurst 1610. Price £350. [3223]

BUSINESS AND PROPERTY

BOURNEMOUTH.—Central freehold property for sale; d/f shop, basement, 4 floors, residential flat; adjacent theatre; suitable television snowrooms; new station opening.—K., 4, Little-down Rd., Bournemouth. [3442]

BUSINESS OPPORTUNITIES

OLD-ESTABLISHED firm of exporters in the electronic field, invite manufacturers seeking overseas sales to communicate Box [0252]

WORK WANTED

ASSEMBLY, wiring of all types of electronic eqpt., control panels, switchboards, etc.—R.A.E. 377, High Rd., London, N.2. [0219]

WORK wanted; versatile AID approved winding, assembly machining capacity available; Toroidal to close accuracy, and design machining specialists.—Bel, Marlborough Yard, N.18. Arc. 5078. [0083]

ARMATURE, stator and general collwinding, excellent production and test facilities, express rewind service.—Collwinding Services, 26, Lower Richmond Rd., London, S.W.15. Putney 2667. [2438]

CAPACITY AVAILABLE

PRESS tools, plastic injection moulds, compression moulds.—J. B. Andrews, Ltd., Hartfield Crescent, Wimbledon, S.W.19. [3455]

MISCELLANEOUS

COIL winding machines; from £15.—Hawkins, 170 Witton Rd., Birmingham 6 [2879]

LEAK P.U., L.P., 2 transf. Wharfedale 3,000 L Xover; Pollock P.U., cheap, good condit., Box 7046. [5299]

RUN your 3-phase motor on single phase; send 2/6 for instructions.—Holderness, Wantage, Berks. [3353]

SERVICE sheets for radio and television from 1932; s.a.e. enquiries.—White, 80, Oldfield Rd., London, N.16. [3298]

TAPE to disc, microgroove L.P.s, 20/- (30 mins.), 24-hour return service.—"Little Place", Moss Delph Lane, Aughton, Ormskirk, Lancs. [3338]

LAMP SHADE makers! Old legal handwritten parchments, 1/- per sq ft; piece with seals 1/- extra.—BDC (ww), 591, Green Lanes, London N.8 [3134]

STEEL lattice and guyed radio masts, 100ft high, for sale, delivery from stock, excellent condition.—Belmans, Terminal House, S.W.1. [3072]

RECEIVERS with Teletron Fax coil and E.H.T. germanium, two outputs, photo and recording; 14/6, post, 9d; s.a.e. photo.—T. Wilkinson, 42, Frances Rd., Windsor, Berks. [3440]

YOUR own tape recording transferred to disc.—Write, call or 'phone Queensway Private Recording Studios, 123, Queensway, W.2. Tel. Bay. 4992. Studio recordings, tape recording service. [3297]

LP Microgroove and 78's from your tapes, Pergraph recorders, microphones, tape, prompt postal service.—"Erolca" Recording Services, Peel St., Eccles Manchester, Eccles 1624. Director, Thurlow Smith, A.R.M.C.M. [0121]

WONDER soldering tool! Immediate operation! No current consumed when idle! Operates off 4-12v supply, A.C./D.C.—specially designed for miniature components and valveholders, limited supplies; 4/11 each, transformer if required 9/—Collwinding Services, 26, Lower Richmond Rd., London, S.W.15. Putney 2667. [3441]

A REMINDER...



Since we pioneered wide-angle scanning for the Home-Constructor several years ago, we have become so well-known as manufacturers of reliable television components that some of our standard lines are liable to be forgotten.

Typical examples of these are:—
465 kc/s I.F. Transformers, type 160 (Miniature) size 1in. x 1in. x 2in. Price 7/6 each.

465 kc/s I.F. Transformers, type 158 (Standard) size 1 3/8in. x 1 3/8in. x 3 1/2in. Price 9/6 each.

Tape-Deck Oscillator Coils, type 31. High impedance, screened, each coil adjusted to 9 mH. Price 9/3 each.

Shown at the top of the column are our Deflector Coils type DC300/C. These are as specified for "Televiking," "Supervisor" and "Magnaview."

Conversion circuits for 14in. and 17in. C.R. Tubes now available.

From all Leading Stockists or direct from:

ALLEN
COMPONENTS LIMITED
Crown Works, Lower Richmond Road,
Richmond, Surrey.

Telephone: Prospect 9013

Send 9d. and S.A.E. for Wide-Angle Circuit Diagrams.

"LAFCO" EASY PAYMENT GUIDE

LOOK FOR US EVERY MONTH
HERE

"WOLF" SOLDERGUNS.

TYPE 51. Automatic soldergun; supplied complete with 2 reels of solder (one acid cored, one resin cored), in chrome finish. £2/19/6 cash or deposit and 8 monthly payments of 7/4.

TYPE 81. For extra heavy work. 16 oz. bit. Chrome. Cash price and terms as type 51.

TYPE 71. For medium to heavy work. Cash £1/12/8 or deposit and 8 monthly payments of 4/-.

TYPE 31. For fine instrument work. Cash £1/10/- or deposit and 8 monthly payments of 3/8.

Other types available from 25/- to 30/6. All available on easy terms. Send for leaflets.

TEST EQUIPMENT.

AVO. Model 8 meter, £23/10/- cash or deposit and 8 monthly payments of 57/8.

Model 7 meter, £19/10/- cash or deposit and 8 monthly payments of 47/8.

Universal Avomitor, £10/10/- cash or deposit and 8 monthly payments of 25/8.

D.C. Avomitor, £5/5/- cash or deposit and 8 monthly payments of 12/10.

AMPLION Test Meter, £5/19/6 cash or deposit and 8 monthly payments of 14/8.

PULLIN Series 100, £11/11/- cash or deposit and 8 monthly payments of 28/8.

If you do not see the item you require please do not hesitate to write us. We will quote you our terms on receipt of full information. Send your remittance to

DESK 57, LAFCO COMPOUNDS LTD., 3, CORBETTS PASSAGE, ROTTERHAM NEW ROAD, S.E.16. BERMondsey 4343.

BRASS, COPPER, DURAL, ALUMINIUM, BRONZE
ROD, BAR, SHEET, TUBE, STRIP, WIRE
3,000 STANDARD STOCK SIZES
No Quantity too Small List on application
H. ROLEY & Co., Ltd.
6 Chesham Place, S.W.1. SLOanc 3463
ALSO AT LIVERPOOL, BIRMINGHAM, MANCHESTER, LEEDS

INTERESTED IN F.M. ?
Smith's
of
EDGWARE ROAD

Component Specialists since Broadcasting started
Can supply all the parts for the DENCO
F. M. FEEDER UNIT

Send 1/6 for DENCO Booklet with full constructional details, also for price-list of parts.

H. L. SMITH & CO. LTD.
287/289 EDGWARE ROAD, LONDON, W.2
Telephone: Paddington 5891
Hours 9 till 6 (Thursday, 1 o'clock).

Near Edgware Road Stations, Metropolitan & Bakerloo

MISCELLANEOUS

COPPER wires enamelled, tinned, Litz, cotton, silk covered, all gauges; B.A. screws, nuts, washers, soldering tags, eyelets, ebonite and laminated bakelite panels, tubes, coil formers; Tufnol rod, headphones, flexes, etc.; latest radio publications, full range available. List, s.a.e.; trade supplied.—Post Radio Supplies, 53, Bourne Gardens, London, E.4. [0138]

S.N.P. members Assoc. Professional Rec. Studios, would service your equipment, supply tested tapes of all makes; their tape-to-disc service is unrivalled; D.s. 10in records 15/6. 12in 18/6, including trailers; also LP-s; trade enquiries from equipment dealers invited.—Sound News Productions, 3, Clover Works, London, S.W.3. Flaxman 3706. [3447]

NOTICES

BRITISH SOUND RECORDING ASSOCIATION. Details of membership, open to the professional sound recording engineer and all other interested in recording high quality reproduction and other branches of audio engineering, together with details of the London lecture programme and the Manchester Portsmouth and Cardiff Centres, may be obtained from the Hon. Membership Secretary, H. J. Houlgate, A.M.I.E.E., 12, Strongbow Rd., Eitham, S.E.9. [0031]

SITUATIONS VACANT

The engagement of persons answering these advertisements must be made through the local office of the Ministry of Labour and National Service, etc., if the applicant is a man aged 18-64 or a woman aged 18-59 inclusive, unless he or she or the employer is excepted from the provisions of The Notification of Vacancies Order 1952.

ELECTRICAL Engineers.

WAYMOUTH GAUGES & INSTRUMENTS, Ltd., a subsidiary company of Smiths Aircraft Instruments Ltd., have vacancies in their Aircraft Fuel Gauge Laboratory for Assistant Engineers, required for development of electronic fuel gauges. They should have an engineering degree or Higher National Certificate. Technical assistants are also required for experimental work in electrical measurements; preference will be given to applicants holding a technical qualification.—Apply in writing to the Chief Development Engineer, Waymouth Gauges & Instruments Ltd., Station Rd., Godalming, Surrey. [3432]

RADIO technician required as

SIGNALS Assistant Inspector of Police by Nyasaland Government for one tour of 2-3 years with prospect of permanency. Salary scale (including present temporary allowance of approx. 13% of salary) £651 rising to £1,103 a year. Commencing salary according to experience. Outfit allowance £50. Uniform allowance £10 a year. Free passages. Liberal leave on full salary. Candidates must be between 21 and 30 years of age, of good education and physique, not below 5ft 7in in height, normal vision without glasses. They must have a sound knowledge of H.P. and V.H.F. fixed and mobile simplex and duplex radio telephone systems and low-power petrol/electric chargers and alternators. Knowledge of Morse and ability to instruct trainees in radio subjects desirable.—Write to the Crown Agents, 4, Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M1/36023/WF. [5348]

RADIO Officers required by the

EAST Africa High Commission Directorate of Civil Aviation for one tour of 30 to 48 months in the first instance with prospect of permanency, salary scale (including present temporary allowance of 35% of salary) £742 rising to £965 a year, gratuity of 13 1/2% of total basic salary drawn during contract for those not taken on permanent establishment, free passages, liberal leave on full salary, outfit allowance £50; candidates must be capable of operating at 25 w.p.m. and should preferably hold M.C.A. 1st Class Certificate in radio telegraphy; knowledge of touch typing for teleprinter, the operation of modern radio or radar aids, or experience in radio maintenance would be an advantage.—Write to the Crown Agents, 4, Millbank, London, S.W.1, state age, name in block letters, full qualifications and experience and quote M2C/30606/WF. [3351]

RADIO and Television Engineer.

APPLICATIONS from experienced men in the London area invited by Selfridges, Ltd. Excellent working conditions on most personal shopping.—Apply, Staff Manager, Provisions Building, Somerset St., W.1. [3379]

SENIOR Engineering Appointments.

CONSEQUENT on continued expansion of activities and recent promotions a large company in the London area has vacancies in the grade of assistant chief engineer for several electronic or radio engineers. Applicants should be able to furnish evidence of experience in a similar post or possess a background of at least 5 years' work in a senior engineering capacity on development or design work. These posts command a very adequate salary and offer excellent opportunities for promotion.—Apply, in strictest confidence, to Box 7601. [3436]

RADIO and TV engineers required, must drive; excellent prospects; top wages for good men.—Apply GUY 5051. [3345]

AERIAL designer (V.H.F.) required immediately by large group.—Experience and salary required to Box 7209. [3335]

OPPORTUNITIES IN RADIO



Get this FREE Book!

'ENGINEERING OPPORTUNITIES' reveals how you can become technically qualified at home for a highly paid key-appointment in the vast Radio and Television Industry. In 144 pages of intensely interesting matter, it includes full details of our up-to-the-minute home study courses in all branches of

TELEVISION and RADIO, A.M. Brit. I. R. E., City & Guilds, Special Television, Servicing, Sound Film Projection, Short Wave, High Frequency and General Wireless Courses.

We definitely Guarantee

"NO PASS—NO FEE"


If you're earning less than £15 a week this enlightening book is for you. Write for your copy today. It will be sent FREE and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY BIET
3888 COLLEGE HOUSE,
28-31, WRIGHT'S LANE,
LONDON, W.8.

THE CHAFFEY CABINET COMPANY

63a, CHELTENHAM RD., LONDON, S.E.15
TEL: NEW CROSS 4786

QUARTZ CRYSTAL UNITS



Type B7

The type B7 unit is mounted in the standard B7G valve envelope and is hermetically sealed and fully evacuated.

Available for the frequency ranges from 100 kc/s. to 500 kc/s. and from 3 Mc/s. to 16 Mc/s. Gold electrodes applied by cathodic sputtering give permanence of calibration. Normal adjustment accuracy 0.01% Max. adjustment accuracy 0.003%.

Early delivery can be given of some frequencies, and we will be pleased to quote for your specific requirements.

THE QUARTZ CRYSTAL CO. Ltd.
63-71 Kingston Road,
NEW MALDEN, SURREY

Telephone: MALden 0334 Cables, etc.: QUARTZCO NEWMALDEN

SOUTHERN RADIO'S WIRELESS BARGAINS

TRANSRECEIVERS. Type "38" Mark II (Walkie-Talkie). With 5 valves and ready for use. Metal carrying case. Less external attachments, 30/- per set.

TRANSRECEIVERS. Type "18" Mark III. Comprising Superhet Receiver and Transmitter. Two units contained in metal carrying case. Complete with 6 valves, £4/10/- per complete set.

RECEIVERS. Type "109." Built-in speaker. 8 Valves with VIBRATOR PACK for 6 volts. Contained in metal case. Perfect, £5 each to CLEAR.

TELESONIC 4-valve Battery Portable. Complete with Hivac valves in metal carrying case. Simply converted to Personal Portable, £2 per set including Conversion Sheet.

BOMBSIGHT COMPUTERS. BRAND NEW ex-R.A.F. Contains gyro, motors, rev. counters, gear wheels, etc., etc. Ideal for model makers, experimenters, etc., £3/5/- each, plus 10/- carr.

CRYSTAL MONITORS. Type 2. New in transit case. Less crystals, 6/- each.

LUFBRA HOLE CUTTERS. Adjustable 2 to 3/4 in. For metal, wood, plastic, etc., 6/6.

RESISTANCES. 100 Assorted, all useful values, etc. Wire end, 12/6 per 100.

CONDENSERS. 100 Assorted. Mica, Metal, Tub., etc., 15/- per 100.

PLASTIC CASES. 1 1/4 in. by 1 1/2 in. Transparent. Ideal for maps display, etc., 5/6.

STAR IDENTIFIERS. Type A-N. Covers both Hemispheres, in case, 5/6.

CONTACTOR TIME SWITCHES. In-sound-proof case, 2 impulses per second. Thermostatic control. Clockwork movement, 11/6 each.

REMOTE CONTACTORS for use with above. 7/6 each.

MORSE TAPPERS. ALL BRAND NEW. Standard Type ex-Govt., 3/6; HEAVY DUTY TYPE "D" completely enclosed. Solid brass on heavy base, 8/6.

MORSE PRACTICE (WITH BUZZER) SET Mounted, 6/9.

DIMMERS. Wire wound in bakelite case. 1/3 each; 12/- doz.

MAGNETIC RELAY SWITCHES. Bakelite, 5c/723, 2/6 each; 25/- per dozen.

METERS, 12 Instruments. May need adjustment or with broken cases, 35/- for 12.

AIRCRAFT INSTRUMENTS. Pressure gauges, climb indicators, oxygen meters, etc., etc. New and cartoned, 25/- per dozen instruments.

LANTERNS. For Darkroom or Parking with bulbs (one spare). Takes standard twin cycle battery, 1/9 each.

AERIAL COUPLING UNITS. Type "C." Brand new in metal case. Complete with meter, 6/- each.

TRANSMITTERS. Type 1154. Brand new. Complete with meters and valves in transit case, 37/6 each.

CONVERSION KITS for 1154 Transmitters. New, 10/- each.

VOLUME CONTROLS. All useful values New, 12/- per dozen.

CARBON INSERTS. Midget and larger sizes. New and cartoned, 6/- per dozen.

SWITCHES. Bakelite, Rotary, etc., etc., 7/6 per dozen.

SLEEVING. Plastic. Cotton covered. Gross yds. on reel, 6/-.

RELAYS. TWIN. 500-ohm coils (2). Brand new, 5/6 each.

AERIAL FILTER UNITS. Marconi. P.O. specifications, 4/6.

LEADS. With 5-point plug and socket at either end. Type ZA1853/2994. New, 2/9 each.

Full List of Radio Books, 2/4d.

SOUTHERN RADIO SUPPLY LTD.
11 LITTLE NEWPORT STREET
LONDON, W.C.2 Gerrard 6653

SITUATIONS VACANT ELECTRONIC Development Engineers.

ULTRA ELECTRIC, Ltd., Western Ave., Acton, London, W.3.

ANNOUNCE the following permanent, pensionable positions:

- (i) SENIOR Electronic Development Engineers, with experience in any of the following: (a) sub-miniaturisation of radio and audio frequency circuitry; (b) transistor applications; (c) pulse techniques-radio navigation; (d) radio and T.V. projects.
- (ii) ELECTRONIC Development Engineers for measurement, functional test and development.
- (iii) TEST Equipment Development Engineers with experience of design of test equipment to meet production requirements.

APPLICANTS are invited to apply in the strictest confidence to the Personnel Manager by letter or by telephone (Acorn 3434) for interview appointments—on Saturday mornings if desired. [3452]

TECHNICIANS Grade I (Radio) required by

EAST African Posts and Telecoms Administration on probation for pensionable employment; salary scale (including present temporary allowance of 35% of salary) £742 rising to £1,134 a year, outfit allowance £30, free passages, liberal leave on full salary, normal tour 4 years; candidates should possess a thorough practical knowledge of working and maintenance of modern HF radio telegraph equipment and VHF multi channel radio-telephone equipment; G.P.O. staff should apply through departmental channels.—Write to the Crown Agents, 4, Millbank, London, S.W.1, state age, name in block letters, full qualifications and experience and quote M2C/32424/WF. [3350]

ASSISTANT Signals Officer required by the

SIERRA Leone Government Civil Aviation Department for one tour of 18/24 months with prospect of permanency. Salary scale (including expatriation pay) £742 rising to £1,177 a year. Outfit allowance £30. Liberal leave on full salary. Free passages for officer and wife, assistance towards cost of children's passages or grant up to £150 annually for maintenance in U.K. Candidates should be experienced in MF, HF, VHF and VHF/DF and ancillary equipment and should hold the P.M.C. Certificate in Wireless Telegraphy or equivalent.—Write to the Crown Agents, 4, Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/30353/WF. [3363]

CITY OF PLYMOUTH Education Committee.

PLYMOUTH and Devonport Technical College. PRINCIPAL: John Graymore, M.Sc., Ph.D., F.R.I.C., F.C.S.

APPLICATIONS are invited for the following full-time post, the appointment to take effect from October 1, 1954, or as soon as possible after that date:—

ASSISTANT Lecturer (Grade A Basic Scale, £450X£18 to £725) with a first- or second-class Postmaster-General's Certificate. The vacancy occurs in connection with the establishment of a Radio Officers' Course.

APPLICATION forms and further particulars may be had, on receipt of a stamped addressed envelope, from the undersigned, and an application should be returned within a fortnight of the appearance of this advertisement.


ANDREW SCOTLAND, Director of Education, Education Offices, Cobourg St., Plymouth. [3421]

STOREKEEPER (Radio Equipment) required

of NIGERIA Posts and Telegraphs Department for one tour of 12-24 months in first instance either (a) with prospect of pensionable employment, salary scale (including expatriation pay) £750 rising to £1,175 a year or (b) on contract, salary scale (including expatriation pay) £307 rising to £1,269 a year plus gratuity at rate of £100/£150 a year; commencing salary according to experience; outfit allowance up to £60; free passages for officer and wife; assistance towards cost of children's passages or grant up to £150 annually for their maintenance in United Kingdom; liberal leave on full salary; candidates must have substantial experience in radio equipment storekeeping, including H.F. and V.H.F., stock control and stores accounting procedure. WRITE to the Crown Agents, 4, Millbank, London, S.W.1; state age, name in block letters, full qualifications and experience and quote M3B/34215/WF. [3321]

TELEVISION engineer, able to drive, reqd. by leading dealer holding all main agencies must be first-class engineer, salary £625 per annum; accommodation will be available if required.—Apply, giving experience, to Box 7582. [3433]


SENIOR engineering administrative assistant required by service department of company specialising in cinema sound equipment installation and maintenance for duties in connection with administration of engineering and commercial activities at London Head Office and provincial offices, good prospects for energetic, resourceful and well educated man with initiative and organizing ability; applicants must have good practical engineering experience and thorough knowledge audio frequency amplifying equipment and general principles electrical engineering. Preference given to applicants with some administrative and/or supervisory experience; company contributory pension scheme; state age and give complete details education, previous experience and salary required.—Box 7442. [3388]

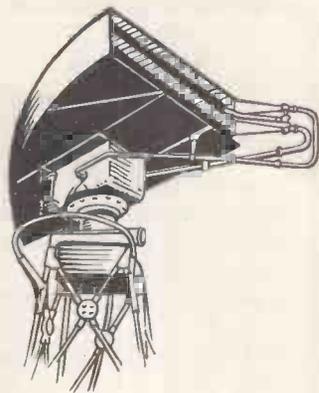

"now
more than
ever"

SAVAGE TRANSFORMERS

are meeting the specialists need in every electronic field. Our 26 years of research and experience is at your disposal.

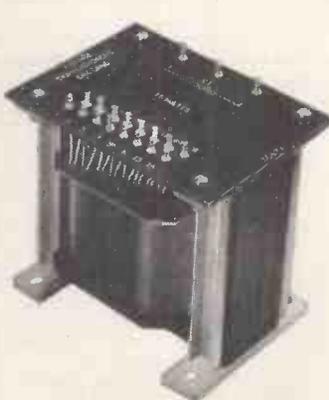

NURSTEED ROAD,
DEVIZES, WILTS.
Telephone: DEVIZES 536



A.I.D. APPROVED

TRANSFORMERS AND COIL WINDINGS FOR RADIO, ELECTRONIC, INDUSTRIAL AND AIRCRAFT EQUIPMENT.

TRANSFORMERS of all types up to 25 KVA for Single or Three Phase operation, Phase Conversion, etc.

MAINS, Output, Replacement and Special Purpose Transformers for Radio Equipment ; Chokes, etc.

COILS for Contactors, E.M. Brakes, Air Valves, etc., and COIL WINDINGS for all purposes.

SOLENOIDS for A.C. and D.C. Operation.

W. F. PARSONAGE & CO LTD
INDUCTA WORKS
PARK RD · BLOXWICH · WALSALL
TELEPHONE: BLOX. 66464

TR1154/55 RECTIFIERS

Input:—200/250v., 50~S.P. Output:—5, 3v.
13A.—220v., 110m.a.—1200v., 200m.a.
NEW CONDITION—TESTED—GUARANTEED
£17-10-0 per set. Carriage extra.

A. J. WHITTEMORE (Aeradio) LTD.
Croydon Airport Surrey Tel.: Croydon 5791, 4383, 7744
Gram.: Aeradio, Croydon.

Introducing the:—
TYANA TRIPLE THREE



Reg. Design No. 867884

MAKE SOLDERING A PLEASURE
SMALL SOLDERING IRON

Complete with detachable BENCH 19/6 STAND

The smallest high-power soldering iron. Length only 8 1/2 in.; adjustable long bit dia. 3/16; mains voltages 100/110, 200/220, 230/250.

The "STANDARD"
Popular Soldering Iron



now reduced to 14/11

Replacement Elements and Bits for both types always available.

KENROY LIMITED
152/297 UPPER ST., ISLINGTON
LONDON, N.I.

Telephone: Canonbury 4905-4663

SITUATIONS VACANT

ASSISTANT Lecturer (Electrical Engineering) required by **NIGERIA** for two or three tours totalling 36 months, appointment either (a) on temporary terms with salary scale (including expatriation pay) £807 rising to £1,453 a year plus gratuity at rate of £100/£150 a year, or (b) with prospect of permanency with salary scale (including expatriation pay) £750 rising to £1,515 a year, outfit allowance up to £50, free passages for officer and wife, assistance towards cost of children's passages or grant up to £150 annually for maintenance in United Kingdom, liberal leave on full salary; candidates, with H.N.C. in Electrical Engineering, must have had sound training in radio receiving and transmitting work and must be able to teach feeder and aerial theory, theory and practice of all types of recording apparatus and general audio and acoustic theory; they should have had wide experience in the industry and experience of teaching.—Write to the Crown Agents, 4, Millbank, London, S.W.1, state age, name in block letters, full qualifications and experience and quote M2C/40373/WF. [3349

FERGUSON RADIO CORPN., Ltd., have vacancies for:
SENIOR Engineers with initiative and sound sound technical background for work on a wide range of projects in the field of electronics including television, radio communications and test equipment; permanent posts for men able to carry responsibility in rapidly expanding department offering exceptional promotion and long term prospects.

JUNIOR engineers of ability for work on development projects offering a wide experience in the fields of television, radio communications and test equipment with excellent prospects for advancement; vacancies exist in laboratories situated at both Enfield and Spennymoor Co. Durham; these laboratories are well equipped and working conditions excellent; successful applicants eligible for Company's pension and life assurance scheme; applications specifying the post for which application is made and giving full particulars as to age, qualifications and experience, etc., to:—Personnel Manager, Ferguson Radio Corp., Ltd., Gt. Cambridge Rd., Enfield. [327*

UNITED KINGDOM ATOMIC ENERGY AUTHORITY.

FORT HALSTEAD near Sevenoaks, requires a **SENIOR Assistant (Scientific)** FOR work on radio frequency equipment and the measuring of R.F. power, standing wave ratio and aerial performance. **CANDIDATES** must have reached matriculation standard and have had previous experience in this field. Salary range (male) is £520, rising to £715 per annum. Application form from Senior Recruitment Officer, A.W.R.E., Aldermaston, Berks. Quote Ref.: 176/W.G.E./45. [3422

E.M.I. RESEARCH LABORATORIES, Ltd., have vacancies for **PHYSICISTS** and engineers for circuit research in connection with television systems; men with academic or professional qualifications and with several years' experience are reqd.; there are also vacancies for university graduates without industrial experience, and for junior engineers with H.N.C. or similar qualifications; a knowledge of television camera design would be a useful qualification for one of the vacancies.—Please apply to the Personnel Dept. (RL/13), E.M.I. Ltd., Blyth Rd., Hayes, Middx. [3370

TELEVISION Engineer, good wages suitable applicant; Harrow.—Box 7016. [3294

FERRANTI, Ltd., of Wythenhawe, have a number of vacancies for technical assistants in the following fields of investigation:
HYDRAULIC control mechanisms and Servos. GYROS.

RELAYS and electro-mechanical instruments. **EXPERIMENTAL vibration testing.** **MICRO-WAVE systems.** **R.F. circuits.** **PULSE circuits.**

APPLICANTS should hold a degree or Higher National Certificate in electrical or mechanical engineering.

THE work would be of particular interest to men completing National Service in technical branches of the Services. The appointments would be to the permanent staff of the company and offer the prospect of interesting work in modern well-equipped laboratories opened in South Manchester within easy reach of residential districts. THE company operates a staff pension scheme. **APPLICATION** forms from Mr. T. J. Lunt, Staff Manager, Ferranti, Ltd., Hollinwood, Lancs.

PLEASE quote reference WTA. [3403

An engineering company situated in the Boreham Wood area require personnel as shown hereunder.

RADAR and communications circuit engineers. **RADAR** and communications technical writers. **PREFERABLY** with a knowledge of components and specifications concerning the above subject.

DRAUGHTSMEN (male or female).

TECHNICAL shorthand-typists.

INSTRUMENT makers.

THESE vacancies offer excellent opportunities and permanent and progressive employment to applicants with good qualifications and ability. Please rep'y, giving full details to Box No. 7550.

EXPERIENCED Service Engineers and Technical Salesmen can earn high salaries with permanent employment at the Radio Centre, 35, Tottenham Court Rd., W.1. Tel. Museum 6667. [3364

Fidelia
HAND BUILT QUALITY UNITS

MAJOR 10-VALVE RADIOGRAM CHASSIS £32/8/4.

As announced several months ago a frequency modulation tuner unit to receive the new V.E.F. transmissions will be available when regular programmes are started. This unit will work with all Fidelia models made since 1946. Those interested in recent claims to very extended frequency response in audio systems may be interested that the audio circuit of the Fidelia (even the first models) will amplify frequencies above 180,000 cycles.

Fidelia Standard 7 valve model £21 12 0
Fidelia Plus 8 valve model £24 18 4
Fidelia 10 watt amplifier £27 10 0
Fidelia De Luxe 9 valve model with 7 watt push-pull output stage £25 5 0

ALL MODELS have triode output stages. Variable Selectivity, Separate Bass and Treble Controls. Cathode follower detector, 20-20,000 cycle audio response.

ELECTRO Acoustic DEVELOPMENTS
2, AMHURST ROAD, TELSCOMBE CLIFFS, Nr. Brighton, SUSSEX
Tel.: Peacehaven 3166

AUTOMATIC (TIME) SWITCHES
New and reconditioned 15 day clockwork and electric switches
from **35/-**
Send S.A.E. for illustrated details to:—
DONOHUE (TIMERS) GEORGE STREET NORTH SHIELDS, NORTHUMBERLAND

ODDIE FASTENERS
Pat. 507249

THIS FASTENER WITH ENDLESS APPLICATIONS—SIMPLE—POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES. SPECIAL FASTENERS TO SUIT CUSTOMERS' REQUIREMENTS. WIDELY USED IN THE RADIO INDUSTRY.

Illustrated brochure and other information will be gladly sent on request.

DEPT "W.W."
Oddie, Bradbury & Cull Ltd., Southampton
Tel.: 55883 Cables: Fasteners, Southampton

GALPIN'S

ELECTRICAL STORES

408, HIGH STREET, LEWISHAM, S.E.13.

Tel.: Lee Green 0309. Nr. Lewisham Hospital.

TERMS: CASH WITH ORDER. NO C.O.D

All goods sent on 7 days' approval against cash

EARLY CLOSING DAY THURSDAY

HEAVY DUTY SPOT WELDER TRANSFORMERS, input 200/250 volts. OUTPUT a combination of 2, 4, 6, 8, 10, 12 volts at 120/150 amps. New £6/15/- each, carriage 6/-.

LIGHT ARC WELDING TRANSFORMERS, 200/250 volts Input, Output 40/60 volts, 30/40 amps, £7/5/- each.

MEDIUM SPOT WELDING TRANSFORMERS, input 200/250 volts, OUTPUT a combination of 2, 4, 6, 8, 10, 12 volts at 50/70 amps. New £5/2/6, C/paid.

HEAVY DUTY L.T. OUTPUT TRANSFORMERS, 200/250 volts Input. Output a combination of 6, 12, 18 and 24 volts at 30 amps. £4/2/6 each. C/paid.

Another Input as above, Output 0, 6, 12, 18, 24 volts at 12 amps., 55/- each, post 2/-. Another Input as above, Output 0, 6, 12, 18, 24 volts, 6/8 amps., 4/6/- each.

HEAVY DUTY L.T. TRANSFORMERS suitable for rectifiers, soil heating, etc. Input 200/250 volts, Output a combination of 6, 12, 18, 24, 30, 36 volts at 15 amps., 67/6 each, post 2/6. Another Input and Output as above but at 6 amps., 47/6, post 2/-. Another input and output as above but at 4 amps., 36/6 each.

CONVERTERS, 400 watts-output, 24 volts D.C. input, 50 volts 50 cycles 1 phase output. Complete with step-up transformer from 50 volts to 230 volts at 400 watts. £12/10/- each C/F. Ditto 200 watts. £9/10/- each C/F., fully guaranteed.

ROTARY CONVERTERS, 230 volts D.C. input, 230 volts A.C. output. 50 cycles 1 phase at 250 watts. £15 each C/F.

EX-RADAR MAINS TRANSFORMERS. Input 230 volts. Output 4 or 5 Kilo-volts at 30 min., also 3 L.T. windings 4 v. 2 a., 6.3 v. 2 a., 2 v. 2 a., these transformers are capable of a larger output than stated and are immersed in oil. £3/15/- each, carriage 5/-.

DIMMER RESISTANCES. Large type 2,000 watts rating, 45/- each, carriage 5/-.

MAINS TRANSFORMERS (NEW), Input 200/250 volts in steps of 10 volts, output 350/0/350 volts, 180 m/amps., 4 volts 4 amps., 5 volts 3 amps., 6.3 volts 4 amps., 45/- each, post 1/6; another 350/0/350 volts 180 m/amps., 6.3 volts 8 amps., 0/4/5 volts 4 amps., 45/- each, post 1/6; another 500/0/500 volts 150 amps., 4 volts 4 amps., C.T., 6.3 volts 4 amps., C.T., 5 volts 3 amps., 47/6 each, post 1/6; another 425/0/425 volts 160 m/amps., 6.3 volts 4 amps., C.T., twice 5 volts 3 amps., 47/6 each, post 1/6.

MAINS TRANSFORMERS, 200-250 volts input, output 400/0/400 volts, 280 m/amps., 6.3 v. 8 a., 2 v. 3 a., 5 v. 3 a., 4 v. 2 a., 4 v. 2 a., the last two heaters insulated at 8,000 volts, 85/- each; another 200/230 volts input, output tapped 0, 9, 18 volts at 4 amps., 25/- each, post 1/6.

MAINS TRANSFORMERS, 200/250 volts input, 300/0/300 volts 150 m/amps., 6.3 v. 4 a., 4 v. 2 amps. output. Makers Rich & Bundy. 32/6 each, C/paid.

EX-U.S.A. ROTARY CONVERTERS, 12 volts D.C. input, outputs 500 volts 50 mA. 275 v. 100 mA. Complete with smoothing, 22/6 each, carriage 2/6. As new.

EX-NAVAL ROTARY CONVERTERS, 110 v. D.C. input 230 volts A.C. 50 cy., 1 ph. 250 watts, output. Weight approx. 100 lbs. £12/10/-, C/F.

ELECTRIC LIGHT CHECK METERS, useful for sub-letting, garages, etc., all for 200/250 volts A.C. mains, 5 amp. load, 19/- each; 10 amps., 22/6; 20 amps., 27/-; 25 amps., 32/6.

METERS. Moving coil, 0 to 14 amps., 18/6 each. Ditto, Moving Iron, suitable for A.C. 0 to 30 amps. 25/- each. Another moving coil, 100 to 250 amps., D.C. 35/- each, all 4in. scale.

1,000 WATT AUTO WOUND VOLTAGE CHANGER TRANSFORMER tapped 0/110/200/230/250 volts. £5/15/- each, carriage 4/6.

1,500 watt ditto, £7/15/-, carriage 7/6. 350 watt 55/-, 500 watt 75/-, 200 watt 45/-.

PRE-PAYMENT 1/2-ELECTRIC LIGHT SLOT METERS, S/H, reconditioned, variable tariff. 10 amp. load, 200/250 volts A.C. 55/- each.

Clients in Eire, please allow at least double the carriage stated to allow for customs clearance charges.

SITUATIONS VACANT

SHORT BROTHERS & HARLAND, Ltd., Belfast, require a laboratory superintendent for their research department. THE position involves responsibility for providing equipment, supplies and services in the laboratories; also control of laboratory personnel.

CANDIDATES should possess organizing ability, and be familiar with the running of a laboratory or workshop. EXPERIENCE in light electrical equipment or precision instruments essential.

CONSIDERABLE tenacity and drive necessary to co-ordinate and sustain action with external official bodies.

THIS appointment is suitable for a retired officer of one of the technical branches of the services. ASSISTANCE with housing, and with removal expenses.

SEND full details of age, qualifications and experience, quoting Ref. 613/St. App. to Staff Appointments Officer, Short Bros. & Harland, Ltd., P.O. Box No. 241, Belfast. [3544]

THE English Electric Valve Co., Ltd., Chelmsford, requires the following technical staff for their Camera Tube Division:—

(A) Test Room Supervisor. Applicants should have H.N.C. Radio Engineering or its equivalent, and some experience would be desirable.

(C) Inspector. Experience of valve assembly and process detail is necessary, and a science degree would be a considerable advantage.

(D) Circuit Maintenance Engineer. Some experience in this field is highly desirable, together with suitable technical qualifications. IN certain cases housing assistance may be provided.

WRITE with full details of qualifications and experience, and quoting relevant vacancy and Ref. SA52A, to Dept., C.P.S., 336/7, Strand, W.C.2. [3577]

TELEVISION service engineer manager required by dealer all leading agencies; no limit to prospects for the right man.—Apply Box 7179. [3525]

SUPERINTENDENT for electronic and radar test department required by established firm opening up large new factory near South Coast. APPLICANTS must have the following qualifications:—

(a) ABILITY to organise and control staff.
(b) A GOOD technical background.
(c) EXPERIENCE in production testing of microwave radar, servo and pulse equipment requirements.

HOUSING and superannuation scheme available. SALARY commensurate with experience and ability. FULL details of education and experience to Box 7555. [3414]

TESTERS required for television and radio manufacturer good rates for experienced men; N.W. London area—Write for full particulars to Box 7628. [0032]

RADIO and television engineers of varying grades required by rapidly expanding company, top wages and conditions.—Roberts, Ltd., 143, North End Croydon. [3367]

TELEVISION service engineer required for bench work in modern workshop near Birmingham; permanent well paid position, dealing with leading makes.—Box 7211. [3337]

SERVICE engineer for West End firm specialising in HI-FL. Good salary to right man.—Age and career details to Box R.342, c/o Streets, 110, Old Broad St., E.C.2. [3426]

RADIO and TV engineers, improvers, technical salesmen, excellent salary and permanent positions.—Radio Centre, 33, Tottenham Court Rd., W.1. Tel. Museum 6667. [3302]

BRITISH INSULATED CABLES LTD. invite applications for the undermentioned vacancies with their Telecommunications Engineering Department at Prescott. TECHNICAL assistant for the preparation of technical recommendations and the evaluation of tenders, etc. A capacity for clear exposition is essential and the successful candidate must become familiar with a wide technical field which will require Higher National or degree standard in Electrical Engineering.

TECHNICAL assistant to undergo training in telephone cable design and allied work which will involve considerable responsibility and judgment. Minimum qualifications, National Certificate or equivalent in Electrical Engineering.

APPLICATIONS quoting reference No. P/50/54 should be submitted in writing to: THE Staff Officer, Prescott, Lancs. [3423]

RADIO and TV service engineers required for old-established retailers: must be experienced and able to drive; good pay and prospects.—Aneley Radio, 15, Upland Rd., S.E.22. [3240]

ELECTRONIC testers; sound basic radio background, preferably experience pulse work or radar.—Write with full particulars of experience and salary required to Personnel Manager, Victor-Burnett Ltd., Erith, Kent. [3449]

FULLY qualified TV engineer required; top makes held; good wages paid; accommodation can be arranged if necessary.—Apply, giving particulars of salary required, to Victor Freed, Ltd., Aberdeen. [3435]

ELECTRONIC engineers—Opportunities for electronic engineers; must be experienced and capable of writing prototypes and models from circuit diagrams; permanent progressive positions; housing assistance.—Apply to Hartley Baird, Ltd., Monkmoor, Shrewsbury. Tel. No. Shrewsbury 6343. [3415]

THE MODERN BOOK CO.

BRITAIN'S LARGEST STOCKISTS OF AMERICAN & BRITISH TECHNICAL BOOKS

Radio Laboratory Handbook, by M. G. Stroggie. 25s. Postage 9d.

Radio Valve Data: NEW EDITION compiled by "Wireless World." 3s. 6d. Postage 3d.

Electronic Organs by R. L. Eby. 40s. Postage 9d.

The Oscilloscope and its Applications by "Philips Electrical Ltd." 5s. Postage 4d.

Telecommunications by A. T. Starr. 35s. Postage 9d.

Television and Special Tubes Vade Mecum: 1954, by P. H. Brans. 22s. 6d. Postage 1s.

Television Receiver Servicing: Vol. I—Time-Base Circuits, by E. A. W. Spreadbury. 21s. Postage 9d.

How to Build the Osram 912. 3s. 6d. Postage 3d.

The Oscilloscope at Work, by A. Haas and R. W. Hallows. 15s. Postage 6d.

Acoustics, by L. L. Beranek. 64s. 6d. Postage 1s.

Principles and Practice of Radar, by H. E. Penrose and R. S. H. Boulding. 50s. Postage 1s.

Radio Control for Model Ships, Boats and Aircraft, by F. C. Judd. 8s. 6d. Postage 6d.

The Radio Amateur's Handbook: 1954, by "A.R.R.L." 30s. Postage 1s.

Radio Engineering, by F. E. Terman. 50s. Postage 1s.

Radio Receiver Design: Parts I and 2, by K. R. Sturley. Part I: 56s. Part 2: 30s. Postage 9d. ea.

Radio Designer's Handbook, by F. Langford-Smith. 42s. Postage 1s.

Electronic Measurements, by F. E. Terman and J. M. Pettit. 72s. 6d. Postage 1s.

The Williamson Amplifier, reprinted from "Wireless World" 3s. 6d. Postage 3d.

Handbook of Industrial Electronic Circuits, by J. Markus and V. Zeluff. 46s. 6d. Postage 1s.

At a Glance: Radio Valve and Television Tube Equivalents by B. Babani. 5s. Postage 3d.

Television Circuit Refinements by C. H. Banthorpe. 5s. Postage 3d.

Industrial Electronics, by R. Kretzmann. 25s. Postage 9d.

Sound Recording and Reproduction, by J. W. Godfrey and S. W. Amos. 30s. Postage 9d.

Reference Data for Radio Engineers' compiled by W. L. McPherson. 10s. 6d. Postage 6d.

Radio Data Charts, by R. T. Beatty, revised by J. McG. Sowerby. 7s. 6d. Postage 6d.

Please write or call for our catalogue

19-23 PRAED STREET LONDON, W.2

(Dept. W.10)

'Phone: PADDINGTON 4185

Open all day Saturday.

MELTON METALLURGICAL LABORATORIES LIMITED

Liquid Silver
for
CERAMICS, MICA and PLASTICS

SPECIALISTS IN METALLIZING CERAMICS

Manufacturers of high stability U.H.F. inductors on ceramic formers.

42, TOWNGATE STREET, POOLE DORSET
Telephone No.: Poole 1241

ARIEL SOUND

Professional Recording Engineers
Public Address Equipment
Electronic Design, Manufacture and Repair

(Please refer to Repairs and Services Section for details of some of our services.)

57 LANCASTER MEWS, LONDON, W.2
Telephone: Paddington 5092

MALVYN ENGINEERING WORKS

Precision Engineers

Manufacturers of: Chassis, Small Pressings, Machined Components, Wiring and Mechanical Assemblies to specification.

Single and Production Quantities. Enquiries Invited.
100 PARK ROAD, WARE, HERTS.
Telephone: Ware 465

CABLES AND FLEXES

CHEAPER IN VARIED LENGTH COILS
No coil under 25 yds. All Prices per 100 yd. lot.
Everything tested and guaranteed.

(100 yd. Coils can be supplied-add 1/6 in £ to prices)

	Do. 7/029		Do. 7/044		Do. 7/036	
	W/E	W/E	W/E	W/E	W/E	W/E
TWIN FLAT	1/044	3/029	1/044	3/029	1/044	3/029
RUBBER	39/-	49/-	59/-	101/-	156/-	198/-
PLASTIC	36/-	49/-	57/-	99/-	155/-	198/-
Single V.I.R.	17/-	21/-	—	34/-	66/-	—
Single Plastic	13/-	22/-	—	38/-	72/-	—
3 Core						
CIRCULAR	Twin 14/36	23/36	40/36	23/36	40/36	23/36
RUBBER	54/-	61/-	76/-	75/-	100/-	—
PLASTIC	41/-	54/-	76/-	63/-	89/-	—
Padd./Braided	35/-	42/-	63/-	53/-	68/-	—
EARTHWARE	7/029	tinred, 7/6	per 100 foot lot.			
FLEX. Plastic twin twisted or flat, 13/9.	Maroon flex, 24/-					
(In 10/20 yd. coils 20/-) In 100 yd. coils 27/6.						
100 yd. Coils Transparent Plastic, T.T. or flat, 15/-						
Less than 100 yd. lot of anything supplied just add 5%.						
Send for lists, every type ever made is available. Add part cartage to small orders please.						
British Distributing (W.W.), 591 Green Lanes, London, N.8.						
MOU. 0055/6.						

SITUATIONS VACANT

TELEVISION and radio engineers required, first-class men only; top basic wage and overtime; must drive.—Apply Box 7252. [3347]

DESIGN engineer required urgently for work on H.F. and V.H.F. projects; must be able to work on own initiative and supervise others.—Details of experience and salary required to Box 7209. [3334]

SENIOR television engineer required by first-class dealer, previous engineer, been with us over 22 years, must be top-line man.—Davies Road, 129, High St., Southend-on-Sea. Tel. 41151. [3371]

ASSISTANT required for radio and television service controller, must be first-class engineer and experienced administrator, capable of handling staff; ability to drive essential.—Apply Box 7251. [3346]

TELEVISION/RADIO service engineer, fully experienced all makes, good references, able to drive; permanent position.—A. G. Allen & Co., Ltd., 3/4, Bridge Rd., Wembley Park, Arnold 2261. [3454]

EDITOR for Technical Publications Dept. dealing with wide range of electronics and allied apparatus, exp. of handbook production essential; N. London area; £750-£900 p.a.—Write Box 7284. [3357]

TECHNICAL Author for several interesting projects in N. London area, exp. of electronics and communications desirable; salary scale £650-£800 p.a., accord. to exp.—Write Box 7283. [3356]

RADIO Testers, E. K. Cole, Ltd., have vacancies at their Southend factory for radio testers and trouble shooters; experience or theoretical knowledge essential.—Applications to Personnel Manager. [3355]

ELECTRICAL SERVICE (EDGWARE), Ltd., have a vacancy for a service engineer familiar all types radio and TV; good position, conditions and wages; references.—117, Edgware Rd., W.2 Ed. 2342. [3310]

RADIO service mechanics required by Smiths (Radiomobile) Ltd. for many parts of the country.—Write details of experience and qualifications to Personnel Officer, Goodwood Works, North Circular Rd., London, N.W.2. [3042]

SHORT BROTHERS & HARLAND LIMITED have vacancies in their Research Department for the following additional staff to work on guided missiles and other interesting military and commercial projects:—

MECHANICAL Section.—Senior engineers, engineers and technical assistants to develop hydraulic and pneumatic servos, precision mechanical devices, etc.

ELECTRONICS Section.—Senior engineers, engineers and technical assistants to work on computing, navigational and servo systems.

ELECTRO-Mechanical Section.—Engineers and technical assistants to develop small electromagnetic devices, navigational instruments, etc.

QUALIFICATIONS.—Senior engineers, Honours Degree plus at least five years' good engineering development experience; engineers, University Degree or equivalent, with several years' experience of development work; technical assistants, B.N. or equivalent, with good practical experience in appropriate field.

THESE are permanent positions in an expanding organization; good salaries and prospects for men with initiative; pension scheme, assistance with housing.—Send full particulars of age, qualifications and experience, with salary required, to Short Brothers and Harland, Ltd., Castlereagh Factory, Belfast, quoting Ref. No. E9. [3267]

BERRY'S (SHORT WAVE), Ltd., have vacancies for experienced senior and junior sales staff; applications in writing should give full particulars of experience, age and salary required to 25, High Holborn, London, W.C.1. [3224]

INSTRUMENT Mechanic (Electronic), O.N.C. (Elec.), for maintenance of electrical, electronic and mechanical metering and control equipment. Experience of test repair and adjustment of such equipment essential.

SUCCESSFUL applicant is required to work in Harlow New Town, Essex. Housing available in Harlow within a few weeks of engagement. PLEASE write, stating age, experience, etc., to PERSONNEL Manager, Rectifier Division, Standard Telephones and Cables, Ltd., Warwick Road, Boreham Wood, Herts. [3444]

TECHNICAL writers (electronics) required at Brentford and in Gloucestershire. Applicants must have similar previous experience, including editing and layout, and have ability to write on electronic and radar equipment. GOOD salary and conditions. Pension scheme. APPLY with full details, including salary, quoting No. 1490, to Personnel Manager, Sperry Gyroscope Co., Ltd., Great West Road, Brentford, Middx. [3330]

DRAUGHTSMEN.—Vacancies for designer draughtsman and detail draughtsman with experience of light mechanisms or instrument work; modern factory in Surrey area; 5-day week, canteen, pension scheme.—Box 7066. [3305]

EXPERIENCED radio testers and inspectors required for production of communications and radio apparatus, also instrument makers, wiremen and assemblers, for factory test apparatus.—Apply Personnel Manager, E. K. Cole, Ltd., Ekco Works, Malmesbury, Wilts. [0238]

TECHNICAL Assistant, Inter. B.Sc. or Higher National Cert., together with some years' experience in electronic circuitry, required at Research and Development Dept., near Epsom.—Please apply, State Manager, The Distillers Co., Ltd., 21, St. James's Square, S.W.1. Quote Ref. Res. 654. [3322]

BENSON'S BETTER BARGAINS

METERS. New, boxed, M.C. 24in. Ft. rd., 100 micro-amp. 35/-; 350/70 v. (1 m.a. F.S.D. only), 20/-; 15/0/15 v. 10/6; 10/0/10 m.a. Proj., 10/6; Electrostatic 1500 v. Proj., 20/-; 10 m.a., 78/- doz. 130 v. (1 m.a. F.S.D.). Rec., 15/6; 10 m.a., 20 m.a., 100 m.a., 200 m.a., 300 m.a., M.I. 15 v., 20 a. Proj. T.C. 1 a. M.C. 30 a. All at 6/- each, 2in. sq. M.C. 5 m.a., 100 m.a., T.C. 3 a. at 7/- each. 2in. Rd. Proj. M.C. 30 m.a., 7/-; 2in. sq. ft. 20 v. M.C. 8/6. R1156, slow motion drives, 7/6; I.F. Filter, 2/6. Coilpacks, new, 10/6. CONDENSERS. Variable, min. spindle, 15, 25, 50, 75 p.f.s., 1/3. DYNAMOTORS, solenoid cases, D.C. (approx. 250 v. 80 m.a., at 6 v.), 6/6. 12 v. to 250 v. cased, 17/6; uncased 12/6. Filters for these, 2/6. WAVEMETERS, new, 3/VR92, 3/VR136, 1/6/5, 140/250 Mc/s. (less meter) 27/6. I.F.T.s., new, canned 10/13 Mc/s., 1/8. R.F. Units, type 24, 15/-; 25 17/6; 26, 27, 30/-; Universal Avometer, replacement front panels, 3/6. CROCKES LF 9H 100 m.a., 7/6; 2H 200 m.a., 4/6; 10H 150 m.a., 8/6. POTENTIOMETERS. Preset carbon, 1/3, spindle 1/6, with 8 P. switch 2/9; most values. Record Players, new (famous maker), 33 1/2 r.p.m. and 78. Xtal P.U., 79/6. POWER UNIT 255. 230 v. 50 c. input. Output D.C. 2kV. 5 m.a., 350 v. 150 m.a., A.C. 6.3 v. 10 a. and 5 a. 3 valves. New, 85/-, carr. paid inland. U.S.A. Rx RAY5/PRTNA, 11 valves, Xtal, 28 v. dynamotor, 23.3 Mc/s. Nom. freq., 24, carr. paid inland. MICA RESISTANCE STRIPS, 800 Ω . 3 a. with 2 taps, 1/6. TRANSFORMERS, new, std. mains input: 250-0-250 v. 70 mA., tapped 200 v., 6.3 v. 3 a., 4 v. 2 a., 10/6; 600 v. H.V. 6.3 v. 3 a., 4 v. 2 a., 12/6; 14 v. 20 v. 15-20 a. H.V. 30/-; 230 v. to 6.3 v. 5 a. and 10 a., 17/6; 2 kv. 5 m.a., 2 v. 2 a., 25/-; 350-0-350 v. 150 m.a. 5 v. 3 a., 25/-; 210/240 v. input. Outputs: 460-0-460 v. and taps, 220 v.a., 740-0-740 v. and taps, 165 v.a., 4 v. 8 a. (twice), 40/- (carr. 5/-); 220-0-220 v. 33 m.a., 5 v. 3 a., 7.1 v. 8 a., 8.4 v. 10 a., all C.T., 16/6 (carr. 3/6). 230 v. input. Outputs 55 v. 30 mA. twice, 6.3 v. 3.2 a., 9/- CLASS "D" WAVEMETERS, new, complete, 26/10/- Strip (I) with 3/6/6, 2/EB91, 1/6F33, 2/EF91, 2/6F17, 67 res/conds., 85/- (ii) 4/6F33, 1/EB91, 1/EA091, 1/6/6, 60 res/conds., 1 relay, 65/- (iii) 5/6/6, 2/EA091, 2/6F33, 71 res/conds., 80/- (iv) 2/19/6, 2/6X4, 1/EB91, 1/STV70-20, 1/EA091, Small blower, 34 res/conds., 70/- Above strips all new, modern. PTFE v/hdrs. Postage 2/6.

List and enquiries, S.A.E. please!
Terms: Cash with order. Postage extra.
Immediate despatch.

Callers and Post W.A. BENSON (WW), 308 Rathbone Rd., Liverpool 13, ST0 1804. Callers only (W'chapel) LTD., 116 Whitechapel, Liverpool 1. ROY 1130.

AMPLIFIERS · TUNER UNITS · LOUDSPEAKERS GRAM MOTORS · CABINETS

LANCASTER HI-FIDELITY Acoustical Equipment Co., 27/29/31 Lancaster Ave., Fannel St., MANCHESTER, 4 DEA 2503.

WORLD'S FINEST RAY-KITS

RADIOS PHONOGRAPHS TV TEST EQUIPMENT HI-FI Write for FREE Brochure

Radio Kits, Inc. · 120 CEDAR STREET NEW YORK 6, NEW YORK · U.S.A.

HIGH GRADE TRANSFORMERS

FOR ALL PURPOSES
SINGLY OR IN QUANTITIES
TO YOUR SPECIFICATION
VARNISH IMPREGNATED
BAKED WINDINGS
WITH OR WITHOUT TAG PANELS
GOOD DELIVERIES
Our rewind dept. will handle your repairs promptly and efficiently
P. HOWARTH
(Dept. W.W.)
51 POLLARD LANE · BRADFORD
Tel.: 37030

WIRE

on $\frac{1}{4}$, $\frac{1}{2}$ & 1 lb. reels

In stock for IMMEDIATE DELIVERY

per $\frac{1}{4}$ lb. reel

ENAMELLED COPPER WIRE

SWG.	PRICE	SWG.	PRICE	SWG.	PRICE
16-18	1/6	28	2/4	38	3/3
20	1/8	30	2/6	40	3/6
22	1/10	32	2/8	42	4/3
24	2/-	34	2/10	44	5/6
26	2/2	36	3/-	46	8/9

DOUBLE COTTON COPPER WIRE

16	1/9	24	2/8	32	3/8
18	2/2	26	2/11	34	4/2
20	2/4	28	3/2	36	4/8
22	2/6	30	3/6	38	6/2

DOUBLE SILK COPPER WIRE

16	1/9	26	3/6	36	6/-
18	2/2	28	3/10	38	6/8
20	2/8	30	4/2	40	7/8
22	3/-	32	4/8	42	10/6
24	3/2	34	5/4	44	15/6

TINNED COPPER WIRE

16	1/6	20	1/10	24	2/2
18	1/8	22	2/-	26	2/4

ENAMELLED SINGLE SILK

20-22	2/6	32-34	3/9	40	7/6
24-26	2/9	36	5/-	42	11/0
28-30	3/3	38	6/-	44	17/0

INTERMEDIATE GAUGES AVAILABLE
Nickel chrome and resistance wires available.

Orders up to £1 — Postage 1/3
Orders £1 up — Post Free

HYGRADE

WIRE CO
Telephone: GERRARD 7676
16 Gerrard Street, London W.1



BASS REFLEX CABINETS
in Walnut, Mahogany or Oak.
12in. Speaker Model £10 0 0
10in. " " £9 10 0
8in. " " £9 0 0
Complete Range of Bass Reflex
Cabinets. We can finish in period
or contemporary styles.
CORNER REFLEX CABINETS
for Axiom 22 and Axiom 150
Mk. II veneered and French pol-
ished from £15, carriage paid.

Cabinets made to order.

Armstrong Chassis and Amplifiers.
The Leak TL10 Amplifier.
LOUDSPEAKERS

H.P. Terms available.

A. DAVIES & Co. (Cabinet Makers)

3 Parkhill Place, off Parkhill Road, London,
N.W.3 GULLIVER 5775.

SITUATIONS VACANT
ST. CRISPIN HOSPITAL, Duston, Northamp-
ton.
ELECTRO-Encephalography Recordist, Grade 1,
required at the above hospital for Mental and
nervous disorders, for a new E.E.G. department
to be opened in the near future. The hospital
has 1,250 beds and is situated three miles from
Northampton. Whitley Council Scales and con-
ditions. Excellent social amenities.
APPLICATIONS giving full details and names
of two referees to the Physician Superintendent
within fourteen days of the appearance of this
advertisement. [3238]

BUSH RADIO, Ltd. have a number of
vacancies in their expanding laboratories at
London and Plymouth, applicants for posts (a)
and (b) should preferably hold a B.Sc. or
equivalent qualification in physics or engineer-
ing.

(a) **RESEARCH and Development Engineers**
and Junior Development Engineers for work in
new television and circuit fields, applicants
should have interests and preferably experience
in: Telecommunication, television, net-
work analysis, feedback, pulse techniques,
optics.

(b) **JUNIOR Development Engineers** for
interesting work on Government contracts.
experience in any of the following fields would
be an advantage: Video amplifiers, feedback,
pulse techniques, microwave techniques.

(c) **DEVELOPMENT Engineers** to
initiate design and engineering layout of domestic radio
receivers, experience of design of domestic radio
receivers, and familiarity with working draw-
ing office and production departments, are
required.

GOOD prospects, pension scheme, interviews in
London or Plymouth.—Write giving full details
and salary required, to the Chief Engineer,
Bush Radio, Ltd., Power Rd., Chiswick, W.4.
[3051]

TELEVISION Laboratory senior engineer
required to lead team on development of mass
production receivers; at least five years' pre-
vious experience in this field essential; salary
commensurate with qualifications; pension
scheme.—Full details to Personnel Manager,
VIDOR-BURNDEPT, Ltd., Erith, Kent. [3360]

ELECTRONIC Engineer reqd. for interesting
work mainly on Video amplifier develop-
ment; a degree or H.N.C. an advantage; super-
annuation scheme; apply giving full details to
—Personnel Dept. (SF), E.M.I., Ltd., Blyth
Rd., Hayes, Middx [3301]

INSTRUMENT Mechanics who have served
recognised relevant apprenticeships required
as Research and Experimental Mechanics at
United Kingdom Atomic Energy Authority,
Industrial Group, Windscale Works, Sellafield,
Cumb.

ELECTRONICS.—Good theoretical knowledge of
electronics (Ordinary National Certificate stan-
dard desirable) with practical knowledge of
wiring, assembly and testing of electronic
apparatus. Experience of general instrument
calibration an advantage.

PHYSICAL.—Experience of industrial instru-
ments used in measurements or control of tem-
perature, specific gravity, pH and flow; know-
ledge of vacuum techniques and measurement
of gaseous properties an advantage.

GENERAL.—Experience of relay circuits and
automatic telephone exchange maintenance.

RATES of pay for 44-hour 5-day week: 160/1
on entry with early assessment for merit pay.
Opportunities for advancement to 186/1 with
a ceiling for specialised few of 202/1. Apply
giving details of apprenticeship, training (in-
cluding Forces training), qualifications and ex-
perience, to Senior Labour Manager, Windscale
Works, Sellafield, Calderbridge, Cumberland.
[3374]

BRITISH Acoustic Films have staff vacancy
for a test engineer with experience in audio
frequency equipment, H.N.C. or equivalent pre-
ferred.—Write, stating age, experience and
salary to Works Manager, British Acoustic
Films, Ltd., Woodger Rd., London, W.12. [3375]

TELEVISION engineer required, must be ex-
perienced with leading makes and quick
fault finder, able to drive, permanent progres-
sive position to right applicant; wages £600
per annum, single or married; flat supplied
if necessary.—Apply, giving full particulars,
to Box 6637. [3210]


LABORATORY assistant is required to
carry out acoustical measurements and
experimental work on loudspeakers, micro-
phones, etc.; a good theoretical approach and
interest in sound reproduction is essential;
salary according to qualifications and experi-
ence.—Box 762. [3443]

HIGHLY qualified glass technician required
by The English Electric Valve Co., Ltd.,
Chelmsford, for small laboratory production of
special glasses, some years' experience in actual
manufacture of glass as well as academic qual-
ifications.—Apply, quoting reference 497G to
Dept. C.P.S. 336-7, Strand, W.C.2. [3425]

DESIGNER Draughtsman, preferably with
experience on electro-mechanical instru-
ments and components; H.N.C. (Mech.) stand-
ard and workshop training desirable; good
prospects and conditions with pension scheme;
location S.E. London; full particulars and
salary required to—Box 7140. [3311]

TRANSFORMER Designer required for de-
velopment projects involving audio-fre-
quency power transformers, pulse transformers,
oil-filled units, etc.—Apply stating age, qual-
ifications and experience, to The Personnel
Manager (Ref. R.C.) The General Electric Co.,
Ltd., Brown's Lane, Allesley, Coventry. 10260

RELAYS TYPE 3000



**BUILT TO YOUR SPECIFICATION—EARLY
DELIVERY QUOTATION BY RETURN—
PLEASE STATE RESISTANCE OF COIL
REQUIRED AND CONTACT BUILD UP.**

TELEPHONE SETS FOR PERFECT COMMUNICATION BETWEEN 2 OR MORE POSITIONS. EASY TO INSTAL.

1 Pair of Units £5 Post 2/6

Illustrated leaflet and wiring diagram for the
set available on request.

KEYSWITCHES



PROMPT DELIVERY OF ALL TYPES

BACKS. Standard 6ft. P.O. type for 19in. panels,
steel channel sides correctly drilled, heavy angle
base.

VARIAC TRANSFORMERS. Type 80 CO. Input
200/240 v. Output 220 v. 7.5 amps. £8/10/- each

HIGH STABILITY RESISTORS. 1%, 2%, 5% and
wire wound, vitreous, available ex-stock. Best makes,
low prices.

AUTO TRANSFORMERS. 230/115 volts, 500 watts,
50 cy. fully shrouded. New. METVIC, 90/- each.

MICROMETERS
250 P.S.D. 3 1/2in. Flush. Model 537
Specially scaled for test meters.


Knife edge pointers, magnetic shield.
Guaranteed. Brand new. Not Govt. surplus.
Offered about half usual price.

55/- post free.

INSTRUMENT RECTIFIERS. 5 milliamp., 7/6 ea.,
11A, 5/- ea.

VOLTMETERS. 0/300 v. A.C. 50 cy. 2 1/2in. flush
moving coil. Rectifier type, 30/-, post 1/-; Also,
5in. surface-type moving iron with open scale,
only 60/-, Worth double.

MOVING COIL METER with 1 mA movement, 2 1/2in.
flush, rectifier type, scaled 0/100 volts A.C. Resistance
100 k. ohms. A very useful basic meter, 30/-.



ELECTRO MAGNETIC COUNTERS. Post Office type
11A, counting up to 9,999, 2 to 6 volts D.C., 3-ohm
coil 12/6 each, post 1/- Many other types in stock,
lists sent with order or send S.A.E.

VEEDER COUNTERS to 9,999 also others up to
99,999 only 7/6 each. Post 6d.

R.F. UNITS TYPE 26. 50/65 Mc/s. Variable tuning
complete with valves. A fortunate purchase enables us
to offer these units at the special low price of 35/-.
Post 2/6.

ROTARY CONVERTERS. Input 24 volts D.C. output
230 volts A.C. 50 cycles, 100 watt, 92/6 each. Also
available with 12 volt input, 102/6, carr. 7/6.

L. WILKINSON

DEPT. W.W.

19, LANSDOWNE ROAD, CROYDON

Phone: CRO 0839 Telegrams: "WILCO" CROYDON

LONDON CENTRAL RADIO STORES

FRACTIONAL H.P. UNIVERSAL MOTORS. A.C./D.C.
All voltages up to 250. Watts 7 to 50. Cycles 25 to 100. Double spindle. Voltage regulator. Weight approx. 5 lb. £2/15/-, plus 3/6 C. & P.
VCR97 TUBES. CALLERS ONLY, 20/-.

PHILCO 5-VALVE RECONDITIONED SUPERHETS
—A.C. or A.O./D.C.
All thoroughly overhauled at our works. Ready for immediate use and guaranteed in working order.
2-WAVEBAND MODEL £3 15 0
3-WAVEBAND MODEL £5 10 0
Plus 10/- per set carriage and packing.

EX-G.P.O. CANDLESTICK MIKES, 5/6, post paid.
GROOVE LOCATING UNITS enabling operator to preset any point on 10, 12 or 16in. discs for playback purposes.

Consists of substantial machined casting with adjustable counterpoise pick-up arm fitted with high-fidelity pick-up and instantaneous calibrated groove selector with micrometer adjustment and "velvet touch" lever for dropping pick-up, £2/10/-, carr. paid.

4-VALVE (Used) SUPERHET UTILITY RECEIVERS.—Medium wave band only. Four valves, P.M. Speaker complete in pine wood cabinet size 13 1/2 x 12 x 8 1/2 in. In good condition. A.C. mains 200/250 volts. Price £4/10/-, Carr. etc. 5/-.

N.B.—Carriage charges relate to British Isles only.

23 LISLE ST. (GER. 2969) LONDON, W.C.2
Closed Thursday 1 p.m. Open all day Saturday

CABINETS

We specialise in making **HIGH CLASS** cabinets to individual specification, particularly in the high fidelity field.
Competitive Prices.

ALAN CRANSTON (Cabinet Makers),
20, Lorrimore Bldgs., Olney Road, Watworth,
LONDON, S.E.17.
Phone: RODney 2349.

YOUR METER DAMAGED?

Leading Electrical Instrument Repairers to the Industry

Contractors to The Ministry of Supply and General Post Office
Repairs by skilled craftsmen of all makes and types of Voltmeters, Ammeters, Microammeters, Multirange Test meters, Electrical Thermometers, Recording Instruments, etc. Quick deliveries—For speedy estimate send defective instruments by registered post to:

L. GLASER & CO.

Electrical Instrument Repairers
96-100 ALDERSGATE STREET, E.C.1
(Tel.: MONarch 6822)

MARRIOTT RECORDING COMPONENTS

ONE HEAD?

Type R/P/E (above) is a combined record playback and erase head.
Price 45/-

The completely new form of construction which makes this possible also gives more output, with a better frequency response and less noise and hum (double internal screening). The erase and bias require so little power, they can be run from a small double triode (if desired). Record/playback track, .035in., erase track, .110in. Dimensions (in. dia., in. high. Oscillator coil, 9/8. Head transformer, 12/6. Also many other types of heads, coils, transformers.

Send S.A.E. for illustrated details to:—
P. A. MARRIOTT & Co., SUNLEIGH WORKS,
SUNLEIGH RD., ALPERTON, MIDD., (Wem 7483)

SITUATIONS VACANT
RADAR Observer (Ground) (ref. W.W/4) to act as this company's representative at a Ministry of Supply Establishment in Wales, duties will include liaison between the company's and the Ministry's technicians; applicants should have a good technical background of radar or communication equipment.
ASSISTANT Electronic Engineer (ref. W.W/5) to maintain and assist in the operation of development test gear for guided missile projects, considerable experience, or radar equipment is necessary; this vacancy is at our Establishment in Wales; appropriate training and experience in H.M. Forces would qualify for either of the above positions; good salaries with bonus, excellent opportunities for advancement in this new field, pension scheme, fully quoting reference above, with full details of experience to The Assistant Manager, The Falrey Aviation Co., Ltd., Weapon Division, Heston Aerodrome, Hounslow, Middx. [3359]

RADIO and television field service and bench service engineers required, with first-class experience; excellent opportunities in new service factory with good working conditions and good salary write or telephone, Leytonia Radio, Ltd., Service Department, 784-786, High Rd., Leyton E.10. Tel. Leytonstone 3003. [3172]

CHIEF engineer required for well-established electronic test equipment manufacturers; practical knowledge of test gear design and ability to take full technical control of growing output essential. Give full details of experience and qualifications to: Man Dir. Box G.A.075, 4, Salisbury Court, Fleet St., E.C.4. [3399]

ELECTRONIC/Electrical Engineer required to take charge of small laboratory; applicant must have some years experience in laboratory of manufacturers or large scale users of any of the following: cables, capacitors or insulation materials; maximum age 35; address London, E.11; write with fullest particulars.—Box 7602. [3437]

VACANCIES exist at A.A. Command Permanent Range Tontanau, Merionethshire, for Technical Assistants Grade III, good knowledge of Service radar or predictors is required. Salary commencing at £510, rising to £640 per annum.—Application to: ADME 4, A.A. Group, Peninsular Barracks, Warrington, Lancs. [3395]

SENIOR Development Engineers (two) required for work on electronic test gear, varied, interesting work, one vacancy calls for experience in pulse work, permanent well-paid positions; write details of academic qualifications and practical experience to: General Manager, Taylor Electrical Instruments, Montrose Ave., Slough. [3397]

TELEVISION engineer required by South Wales dealers, fully experienced; all leading agencies held; permanency to single or married man, and accommodation arranged if required; excellent salary.—Apply, giving particulars of experience and salary required, and appointment can be arranged immediately (all letters answered) Box 7583. [3434]

ELECTRONIC engineers with experience, required for responsible positions in connection with the development and testing of electronic training aids and computing devices initially at Webber Street, London, S.E.1, later Crawley, Sussex, where accommodation available.—Apply in writing stating age, qualifications and experience to REDIFON, Ltd., Kelvin Way, Crawley. [3411]

TELEVISION engineers required by old-established company holding every one of the well-known agencies; applicants must be fully experienced and preferably able to drive; top rates and permanent positions; good openings to the right men.—Apply to A. S. White & Sons, Ltd., 130/2 High Rd., S. Tottenham, London, N.15. Sta. 7861-2. [3178]

DEVELOPMENT and Production Engineer for TV aerial manufacture. Fully experienced small electronic assembly and soldering lines, fully conversant with current aerial and associated TV problems. Field testing experience advantage. Progressive position. Salary according experience.—Send full details experience, age, salary to Box 7287. [3362]

ELECTRICAL engineer with degree in electrical engineering or with a minimum qualification of H.N.C. in electrical engineering, knowledge of electronics or magnetic amplifiers preferable but not essential; National Service should have been completed; salary in accordance with qualifications and experience.—Apply Labour Manager, Rolls-Royce, Ltd., Derby. [3400]

TELEVISION Engineer.—First-class engineer required for Cardiff old-established dealer, holding all the main agencies; good opportunity to join reputable progressive house for the right experienced man; salary £500 p.a. with progressive increments; accommodation available for married applicants if necessary; full particulars in first instance.—Box 7141. [3312]

TECHNICAL assistant required by large firm of cable manufacturers for the testing of high frequency and land communication cables; previous experience in cable testing essential; O.N.C. standard in electrical engineering would be an advantage; salary in accordance with qualifications and experience; five-day week and pension scheme.—Details, quoting reference OD/1 to Staff Officer, The Telegraph Construction & Maintenance Co., Ltd., Telcon Works, Greenwich, S.E.10. [3412]

LYONS RADIO Ltd.

RECEPTION SETS AEW.1. These are 5 valve superhet receivers with a frequency range in 4 switched bands covering medium band (188-545 Metres) and short wave (12-50 metres). Valve line-up 6U7, 6K8, 6U7, 6Q7, 6V8 or equiv. types. Incorporates power pack for operation from 6 v. accumulator. Housed in metal case 14 x 10 x 9in. The speaker is housed in a separate case approx. 11in. dia. x 7in. deep. Condition is as new and unused although outside of cases are store soiled. Complete with instruction manual. Can easily be converted for A.C. mains operation. PRICE £11/10/-, carriage 9/6.

R.F. UNITS, TYPE 32. These converter units are similar to the better known type 25 but all three stages, Aerial, Oscillator and Mixer, are tunable independently by means of variable condensers. Frequency range is 20-30 Mc/s., and three valves type VR85 are employed. PRICE 25/-, post 2/6.
2 MID. HIGH VOLTAGE CONDENSERS. Working 5,000 v. D.C. Test 10,000 v. D.C. Overall size 14 x 9 x 6 in. PRICE 15/-, carriage 5/-.
INDICATOR UNITS TYPE 6. Fitted cathode ray tube VCR97 (Scope Tested) Mu metal screen, 6 valves (4-VR81's and 2-VR54's) pots, resistors, condensers, and other useful gear. In good used condition and with conversion data for making a TV. scope. PRICE ONLY 55/- or less valves 37/8. Carriage charge 6/6. TRADE INQUIRIES INVITED. For Magnetrons type 2431.

SPECIAL VALVES. 866A—12/6 each. CV138—7/6 each. VR65A—2/6 ea. 6d. post or 3 for 6/- or 8 for 10/-.

3 GOLDHAWK ROAD, (Dept. M.W.) SHEPHERD'S BUSH, LONDON, W.12
Telephone: Shepherd's Bush 1729

TAPE RECORDERS

Your leading Northern Specialists can supply all leading makes from stock.

Guaranteed component parts for the amateur and professional constructor. Also HI-FI-fidelity amplifiers.

Service and advice after sales. Call for free demonstration and advice.

ALLEN-DIXON
SALES - ELECTRONIC - SERVICE
229 OXFORD RD., MANCHESTER 13
Telephone: ARD 4269

STABILISED POWER UNITS

Boldre Series
Input: 80-240 v, 50-1500 ~
Outputs: 150-500v, 100 watts, 300 m.a.
Subsidiary independent outputs to choice.
Price: from £59-10-0
Skeleton model £44-0-0

NEWTOWN INDUSTRIES, Lyngington, Hants
Electronic Engineers and cabling contractors

PULLIN
SERIES 100
TEST METER
AC/DC 10,000 A/V
21 RANGES
100µA to 1000V
COMPLETE IN DIE-CAST CASE WITH TEST LEADS CLIPS AND PRODS FULLY GUARANTEED

SENT POST FREE FOR £2.10s.
DEPOSITS AND TEN FURTHER MONTHLY PAYMENTS OF £1. CASH PRICE 11GNS

Frith PHONE 58927
RADIOCRAFT Ltd
69-71 CHURCH GATE LEICESTER

NEW G.E.C., S.T.C. AND "WESTALITE" SELENIUM RECTIFIERS.
Largest L.T. range in Great Britain.
Latest Current Products. NOT SUPERS.

CURRENT PRICE LIST

DEDUCT 15% FROM S.T. & C. PRICES.
S.T. & C. E.H.T. K3/15, 4/5; K3/45, 8/2;
K3/50, 8/8; K3/100, 14/8.

BRIDGE CONNECTED FULL WAVE.
17 v. 1.2 a., 16/4; 1.6 a., 26/-; 2.5 a., 29/-;
3 a., 30/-; 4 a., 34/6; 5 a., 37/6; all post 6d.
33 v. 0.7 a., 24/3; 1 a., 28/-; 1.5 a., 45/-;
2 a., 51/-; 3 a., 52/-; 4 a., 62/-; 5 a., 67/-;
all post 1/- 54 v. 1 a. 38/6; 1.5 a., 62/-;
2 a., 69/-; 3 a., 70/-; 5 a., 93/-; 7.2 v. 1 a., 49/-;
1.5 a., 78/-; 2 a., 81/-; 3 a., 92/-; 5 a., 122/-;
100 v. 1 a., 70/-; 1.5 a., 112/-; 2 a., 128/-;
5 a., 174/-; all post 1/4.

BRIDGE CONNECTED HEAVY DUTY
7 1/2 in. SQUARE COOLING FINS. 17 v. 6 a., 49/6; 10 a., 56/-; post 1/10.

BRIDGE CONNECTED HEAVY DUTY
Funnel Cooled, also
7 1/2 in. SQUARE COOLING FINS. Revised price, same both types. 17 v. 12 a., 102/-; 20 a., 118/-; 30 a., 164/-; 50 a., 212/15/-; 33 v. 6 a., 91/-; 10 a., 104/-; 12 a., 168/-; 20 a., 188/-; 54 v. 6 a., 120/-; 10 a., 142/-; 7.2 v. 6 a., 154/-; 10 a., 178/-; 100 v. 6 a., 211/-; 10 a., 212/15/-; all post 2/-.

"WESTALITE" (BRIDGE), 12-15 v. D.C., 1.2 a., 15/10; 2.5 a., 27/8; 5 a., 31/9; 10 a., 54/6; 20 a., 99/6; 30 a., 144/10; 50 a., 257/-; 24 v. 1.2 a., 15/10; 2.5 a., 27/8; 5 a., 51/-; 10 a., 92/7; 20 a., 176/3; 36 v. 1.2 a., 27/8; 2.5 a., 51/-; 5 a., 69/10; 10 a., 130/9. E.H.T. RECTS., 14D, 134, 22/-; 36 E.H.T. 60 31/10, all post extra.

Wholesale and Retail
Special Price for Export and Quantity.

T. W. PEARCE

66 GREAT PERCY STREET, LONDON, W.C.1
Off Pentonville Rd. Between King's Cross and Angel

SITUATIONS VACANT
KELVIN & BOGHS, Ltd., Barkingside, Essex, have vacancies for Research Engineers for experimental work relating to underwater sound apparatus. Applicants should be of Degree standard and should have a sound knowledge of communications, in particular electronics.—Applications stating salary required should be addressed to the Personnel Manager. [3150]

THE Ministry of Supply, Radar Research Establishment, Great Malvern, Worcs. requires Instrument Makers, Universal Millers, Centre Lathe Turners, Precision Aircraft Air Frame, Electrical and Motor Transport Fitters, Aircraft Electricians, Sheet Metal Workers, and Radar Mechanics to serve as R. & E. Mechanics (Special) at Malvern and Bedford.

HOTEL accommodation is immediately available and housing accommodation may be available within a reasonable period for successful married applicants.

RATE of pay on entry for a five-day week of forty-four hours is 147/10 plus 26/- merit pay, with early re-assessment of merit pay up to 36/- and prospects of further advancement.

Re-assessment of merit pay after 1-3 months will be retrospective to date of entry. APPLY, giving details of apprenticeship, training (including Forces training), qualifications and experience, to the Director, Radar Research Establishment, St. Andrews Rd., Malvern, Worcs. [3378]

INSTRUCTOR required in marine radiotelegraphy; applicants must hold P.M.G. 1st class certificate (preferably acquired last 5 years); C. & G. certificates in radio and telecommunications principles an advantage.—Write giving full details in confidence and salary expected, to Principal, College of I.M.R.C., Overseas House, Brooks Bar, Manchester, 16, marking envelope "Staff." [3381]

AN opportunity occurs in progressive manufacturing concern in London area for engineer aged 25-35 with electrical or physicist degree, on development and research work on high-frequency telecommunication cable and associated testing equipment. Salary will be commensurate with qualifications and experience.—Appy. giving full particulars to Box 6310 [3135]

ASSISTANTS (Scientific). The Civil Service Commissioners invite applications for pensionable posts. Applications may be accepted up to December 31st, 1954, but early application is advised. Further closing dates may be announced either for the competition as a whole or in one or more subjects. The Interview Board will sit at frequent intervals.

AGE at least 17 1/2 and under 26 years of age on 1st January 1954, with extension for regular service in H.M. Forces, but candidates over 26 with specialised experience may be admitted.

CANDIDATES must produce evidence of having reached a prescribed standard of education, particularly in a science or mathematical subject. At least two years' experience in the duties of the class gained by service in a Government Department or other civilian scientific establishment or in technical branches of the Forces essential in one of the following groups of scientific subjects:—

- (i) **ENGINEERING** and physical sciences.
 - (ii) **CHEMISTRY**, bio-chemistry and metallurgy.
 - (iii) **BIOLOGICAL** Sciences.
 - (iv) **GENERAL** (including geology, meteorology, general work ranging over two or more groups (i) to (iii) and highly skilled work in laboratory crafts such as glassblowing).
- SALARY** £250 (at 18) to £520 (men) or £435 (women). Starting pay up to £380 (men) or £340 (women) at 25. Somewhat less in provinces. Opportunities for promotion.
- FURTHER** particulars and application forms from Civil Service Commission, Scientific Branch, 30, Old Burlington St., London, W.1, quoting No S 59/54. [3572]

DEVELOPMENT Engineer of graduate standard with minimum of 5 years industrial experience required to develop special purpose magnetic recording equipment. A wide knowledge of audio techniques and the ability to work with the minimum of supervision is needed.—Reply in confidence to the Chief Engineer, Grundig (Great Britain) Ltd., 6, Government Buildings, Kidbrooke Park Rd., London S.E.3. [3361]

DESIGNER-draughtsmen and detail draughtsmen are required by British Telecommunications Research, Ltd., in connection with development work on H.F. radio line and television transmission projects. Applicants should have had previous experience of communication, radar or allied light current equipment.

The company operates a superannuation scheme and offers attractive working conditions with good social and recreational facilities. APPLICATIONS will be dealt with in confidence and should be addressed to the Executive Director, British Telecommunications Research, Ltd., Taplow Court, Taplow, Bucks. [3203]

THE GENERAL ELECTRIC Co., Ltd., Brown's Lane, Coventry, requires senior and junior electronic development engineers for work on guided weapons and like projects, particularly in the field of microwave and pulse applications; mechanical development engineers, designer draughtsmen and draughtsmen, preferably with experience of radar-type equipments, also required for the above projects; salary according to age, qualifications and experience.—Apply by letter, stating age and experience, to the Personnel Manager (ref. R.G.). [0259]

SSC Bargains from SHERMAN'S

Car. Paid — Money-Back Guarantee!

HIGH PRESSURE REDUCING VALVE


Complete with 0-3,000 lb per sq. in. pressure gauge. Suitable for Compressors, Cylinders of Gas, etc. Brand new and boxed **12/6**



AIR BOTTLE

23in. x 6in. diam. Tested to 300 lb. per sq. in. Suitable for above valve **25/-** or compressor.

BOMB SIGHT COMPUTER



A model maker's paradise, over 86lb. of magnificently made gears, driving shafts, bearings, miniature motor, repeater motor, gyroscopes, etc. All supplied in a strong wooden transit case 24in. x 22in. x 11in. high which itself is ideal as a tool box. Only **62/6** Each


APOLLO SPRAY GUN

Ideal for model maker and handyman. Will spray paints, insecticides, etc. Will work from foot pump, spare car tyre, compressor, etc. **15/-** New and boxed.



Set of TWIST DRILLS

9 drills, 1/16 in. to 3/16 in. complete with plastic case and stand. Brand new **4/6**



ALL-STEEL TOOL BOX

Complete with removable inner tray. Fitted with strong hasp, staple and carrying handles. Size 1, 14in. x 8in. x 8in. **25/-**
Size 2, 17in. x 8in. x 8in. **30/-**
Size 3, 24in. x 8in. x 8in. **37/6**



MODEL MAKER'S MOTOR
Extremely powerful and robustly designed motor measuring only 8in. x 1 1/2in. x 1 1/2in. Built-in variable resistance and centrifugal governor. 12 v. d.c. will operate on A.C. Unrepeatable **15/-** at

ALL-PURPOSE STEEL SPINDLE

15in. long. Complete with 1/4 in. capacity 3-jaw chuck, 4-speed pulley. Ideal for circular saw, grinder, polisher, drill, etc. **37/6**



4-step Pulley. To match above spindle. **11/6** each.
MODEL MAKER'S MAINS TRANSFORMER
All purpose low voltage. Input 210/250 volts. Output 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30 volts. Rating 2 amps. Brand new, fully guaranteed, **24/-**.

SELENIUM METAL RECTIFIER
Suitable for 2, 6 and 12 v. battery chargers. Max. capacity 15 v. at 1 amp., new and boxed, **9/6**.


Send 3d. for New Catalogue
TERMS—CASH WITH ORDER. C.O.D. 1/- EXTRA.
Phone Orders Accepted. (Dept. W7)
479 HARROW ROAD, LONDON, W.10. LADbroke 1718
HIGH STREET, HARLESDEN, N.W.10

SHERMAN'S SUPPLY COMPANY

DIRECT FROM THE MANUFACTURER

Dulci Radio/Radiogram Chassis

A/C 100-120 & 200-250 VOLTS. All chassis 1 1/2 in. x 7 in. x 8 in. high. Latest type valves 6BE6, 6BA6, 6AT6, 6BW6, 6X4. Flywheel tuning. Negative feedback over entire audio section. Engraved knobs.3 Tone position for Radio and Gram.

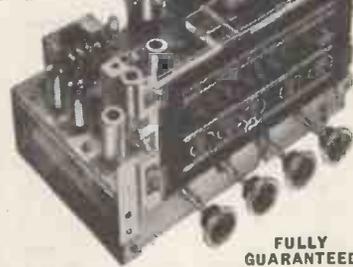

FULLY GUARANTEED

- Model B3, Long, Med., Short (5 Valves) **£12. 12. 0**
- B3 Plus Push Pull Stage (6 Valves) **£15. 15. 0**
- B3 Double Feature P/Pull & RF Stage (7 Valves) **£18. 18. 0**
- Model B6 Six Wavebands Med. L, 4 Short (8d-Stage) **£15. 15. 0**
- B6 Plus Push Pull Stage (6 Valves) **£18. 18. 0**
- B6 Double Feature P/Pull & RF Stage (7 Valves) **£23. 2. 0**

ALL PRICES TAX PAID. Escutcheon for 9in. x 5in. dial, 4/9 extra. Matching speakers P.M. type 3 ohms 8in or 10in available. Money back guarantee. Free particulars from the Manufacturers.

THE DULCI CO. LTD.
97 VILLIERS ROAD, LONDON, N.W.2
Telephone: Willesden 7778

APPLICATIONS

are invited for the following permanent and progressive positions:—

MECHANICAL FITTERS: Knowledge of electrics. (Ref. 13).

PLANNING AND MECHANICAL ENGINEER: Design of rigs and fixtures, heating inductors, to assist in planning of operations. O.N.C. with factory experience or H.N.C. standard. Candidates must have completed National Service. (Ref. 14).

Candidates for the above two positions will be required to work at Hatfield initially but final employment will be at Edmonton.

ELECTRONIC AND ELECTRICAL ENGINEERS: for development work on servo mechanisms. (Ref. 44).

WIREMEN: electronic, for model shop development work. (Ref. 12).

CIRCUIT ENGINEER: previous experience and knowledge of electronics essential. (Ref. 41).

INSTRUMENT MECHANIC: with electrical instrument experience for Vibration Research. O.N.C. or H.N.C. standard. Staff appointment. (Ref. 42).

DRAUGHTSMAN: jig and tool. Salary according to age and experience. (Ref. 11)

Write in detail, quoting reference number of position sought to: The Personnel Department (Technical Employment), de Havilland Propellers Limited, Hatfield, Herts.

FREQUENCY MODULATION TUNER

Full Building Instructions, with Photographs, as featured recently in two articles in "Radio Constructor" 3/- COMPLETE Set of Parts including 4 valves and 2 matched crystals, £7.2.6. IFT's—Ratio Detector and all coils £1.0.6. Chassis—Completely drilled 8/- Jackson Bros. Dial and Condenser £1.5.3. G. Blundell 7, Sunnyside House, Child's Hill, London, N.W.2.

TELEVISION AND RADIO MAINTENANCE ENGINEERS WANTED

Good remuneration, conditions and prospects for capable men.

Apply to Clydesdale Supply Co., Ltd., 2 Bridge St., Glasgow, C.5. or contact the Manager at our branch nearest to you.

SCOTLAND. Alloa, Aberdeen, Arbroath, Ayr, Cambuslang, Clydebank, Coatbridge, Cowdenbeath, Dumbarton, Dumfries, Dunfermline, Dundee, Edinburgh, Falkirk, Glasgow, Greenock, Irvine, Kirkcaldy, Kilmarnock, Motherwell, Paisley, Perth, Renfrew, Stirling.

ENGLAND. Birmingham, Bromsgrove, Darlington, Doncaster, Dudley, Gloucester, Middlesbrough, Newcastle - on - Tyne, Stockton-on-Tees, Walsall, York.

NORTHERN IRELAND. Ballymena, Belfast.

SITUATIONS VACANT

ELECTRONIC Engineers (ref. W.W/1) to become section leaders of small teams responsible for the preparation, testing in the field, and further laboratory development of guided weapons, applicants should have at least H.N.C. and 5 years' experience in the microwave pulse or communication field; equivalent training and experience in H.M. Forces will also qualify for these positions.

ASSISTANT Engineers (ref. W.W/2) to form such teams, either (a) with a similar background to the above or (b) having considerable experience of developing and testing small prototype electro-mechanical instruments; the vacancies which offer exceptional scope for advancement are at Heston Aerodrome, Middlesex; periods of work at outstations in the U.K. are covered by adequate allowances and weekend leave privileges; there are likely to be opportunities for continuing this work in Australia at a later date, good salary with bonus, pension scheme.—Details of experience and qualifications should be sent, quoting reference of position sought, to the Assistant Manager, The Fairey Aviation Co., Ltd., Weapon Division, Heston Aerodrome, Hounslow, Middx. [3358]

A UNIQUE opportunity exists in a small but rapidly expanding organization in North West England for a qualified electronic engineer, to be employed on the development of television and radio receivers; permanent staff appointment; recent experience of this type of work essential.—Apply, giving details of qualifications, experience and salary required, Box 7439. [3385]

LAB. technician required to undertake design and construction of test gear and carry out measurements of electrical properties of semiconductor materials; H.N.C. standard and some practical experience; salary according to age, qualifications and experience.—Apply in writing to Director, Research and Development Dept., General Radiological, Ltd., 15/18, Clipstone St., W.1. [3418]

MECHANICAL Development Engineer required for work on varied and interesting projects; applicants should be of degree or H.N.C. standard, with experience camera, light servo-mechanisms or electro-mechanical design; good prospects with progressive firm in Surrey area; 5-day week, canteen, pension scheme; apply with full details of previous experience to—Box 7067. [3306]

ELECTRONIC Engineer to work within our Trials Division at Edinburgh. The nature of the work involves conducting trials and evaluating the performance of electronic and radar equipment. Applicants should have recent technical and operational experience in industry or the services. Staff Pension Scheme.—Apply in writing, quoting Ref. EE/TID, to the Personnel Officer, Ferranti Ltd., Ferry Rd., Edinburgh, 5. [3366]

RADIO technicians required by International Aeradio, Ltd. for overseas service; permanent and pensionable position; inclusive salary from £894 per annum to £1,373 per annum, tax free according to marital status; free accommodation; kit allowance; free air fares; generous U.K. leave.—Qualified candidates to whom replies only will be sent please write quoting RT to Personnel Officer, 40, Park St., W.1. [0262]

ELECTRONIC Engineer required by large company in S. London age 25-35 and preferably O.N.C. standard. Applicant must have had experience in building and servicing factory test equipment and have some knowledge of proprietary electronic equipment; the position is pensionable.—Write giving details of age, experience and salary required to Box 796, c/o J. G. King & Son, 150, Fleet St., London, E.C.4. [3352]

ELECTRONIC engineer reqd. for exceptionally interesting development work, applicants should have good academic training with 5-10 years' practical experience of development, including some on communication equipment employing frequency modulation at U.H.F.; the post carries a good starting salary and excellent prospects.—Please write, with details, to Personnel Dept. (ED/189), E.M.I. Eng. Dev., Ltd., Hayes, Middx [3340]

PERSONAL assistant of high ability and integrity required by well-established radio and electronics component business in Home counties; must possess a wide knowledge of electronics and be capable of assisting in the management and development of a business; excellent opportunities for advancement are offered; please write giving full details of military service, past and present occupation.—Box 7516 [3402]

ELECTRICAL foreman with wide production experience in radio industry of small and medium electrical contact gear manufacture, test and installation required by manufacturers of materials handling vehicles in pleasant country district, 1 hour London, good prospects of advancement; housing assistance; canteen and social facilities.—Please write giving details of past experience, present salary, salary required, married/single, to Box 7440. [3386]

RADIO.—Junior laboratory engineer required by North London manufacturers, of good education and technical training, preferably holding or studying for recognised qualifications.—Apply stating fullest details of education, experience and minimum salary required (which latter will be considered in selecting applicants for interview but not to determine the amount offered to successful applicant) to Box 7402. [3383]

NEW! 4th Edn!

Wireless World

RADIO VALVE DATA

With characteristics of 2,000 British and American Valves and 150 Cathode Ray Tubes. Special Quality Valves and Equivalent Valves (direct plug-in replacements) are included in the Index.

Price 3/6 Post 3d.

MODERN BOOK CO.

19 Praed Street, Paddington, W.2

PROBE UNIT



For Oscilloscopes. High Impedance. 3 ranges. (Separate power supply optional)

SEND FOR LEAFLET 22

SUTTON COLDFIELD ELECTRICAL ENGINEERS

Clifton St., Sutton Coldfield, phone 5666

LOCKWOOD

makers of

Fine Cabinets

and woodwork of every description for the Radio and allied trades

LOCKWOOD & COMPANY

Lowland Rd., Harrow, Middlesex. Byron 3704

VACANCY

Graduates with Honours Degrees in Physics or in Electrical Engineering are required by the British Thomson-Houston Company, Rugby, for research in the field of magnetron development; some knowledge of radar is desirable.

Applicants should write to the Director of Research giving their age, qualifications, and College, quoting reference DR.

A. V. ROE & CO. LTD.

WOODFORD AERODROME

CHESHIRE

Have vacancies in their newly formed

WEAPONS RESEARCH DIVISION

SIMULATOR DEVELOPMENT

Electronic Engineer with Honours Degree in Physics or Engineering and having experience on the design of electronic computers or simulators.

The vacancy is for someone to take charge of and build up a team which will be working on Simulator Development.

TRIALS

Electronics Engineer with Physics Degree and a wide practical experience of telemetering.

The vacancy is for someone to take charge of and build up a team for the development of trials instrumentation.

GOOD SALARIES AND PROSPECTS. PENSION AND LIFE ASSURANCE SCHEME.

Apply giving full particulars of academic training and experience to:

A. V. ROE & CO. LIMITED
Weapons Research Division
Woodford, Cheshire

MORSE CODE Training

COURSES FOR BEGINNERS AND OPERATORS, also a SPECIAL COURSE for passing the G.P.O. Morse Test for securing an AMATEUR'S TRANSMITTING LICENCE.

Send for the Candler BOOK OF FACTS
It gives details of all Courses
Fees are reasonable.

Terms: Cash or Monthly Payments.

THE CANDLER SYSTEM CO.
(55W) 52b ABINGDON RD., KENSINGTON
LONDON, W.8

Candler System Co., Denver, Colorado, U.S.A.

SITUATIONS VACANT

THE LONDON HOSPITAL, Whitechapel, E.1. has vacancy for an assistant electroencephalogram recordist, either sex; if successful applicant has no previous experience training will be arranged, but some knowledge of electronics desirable; ability to type and/or experience of maintaining electrical equipment an advantage; salary £340-£480 p.a. according to age.—Apply to House Governor by October 11th. [3391]

MECHANIC required for duties in the Department of Physics; good knowledge of electronics essential, with experience in instrument making and repairing; duties will include maintenance and construction of electronic laboratory and experimental apparatus; weekly rate of pay £9/5/2 (44 hours).—Written application should be addressed to the Head of the Department of Physics, Chelsea Polytechnic Manresa Rd., S.W.3. [3390]

PRACTICAL electronic engineer required for work on test equipment; should be able to diagnose faults using diagram and technical write-up, calibrate to close tolerances, and work on his own initiative with the minimum of supervision; must have had experience according to qualifications.—Write quoting reference 33/EN to the Personnel Manager, Smiths Aircraft Instruments, Ltd., Bishops Cleeve, near Cheltenham, Glos. [3389]

MICROWAVE inspection; engineer required to take charge of microwave inspection department; must have both electrical and mechanical knowledge of testing aerial waveguide sections, attenuators, wave-meters, oscillators, mixers, etc.; opportunity for advancement with progressive company in S.W. London area.—Application in writing, stating experience and salary required, to Box 5979, 15, Hill St., London, W.1. [3388]

A LONDON company engaged in important defence contracts, seeks graduate engineers or physicists interested in servo-mechanisms or electronics; senior posts are available for men suitably qualified; newly graduated engineers will receive training in interesting new fields of electro-mechanical design and in latest manufacturing techniques; reply giving full details, in confidence, of education and previous career to—Box 7533. [3410]

TELEVISION and Radio Engineers required for retail radio shops in all parts of London and provinces. Excellent wages and weekly commission. Holidays with pay. Applicants should be able to drive and vehicles are supplied. These are permanent pensionable positions for experienced men.—Phone or write, Staff Manager, J. & F. Stone Lighting & Radio, Edgware Rd., The Hyde, Hendon, N.W.9. (Corner of Colindale Avenue.) Colindale 7061. [3380]

SENIOR Development Engineers required by large electronic company, in N. London area, for radar communications, television and instruments projects in their Development Division; Engineering degree or equivalent professional qualifications; experience in developing to Government and other specifications and directing work of development engineers; salary scale up to £1,900 p.a. according to experience; accommodation available.—Write, Box 7205. [3330]

FIRM of Consulting Geophysicists have openings for young Electronic Engineers, preferably single, on oil prospecting parties overseas; commencing salary £50 per month, plus allowances depending upon area of operations; free accommodation and messing provided when serving abroad; qualifications, Higher National or C. & G. Certificates in Electrical Engineering or Telecommunications; pension fund.—Apply, giving particulars of experience, to Box 7178. [3324]

LABORATORY Technician (Physics), Queen Mary College (University of London), Mile End Road E.1. £315 p.a. by £15 to possible £450 subject to efficiency review at £390, plus London weighting £20 or £30 according to age, pension scheme, general duties, especially instrument repairs, glass blowing, lecture demonstrations and assisting in research; to start about September.—Letters only to Registrar, stating age, full details experience and present work. [3332]

THE electronics department of a large manufacturing company requires enthusiastic and experienced senior and junior electronic and electro-mechanical engineers for developments in internal and commercial instrumentation work; the company is situated in pleasant countryside on the outskirts of Wolverhampton; a superannuation scheme is in operation; initial salaries will be commensurate with ability, and there are good opportunities for advancement.—Box 1777. [3323]

B.E.C. requires engineering staff (British minimum age 20) for operation and maintenance duties at transmitter, studio, recording and television centres. Must be willing to serve anywhere in U.K. and have completed or been exempted from National Service. Experience in radio engineering desirable. Essential qualifications include University Degree, Higher National Certificate or equivalent in electrical engineering or success in examinations for C. & G. Final Certificate in Telecoms, or Full Technological Certificate, or Graduateship of I.E.E. or Graduateship with maths of Brit. I.R.E. Promotion prospects. Starting salary £545 rising by 5% annual increments to £755. Requests for application forms (enclosing addressed envelope and quoting ref. "EX.11/W.W.") should reach Engineering Establishment Officer, B.E.C., London, W.1, within 7 days. [3376]

GUIDED WEAPONS

The Guided Weapons Department of Vickers-Armstrongs Limited, Weybridge, has vacancies for the following Staff—

GRADUATE ENGINEERS, with degrees in Engineering, Physics or Mathematics, and 3 to 5 years' experience in one of the following categories:—

- E.1. Design and development of high pressure hydraulic or pneumatic systems and components.
- E.2. Development of techniques for vibration and/or climatic testing as applied to electronic equipment and design of associated test gear.
- E.3. Development work on reinforced plastics.
- E.4. Design of missile autopilots; simulators and computers.
- E.5. Design of U.H.F. and Micro-wave Transmitters and Receivers.
- E.6. Design of Transformers and magnetic amplifiers, with good general knowledge of electrical properties of materials.
- E.7. Design of electronic circuits and servo mechanisms.
- E.8. Engineering development of missile electronic equipments.

TECHNICAL ASSISTANTS, with degree, Higher National Certificate or equivalent, and experience in one of the following categories:—

- T.1. Development and test of high pressure hydraulic or pneumatic systems and components.
- T.2. Environmental testing of missile components.
- T.3. Manufacture of prototype missile electronic equipments to M.O.S. specifications.
- T.4. Manufacture of reinforced plastic components and potting of electronics.
- T.5. Development and test of instrumentation for missile trials.
- T.6. Development of missile autopilots and analogue computers.

LABORATORY ASSISTANTS, preferably with O.N.C. or equivalent.

- L.1. Assembly, test, and maintenance of hydraulic and pneumatic systems and components.
- L.2. Drawing and constructing test rigs used for mechanical and environmental testing.
- L.3. Manufacture of prototype electronic equipment and electro-mechanical devices. Layout and wiring from circuit diagrams and sketches, chassis work and simple machining.

DRAUGHTSMEN, with 2 years' experience or more as follows:—

- D.1. Design of ground, airborne or missile types of radar equipment.
- D.2. Design of small mechanisms such as missile autopilots, and electro-mechanical computers embodying gyroscopes, accelerometers, small motors, gearboxes, etc.

Apply to Employment Manager, Vickers-Armstrongs Limited (Aircraft Division), Weybridge, Surrey, giving full particulars and quoting reference EO/G.W./reference number above.


Weybridge station is 30 minutes from London on the main Waterloo/Portsmouth line.

Additional buses operate to and from the Works at starting and finishing times.

Canteen facilities.

MAST HEAD UNITS

(Gain approximately 15 dBs.
Noise fa-to approximately 2 dBs.



Beautifully designed and engineered

Incorporating a Cascode connected amplifier and suitable for use with all types of aerials. Supplied complete with power supply unit and mounting bracket. Descriptive leaflet on request.

Price Complete with 40 feet of special low loss feeder. **£19.00** (sent carriage & pkg. free or available from your dealer).

SPENCER-WEST QUAY WORKS, GT. YARMOUTH

A.G.N. Electronic Company

Specialists in Sound Reproducing Equipment
169, Park Lane, Leeds 1. Tel: 23609
Sales — Repairs — P.A. Hire

Purchase or hire your
'VORTEXION TAPE RECORDER'
& ASSOC. EQUIPMENT FROM
GRIFFITHS HANSEN (Recordings) LTD.
32/33 GOSFIELD ST., LONDON, W.1.
MUScum 0642/2771.

Chassis, Cases and all metal fittings made to specification for the Radio and Electronic Industry.
STAR METAL PLATE WORKS
74 CHURCH Rd., BARNES, S.W.13
Tel: RIV 6673/4

Z. & I. AERO SERVICES LTD.
19, Buckingham Street, W.C.2.
Telephone TRAFalgar 2371.
Special supplies of Test Equipment to Laboratories: Signal Generators TF-144G, UHF Type 1802 (8-150Mc/s.) 1-130A, Frequency Meters BC-221, TS-69, Portable Oscilloscopes TS-34. British and American Receiver Headgear Assys., HS-30, 33, 38, etc., M.C. Ammeters 5Q/1633, 20-0-20 Amps., M.C. Milliammeters 0-50 mA.
Transmitters BC-375 with Accessories. F.M. Walkie Talkies SCR-300.
Dynamotors DM-32, DM-33, PE-73, PE-86, PU-16.
Please apply for Stock Lists.
We urgently require TCS-Collins and other American Equipment

SITUATIONS VACANT
TELEVISION engineer, fully qualified, required by West End Murphy dealers; able to drive; permanent situation with top wages to suitable applicant; pension scheme, half-day Saturday.—Larg & Sons, Ltd., 76-77, High Holborn, W.C.1. Tel. Hol. 7918. [3424]

DRAUGHTSMEN, experienced in the radio field on electrical/mechanical assemblies required for interesting work on—Write, giving full particulars, including age and salary required, to Personnel Department, Vickers-Armstrongs, Ltd. Hursley Park, nr. Winchester. [3069]

McMICHAEL RADIO, Ltd., require senior and junior engineers in their equipment division laboratory at Slough; training and experience in the field of applied electronics (including communications) and experience of working with Government Departments are the chief qualifications required.—Write, stating age and full details of training, qualifications and experience, to the Chief Engineer, Equipment Division, McMichael Radio, Ltd., Slough Bucks. [0198]

ELECTRONIC Engineer required for the Research Laboratory of The English Electric Valve Co. at Chelmsford; applicants should have a Science Degree or equivalent qualifications, together with considerable experience in the design of circuits for experimental television and radar equipment; apply giving details of qualifications, experience and salary required to—Central Personnel Services, The English Electric Co., Ltd., 336-7, Strand, London, W.C.2, quoting Ref. 440F. [3313]

REQUIRED, keen young engineer or physicist (completed National Service) for interesting work on scientific and industrial instruments employing Servo mechanisms and electronic techniques; technical education to level of H.N.C. with sound knowledge of basic electrical and magnetic principles and willingness to learn; good salary and excellent prospects for the right man.—Write, giving full details to W. G. Pye Ltd., Granta Works, Newmarket Rd., Cambridge. [3431]

KELVIN & BUGHES, Ltd., Barking, Essex, have vacancies for Technical Assistants for development of electro-mechanical and electronic instruments (Marine). Work involves initial experiments, sea-going trials, production model's construction. Overseas visits overseas are arranged. Qualifications—Practical: 5 years' workshop or drawing office experience. Academic: City and Guilds Telecommunications Final Group Certificate, or equivalent.—Applications stating salary required should be addressed to the Personnel Manager [3151]

AN old-established engineering company in the Birmingham area have a vacancy for a young man (age about 25/27) for training as a service engineer on their outside staff; National Service must have been completed; apprenticeship and actual industrial experience in electrical or electronic work with emphasis on fault finding and testing of production equipment necessary; very good prospects to successful candidate.—Apply giving full details of experience, age and wages required to Box /515. [3398]

E.M.I. Research Laboratories, Ltd., have vacancies for engineers with design experience in the general field covered by high quality audio equipment, including transducers and measuring equipment recording equipment, pulse and analogue circuitry as applied to radar, computers, etc., and servomechanisms. Men with academic or professional qualifications preferred, but wide experience may be accepted as an alternative.—Apply in person or write to the Personnel Dept. (RL/12), E.M.I., Ltd., Blith Rd., Hayes, Middx. [3365]

A DEVELOPMENT establishment, associated with a large group of companies and situated west of London, requires draughtsmen with experience in the design of electronic apparatus and preferably with a knowledge of radio or line communication equipment. Salary offered will be commensurate with experience and qualifications. Details of conditions of service which include schemes to assist further technical education will be available during interview. Good social facilities provided. Apply Box No. 962, Dorland Advertising, Ltd., 18/20, Regent St., S.W.1. [3292]

DRAUGHTSMEN are required for permanent posts in the field of radar engineering; excellent opportunities for advancement; Salaries beyond A.E.S.D. rates to suitable applicants; staff pension scheme and canteen facilities; 5-day week; British Nationality essential. Posts to be filled in the following grades: Senior section leader; checker draughtsman and senior design draughtsman; intermediate draughtsman; circuit draughtsman; installation draughtsman.—Apply, quoting Ref. RLA/21, Chief Draughtsman Decca Radar, Ltd., Research Laboratory, 2, Tolworth Rise, Surbiton, Surrey. [3151]

MINISTRY of Transport and Civil Aviation—Radio technicians (men only) required at aerodromes and radio stations in U.K.; special training courses for keen technicians with basic qualifications; interesting work in progress providing electronic aids to navigation; prospect of permanent pensionable posts; rates of pay (London) from £330 p.a. at age 19, to £445 at 25, rising, subject to qualifying test to £540; rates slightly lower for provinces; candidates aged 19 or over with practical experience in maintenance of radio or radar equipment should apply to—Ministry of Labour and National Service, Chadwick St., London, S.W.1, quoting Order No. 6627. [3320]

"Always a good deal" at
WEST END RADIO

COMMUNICATIONS RECEIVERS—
AR7E, as new £37 10 0
CR100, as new £29 10 0
RI155, as new £7 19 6

HOOVER MINIATURE ROTARY TRANSFORMERS, 12 v. input (will run on 6 v.). Output: 365/310 v. 30 mA D.C. Size: 4 1/4 in. long, 2 in. diam. New, 12/6 ea. Post 1/-.

CANADIAN MARCONI No. 9 RECEIVERS, 2 Channel 1.9-5 Mc/s. 10 valves. B.F.O. X-Tal Controlled. BRAND NEW, 95/-. P. & P. 15/-.

109 RECEIVERS, 2 Channel, 8 valves 1.8-8.5 Mc/s. Complete with speaker and vibrator pack for 6 volt operation. 90/-. P. & P. 10/-.

1,000 Bargains for callers!

WEST END RADIO LTD.
14, LISLE STREET, LEICESTER SQUARE, LONDON, W.C.2.

Phone: GER 7341
OPEN ALL DAY SATURDAY!

-MORLEY TRANSFORMERS*

QUALITY P.P.O./P. TRANS. 20w., super Bifurcated Section low leakage windings, prim. ind. 75H. leakage ind. 075H. Sec. 3 and 15 ohms Prim. to indiv. requirements. Shrouded and term., wt. 5 lbs. 3 gns. Ditto 15 w., 2 1/2 gns. L.F. CHOKES, 10H. 65 mA. 4/6. 15H. 100 mA., 10/6. 20H. 150 mA., 12/6. CRT Htr. Isolation Trans. 25% sec. boost volt. 2 v., 10/6; 6.3 v., 10/6. MAINS TRANS. 0-300/250 v. tapped prim. 350-0-350 v. 80 mA. 5 v. 2 a., 6.3 v. 4 a., etc., from 21/- 6.3 v. 1 1/4 a. Htr. Trans. 7/6. Quotations for specials and rewinds. Part. P. & P. 1/-
2, PAWSONS RD., W. CROYDON, THO 1665

TELECRAFT

TV AERIALS

ARE CHEAPER AND BETTER

Send for Lists
TELECRAFT LTD.
THORNTON HEATH, SURREY.
THORnton Heath 1191-2


NEW! Easco HOME BATTERY CHARGER

For 12, 6 or 2 volt batteries
Charging Rate 2 1/2 Amp.

Price Only £5.15s.

EASCO ELECTRICAL LTD.
Dept. W.W.9
Brighton Terrace, S.W.9

Phone/Grams: BRixton 4961-2-3.



"THE CHALLENGER"

BRITAIN'S NEWEST TAPE DECK
Really compact, size only 11" x 7 1/2"
Weight 6 lb.

Incorporating the very latest in Deck design and fitted with new type super heads giving high quality reproduction. Just the Deck you have been waiting for at the right price.

£10. 10. 0



Send stamp for details of this and Amplifier to suit the E.W.A. Decks to:

E. W. A.

266 Warbreck Drive, Blackpool

**FINISHED BUILDING
THAT CHASSIS?**

*Why not have the
cabinet made to your
own specification!*

Send sketch and full details—we will quote by return. Or send 1/- for our latest illustrated catalogue of T/V, Radiogram, Table, Corner Baffle Cabinets, etc., in all of which the radio panel, motor and baffle boards may be cut to suit your own requirements.

Components

We hold extensive stocks of Radio and T/V components. No list available.

Chassis

Send for free leaflet on our latest 5 valve, 3 waveband superhet radiogram chassis.

Amplifiers

Send for details of our domestic 4½ and 5 watt amplifiers.

Tape Recorders

The latest 2-speed "ELIZABETHAN" model available at 48 gns. Send for details.

LEWIS RADIO CO.

Dept. 1054, 120 Green Lanes,
Palmers Green, London, N.13
Tel.: BOWes Park 6064

*Excellence in
design..*

Specialists in Sub
miniature Telecommuni-
cation Components




**STAND OFF
INSULATOR**

For 1500 volt working
Overall height 1.1".
Over chassis .86".
Dipped tinned spill
.35". Thread and
hexagon 6BA.

These are reproduced (approx) actual size

MINITRIMMER

Standard maxi-
mum capacities up
to 13pF. Voltage
500 DC. Base ½
square with fixing
centres for 10 BA
¼ apart.



Details from—

OXLEY
DEVELOPMENTS CO. LTD.
ULVERSTON, NORTH LANCs
Tel: ULVERSTON 3306

SITUATIONS VACANT

SENIOR design and development engineer required by well-known manufacturer (North-West England) of switches, relays and small electro-mechanical assemblies for the light electrical, electronic and telecommunications industries; applicants should have sufficient personality and experience to administer and direct the development activity of the advertiser in respect of these products.—Written applications, which can be made in the strictest confidence, should provide full particulars of qualifications, experience, age, salary required, to Box 7534.

A **SENIOR** appointment will shortly be filled in the London laboratory of a firm holding contracts in guided weapons and kindred fields; engineers who wish to be considered for this vacancy should be graduates and should have had some experience in industrial engineering laboratories; some production engineering experience in addition to microwave electronic and/or servo experience would be an advantage; starting salary will range according to age and experience and will be on a generous scale and will be subject to good increases, according to merit; pension and life assurance schemes are in operation.—Write, giving full details, in confidence, to Box 7532. [3409]

EXPERIENCED engineers are invited to apply for a position where energy, skill and initiative will be well rewarded; the work relates to the development of television components and circuits and the design of components for large-scale production; previous experience of television receivers is required, preferably in respect to means of scanning and focusing; the position is a permanent one which offers scope for advancement to a senior position; the commencing salary will be in accordance with previous experience, based on a generous and progressive scale.—Write, giving full personal particulars to the Personnel Manager, The Plessey Co., Ltd., Ilford, Essex. [3401]

SERVICE division of company specialising in cinema sound equipment installation and maintenance has vacancy for engineer at London headquarters; applicants must have good practical engineering experience and ability, with thorough knowledge audio frequency amplifying equipment and general principles electrical engineering; preference given to applicants prepared to undertake periodical duties in any part of the British Isles, with possibility of permanent transfer provincial district in supervisory capacity; promotion prospects for well educated, energetic young man with initiative and resourcefulness; car allowance and expenses paid; company contributory pension scheme; state age and give complete details education, previous experience and salary required.—Box 7441. [3387]

MAJOR oil company requires for employment in Venezuela, multi channel radio engineer with approximately 5 years' experience radio operating with U.H.F. techniques including time and frequency division multiplex radio equipment; approximately 30 years of age; must be competent to work independently and be able to co-operate in trouble shooting and testing; salary according to experience; good living conditions for single or married man; contributory pension scheme which covers both employee and family; tours of 3 years duration, also local leave travelling expenses paid for interview London; applications will be treated in strictest confidence.—Apply in writing giving full details age, qualifications, experience, to Box 27, 675 Deacon's Advertising, 56, Leadenhall St., E.C.3. [3382]

MINISTRY OF TRANSPORT AND CIVIL AVIATION: Telecommunications Technical Officers, Grade III. The Civil Service Commissioners invite applications from men for at least three pensionable posts. Age at least 23 and under 28 on August 1st, 1954, with extension for regular service in R.A.F. Forces. Candidates must possess (a) the O.N.C. in Electrical Engineering or (b) City and Guilds Intermediate Certificate in Telecommunications Engineering, plus City and Guilds Certificate Radio III or (c) City and Guilds Certificate Telecommunications Principles III (or higher) and Radio III (or higher) or (d) produce evidence of an equivalent standard of technical education. They must also have had not less than eight years' experience in an appropriate telecommunications field, including manufacturing or maintenance or operation. LONDON salary £480 (at age 23) to £670 (somewhat lower in Provinces). Starting pay up to £580 at age 28 or over on entry. Promotion prospects. **FURTHER** particulars and application forms from Civil Service Commission, Scientific Branch, 30, Old Burlington St., London, W.1, quoting No. S207/54. Application forms must be returned by October 8th, 1954. [3343]

SITUATIONS WANTED

PRODUCTION engineer, shortly leaving U.S.A. and Canada, to take up permanent residence in England; experienced in the design and production of television and electronic equipment, small electrical appliances, refrigeration and air conditioning equipment, etc.; requires a position where an extensive knowledge of American and Canadian production methods coupled with a good knowledge of the requirements of the British market and an ability to organise and handle labour would warrant a fair remuneration; would be willing to bring prototypes and designs, etc., from U.S.A. or Canada; age 36, married, two children.—Box 7058. [3003]

MONEY BACK GUARANTEE
DUKE & CO
621 ROMFORD ROAD, LONDON. E.12
CWO or COD • TEL: GRA 6677

T.V. TUBES £5-12"

3 MONTHS' GUARANTEE. Still our best buy, as supplied to the trade for the past 3 years. Not Ex-W.D. Had some hours' use. Various types and makes. Picture shown to callers. Carriage and insurance 15/6 extra. Please quote make and type required, and set with model No. when ordering.

SPECIAL OFFER of tubes with burns for testing and spares at 30/- each, with cathode to heater short 30/- each plus carriage and insurance.



DUNLOPILLO EX-COACH SEATS. 34in. x 16in. x 4in., 37/6. Ideal for cars, caravans and utilities. Carriage 4/6.

CAR REARLIGHTS

Infra-red glass. Easily changed for clear or red. Ideal tail lamps. As now law. Are over 2in. dia. New Ex-W.D. 1/9. Post 9d.



SPOTLIGHTS, 8/9. Butlers new but Ex-W.D. 7½in. dia., 6½in. deep. These lights are similar to those sold for £3-£5, but finished black. This light is easily fitted to dumb irons of bumper. Bulbs now available 6 v. 36 watt and 12 v., 48 watt. 4/6 each.

AMPLIFIERS. Push-pull, 77/6, 7 watts output. A.C. or Universal. 4 valves and 1 rec. Ideal for Pick-up or Mike. Post 2/6.

AMPLIFIERS. 57/6. 4-watts output. 3 valves. A.C. or A.C./D.C. Ideal for Pick-up or Mike. Post 2/6.

RECTIFIERS. 8/9. T.V. type. Salvage, guaranteed, 250 volt at 200 mA. And New. 350 volt at 200 mA., 12/9. Post 1/- each.

TELESCOPIC MASTS. Ex-W.D., but unused. Extend to 7ft. 6in. Base diameter ½in., tip ¼in. Closed length 15in. Ideal Aerial. **GIFT PRICE 5/9.** Post 1/3.

CRYSTALS. Germanium. Brand new, made by B.T.H. Give first-class results. With drawing, 1/9. Post 6d.

TRANSFORMERS. MICROPHONE TRANS. 2/9. E.M.I. type, fully shielded case. Post 1/-.

CAR RADIO TRANSFORMER. 5/9. 6 volt. New. Drawings 1/- each, post 1/9.

EXTENSION SPEAKERS. Brand new 6½in. p.m. speaker (low impedance). Mounted on polished and veneered baffle stand, gold fret. 5ft. lead ready connected. **ONLY 19/9.** Post 1/9.

RADIOGRAM CHASSIS. End drive, £6/17/6. Salvage, reconditioned, 3-wave band, 5-valve superhet (latest midgets), ext. speaker and pick-up sockets. Post 3/6.

P.M. SPEAKERS. 10in., 25/9, 8in., 18/6, 6½in., 14/9, 5in., 13/9. All three ohms. Best makes. P. & P. 1/9.

MOTORS. 12-24 volts, with flexible shaft, 18 ct. gold brushes. 17/6. Post 2/6.

ACCUMULATORS. 7/9. New, 2 v. 45 amperes. Post & Pkg. 2/-.

BATTERIES. H.T. New 90 v. portable Batrymax, 7/9; Ex-W.D. 90 v., 5/9; also Ex-W.D. 90 v. + 1½ v. 5/9. Post & Pkg. 1/9 each; 4½ v. L.T. Battery. New, 1/-, post 6d.

BEDSIDE T.R.F. RADIOS. 4 valve L. & M. wave bands. Walnut, plastic or white cabinets. Complete £6/9/6, plus 3/6 P. & P.

100 M/A MOVEMENT X.W.D. 2½" square (late oil temp.) As new, with drawing, 12/9, post 1/6.

SEND STAMP FOR 1954 CATALOGUE.

SITUATIONS WANTED

PARTNERSHIP sought in established or proposed company by well-qualified engineer (B.Sc) with inventive ability possessing some practical production lines (patented); 12 yrs. industrial exp. in development and production methods of radio, T.V, G.W., radar, lab. test gear, sheet metal and press work; considerable exp. in light electro-mechanical and electronic devices; good contacts; skilled worker; small capital; Surrey area preferred; state details to—Box 7143. [3517]

TECHNICAL TRAINING

CITY & GUILDS (Electrical, etc.) on "No Pass-No Fee" terms; over 95% successes; for full details of modern courses in all branches of Electrical Technology, send for our 144-page handbook—free and post. free.—B.I.E.T. (Dept. 388A), 29, Wright's Lane, London, W.8. [0117]

TUITION

NOTHING succeeds like success! What we have done a thousand times we can do again for you—see the B.N.R.S. advt., page 154. [0172]

WIRELESS operating; attendance and postal courses.—Stamp for reply to Manager, The Wireless School, Manor Gdns., London, N.7. [0104]

SEE the world as a radio officer, short training, low fees, scholarships, boarding/day students; stamp for prospectus.—Wireless College, Colwyn Bay. [0018]

THE Institute of Practical Radio Engineers have available home study courses in every phase of radio and television engineering specialising in the practical training of apprentices in the retail trade; enrolments limited, fees moderate.—The Syllabus of Instructional Text may be obtained post free from the Secretary I.P.R.E., Fairfield House, 20, Fairfield Rd., Crouch End, London, N.8. [0088]

TUITION

LEARN it as you do it.—We provide practical equipment combined with instruction in radio, television, etc.—Write for full details to Dept. WW47, E.M.I. Institutes, London, W.4. [0179]

T/V & Radio—A.M.Brit.I.R.E., City & Guilds, R.T.E.B., Cert., etc., on "no pass—no fee" terms. Over 95% successes. Details of Exams. & Home Training Courses in all branches of radio & T/V, write for 144-page handbook—free.—B.I.E.T. (Dept. 387A), 29, Wright's Lane London, W.8. [0116]

A.M.I.Mech.E., A.M.Brit.I.R.E. City and Guilds, etc., on "no pass—no fee" terms; over 95% successes; for details of exams and courses in all branches of engineering, building, etc., write for 144-page handbook—free—B.I.E.T. (Dept. 387B), 29, Wright's Lane, London, W.8. [0118]

FREE! Brochure giving details of home study training in radio, television, and all branches of electronics; courses for the hobby enthusiast or for those aiming at the A.M.Brit.I.R.E., City and Guilds Telecommunications, R.T.E.B., and other professional examinations; train with the college operated by Britain's largest electronic organization moderate fees.—Write to Dept. WW28, E.M.I. Institutes, London, W.4. [0001]

WIRELESS telegraphy.—Merchant Navy offers to youths 16 upwards after qualification, lucrative positions as radio officers.—Apply British School of Telegraphy, 179, Clapham Rd., S.W.9 (Est. 1906). Recognised by Ministry of Education, moderate fees, modern equipment, day and evening tuition; also postal courses in theory of wireless telegraphy for P.M.G. Certs. and Amateur Transmitting Licence. [0124]

TUITION

FULL-TIME courses for P.M.G. Cert., C.G.L.I. Telecommunications, Radar Maintenance Cert. and B.Sc (Eng.); prospectus free.—Technical College, Hull. [0111]

BOOKS, INSTRUCTIONS, ETC.

REQUIRED issues of Wireless World for September 1951, March 1952, May 1953.—Elcontrol, Ltd., Wilbury Way, Hitchin, Herts. [5314]

BOOKLETS "How to Use Ex-Govt. Lenses and Prisms," No. 1 and 2, price 2/6 each; ex-Govt. optical lists free for s.a.e.—H. English, Rayleigh Rd., Hutton, Brentwood, Essex. [0181]

I.P.R.E. technical publications, 5,500 Alignment Peaks for Superheterodynes, 5/9, post free; data for constructing TV aerial strength meter, 7/6; sample copy "The Practical Radio Engineer," quarterly publication of the Institute 2/-; membership and examination data, 1/-.—Sec., I.P.R.E., 20, Fairfield Rd., London, N.8. [0089]

"SHORT-WAVE Radio and the Ionosphere." By T. W. Bennington. A new edition of "Radio Waves and the Ionosphere"; this book shows how existing ionospheric data can be applied to everyday problems of short-wave transmission and reception. 2nd Edition, 10/6 net from all booksellers, 10/10 by post from Iliffe & Sons Ltd., Dorset House, Stamford St., London, S.E.1.

MANUAL of Hire Purchase Law, 2nd Edition. By A. C. Crane and A. C. Crane Jnr., B.A. (Oxon). Clearly explains the mass of general legal points affecting hire purchase transactions. Both types are covered—the general law applicable to all cases and the Acts of 1938, which are dealt with in clause by clause. 5/- net from all booksellers. By post 5/4 from Iliffe & Sons Ltd., Dorset House, Stamford St., London, S.E.1.

EUREKA & CONSTANTAN RESISTANCE WIRES

Prices per ounce

SWG	Enam.	D.A.S.C.	SWG	Enam.	D.A.S.C.
16	1/6	1/6	28	2/1	2/6
17	1/6	1/6	29	2/2	2/6
18	1/6	1/6	30	2/2	2/6
19	1/6	1/6	31	2/3	2/8
20	1/6	1/6	32	2/3	2/9
21	1/6	1/6	33	2/4	3/-
22	1/6	1/8	34	2/6	3/-
23	1/6	1/10	35	2/8	3/3
24	1/8	2/-	36	2/9	3/6
25	1/10	2/2	37	3/-	3/9
26	2/-	2/4	38	3/3	4/3
27	2/-	2/4	40	3/6	4/9

COPPER INSTRUMENT WIRE ENAMELLED, TINNED, LITZ, COTTON AND SILK COVERED.

All gauges available.
B.A. SCREWS, NUTS, WASHERS, soldering tags, eyelets and rivets.
EBONITE AND BAKELITE PANELS, TUFNOL ROD, PAXOLIN TYPE COIL FORMERS AND TUBES.
ALL DIAMETERS.

SEND STAMP FOR LIST, TRADE SUPPLIED.
POST RADIO SUPPLIES
33 Bourne Gardens, London, E.4

PRECISION SHEET METALWORK

We specialise in manufacturing of Chassis in all metals, large or small quantities to your own specifications.

V. W. BEAMISH

Shardeloes Garage, Shardeloes Rd., New Cross, London, S.E. 14.
Telephone: TIDeway 4795

THE POLLOCK M.C. PICKUP

Response 10 es. to 20 Kc/s. H.F. resonance 25 Kc/s., L.P. 20 Kc/s. Kit of parts to make pickup complete, including 100 : 1 transformer and sapphire stylus, 001 or .0025in., and full building instructions £4. 8s. 6d. Parts sold separately, prices: head and stylus 38/6; head for min. thorns 31/-; arm/pivot 26/-; transformer 26/-; all prices post free. S.a.e. for details to:—
G. BLUNDELL, 7 Sunnyside House, Child's Hill, London, N.W.2.

NEW! RADIO AND TELEVISION COMPONENT CATALOGUE

available on request, to

J. T. FILMER

MAYPOLE ESTATE, BEXLEY, KENT
Tel: Bexleyheath 7267

1954 - 5
CATALOGUE
JUST RELEASED

- ★ 60 PAGES
- ★ 2000 COMPONENT TYPES
- ★ 500 ILLUSTRATIONS

PRICE 1/-

COVENTRY RADIO

189 DUNSTABLE RD., LUTON
Tel: LUTON 2677



METERS



FOR WORKSHOP AND LABORATORY

Electrical test instruments repaired and calibrated, all types and makes, ammeters, voltmeters, ohmmeters, DC AC multirange meters, etc., meters converted and rescaled to specification. Quick service for industry

THE ELECTRICAL INSTRUMENT REPAIR SERVICE

329 Kilburn Lane, London, W.9. Tel. LAD 4168

"I NEVER THOUGHT THAT I COULD MAKE A RADIO SET"

say Satisfied Customers "Your instructions were so simple I couldn't go wrong!"

By using our "Home Constructor" Handbook (Price 2/6 only). YOU too can build superb sets. Crammed with Circuits, Supra-Simplified wiring diagrams, constructional details and "Know-How"

With RADIO CONTROL Information too!
* "The most helpful book in the trade."

Send today to
SUPACOILS, Dept. W.25
21 Markhouse Road, London, E.17

TELETRON SUPER INDUCTOR COILS
WITH MINIATURE DUST CORES

TRANSISTOR COILS
of high Q.



Triple wound for max. Selectivity
HMX. 200-550. M. 3/-. HLX. 1000-2000. 3/6.
HAX. 200-550. M. 3/- for Xtal diodes.
TRF. Dual wave. A/HF. 7/- Matched pairs. (as illustrated)

Stamp for complete list & circuits.
THE TELETRON CO.,
266, Nightingale Road, London, N.9.
HOW. 2527

Trade enquiries to sole distributor. **SAM MOZER**
95, Kendal Avenue, N.18. Edm. 7707

Electradix Amplifiers

Pre-amplifiers for Television, gain 55 db, frequency response flat from 42/49 mc/s. 6 db down at 41.5 db. Standard rack mounting, mains operated, switched milli-ammeter incorporated for monitoring complete with valve. Ideal for fringed areas or television rediffused in blocks of flats.

20 watt 4-channel Amplifiers, 5 watts each channel. Frequency response flat 40 cycles to 12 kc/s. Input and Output 600 ohms, 4 separate amplifiers in one case, gain control and monitoring input and output chokes all built into one cabinet.

R.C.A. Wavemeters, T.E.149, 200 kc/s to 20 mc/s. accuracy 0.005 per cent with crystal, spares and instruction booklet, supplied in maker's original cartons, new and tested.

Leslie Dixon & Co.

Dept. A, 214 Queenstown Road, London, S.W.8

Telephone: MAcaulay 2159



The odd case of the varnishing medium

Obvious to the meanest intelligence! If my deductions are correct we will discover our medium on insulations enclosed in a metal circuit, eliminating discharges on the slot portion of motor coils and on instrument transformer coils. Yet this varnish medium is but one link in the case, for it holds a pure silk fabric coated with graphite — the whole being known to discerning electricians as Symoid Conducting Tape. Thanks to the valuable pioneer work of our associate Inspector Symons, I am able to say that, as a flexible conducting material, Symoid can be used in all types of taping operations where a metallic tape would prove too rigid.

SYMOID CONDUCTING TAPE

Pure silk fabric coated with graphite held in a varnish medium. For all taping operations where metallic tape is too rigid. Resistance value varies linearly with thickness of coating, and will be lowered with ageing. Can be supplied in roll form 36" wide and as tape either bias or straight cut.

TESTED FLEXIBLE INSULATION BY

H. D. Symons & Co. Ltd.

PARK WORKS · KINGSTON HILL · SURREY
TEL KINGSTON 0091 · GRAMS INSULATION (PHONE) KINGSTON · ON · THAMES

Symons
ADVISORY
SERVICE

If you have an electrical insulation problem, send it to us! Our experts will be pleased to advise you.

THE
DESIGN and DEVELOPMENT
of specialised equipment for
Research and Industry.
DUN-SOBIESON ELECTRICAL CO.,
17 Victoria Gardens, London, W.11. Park 6636

TESTOSCOPE Mains Tester

For high and low voltage testing.—

1/30 and 100/850 volts A.C. or D.C. Write for interesting leaflet 30P.



RUNBAKEN · MANCHESTER 1

RADIO & TELEVISION COMPONENTS
WE OPERATE A PROMPT & EFFICIENT
MAIL ORDER SERVICE.
"VIEW MASTER" & "TELE-KING" specialists
Easy terms available. Stamp (only) for lists
JAMES H. MARTIN & CO.,
FINSTHWAITE, NEWBY BRIDGE,
ULVERSTON, LANCs.

CLASSIFIED ADVERTISEMENTS

Use this Form for your Sales and Wants

To "Wireless World" Classified Advertisement Dept., Dorset House, Stamford Street, London, S.E.1

PLEASE INSERT THE ADVERTISEMENT INDICATED ON FORM BELOW

- RATE: 7/- for TWO LINES. 3/6 every Additional Line. Average six words per line.
- Name and address to be included in charge if used in advertisement.
- Box No. Allow two words, plus 1/-.
- Cheques, etc., payable to Iliffe & Sons Ltd., and crossed " & Co."
- Press Day, October 5th for November issue.

NAME

ADDRESS.....

REMITTANCE VALUE.....ENCLOSED

Please write in block letters with ball pen or pencil.

NUMBER OF INSERTIONS.....

INDEX TO ADVERTISERS

	PAGE		PAGE		PAGE
A.A. Tools	156	Ferranti, Ltd.	19	Palnton & Co., Ltd.	47
Acoustical Mfg. Co. Ltd.	21, 57	Field, Norman H.	152	Palmer, G. A. S.	116
Adcola Products, Ltd.	46	Palmer, J. T.	142	Parker, A. B.	142
A.D.S. Relays, Ltd.	92	Poyle, W. & G., Ltd.	92	Partridge, W. F. & Co., Ltd.	162
Advance Components, Ltd.	11, 70	Prith Radiocraft, Ltd.	166	Partridge Transformers, Ltd.	155
Aerco	88	Furniss	34	P.C.A. Radio	162
Aerialite, Ltd.	89	Furzeill Laboratories, Ltd.	74	Patent	162
Aero Research, Ltd.	39			Phillips Electrical, Ltd.	84
A.G.N. Electronic Co.	170			Plasticable, Ltd.	92
Airmec, Ltd.	43			Post Radio Supplies	172
Allen Components, Ltd.	159	Galpins	163	Power Controls, Ltd.	37
Alpha Radio Supply Co., The	154	Gardners Radio, Ltd.	48	Pratt's Radio	144
Altham Radio Co., Ltd.	145	Gee Bros., Radio, Ltd.	146	Premier Radio Co.	93, 94
Ambassador Radio & Television	88	General Electric Co., Ltd.	41, 75	Proop, Bros., Ltd.	123
Amplex Appliances (Kent), Ltd.	148	Gaser, L., & Co.	166	Pye, Ltd.	18, 39, 49
Amplivox, Ltd.	92	Goonmans Industries, Ltd.	45, 69	Pye, W. G., & Co., Ltd.	30
Anders Electronics, Ltd.	126	Goodsell, Ltd.	82		
Anglo-American Vulcanised Fibre Co., Ltd.	20	Gowlands	92	Quartz-Crystal Co., Ltd.	160
Antiference, Ltd.	111	Jramophone Co., Ltd., The	102		
Appointments Vacant	152, 154, 168, 169	Jrampan Reproducers, Ltd.	124	Radio & Electrical Mart, The	150
Arlecronic Switches, Ltd.	44	Gray, Arthur, Ltd.	86	Radio Corporation of America	13
Ariel Sound	164	Jresham Transmitters, Ltd.	10	Radio Kits, Inc.	164
Armstrong Wireless & Television Co., Ltd.	89, 157	Griffiths Hansen (Recordings), Ltd.	170	Radio Resistor Co., Ltd., The	164
Ashdown, H.	68	Jrunding (Gt. Britain), Ltd.	82	Radio Servicing Co.	120
Ashworth, H.	42			Radiospares, Ltd.	152
Associated Cine Equipments, Ltd.	78	Hall Electric, Ltd.	50	Radio Supply Co.	138, 139
Automatic Coil Winder & Electrical Equipment Co., Ltd., The	31	Hanney, L. F.	124	Radio Traders, Ltd.	153
Automatic Telephone & Electric Co., Ltd.	1	Hartley, H. A., Co., Ltd.	123	Rawplug Co., Ltd., The	40
Autoset (Production), Ltd.	74	Hartleys, W. T., Telegraph Works Co., Ltd.	156	Reproducers & Amplifiers, Ltd.	52
		Henry's	147	R.N.Z.A.F.	128
Bakers "Selhurst" Radio	76	Hin, Ltd.	147	Reed Laboratories	124
Barker Natural Reproducers	159	Holley's Radio	126	Regers Development Co.	46
Barton's (Radio)	144	Jomelab Instruments, Ltd.	119	Rolet, H. & Co., Ltd.	150
Beamish, V. W.	101	Household Electric, Ltd.	117	Runoaken Electrical Products	173
Belling & Lee, Ltd.	101	Laworth, P.	134		
Bell, John & Croymen	142	H.P. Radio Services, Ltd.	78	Salford Electrical Instruments, Ltd.	56
Bel Sound Products, Ltd.	152	Hidson Electronic Devices, Ltd.	60	Sallis, A. T.	144
Benson, W. A.	164	Jughes, F. A., & Co., Ltd.	42	Samsons Surplus Stores	152
Berry's (Short Wave), Ltd.	87	Hunt, A. H. (Capacitors), Ltd.	25	Savage Transformers, Ltd.	161
Bird, S. S., & Sons, Ltd.	31	Hunton, Ltd.	128	Service Radio Spares	152
Birmingham Sound Reproducers, Ltd.	96	Jygrade Wire Co.	165	Sherman's Supply Co.	167
B.K. Partners, Ltd.	68, 118			Sherratt's Electrical Instruments Co., Ltd.	120
Blickvac	88	Iliffe Books	86, 148	Simmonds, L. E., Ltd.	120
Blundell, G.	168, 172	Imhof, Alfred, Ltd.	66	Simon Sound Service	64
Bradmatic, Ltd.	116	Industrial Electronics	119	Smith, G. W. (Radio), Ltd.	149
Britain, Chas. (Radio), Ltd.	117	International Radio, Ltd.	89	Smith, H. L. & Co., Ltd.	160
British Communications Corp., Ltd.	24	International Correspondence Schools	76	Smith, W. H. & Sons, Ltd.	118
British Distributing Co.	164			South Sales, Ltd.	162
British Institute of Engineering Technology	152, 160	Jackson Bros. (London), Ltd.	64	Southern Radio Supply, Ltd.	72
British Insulated Cables, Ltd.	Cover 11			Southern Rentals, Ltd.	72
British National Radio School	154	Kaye Electrical Mfg. Co.	146	Spencer-West	170
British Physical Laboratories	48, 80	Kemper, S.	129	Speers, Ltd.	90
British Sarozal, Ltd.	154	Kenroy, Ltd.	162	Standard Telephones & Cables, Ltd.	22, 99, 110
Brookes Crystals, Ltd.	82	Keyswitch Co., The	142	Star Metal Plate Works	170
Brown, S. G., Ltd.	80	Kolectic, Ltd.	70	Stearie & Porcelain Products, Ltd.	61
Bulwin, A. F., & Co., Ltd.	Edit. 527	Koskie, E.	146	Stern Radio, Ltd.	130, 131, 132, 133
Bullers, Ltd.	52			Stewart Transformers, Ltd.	126
Bull, J., & Sons	91			Stratton & Co., Ltd.	56, 126
				Sugden, A. R., & Co. (Engineers), Ltd.	60
Candler System Co.	169	Lafo Compounds, Ltd.	160	Sujacolis	158, 172
Cementation (Muffelite), Ltd.	86	Lancaster Hi-Fidelity Acoustical Equipment Co.	164	Swift Coldfield Electrical Engineers	168
Chaffey Cabinet Co.	160	Lasky's Radio & Co., Ltd.	135, 136, 137	Simons, H. D., & Co., Ltd.	173
Champion Products	158	Leak, H. J., & Co., Ltd.	113		
Chapman, C. T. (Reproducers), Ltd.	70	Lee Products (Gt. Britain), Ltd.	86	Tannoy Products, Ltd.	67
Cinema Television, Ltd.	53	Leavers-Rich Equipment, Ltd.	120	Taylor Electrical Instruments, Ltd.	17
City Sale & Exchange, Ltd.	122	Lewis Radio Co.	171	Technograph Printed Circuits, Ltd.	26, 27
Clastic Electrical Co., Ltd.	82	Lockwood & Co.	168	Tektronix, Inc.	29
Clydesdale Supply Co.	151	London Central Radio Stores	166	Telecraft, Ltd.	170
Clyne Radio, Ltd.	140, 141	Lowther Mfg. Co.	129	Telegraph Condenser Co., Ltd.	Cover 11
Cohen, D.	142, 143	L. R. Supply Co., Ltd.	117	Telemechanics, Ltd.	70
Cosmocord, Ltd.	100	Lyons, Claude, Ltd.	15	Tele-Radio (1943), Ltd.	58
Cossor, A. C., Ltd.	107	Lyons Radio	166	Teleton Co., The	172
Covenry Radio	172	Magnetic Coatings, Ltd.	62	Transradio, Ltd.	72, 82
Cranstow, Alan	166	Magnetic Devices, Ltd.	81	Trianon Electric, Ltd.	91
		Mail Order Supply Co.	33, 34, 35	Trix Electrical Co., Ltd.	Edit. 525
Davies, A. & Co.	165	Marconl Instruments, Ltd.	6	Truvox, Ltd.	38, 125
Davis, Jack (Relays), Ltd.	76	Marconi's Wireless Telegraph Co., Ltd.	105		
Denco (Clackon), Ltd.	124	Marine Radio Communications Co.	129	Uncles, Bliss & Co., Ltd.	72
Direct T.V. Replacements	124	Marriott, P. A., & Co.	163	Universal Electrical Instruments Corp.	153
Dixon, L. & Co.	173	Martin, J. H.	176	Universal Electronics	151
Dixon's Electronic Sales & Service	166	McGraw-Hill Publishing Co., Ltd.	74		
Donohoe's (Timers)	162	McMurdo Instruments Co., Ltd.	50	Valradio, Ltd.	90
Duke & Co.	171	Melton Metallurgical Laboratories, Ltd.	164	Verdik Sales, Ltd.	127
Dunlop Co., Ltd., The	173	Milani Instrument Co.	144	V.E.S. Wholesale Services, Ltd.	150
Dun-Sobleson Electrical Co.	173	Miers, N. & Co., Ltd.	119	Vitavox, Ltd.	87
		Minnesota Mining & Manufacturing Co., Ltd.	78	Vortexion, Ltd.	111
E.A.P. (Tape Recorders), Ltd.	128	Modern Book Co.	163, 168		
Easeo Electrical, Ltd.	170	Modern Electrics, Ltd.	90	Wayne Kerr Laboratories, Ltd., The	71
Edison Swan Electric Co., Ltd.	16, 85	Modern Techniques	122	Webber, R. A., Ltd.	92
Electrical Instrument Repair Service, The	172	Morley Transformers	170	Webb's Radio	152
Electro-Acoustic Developments	162	M.R. Supplies, Ltd.	84	West End Radio, Ltd.	170
Electro-Acoustic Industries, Ltd.	4	M.S.S. Recording Co., Ltd.	51	Westinghouse Brake & Signal Co., Ltd.	80
Electro Methods, Ltd.	28	Mullard, Ltd.	3, 7, 23, 36, 83, 98	Westinghouse Wireless Works	116
Electronic Laminations, Ltd.	127	Multicore Solders, Ltd.	Cover 1v	Whitaker, H.	148
Electronic Precision Equipment	114	Murex, Ltd.	40	Whiteley Electrical Radio Co., Ltd.	79
Electro-Winds, Ltd.	150			White, S. S., Co. of Gt. Britain, Ltd., The	55
E.M.G. Handmade Gramophones, Ltd.	156	Newtown Industries	166	Whittemore, A. J. (Aeradio), Ltd.	162
E.M.I. Institutes	102, 106, 109	Northern Radio Services	12	Wilkinson, L.	84
Engineering Industries Association	44	Northern Transformer Co.	158	Willenden Transformer Co., Ltd.	165
Enthoven Solders, Ltd.	65			Woden Transformers, Ltd.	59
Ever Ready Co. (Gt. Britain), Ltd., The	2	Oddie, Brayburv & Cull, Ltd.	162	Wolf Electric Tools, Ltd.	62
E.W.A.	170	Osma Radio Products, Ltd.	53	Woolleys Radio & Electrical Supplies, Ltd.	150
Excel Sound Services, Ltd.	14	Oxley Developments Co., Ltd.	171	Wright & Weaire, Ltd.	5
				Young, C. H.	146
				Z. & I. Aero Services, Ltd.	170

Printed in Great Britain for the Publishers, ILIFF & SONS LTD., Dorset House, Stamford St., London, S.E.1. by CORNWALL PRESS LTD., Park Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA AND NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd. WILLIAM DAWSON & SONS (S.A.) LTD. UNITED STATES: The International News Co.

FOCUS ON LEADERSHIP 'LECTROPACKS' for the serviceman



The service engineer depends upon the reliability of the components he uses to safeguard his own reputation: he must be certain they will give trouble-free service. The fact that so many service men use only T.C.C. Condensers is evidence of their supremacy.

are robust yet compact and employ ALL-ALUMINIUM non-corrosive internal construction. The range below is a useful guide to the types available, which in the majority of cases will be found the exact replacement.

T.C.C. "Lectropack" Dry Electrolytic Condensers

Capacity µF.	D.C. Volts		Ripple Current Max. M/A	Dimensions in inches		T.C.C. Type No.	List Price
	Wkg.	Surge		L	D		
60 - 100	275	325	450	4 1/2	1 3/8	CE 37 HE	16/-
60 - 250	"	"	530	4 1/2	1 3/4	CE 60 HE	28/-
100 - 200	"	"	650	4 1/2	1 3/4	CE 60 HEA	28/-
100	350	400	450	2 3/4	1 3/8	CE 10 LE	13/6
200	"	"	770	4 1/2	1 1/2	CE 36 LE	24/-
60 - 100	"	"	450	4 1/2	1 3/8	CE 37 LE	21/-
60 - 100	"	"	500	4 1/2	1 1/2	CE 36 LEB	23/-
64 - 120	"	"	530	4 1/2	1 3/4	CE 60 LE	24/-
60 - 250	"	"	500	4 1/2	1 3/4	CE 60 LEB	34/-
100 - 100	"	"	550	4 1/2	1 1/2	CE 36 LEA	26/-
100 - 200	"	"	700	4 1/2	1 3/4	CE 60 LEA	33/-
100 - 200	"	"	700	4 1/2	2	CE 15 LE	34/-
60	450	550	450	3 1/4	1 3/8	CE 38 PE	14/-
60 - 100	"	"	500	4 1/2	1 3/4	CE 60 PE	29/-

T.C.C. TECHNICAL BULLETIN No. 28 details full range of TV Condensers

THE TELEGRAPH CONDENSER CO. LTD

RADIO DIVISION

NORTH ACTON · LONDON · W.3

Tel: ACORN 0061



SPECIALISTS IN CONDENSERS SINCE 1906

Speed up **SOLDERING**

Cut down **COSTS**

WITH

ERSIN MULTICORE SOLDER

Ersin Multicore Solder is now supplied with 5 cores of flux unless otherwise specified. The use of 5 core solder speeds up soldering processes because the cores of Ersin Flux are situated very near to the circumference of the solder wire, allowing the flux to be released immediately heat is applied.

A new flux (type 362) has been formulated to remove heavy oxide deposits at high speed so that the molten solder wets the surface quickly, penetrating to molecular depth. Type 362 Ersin Flux has been exhaustively tested under high degrees of humidity and found to be completely non-corrosive. The residue is hard and non-sticky; it will not collect dust or mould.

Ersin Multicore 5 core solder has been welcomed by leading manufacturers of Radio, Television and Electronic equipment. The extra high speed characteristics of Ersin Multicore 5 core solder allow in many instances a solder of lower tin content to be used with consequent saving in cost.

Solid solder wire, solder rings, printed circuits, Arax Multicore Solder (for non-electrical work), automatic soldering heads, special high and low melting point solders, etc., also available. Full details on request.

THE MULTICORE RANGE COVERS EVERY SOLDERING NEED

7 lb. REEL

Multicore Solder is supplied for factory use on nominal 7 lb. reels in 6 alloys and 9 gauges with 5 cores of Ersin Flux. 3 core solder available on request. Other alloys and gauges supplied to special order. Prices on application.



RADIO AND T/V SERVICE ENGINEERS' 1 lb. REEL

Approximately 162 ft. of 18 s.w.g. 50/50 alloy is made up in an economy pack for Service Engineers or Workshops not requiring very large quantities of solder. Cat. Ref. R5018, 15/- each (subject).



BIB WIRE STRIPPER AND CUTTER

This three-in-one tool strips insulation without nicking wire, cuts flex without leaving rough edges, splits extruded flex. Easily adjusted to most wire thicknesses. 3/6 each (subject).



JELLY AND LIQUID FLUXES

Ersin Flux in liquid or high-viscosity jelly form is available for processes where it is not convenient to use cored solder. Samples sent to manufacturers on request.



TAPE SOLDER

Useful for processes where no soldering iron can be used or the usual means of heating are not available. Packed in 3 1/2 lb. reels in widths from 1/4" to 3/8" and thicknesses from .005" with or without flux cores. Prices on application.



SIZE 1 CARTON

Made in 4 specifications especially for radio enthusiasts.

Car. Ref. No.	Alloy Tin Lead	S.W.G.	App L'gth per carton
C 16014	60/40	14	21 feet
C 16018	60/40	18	55 feet
C 14013	40/60	13	19 feet
C 14016	40/60	16	38 feet

5/- each (subject).

