

BYTE

12490



FEBRUARY 1984 Vol. 9, No. 2
\$3.50 in USA
\$3.95 in Canada/£2.10 in U.K.
A McGraw-Hill Publication
0360-5280

BENCHMARKS

the small systems journal



APPLE'S MACINTOSH





Inside Apple

Vol. 1, No. 4

A dot matrix printer that will improve your image.

Meet the Apple® Imagewriter, the newest dot matrix printer for your Apple Personal Computer.

And with all that it has going for it, just maybe the best dot matrix printer on the market.

Take legibility, for instance.


The Imagewriter crams 140 x 160 dots into each square inch. So you get text that's highly readable and high resolution graphics, besides.

And is it fast.

The Imagewriter cruises at an unbelievable 120 characters per second. And that's just in the text mode. It's even faster printing graphics. 180 characters per second, to be exact.

What's more, the graphics dump is up to 60% faster than other comparably priced dot matrix printers. And that makes the Imagewriter fast enough to handle the Lisa™

Yet it's just as at home with an Apple III or Apple IIe. Thanks to Apple software experts who designed the control electronics to give the Imagewriter perfect compatibility. Not to mention some special capabilities



like superscript and subscript, to name just two.


Now, with all this high-speed performance, you'd expect the Imagewriter to make the Devil's Own Noise. It doesn't. In fact, the Imagewriter is specially constructed — with overlaid seams and special sound-deadening materials — to achieve a remarkable 53 dB. How loud is a remarkable 53 dB? You'd make more noise if you read this aloud.

The Imagewriter even has quiet good looks, since we designed it to look like the rest of the Apple Family.

Yet even with all its improvements, the Imagewriter is a better deal than any other dot matrix printer with comparable

performance. And you can print that.

**APPLE PRESENTS THE
E IMAGewriter APPLE PR
ESENTS THE IMAGewriter APPLE PRESENT
S THE IMAGewriter APPLE PRESENTS THE IMAGewriter APPLI**

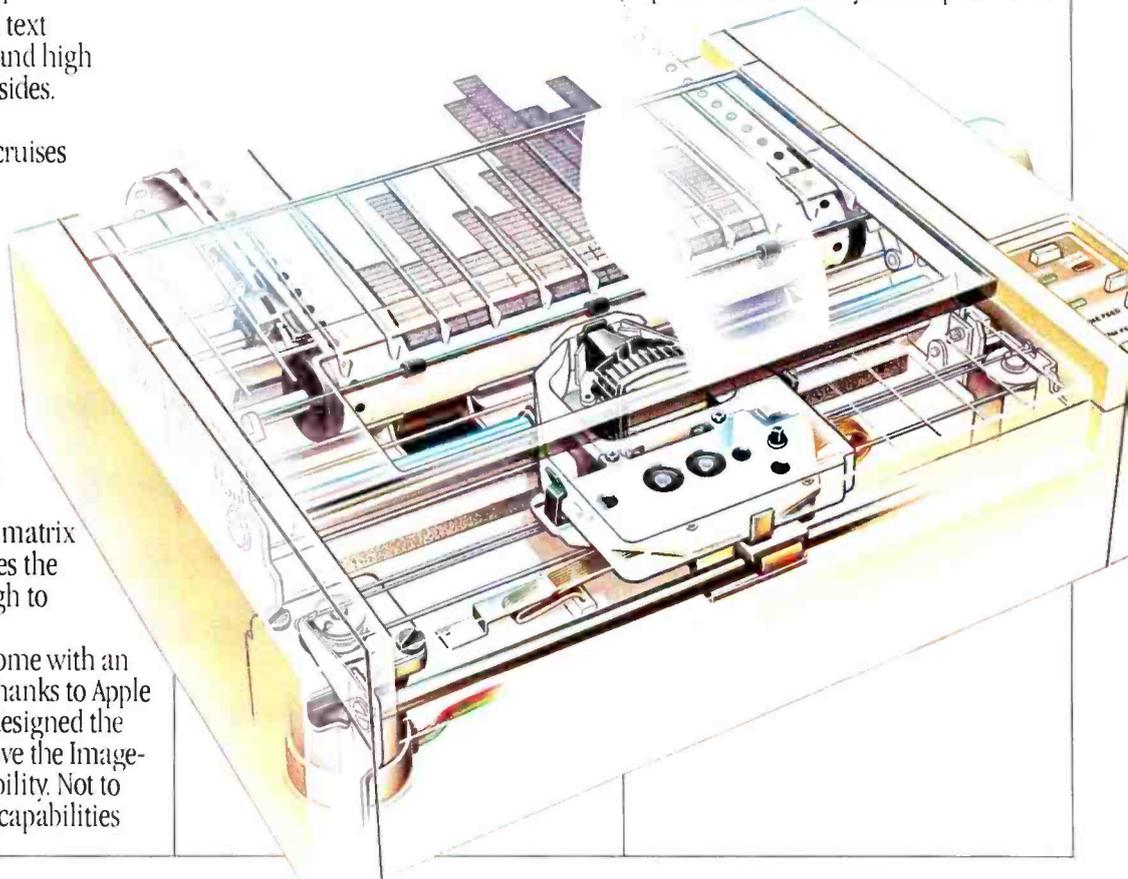



Charge!

Go out there and get the Apple Personal Computer System you really want. Now. Without laying out your extra cash. Without tying up your other lines of credit. With the Apple Card. The only consumer credit card reserved exclusively for the purchase of Apple Computers, peripherals and software.

Like all our products, it works simply:

Fill out an application (short, to the point and annotated in English) at an authorized Apple dealer honoring the Card. Your salesperson will call in the application and in most cases get an approval for you right on the spot.

You can then take your Apple system home. You don't even have to wait for the Card; we'll mail it out to you. And by the time you get it, you'll probably be well into doing whatever you bought your Apple system to do.

There is no annual fee for the Card, although a couple of restrictions do apply. The first purchase must include an Apple Personal Computer and you have to put 10% down. And subsequent purchases need to be at least \$100 if made with the Card. Oh, yes — you'll also have a credit limit.

When you use the Apple Card to make additional purchases, all you have to do is show the Card and sign the invoice. As long as it's within your credit limit, of course. Our dealers get a little nervous when someone signs for half their inventory. You understand.

You'll also receive monthly statements that include the latest purchases, credit available, and the minimum payment due. You'll also be happy to know Apple Card credit terms are affordable and the payments can be spread out. It's all

spelled out for you at the time your Card is approved.

So stop by a participating authorized Apple dealer and get an Apple Card. Just think of it as credit where credit is due.

Give your floppy disks the boot.

We call it the "floppy disk shuffle." It happens when you have two or more software programs on floppies and you need to work with both. What do you do? You put one disk in, boot it, do your work, take it out, put the other disk in, boot it, do your work — you get the idea.

Well, you can stop shuffling any time now.

Thanks to a unique new software program called Catalyst™ from Quark, Inc. Specially designed for your Apple III and ProFile™ hard disk.


Catalyst allows you to take a wide variety of software programs and store them on your ProFile. Once they're on your ProFile, you just select the program you want from the Catalyst menu that appears on your monitor — then Catalyst does the rest. You'll never have to boot those programs again.

What kinds of programs will work with ProFile and Catalyst?

Almost anything written for the Apple III including copy-protected programs like VisiCalc®, Quick File™ and Apple Writer III. Or languages like Pascal, BASIC, or COBOL.

And once you've loaded these programs into your ProFile, the only diskette you may ever need is the Catalyst.

So if you have an Apple III and a ProFile and more floppies than you care to flip through, get yourself a Catalyst. And boot those disks for good.

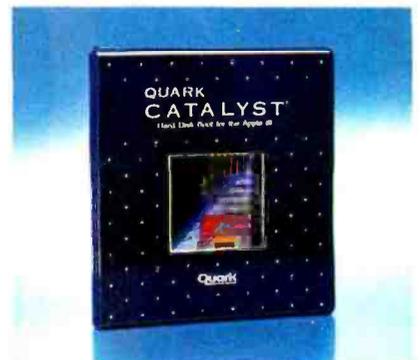



Page 30



Page 58

Cover Story

30 The Apple Macintosh Computer by Gregg Williams / The firm that brought forth the Lisa now offers mouse-window-desktop technology in an under-\$2500 system.

58 An Interview: The Macintosh Design Team by Phil Lemmons / The "wizards" behind the Macintosh discuss the design goals and philosophy that influenced the development of Apple's new computer.

Columns

88 Build the Circuit Cellar Term-Mite ST Smart Terminal, Part 2: Programming and Use by Steve Ciarcia / The supplied standard control software supports several character attributes and various configuration options.

113 User's Column: Chaos Manor Gets Its Long-Awaited IBM PC by Jerry Pournelle / Of mice and men, Eagles, Shirley, the ol' mailbag, and much more.

147 BYTE West Coast: A Business Computer, a Business Program, and More on Voice Recognition by Ezra Shapiro / Recent developments on the computing scene raise some questions about perceived industry trends.

Themes

158 Benchmarks and Performance Evaluation by Bruce Roberts / This month's articles discuss benchmarks, their limitations, and alternative methods of product evaluation.

160 Don't Bench Me In by Jerry Houston / Benchmarks are a popular way to compare both hardware and software. But how meaningful are they?

168 Beyond MIPS: Performance is Not Quality by John M. Carroll and Mary Beth Rosson / Two users observe that there's more to overall system quality than speed of operation.

175 Software Performance Evaluation by Brian Boyle / This article presents some helpful guidelines borrowed from a successful hardware model.

193 The Art of Benchmarking Printers by Sergio Mello-Grand / An exhaustive set of benchmarks helps you determine how fast your printer really is.

218 Benchmarking FORTRAN Compilers by Avram Tetewsky / The author offers insights into determining which compiler creates the fastest code.

227 Benchmark Confessions by Peter Marvit and Mohandas Nair / Understanding the background and intentions of benchmarks is the key to interpreting the results.

235 The Word-Processing Maze by Andrea Lewis / How to find your way through all those "new" features.

243 Evaluating Word-Processing Programs by Arthur Naiman / A 100-point checklist simplifies the decision-making process.

Reviews

251 Reviewer's Notebook by Rich Malloy / A plotter from Hewlett-Packard, a Manesmann Tally printer, and two software packages for the IBM PC are featured in this month's notes.

252 ProDOS by Rob Moore / Apple Computer presents a powerful new operating system for Apple II computers.

267 Knowledgeman by James W. Walker / A new, fully integrated management system offers full database and spreadsheet capabilities in one package.

278 The IBM CS-9000 Lab Computer by Thomas R. Clune / A closer look at IBM's "other" microcomputer.

BYTE is published monthly by McGraw-Hill Inc., with offices at 70 Main St., Peterborough, NH 03458, phone (603) 924-9281. Office hours: Mon—Thur 8:30 AM — 4:30 PM, Friday 8:30 AM — Noon, Eastern Time. Address subscriptions to BYTE Subscriptions, POB 590, Martinsville, NJ 08836. Address changes of address, USPS Form 3579, and fulfillment questions to BYTE Subscriptions, POB 596, Martinsville, NJ 08836. Second-class postage paid at Peterborough, NH 03458 and additional mailing offices. USPS Publication No. 528890 (ISSN 0360-5280). Postage paid at Winnipeg, Manitoba. Registration number 9321. Subscriptions are \$21 for one year, \$38 for two years, and \$55 for three years in the USA and its possessions. In Canada and Mexico, \$23 for one year, \$42



292 The Rixon R212A Intelligent Modem by Chuck Weger / This device can emulate the Hayes Smartmodem and do a few other tricks besides.

303 Savvy by Peter V. Callamaras / This easy-to-use system actually learns from you.

308 The Micro-Sci Gameport III for the Apple III by William J. Purpura and Paula K. Purpura / With this card in place, your Apple III can run most Apple II game software.

310 The Videx Ultraterm by Peter V. Callamaras / Easy to install and use, the Ultraterm video-display card enables the Apple II to display up to 160 columns or 48 lines.

318 Apple Disk Emulators: Axlon, Legend, Plon, and Synetix by Michael W. Gilbert / Four RAM disk emulators for the Apple II allow faster execution times for applications requiring numerous disk accesses.

Features

84 Apple Announces the Lisa 2 by Gregg Williams / Macintosh compatibility is a key feature of the new Lisa.

331 IBM/Apple Communication by Robert Jones / Sending text files between Apples and IBM PCs is easy with these simple programs.

342 A Low-Cost, Low Write-Voltage EEPROM by Joe D. Blagg / Seeq Technology's \$10 EEPROM can be programmed in your computer with simple and inexpensive circuitry.

346 Foot Control by Dennis M. Pfister / Adding a foot-operated Control key to your keyboard simplifies control sequences.

349 Inside a Compiler: Notes on Optimization and Code Generation by Kaare Christian / A look at Pascal/MT+86 and Pascal-86 shows you how to evaluate these and other compilers.

370 Writing Device Drivers for MS-DOS 2.0 Using Tandon TM100-4 Drives by J. Eric Roskos / The increase in flexibility can be worth the added effort.

383 Deciphering Word Games by Mark C. Worley / Two BASIC programs can help you solve cryptograms and anagrams.

388 Five Original Graphics by Robert Sussman and Ted Sussman / Improving on the Spirograph.


395 Bubbles on the S-100 Bus, Part 2: The Software by Louis Wheeler / Making Micropolis MDOS and CP/M work on a bubble-memory board.

416 Calculating Overhead Costs by Computer by G. Truman Hunter / A simple, foolproof arithmetic procedure determines the distribution of indirect costs quickly and accurately.

Nucleus

- | | |
|---|---|
| 4 Editorial: The Compatibility Craze | 466 Books Received |
| 7 MICROBYTES | 469 Clubs and Newsletters |
| 12 Letters | 472 BYTE's User to User |
| 428 Programming Quickie | 478 Book Review |
| 436 Technical Forum | 481 What's New? |
| 438 Ask BYTE | 541 Unclassified Ads |
| 446 Software Received | 542 BYTE's Ongoing Monitor Box, BOMB Results |
| 457 Event Queue | 543 Reader Service |


Cover photo by Paul Avis

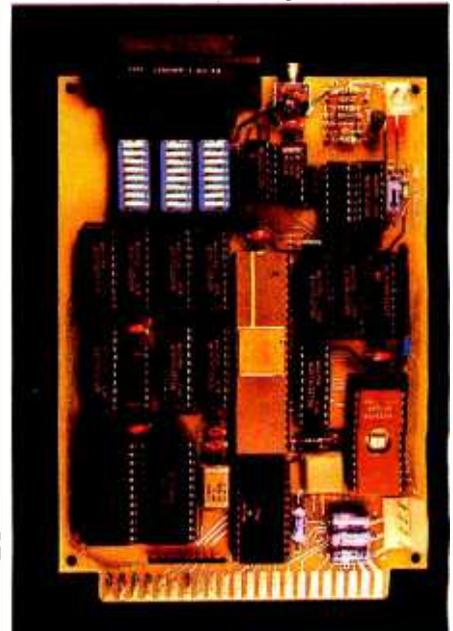

Page 88



Page 278

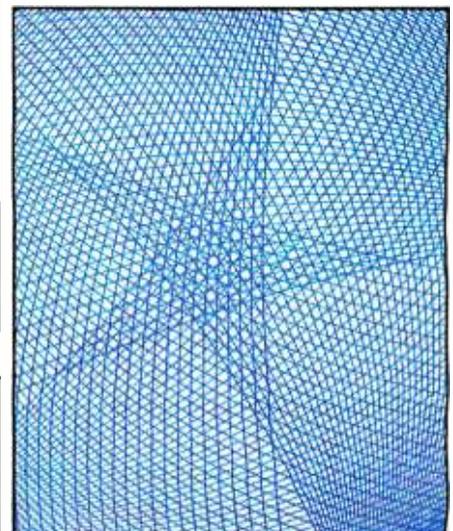

Page 388

for two years. \$61 for three years. \$53 for one year air delivery to Europe. 17,100 yen for one year surface delivery to Japan. \$37 surface delivery elsewhere. Air delivery to selected areas at additional rates upon request. Single copy price is \$3.50 in the USA and its possessions, \$3.95 in Canada and Mexico, \$4.50 in Europe, and \$5.00 elsewhere. Foreign subscriptions and sales should be remitted in United States funds drawn on a US bank. Printed in the United States of America.

Subscription questions or problems should be addressed to:
 BYTE Subscriber Service, POB 328, Hancock, NH 03449



Editor In Chief: Lawrence J. Curran

Managing Editor: Philip Lemmons

Senior Technical Editors: Gregg Williams,
Richard Malloy, G. Michael Vose

Technical Editors: Richard S. Shuford, Arthur A. Little, Stanley Wszola, Bruce Roberts, Gene Smarte, Richard Krajewski, Jane Morrill Tazelaar, Anthony J. Lockwood, New Products Editor; Steve Ciarcia, Consulting Editor; Mark Welch, Staff Writer; Alan Easton, Drafting Editor.

West Coast Editors: Ezra Shapiro, Technical Editor; Donna Osgood, Assistant Editor. McGraw-Hill, 425 Battery Street, 4th Floor, San Francisco, CA 94111, (415) 362-4600

Copy Editors: Nancy Hayes, Chief; Warren Williamson, Elizabeth Kepner, Joan V. Roy, Dennis E. Barker, Anne L. Fischer, Bud Sadler, Margaret Cook

Assistants: Faith Kluntz, Beverly Jackson, Lisa Jo Steiner, Peggy Dunham

Production: David R. Anderson, Assoc. Director; Virginia Reardon, Production Manager; Jan Muller, Michael J. Lonsky; Sherry McCarthy, Chief Typographer; Donna Sweeney, Valerie Horn, Len Lorette

Advertising: Deborah Porter, Supervisor; Marion Carlson, Rob Hannings, Cathy A. R. Drew, Lisa Wozmak, Jeanne Cilley, Janea Reenstierna; Patricia Akerley, Reader Service Coordinator; Wai Chiu Li, Quality Control Manager; Linda J. Sweeney, Advertising/Production Coordinator, Julie Nelson

Advertising Sales: J. Peter Huestis, Sales Manager; Sandra Foster, Administrative Assistant

Circulation: Gregory Spitzfaden, Director; Andrew Jackson, Subscriptions Manager; Barbara Varnum, Asst. Manager; Agnes E. Perry, Louise Menegus, Jennifer Price, Jane Varnum, Phil Dechert, Mary Emerson; James Bingham, Single-Copy Sales Manager; Linda Turner, Asst. Manager; Carol Aho, Edson Ware

Marketing Communications: Horace T. Howland, Director; Vicki Reynolds, Coordinator; Stephanie Warnesky, Graphics Design Manager; Michele P. Verville, Research Manager

Business Manager: Daniel Rodrigues

Controller's Office: Kenneth A. King, Asst. Controller, Mary E. Fluhr, Acct. & D/P Mgr.; Karen Burgess, Linda Short, Vicki Bennett, Vern Rockwell, Lyda Clark, Janet Pritchard, JoAnn Walter, Julie Ferry, Patricia Burke

Traffic: N. Scott Gagnon, Manager; Brian Higgins, Cynthia Damato

Receptionist: Linda Ryan

Personnel/Office Manager: Cheryl A. Hurd

Associate Publisher/Production Director: John E. Hayes

Publisher: Gene W. Simpson;
Doris R. Gamble, Publisher's Assistant

Editorial and Business Office: 70 Main Street, Peterborough, New Hampshire 03458, (603) 924-9281

Officers of McGraw-Hill Publications Company:
President: John G. Wrede; Executive Vice Presidents: Paul F. McPherson, Operations; Walter D. Serwatka, Finance & Services. Senior Vice President-Editorial: Ralph R. Schulz. Senior Vice President Publishers: Harry L. Brown, David J. McGrath, James R. Pierce, Gene W. Simpson, John E. Slater. Vice President Publishers: Charlton H. Calhoun III, Richard H. Larsen, John W. Patten. Vice Presidents: Kemp Anderson, Business Systems Development; Shel F. Asen, Manufacturing; Michael K. Hehir, Controller; Eric B. Herr, Planning and Development; H. John Sweger, Jr., Marketing.

The Compatibility Craze

American history is dotted with inventors—from Thomas Edison to the Wright Brothers—who could not have succeeded without substantial innovation. Indeed, the Wrights had to discard most of the recorded experience of others who had gone before them in nonpowered flight; they truly had to pioneer in propulsion, aerodynamics, and aircraft piloting.

Drs. Shockley, Brattain, and Bardeen revolutionized the world of electronics with their invention of the transistor 36 years ago—an invention that spawned an era of innovative solid-state design in a range of products from radios to computers. But the world of personal computers doesn't appear to be characterized by innovation today. Instead, the personal computer market seems to be shadowed under a cloud of compatibility: the drive to be compatible with the IBM Personal Computer family has assumed near-fetish proportions.

The compatibility craze was evident everywhere at the recent Comdex show in Las Vegas. Billboards outside the convention center and booth personnel inside proclaimed how closely the company's products imitated the IBM PC family. That kind of imitation is inevitable in the light of the phenomenal market acceptance of the IBM PC.

We devoted the theme section of last November's issue to the IBM PC and its clones because a growing fraction of our readers own or use such machines. Unavoidably, we took some heat from some of our more vocal readers who regret IBM's strong emergence in the PC market. Some of those readers sounded a concern with which we heartily agree: that IBM's burgeoning influence in the PC community is stifling innovation because so many other companies are simply mimicking Big Blue.

Innovation usually prospers in companies that respect the role of research and development and which fund R & D appropriately. Most large companies recognize that R & D eventually leads to innovative products that will enhance revenues and profits, but large companies also have a built-in inertia that militates against the risk-taking associated with unproven new products.

Few companies are in a stronger position to foster innovation than is IBM, which has long recognized and generously sponsored R & D. We urge the company, therefore, to encourage the migration downward to its personal computer families of innovative developments that often find their first practical application in larger computers. Such developments could soon include flat-screen displays, half-megabit RAMs, and office-by-example (OBE) software.

We also urge venture-capital organizations to include innovativeness in their checklist of attributes when they are approached by those with ideas who need financial backing. Often the people with such ideas have run into the no-risk inertia of a large corporation, become frustrated with that environment, and have founded successful new companies with the help of backers who are willing to take risks.

We believe innovation has kept U. S. industry competitive in world markets until the recent emergence of keen foreign competition in such basic industries as steel and autos. And we believe it will be innovation that keeps the U. S. knowledge-based industry competitive in the years to come.

—Lawrence J. Curran, Editor in Chief

How Cromemco plugs you into the state of the art.

Cromemco offers you the most complete line of S-100 boards and peripherals in the business. These boards use the new IEEE-696 state-of-the-art standard. One-stop shopping can satisfy your design needs the easy way.

You can build one system, or a hundred, exactly the way you want, and upgrade existing systems with a simple board swap or addition. And since we design our own boards for our own systems, we always take advantage of the latest developments in IC technology.

68000 microprocessor performance. Cromemco's Dual Processor Unit gives you the best of both worlds: the

68000 and the Z-80A microprocessors on the same board. It's the easiest way to move into 68000 performance and still use your existing 8-bit software. Or use Cromemco's Z-80A CPU board or our Z-80A-based single board computer.

For selection, Cromemco can't be matched. From the well-known SDI High Resolution Color Graphics board to the new 512MSU, 512K byte RAM board. From our highly reliable Local Area Network interface (C-NET) to our wide variety of general purpose interface boards. And you can put them in one of our 8-, 12-, or 21-slot card cages with our 12 amp PS-8 power supply to get your system into operation fast.

We have over 30 S-100 boards to fill your needs. And all are supported by a broad line of software. Our Board Products Catalog has the latest information. Call today for your copy, or to get the name of our nearest dealer or distributor. Or, write Cromemco, Inc., 280 Bernardo Avenue, P.O. Box 7400, Mountain View, CA 94039. Tel: (415) 964-7400. In Europe: Cromemco A/S, Vesterbrogade 1C, 1620 Copenhagen, Denmark.

In the U.S., contact your local Hall-Mark or Kierulff distributor.

Cromemco

Circle 97 on inquiry card.



HOW TO GET AN IBM[®] PC FOR JUST \$1995.

BUY A CHAMELEON.



The Chameleon by Seequa does everything an IBM PC does. For about \$2000 less than an IBM.

The Chameleon lets you run popular IBM software like Lotus[®] 1-2-3[™] and Wordstar.[®] It has a full 83 key keyboard just like an IBM. Disk drives like an IBM. And a bright 80 x 25 character screen just like an IBM.

But it's not just the Chameleon's similarities to the IBM that should interest you. Its advantages should, too. The Chameleon also has an 8 bit microprocessor that

lets you run any of the thousands of CP/M-80[®] programs available. It comes complete with two of the best programs around, Perfect Writer[™] and Perfect Calc.[™] It's portable. And you can plug it in and start computing the moment you unwrap it.

So if you've been interested in an IBM personal computer, now you know where you can get one for \$1995. Wherever they sell Chameleons.

The Chameleon by



For the location of the Seequa dealer nearest you, call (800) 638-6066 or (301) 672-3600.

MICROBYTES

Staff-written highlights of late developments in the microcomputer industry.

COMMODORE PLANS UNIX-LIKE OPERATING SYSTEM FOR Z8000-BASED COMPUTER

Commodore announced that it will include the UNIX-like Coherent operating system in a new series of Z8000-based computers. Scheduled to be formally announced in May, Commodore's new computer will be called the Next Generation and will include 256K bytes of RAM and one or two floppy-disk drives at a price the company says will be much lower than any comparable system.

All of Commodore's previous computers have been based on variations of the 6502 microprocessor developed by Commodore's MOS Technology division. Commodore has a license to manufacture Zilog's Z8000 processor.

BOOST IN IBM PRODUCTION COULD SPELL PROBLEMS FOR CLONE MAKERS

In a December speech, IBM senior vice-president Allen Krowe told security analysts that production of the IBM PC will increase as much in 1984 as it did in 1983. Such a dramatic increase in production of the PC could create problems for smaller computer companies using the same parts.

Intel Corp. maker of the 8088 central processor used in the IBM PC and most PC-compatibles, doesn't expect any major problems with that part, although both Intel and Advanced Micro Devices are pushing back their delivery schedules for companies ordering the 8088 and 8086. Intel was less positive about production of the 8088-compatible 80186 processor, which runs faster than the 8088 and eliminates the need for several peripheral chips. Many computer makers have chosen to use the 80186 because of its speed and economy, but Intel expects to ship only about a million 80186 chips this year, although it predicts that demand will be between 3 and 4 million.

Advanced Micro Devices, which has a technology exchange agreement with Intel, will also produce the 80186 later this year. The company would not predict how many it will ship, though it plans to double production of the 8088.

DIGITAL RESEARCH, ZILOG, AMI AGREE TO PUT PERSONAL CP/M ROM ON Z80 CHIP

Digital Research's ROM-based Personal CP/M operating system will be included on some versions of Zilog's Z80 microprocessor, according to an agreement between those two companies and American Microsystems Inc., which will be the first to make and sell the chip. Although no pricing has been announced yet, bundling Personal CP/M on a Z80 chip will probably result in less expensive home computers. Digital Research plans to collect a smaller royalty for CP/M on each chip than it would otherwise charge, in consideration of the large number it expects will be sold.

SEAGATE AND VERTEX UNVEIL 100-MEGABYTE HARD DISKS

Seagate Technology introduced its first 8-inch Winchester disk drive, with 102.1 megabytes of storage. Previously, Seagate made only 5¼-inch Winchester drives, dominating that product market. In large quantities, the company's 8-inch drives will cost less than \$1500 without a controller.

Vertex Peripherals announced a 100-megabyte 5¼-inch Winchester disk drive that will sell to manufacturers for about \$1700 in large quantities. Vertex, which also makes 30-, 50-, and 70-megabyte 5¼-inch Winchesters, plans to announce higher capacity 5¼-inch drives this year.

INTEL INTRODUCES 64K-BYTE CMOS RAMS

Intel is beginning full production of 64K-byte CMOS dynamic RAM chips this month. Because the chips require less power than conventional memory devices, they will probably be used first in battery-powered portable computers. Intel expects to produce the chips in very large quantities at prices only slightly higher than conventional NMOS dynamic RAMs.

KEY TRONIC LICENSES NEW MOUSE TECHNOLOGY

Key Tronic Corp. has licensed the solid-state mouse technology developed by Display Interface Technology. Key Tronic had previously been considering use of the Summagraphics optical mouse but now says the solid-state mouse is superior. The company will sell two versions of the mouse to both manufacturers and end users: an RS-232C version will retail for \$226, and a version to add to some Key Tronic keyboards will sell for \$184, beginning in April.

THE MARKETPLACE IS FLOODED WITH NEW PORTABLE COMPUTERS . . .

Several new portable and transportable computers have been introduced recently. Visual Technologies unveiled the Commuter, which includes a single 5¼-inch disk drive, 128K bytes of RAM, and MS-DOS 2.1 for \$1995. . . . ACT has brought its British-made Appicot computer to the U.S. The \$3100 computer includes 256K bytes of RAM, two 3½-inch disk drives, a two-line LCD on the keyboard, and a 9-inch monitor. . . . Compusource Inc. introduced the Abacus, a \$2045 portable computer that it says can run most IBM, Apple, and CP/M software. . . . Morrow announced a portable version of its Micro Decision computer. The Portable MD3 includes 64K, two 5¼-inch floppy-disk drives, and a built-in monitor for \$1899. Morrow also introduced an 8088 coprocessor board for the Z80-based Micro Decision computers. . . . Televideo Systems introduced three new computers that it says are compatible with the IBM PC. The TPC II, a portable, and the Tele-PC 1605, a desktop computer, include 128K bytes of RAM, two 5¼-inch floppy-disk drives, and a monitor for \$2995. The Tele-XT 1605H replaces one floppy-disk drive with a 10-megabyte hard disk and comes with 256K for \$4995.


. . . AND WITH NEW DESKTOP MACHINES

Televideo Systems also unveiled a Z80-based four-user system that costs \$6600. With a 10-megabyte hard disk and one terminal, the basic TS-804 sells for \$4495. . . . Handwell Corp. introduced a computer that it says is operationally compatible with the IBM PC. With a color display, two serial ports, one parallel port, and one floppy-disk drive, the Handwell PC will sell for \$1995. . . . Logical Business Machines introduced the L-XT, a \$5985 computer that includes a 10-megabyte hard disk, 192K bytes of RAM, and Logical's Natural Language environment. . . . Computer Designed Systems Inc. unveiled the Adviser Micro Plus, which includes a built-in dot-matrix printer, one 5¼-inch floppy-disk drive, and a Z80 processor for \$1995. The computer is also available with 68000 and 8086 processors for \$4995. . . . Kaypro brought out the Robie, a desktop version of its Kaypro 4 portable computer that uses two Drivetec high-density 5¼-inch disk drives. With 5.2 megabytes of floppy-disk storage, the Robie will sell for \$2295.

NANOBYTES

Apple Computer Inc. lost a copyright suit against an Australian computer dealer that sold the Taiwan-made Wombat computer, an Apple-compatible machine reportedly selling for about one-third of the Apple's price. Apple was told by an Australian federal court that computer ROM programs are not literary works and couldn't be protected by Australia's copyright laws. . . . Digital Equipment Corp. has unveiled its DECTalk voice synthesis module, a \$4000 system that reads standard ASCII text. DECTalk attaches to an RS-232C port, generates high-quality speech, and includes heuristics that enable it to guess, for example, whether "St." stands for "Street" or "Saint". . . . Canon U.S.A. has announced an eight-page-per-minute laser-beam printer. The printer, which will be sold only to other manufacturers, is expected to retail for about \$3000. . . . Bank of America has announced HomeBanking, a service available to northern California customers using a terminal or home computer, for \$8 per month. . . . American Micro Products has introduced a \$99.95 MVP FORTH compiler for the TRS-80 Model 100 portable computer. . . . Gold Hill Computers Inc. introduced GCLISP, a \$375 LISP interpreter for the IBM Personal Computer. . . . Micro Software International's PractiCalc II, a \$69 spreadsheet program with some database-management features, is available for the Apple II. . . . National Microware has introduced the Personal Planner, a home software package allowing users to write letters and keep track of appointments, names and addresses, and expense records. For MS-DOS or CP/M, the Personal Planner will sell for \$149. . . . Atari and Activision announced a joint venture to distribute software electronically to home video-game and computer systems. Following a market test, the service is scheduled to begin later this year. . . . Nelma Data Corp. introduced Black Magic, a wireless local-area network that uses UHF FM "radio modems." Up to 256 computers with RS-232C ports can use the network for about \$250 per node. . . . Structured Systems Group Inc. is selling WindowMaster, a \$295 multitasking windowing environment that enables CP/M-86 and MS-DOS applications to run concurrently. WindowPack, which bundles WindowMaster along with SSG's word processor, spreadsheet, and database manager, sells for \$495. . . . Computer Associates International has introduced integrated windowing software linking IBM Personal Computers to mainframes. CA-Executive includes database-management, word processing, spreadsheet, graphics, and other software packages, some of which correspond to CAI mainframe packages. CA-Executive will sell for \$1295.

Net Results ...

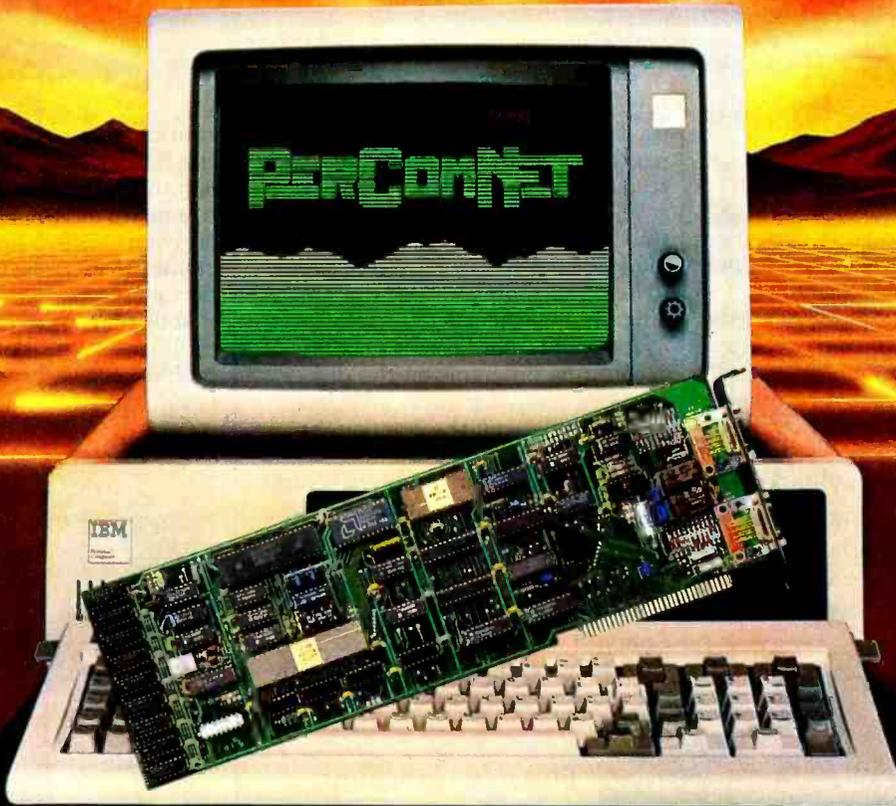

Net results are what you get with **PerComNet™** ... the sophisticated, user-installable Local Area Network from PERCOM DATA CORPORATION.

PerComNet IBM® interface cards are available *now* to provide true networking capabilities for IBM and most IBM compatible personal computers. This includes the sharing of peripheral devices such as printers, modems, floppy disk drives, and all PERCOM DATA High Performance PHD™ Hard Disk Drives.

PerComNet provides these **net results**:

- Token passing reliability.
- Built-in 64K FIFO buffer, to speed data transmissions.
- Signal regeneration at each node to eliminate noise, regardless of network size.
- User installation simplicity.
- Optional NBS encryption for data security.
- Support for simultaneous voice/data transmissions.
- Operating system compatibility for MS-DOS™, CP/M®, UNIX™, and uNETix®. uNETix for PerComNet is distributed by Percom Data.

If you want **net results** ... PerComNet is the logical, economical and reliable choice. PERCOM DATA has a PerComNet OEM Evaluation Package* ready for your immediate use. The package includes all the hardware, and communications and file transfer utilities you need for configuring a network of three IBM PC computers. Package price is only \$1695.

To order your evaluation package or to get more information contact us today!

PERCOM DATA CORPORATION

11220 Pagemill Road • Dallas, Texas 75243

Name: _____ Title: _____

Company: _____

Address: _____

City: _____ State: _____ ZIP: _____

I'd like you to send me more information.

I'm very interested, please have your rep call me at _____

I'd like to know more about your PHD Hard Disk.



Expanding Your Peripheral Vision

DRIVES • NETWORKS • SOFTWARE

11220 Pagemill Road, Dallas, Texas 75243 (214) 340-5800

1-800-527-1222

*Does not include operating system or application software.

PerComNet and PHD are trademarks of Percom Data Corporation. • IBM is a registered trademark of International Business Machines. • MS-DOS is a trademark of Microsoft, Inc. CP/M is a registered trademark of Digital Research. • UNIX is a trademark of Bell Laboratories. • uNETix is a registered trademark of Lanitech Systems Incorporated. COPYRIGHT Percom Data Corporation 1983 • All prices, and descriptions subject to change with notice.

Introducing COMPAQ PLUS, the first high-performance portable personal computer.


The makers of the COMPAQ™ Portable Computer, the industry standard, announce another breakthrough—the COMPAQ PLUS™ Portable Personal Computer. No other personal computer can handle so much information in so many places.

The new COMPAQ PLUS offers the power of an integrated ten-megabyte fixed disk drive in a portable. You get problem-solving power that no other personal computer can match.

Plus a bigger payload

How much is ten megabytes?

Enough to tackle jobs that can't be conveniently handled on most personal computers.

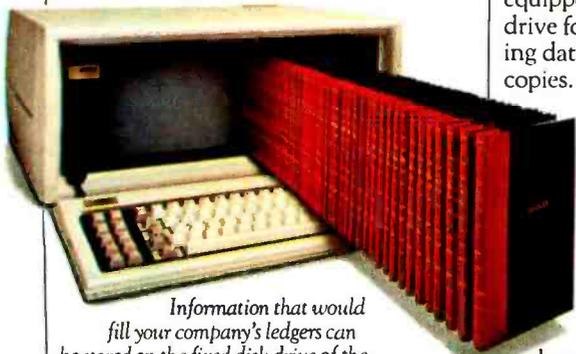

Information that would fill your company's ledgers can be stored on the fixed disk drive of the COMPAQ PLUS.

A mailing list of 100,000 names, addresses, cities, states, and Zip codes.

A full year of daily prices for every stock on the New York exchange.

Inventory records on a quarter million items.

The entire San Francisco phone book. And room left over for Peoria.

The fixed disk drive keeps all the information seconds away, ready to be searched, sorted, retrieved, analyzed or updated.

Plus better use of your time

The integrated fixed disk drive will store programs. That means your most

used programs and data can be permanently kept in the COMPAQ PLUS, ready to call up and run.

With programs permanently stored, the COMPAQ PLUS becomes a well-informed traveling companion, a tool to help you apply your best thinking anytime, anywhere.

You could store a complete library of accounting programs on the disk—payables, receivables, general ledger, and payroll—with the company's books.

You could store an inventory control program with your inventory records and a list management program with your mailing list and a filing program with your personnel files.

The COMPAQ PLUS is also equipped with a 360K byte diskette drive for entering new programs, copying data files, and making backup copies.

Plus more programs

More programs means more versatility. And the COMPAQ PLUS is impressively versatile because it runs all the popular programs written for the IBM® Personal Computer XT, available in computer stores all over the country. And they run as is, with no modification whatsoever.


And the high-capacity portable multiplies the productivity of every program it runs. Your inventory and its



The COMPAQ PLUS runs all the popular programs written for the IBM Personal Computer XT.

control programs can go with you to the factory. Your books and your accounting programs can go with you to a board meeting. Your building specs and your project management programs can go with you to the construction site.

You're buying a computer to solve problems. Why not have more problem-solving programs to choose from?

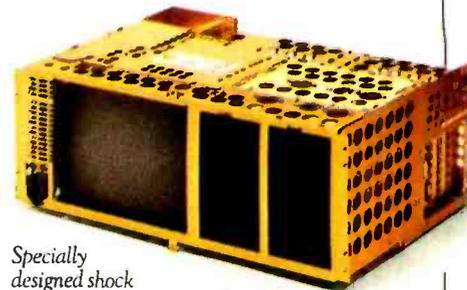

Specially designed shock isolation system protects the fixed disk from jolts.

Plus a traveler's toughness

Life can be tough on the road. A true portable has got to be tougher. The COMPAQ PLUS is.

Its integrated fixed disk drive is unique, designed specifically to travel. Rough roads and hard landings don't bother it because of a specially designed shock isolation system that protects the disk from jolts and vibration.

All the working components are surrounded by a uniquely cross-membered aluminum frame. This structure, common in race car design technology, strengthens it side-to-side, front-to-back, and top-to-bottom.

The outer case is made of LEXAN®, the same high-impact polycarbonate plastic used to make bulletproof windows and faceplates for space suit helmets.

Does a portable personal computer really have to be this tough? Take a good look at your briefcase and then decide.

Plus ease of use

The COMPAQ PLUS is big where it counts.

The display screen is big. Nine inches diagonally. Big enough to show a full 25-line-by-80-character page that's easy to read even if you're leaning back in your chair.

The keyboard is full-sized and typewriter-style for easy control.

With its built-in display, the COMPAQ PLUS makes a smooth, low profile on your desk, not an obstacle that you have to talk around.

Plus an easy way to get started

If you're buying your first personal computer and you're not sure how much capacity you need, your choice is easier now.

Start with the COMPAQ Portable with single or double 320K byte diskette drives. If you need more capacity later, upgrade to the COMPAQ PLUS. A conversion kit is available that turns the COMPAQ Portable into a COMPAQ PLUS, complete in every detail and capability.


Plus a lot more

The COMPAQ PLUS also works with optional printers, plotters, and communications devices designed for IBM's personal computer family.

It has two IBM-compatible slots for adding optional expansion boards. With companion programs, they'll let you share information with a network of personal computers in your office, communicate with your headquarters computer files while you're away, or add memory capacity if your needs grow.

The COMPAQ Portable, the industry standard in portable personal computers. ▼

The problem-solving power of a high-performance desktop personal computer can now go where you need it.

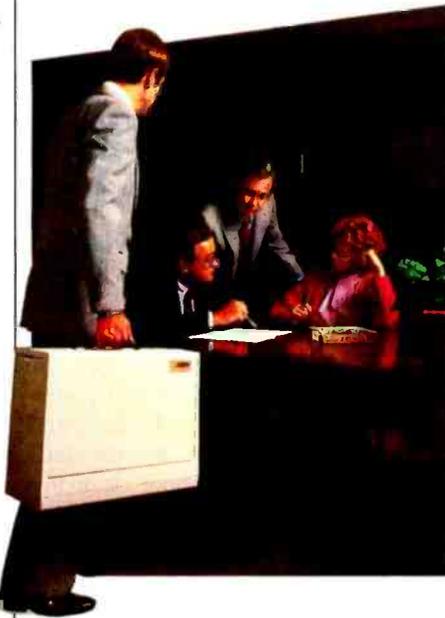

It's got high-resolution graphics and text on the same screen. A detached keyboard. Programmable function keys. Expandable memory. Dozens of other features that simply make it do a better job of personal computing.

And when you see all that the COMPAQ PLUS has to offer, you'll be pleasantly surprised by the price. The fact is, it costs hundreds less than comparably equipped desktop personal computers.

See the first high-performance portable personal computer. The COMPAQ PLUS—performance, programs, productivity. Plus problem-solving power.

The new COMPAQ PLUS, the first high-performance portable personal computer. ▼

COMPAQ PLUS Specifications

Storage

- One integrated 10-megabyte fixed disk drive
- One 360K byte diskette drive.

Software

- Runs all the popular programs written for the IBM XT.

Memory

- 128K bytes RAM, expandable to 640K bytes

Display

- 9-inch diagonal monochrome screen
- 25 lines by 80 characters
- Upper- and lowercase high-resolution text characters
- High-resolution graphics

Interfaces

- Parallel printer interface
- RGB color monitor interface
- Composite video monitor interface
- RF modulator interface

Expansion board slots

- Two IBM-compatible slots

Physical specifications

- Totally self-contained and portable
- 20" W × 8½" H × 16" D

For the name of the Authorized Dealer nearest you, call 1-800-231-0900.

©1983 COMPAQ Computer Corporation
COMPAQ™ and COMPAQ PLUS™ are trademarks of COMPAQ Computer Corporation.
IBM® is a registered trademark of International Business Machines Corporation.
LEXAN® is a registered trademark of General Electric Company.



COMPAQ

PLUS™

More on the Morrow

After reading Tom Wadlow's review of the Morrow Micro Decision (October, page 306), I feel that a few points need additional comment. I own an early single-drive version MMD that I am not entirely satisfied with.

Mr. Wadlow states that all versions use Tandon drives. This is not true. Although double-sided drives may be supplied by Tandon, the single-sided $\frac{3}{8}$ -height drives are Shugart SA 200s.

Mr. Wadlow stated that the system uses a single-density format. This is also incorrect. The format uses 20 sectors with 256 bytes per sector, giving the disk a total of 204.8K bytes. The usable space per disk is 186K bytes or 390K bytes for double-sided drives.

The author also mentions the virtual drive and menu-driven CP/M features. These are nice additions to the system; however, they do not function properly. The virtual drive will respond with a prompt to exchange disks, but this prompt will remain on the screen after the exchange is complete. This is annoying, especially when multiple disk exchanges are required. With programs such as Logicalc and Pearl, it makes it hard to analyze the data that is on the screen.

The menu-driven front end for CP/M is equally disappointing. Many of the optional file-manipulation commands such as PIP and ERA are supported by this driver. However, these selections will not work. This doesn't present a problem for knowledgeable users of CP/M, but for beginners it can present a problem. This obviously makes the entire program useless. The program could easily be fixed. However, Morrow neglected to provide any documentation on its Pilot language.

Mr. Wadlow also mentions that the system can be used with almost any popular terminal. Although I have tried only two terminals, I have found that the Logicalc program will not adapt to an ADM-3A. The terminal setup program provided with the system is also disappointing. To achieve all the features of my Televideo required setting up Wordstar and Logicalc with their individual setup routines. I think Morrow has realized this problem because it no longer advertises the system without a terminal.

As for hardware design, the lack of schematics or cooperation from Morrow

prompted me to analyze the circuits and draw my own set (a tedious process). After analyzing the drawings I am totally amazed that the system even works. This isn't the worst design I have seen, but it is close.

In conclusion, I can only say that I wouldn't recommend this machine to anybody. There are too many bugs in the system that should have been fixed long before the machine was marketed. The problems are obvious and I can't understand how Mr. Wadlow or Morrow could have missed them. I must also conclude that the author did a very poor job on this review.

Don Hair
6208 Adel Cove
Austin, TX 78749

Tom Wadlow responds:

You are right about the Shugart drives. Indeed, all the Micro Decision drives are manufactured by Shugart and not by Tandon, as I mistakenly claimed in the review. The drives used in the Morrow Decision 1 are manufactured by Tandon. As for the rest of your comments:

I believe that if you read the second page of my review, under the paragraph titled "Disk Storage," you will see that I did not say that all Micro Decisions use single-density drives.

The virtual drive feature of the Micro Decision is implemented in the operating system and cannot know very much about individual applications. It would be nice to have the pop-up display you describe, but let's look at what would be involved in doing so on the Micro Decision. To be able to restore the screen to its previous condition when the message goes away, you would have to save any text that might be overwritten. Perhaps your terminal might have a way to do this, probably not. So you would probably have to cause the terminal to send back the contents of the affected area over its serial line. This means that the Micro Decision disk driver would require an intimate knowledge of the terminal (since the text must be both saved and restored in the right place), which implies either yet another configuration program or a hard-wired dependence on only one specific terminal. Both of these alternatives are poor choices if you want to make the system reasonably flexible. I see virtual drives as an operating-system feature intended to make a bad situation (not enough disk drives) more tolerable. Most systems don't even go this far in trying to help.

Your complaints about the menu system and lack of documentation in both hardware and software echo what I said in the review. Morrow's major failing, with the Micro Decision as well as its more powerful Decision line, is its lack of adequate documentation. Unfortunately for us, Morrow is far from alone in this. And as I said in the review, you really need to be somewhat familiar with CP/M to use the Micro Decision. As for Pilot documentation, a call to Morrow Customer Service yields the news that a Pilot manual is now available. Write or call Morrow for information on how to get it.

As for the problem of incompatible terminals, I said that the Micro Decision can be used with most popular terminals, and I suspect that statement still holds true. But if you intend to replace the terminal that Morrow has designed the system around, you should not be surprised at installation difficulties. Morrow does claim to have successfully configured a Micro Decision to run with an ADM-3A. Incidentally, Morrow is now offering the Micro Decision with a Liberty terminal, which has a much nicer keyboard and display than the ADM-20 shown in the review.

I have absolutely no complaints about the hardware of the Micro Decision, other than the design omissions (such as separate printer and modem ports). The disks were fast and quiet, the system unit was rugged and never seemed to have power-up problems. Regardless of what the schematics (or at least your version of them) say, a system that performs as this one does is adequately designed. Morrow designed this system for users who are unlikely to be concerned over the elegance of a particular part of the disk controller or the chip count of the RS-232C circuitry. I agree, however, that such things should be obtainable from the manufacturer, and, indeed, they are. The Morrow Micro Decision Service Manual (\$225) provides complete schematics, test information, and diagnostic software. Once again, write or call Morrow at 600 McCormick St., San Leandro, CA 94577, or (800) 521-3493 for more information.

I still stand by my recommendation. The Micro Decision is not a good system for the computer hobbyist/experimenter. Nor is it a good system for the novice user. But it is serviceable for the minimally experienced computer user who wants a small, quiet, fairly fast desktop system to run a few applications.

As for your final comments: I guess you just can't please everybody. If my mail on this review is any guide, however, you are in the minority.

Get A HeadStartTM On The Other Guys.



HeadStart Features:

Size: 15" wide, 11" deep, 10 1/4" high.
Weight: 25 lbs.
Processors: Z80A (8 bit) and 8086 (16 bit).
Memory: 128K to 1MB depending on model. All models are expandable.
Disk Storage: 500K to 1MB (unformatted) on a 3 1/2" Micro-Disk.
Display: 12" (diagonal) P31 phosphor, non-glare screen, 25 lines x 80 or 132 columns.
Keyboard: Detachable with 105 total keys. Also an optional portable version straps onto the front screen area for easy transportability.
Disk Operating Software: *CP/M 80 for 8 bit. **MS DOS for 16 bit. LAN DOS for multi-user 8 or 16 bit operation.
Networking: Up to 255 HeadStart VPUs may be connected via coaxial interface into one of 2 optional data storage systems.
Interfaces: One RS449/RS232 compatible serial port. One Centronics compatible parallel printer port. External data bus. Coaxial communications interface. External disk I/O interface.
Optional Data Storage Systems: 2 models available. A 10MB, 5 1/4" system is expandable to 20MB. A 50MB, 8" system (25MB fixed, 25MB removable) is expandable to 200MB.
*CP/M is a registered trademark of Digital Research.
**MS DOS is a registered trademark of Microsoft.

Intertec's HeadStart is the smallest, smartest, fastest, most powerful business computer money can buy. And the most expandable (it's networkable up to 255 user stations.)

Great Ideas Come In Small Packages.

Instead of three bulky components, HeadStart needs only two—the keyboard and CRT. There's no need for a cumbersome disk and processor cabinet. With HeadStart, it's all in the CRT enclosure.

HeadStart's small but powerful 3 1/2" disk drive offers as much storage as larger 5 1/4" disks. Its 8 and 16 bit processors make software availability no problem.

And HeadStart's small size permits easy transportability with no sacrifice in performance. Each Video Processing Unit (VPU) comes with its

own easy-carrying handle. A portable keyboard option is also available.

How Fast Is Fast?

HeadStart's RAM Disk, an electronic emulation of the typical second internal drive, responds up to fifty times faster than conventional microcomputers.

Depress a key and you get a response within a split second. Literally before your finger leaves the key.

And HeadStart is incredibly powerful, too. Up to one megabyte of internal memory can tackle even the most sophisticated applications.

Some Ideas Are Bigger Than Others.

Because HeadStart is designed to be both a single and multi-user computer, you buy only as much computer as you need today.

But as your business grows, it grows with you.

Each HeadStart Video Processing Unit comes with its own memory, processors, disk and multi-user interfaces.

Just add a 10 or 50 megabyte Data Storage System and up to 255 users can share a common data base in an incredibly powerful, multi-user network.

HeadStart is available in three different models. All offer full performance, transportability, and are easily expandable.

Unlike conventional, single-user-only computers, HeadStart is here today with the designed-in technology to be here tomorrow.

So get a HeadStart on the other guys. For more information, call (803) 798-9100 or write: Intertec, 2300 Broad River Road, Columbia, SC 29210.

intertecTM

LOOK NO FURTHER! we'll get you low prices and fast service, or else!



ALPHA OMEGA COMPUTER PRODUCTS

COMPUTERS

CORONA Desktop, 128K, 2-320K Drives, Monitor	\$2695
CORONA Portable (same as above)	2645
ROMAR 64K Apple compatible	Call
IBM PC Systems	Call
KAYPRO II Portable	Call

DISKETTES

SCOTCH 3M SSDD	\$23
MAXELL MD2 DSDD	39

PRINTERS

C. ITOH 8510 P. 120 cps	335
EPSON FX80 160 cps	495
EPSON FX100 160 cps	695
OKIDATA Microline 92 160 cps	469
OKIDATA Microline 84 200 cps	1035
DELTA 10 160 cps	Call
GEMINI 10X 120 cps	Call
NEC 3550 35 cps L/Q	Call
JUKI L/Q 18 cps	519
DYNAX DX15 L/Q 13 cps	475
PRINTER Pal	24

MODEMS

HAYES Smartmodem 300	\$199
HAYES Smartmodem 1200	482
HAYES Smartmodem 1200B	442
HAYES Micromodem II	265
ANCHOR A. Mark I	81

MONITORS

TAXAN 12" Amber	\$125
GORILLA 12" Green	85
USI P13 12" Amber	145
AMDEK 300G 12" Green	135
AMDEK 300A 12" Amber	145
AMDEK Color I 13"	269
AMDEK Color II 13" RGB	419
BMC 13" Color	219

APPLE PERIPHERALS & SOFTWARE

VIDEX Videoterm 80C	\$219
VIDEX Ultraterm	279
MICROSOFT 16K RAMcard	69
MICROSOFT 280 Softcard	245
MICROSOFT Premium Pack	479
MICROSOFT Premium Softcard IIE	345
KRAFT & TG Joystick	45

HAYES Mach II Joystick	33
QUENTIN Applemate Drives	233
LAZER 1/2 Height Drives	229
WIZARD BPO 16K Buffer Int.	139
PROMETHIUS Versacard	149
EPS Keyboard	289
KENSINGTON Systemsaver	68
KOALA Pad	93
PFS Filing System	81
PFS Report	81
DBase II	389
Wordstar	249
Home Accountant	65
Multiplan	172
DB Master Version 4	249
DB Utility 1 or 2	95
Magic Window II	109
Zaxxon	29
Choplifter	25
Zork I/II/III	28
Wizardry	39
Sublogic Pinball	27

IBM PERIPHERALS & SOFTWARE

TANDON TM55-2 Thin Line	\$235
TANDON TM100-2	235
SHUGART 1/2 Height	235
MICROSOFT Mouse	145
QUADRAM Quadboard w/64K	269
QUADRAM Quadlink	Call
QUADRAM Quadcolor I	215
64K RAM Kit 200 ns	55
KRAFT & TG Joysticks	46
HAYES Mach II Joystick	35
CORONA Int. 5MB Hard Disk	1545
Property Management	335
Home Accountant +	99
Volkswriter	119
PFS Filing System	93
PFS Report	81
Lotus 1,2,3	Call
DBase II	389
Friday	189
Wordstar	279
Multiplan	169
Flight Simulator	33
Deadline	38
Zork I/II/III	28

Hundreds of available items. Call for complete pricing information.

We do not charge for VISA or MASTERCARD.

(213) 345-4422



4847 La Montana Circle, Tarzana, CA 91356

All products are in factory sealed packages. We guarantee all items for 30 days. Within this period, defective merchandise returns must be accompanied by RMA number. All other returns will be subject to a 10% restocking fee. For prepaid orders there will be a 3% shipping charge; 5% for UPS Blue Label; \$5.00 minimum; all orders outside U.S. at 15% shipping. There will be an additional \$4.00 surcharge on C.O.D. orders. Cash or Cashiers Check is required on C.O.D. orders. Calif. residents add 6.5% sales tax. Prices subject to change without notice.

Letters

Ansi, uh, ANSI Standards

I have just spent a frustrating afternoon trying to install a piece of software into my computer system. As usual, the problem is that my terminal is not one of the ones on the list of choices. What makes it particularly frustrating is that my terminal conforms to the ANSI "mode" for terminal.

I would like to plead with software companies to please include the "standard" as one of the options. I would also like to plead with terminal companies to include the ANSI standard as at least one of the possible emulations that your new terminals can produce.

I realize that it is an imperfect world, but surely one might expect the ANSI specification to have some merit!

J. A. Koehler
2 Sullivan St.
Saskatoon, Saskatchewan
Canada S7H 3G8

Software Swap

I read with great interest the letter "In Praise of Public-Domain Software" in the November BYTE (page 14). We have a large program-exchange system for Timex/Sinclair computers that is similar to public-domain software. The requirements are simple: choose the program you want from the list of available software, then make a copy of a program that you or friends have written or supervised and send it in. Your program will be added to the list of available software. We will send you the programs you have requested. Everyone wins! For more information on this service please contact me.

Billy Casebeer
President, Timex/Sinclair Users Group
POB 372
Oologah, OK 74053

An OS for the M68000 ECB

I enjoyed reading "The M68000 Educational Computer Board" by Robert Floyd (October, page 324). While I was a graduate student in computer science at the University of South Carolina, I was involved with a project that developed software for the Educational Computer Board (ECB). The professor of the operating systems course assigned several groups to develop operating systems for

INTRODUCING ULTRATERM™



YOU'LL LOVE THE VIEW!

With UltraTerm, the revolutionary new card from Videx, you'll enjoy sweeping panoramas of spreadsheets that you've never seen before: 128 columns by 32 lines, 132 columns by 24 lines and even 160 columns by 24 lines. You'll revel in the scenics of a whole year of records stretching out across your screen.

You'll also delight in the new horizon of 80 columns by 48 lines—double the lines you normally have. So your word processing will reveal a "depth of character" never possible before!

Another breath-taking view of UltraTerm—it delivers absolutely flicker-free, state of the art display, with 8 x 12 character matrix giving you preposterously clear, readable characters. Not only will you see more characters on your screen (a whopping 4096 possible), but they'll also be larger and more readable than the characters you read every day in Circle 374 on inquiry card.



Photo of actual-size characters on Apple Monitor III.

your newspaper! And you can differentiate those characters in several modes: normal (white on black), inverse (black on white), bright intensity and dim intensity.


UltraTerm. Come on over and enjoy the view.
Suggested retail price: \$379




897 NW Grant Ave. • Corvallis, Oregon 97330
(503) 758-0521

UltraTerm features a built-in soft video switch and has complete firmware support for BASIC, Pascal and CP/M®. Use it with the Apple® II, Apple IIe, Apple III and Franklin.


Apple and the Apple logo are registered trademarks of Apple Computer, Inc.
CP/M is a registered trademark of Digital Research, Inc.

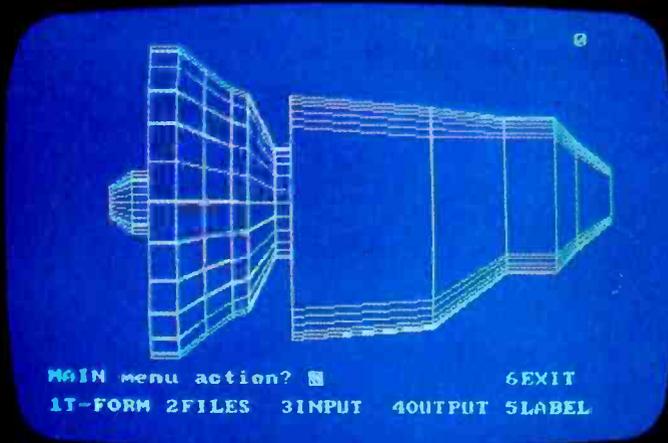


1 Create a 3-D object.

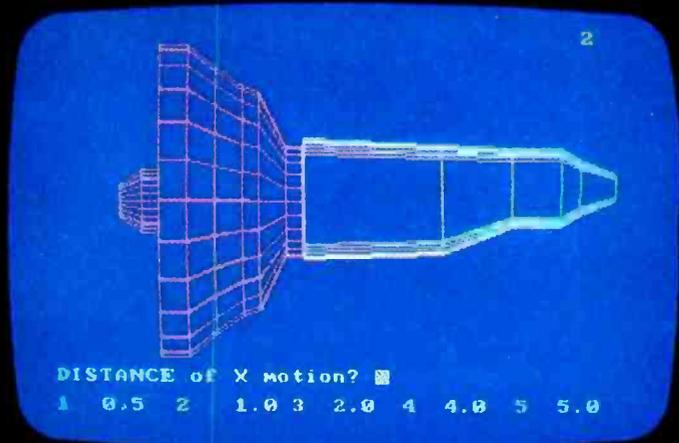


2 Modify it to get the best design.

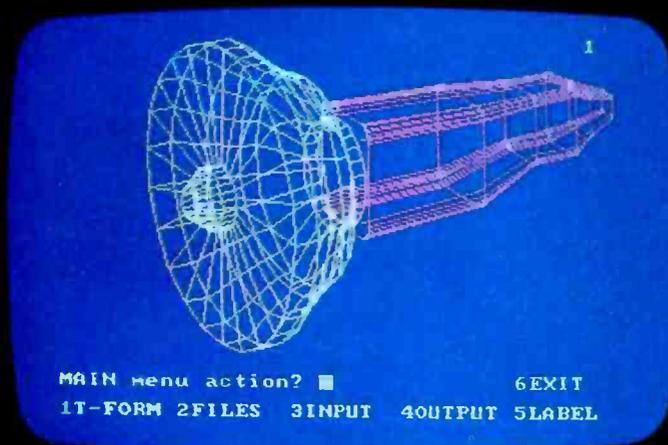


3 Rotate it to examine it from any angle.

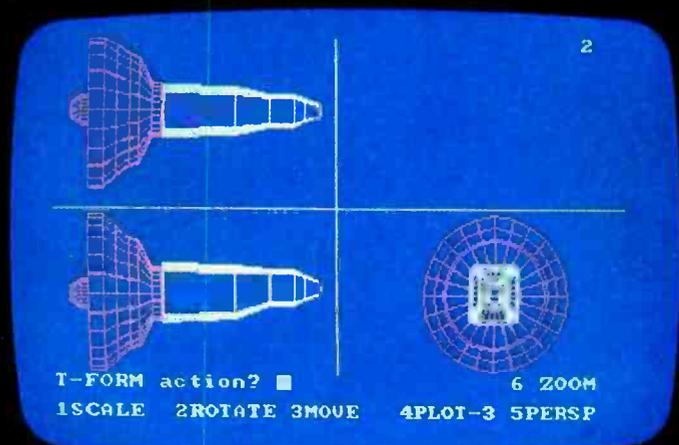

4 Study it in 3 simultaneous orthogonal views.

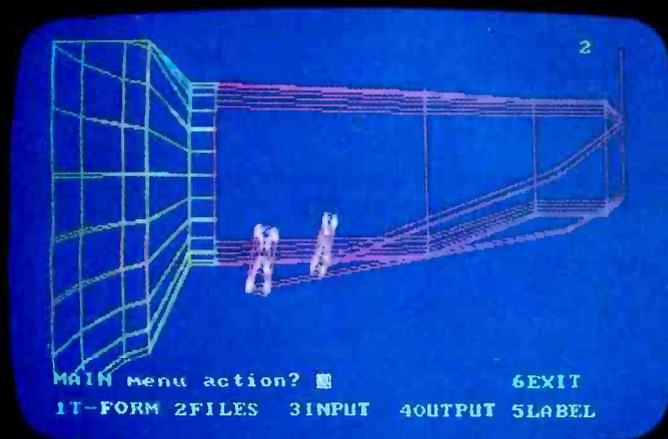

5 Zoom in on part of it and add details.

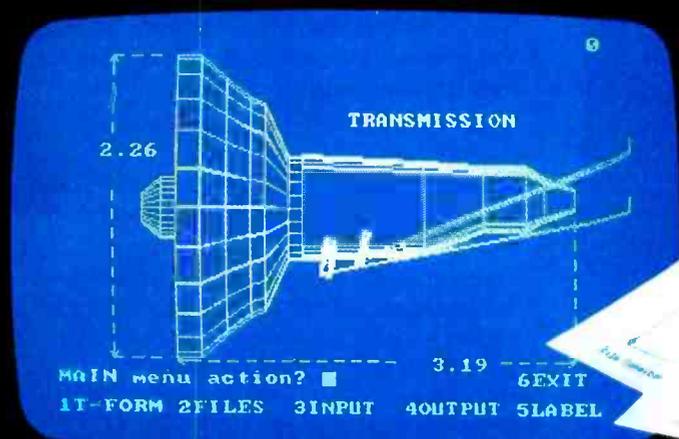

6 Add dimensions and design notes before plotter output.

SCREEN YOUR DESIGNS BEFORE THEY GET ON PAPER.

Turn your microcomputer* into a 3-D CAD system.

Find your best idea, faster. Now, there's a faster, easier way to find the best answer to your design problems. In minutes, you can create, evaluate and perfect your design ideas using your micro and the MCS 3-D CAD system.



Anyone with even minimal computer experience can master our easy-to-use CAD system. It's a simple, menu-driven structure requiring no complicated commands or lengthy keyboarding. You're free to think design, not computers.

Let your micro do the busy work. First, rough sketch your idea using our 3-D Space Tablet™ cursor, our high-res 2-D digitizer, your micro's keyboard, or any combination of the three.

Then, use Advanced Space Graphics™ software to make design changes that normally take hours to do on paper . . . Scale, rotate or move your 3-D wireframe model about any axis. Duplicate it. Create its mirror image. Section it along several planes. Join it with other components stored on file. Study it from 3 simultaneous orthogonal views, or from an isometric perspective. Add arcs and

circles. Generate surfaces of revolution. You do the thinking, your computer does the work.

Dimensions are computed and changed automatically, as your model changes.

When you're ready for hard copy, Advanced Space Graphics lets you add text and output your finished design to a plotter or printer.

The advantages of "true" 3-D. Only our system offers "true" 3-D hardware/software capabilities on a micro. You can use our Space Tablet cursor to actually draw in three dimensions and create, or trace, all kinds of 3-D shapes, even irregular surfaces. True 3-D lets you "reach" into your drawing to grab a point, or figure, and pull it to a new location. It's remarkably easy to translate complex 3-D shapes and ideas into a usable format. Our 3-D CAD system is being used in engineering, architectural, medical, chemical, field mapping, educational, art and many other applications.

A complete 3-D CAD system. The MCS 3-D CAD system includes Advanced Space Graphics software, the 3-D Space Tablet cursor (patent pending), a high performance interface card and a complete user's manual. Our versatile, yet surprisingly affordable system gives you everything you need to do 3-D on your micro. Except, of course, ideas.

For more information, call: (203) 647-0220. Micro Control Systems, Inc., 27 Hartford Turnpike, Vernon, CT 06066.

MICRO CONTROL SYSTEMS, INC.

*IBM PC and a variety of work-alikes are supported. A more basic version is available for the Apple II+ and Apple IIe. Support for a variety of plotters and 2-D graphics tablets available now. The most widely used high-resolution screen displays will be supported by the beginning of 1984.

IBM PC © International Business Machines Corp. Apple II+ and Apple IIe © Apple Computer, Inc.

Circle 237 on inquiry card.

Letters

the ECB. The major goal of each operating system was to implement concurrency.

The group I was involved with undertook a major task: to create an operating system in a short six-week summer school course. We were successful and implemented an operating system that we named OX (for Overnite Executive). OX is approximately 8K bytes long. The operating system consisted of a kernel, task manager, resource manager, and a memory manager. A spooler and several applications programs to prove concurrency were also developed. The code was de-

veloped in 68000 assembly language, Concurrent Euclid, and C, which was cross-compiled on a Unix system. The kernel, task manager, and various initialization was written in assembly language and C, while the larger managers were developed in Concurrent Euclid. The object code was then downloaded to the ECB in Motorola "S" record through the ECB serial I/O port.

As I have stated, the operating system was successful in demonstrating concurrency. This was done by allowing resident tasks to be dispatched in round-robin

fashion at specific timer interrupts. A particularly neat feature of the operating system was the memory manager in which the respective managers and application programs allocated memory. Many hooks exist in the implementation to provide for additional resident tasks such as terminal-message tasks, and perhaps a memory-resident disk.

The project provided a hands-on insight into operating systems, and I must admit I had a great time hacking away. I have a complete set of documentation (57 pages) and the entire source-code listing. I would be happy to pass along this information to any hobbyist or educational institution. Please mail a stamped, self-addressed envelope to me and I will mail the documentation and source code of OX to you.

Mark Cates
8625 Windjammer Dr.
Raleigh, NC 27609

EE/EPROM PROGRAMMERS & UV ERASERS



See us at Comdex Booth -R8624

GANGPRO-8™ MULTIPROGRAMMER \$995.00

GANGPRO-8™ allows user to program up to 8 EE/EPROMs simultaneously using the latest state of the art programming algorithms. It can test and duplicate a wide variety of devices from 16K to 256K. There are no personality modules to buy. 8 digit alphanumeric display prompts user with messages. This unit is extremely easy to operate and is ideally suited for a production environment.

QUV-T8™ series UV EPROM ERASERS

QUV-T8/2T (\$97.50) is an industrial quality eraser designed in a steel enclosure with a 5" wide tray UV indicator lens, antistatic pad, 60 minute rugged timer and safety interlock switch are standard. Capacity is 24 EPROMs. 15-20 minutes erase time for 15 EPROMs.

QUV-T8 / Z (\$124.95) Similar to QUV-T8/2T with 40% faster Erase Time.

QUV-T8/2N (\$68.95) Same as the QUV-T8/2T version without the timer and safety interlock switch.

QUV-T8/1 (\$49.95) Economy model in a molded two part plastic case. Erases 15 EPROMs in 15 minutes.

*MCS-48 is a registered trademark of Intel Co.

PROMPRO-7™ SERIAL RS-232 STAND-ALONE \$489.00

MCS-48™ FAMILY PROGRAMMING WITH PROMPRO-7 PROMPRO-7™ is an intelligent self-contained unit, ideally suited for engineering development, or for field service & production. It can program and verify a wide variety of 8K to 128K EPROMs. This unit has a 32K (4K BYTES) internal RAM Buffer that could be accessed by the user through a computer or terminal. This unit can also program the micro chips such as the 8748, 8749, 8751, 8741, 8742, 8755. The price includes all modules up to 32K EPROMS & The 8748 & 8749H Micros. Upload/download is done by either Motorola or Intel Hex format.

PROMPRO-8™ SERIAL RS-232 STAND-ALONE \$689.00

This extremely versatile programmer has as much as 128K (16Kx8) of internal RAM dedicated to the EE/EPROMs. This RAM buffer can be accessed either through a computer terminal, or by user target system (EPROM emulation). PROMPRO-8 8 digit alphanumeric display prompts user with the system messages. A keypad option is available for standalone editing. An impressive range of devices are programmed (as standard feature).

The Right Equipment for Your Eprams at the Right Price!



AVAILABLE SOFTWARE DRIVERS
1 IBM PC 2 APPLE II 3 MDS-ISIS 4 CPM
5 TEKTRONICS 800Z 6 ATARI 7 TRS-80 COLOR 8 FLEX

LOGICAL DEVICES, INC.
1321-E N.W. 65th PLACE, FORT LAUDERDALE, FLORIDA 33309
TEL (305) 974-0967 - TWX 510-955-9596
DISTRIBUTORS WEI.COME FOR QUALIFICATIONS

Circle 216 on Inquiry card.

Circle 170 on inquiry card. —>

Fred Christiansen
POB 2953
Phoenix, AZ 85062

If you're still looking for
 a heavyweight performer
 at a low price,
 Now, IBC has no competition



IBC HIGH PERFORMANCE MIDDY CADET™

Maximum Users	40
Disk Storage	40 MB
Disk Access Speed	40 MS
Memory	512 KB
CPU Speed	8 MHz
List Price	\$10,995.00

SORRY! NO COMPARISON

Maximum Users	
Disk Storage	Our competition is
Disk Access Speed	now a computer
Memory	generation behind us.
CPU Speed	
List Price	

The IBC MIDDY Cadet is better, faster and less expensive than computers from ALTOS™, ONYX™, DYNABYTE™, and others. And now the new high-performance MIDDY CADET is so powerful that it is in a class by itself.

Because the MIDDY is completely software compatible with competitive systems using CP/M™ 2.2, MP/M™ II or OASIS™, you can transport your applications software to the MIDDY without modification. So why not take the benchmark test yourself.

If you are an OEM, system integrator, multiple end user, or dealer for any of our competitors, send a copy of your application program to IBC. We will run your software on the MIDDY without modification and give you the elapsed time in minutes. You be the judge. If it really is faster than your current hardware and it is, then you owe it to yourself and your customers to switch to IBC.

So remember! When you want a heavyweight performer at a low price, contact:

OUTSIDE THE USA

IBC Integrated Business Computers

24592 Merrille Street
 Chatsworth, CA 91314
 (213) 882 9007 Telex No. 245349

WITHIN THE USA

IBC DISTRIBUTION

1440 36th Street, Suite 242
 Ogden, Utah 84403
 (801) 621 2294

ALTOS is a trademark of ALTOS Computer Systems, ONYX is a trademark of Onyx Systems, Inc., DYNABYTE is a trademark of DYNABYTE Business Computers, CP/M & MP/M are trademarks of Digital Research, and OASIS is a trademark of Phoenix Computers.

Supersoft Speaks Up

I am compelled to respond to your reviews of the Supersoft C compilers for CP/M-86 and MS-DOS, which ran in the August BYTE ("Comparing C Compilers for CP/M-86" by Jerry Houston, Jim Brodrick, and Les Kent, and "Nine C Compilers for the IBM Personal Computer" by Ralph Phraner). Both reviews were outdated, misleading, and contained serious inaccuracies and omissions. They did a disservice to your goal of giving BYTE readers timely information about available C compilers.

In 1982, Supersoft released the first C compiler for CP/M-86 and MS-DOS. This release was preliminary and temporary; its purpose was to let customers of Supersoft's CP/M-80 C compiler be the first to transport their applications to CP/M-86 and MS-DOS. At that time, we were using the compilers in house to transport our own applications to 16-bit systems; we knew they would be useful to others for this purpose. We also knew they would undergo major enhancements, both in the documentation and the programs themselves, before being released

as general development compilers under CP/M-86 and MS-DOS.

In March 1983, after the initial purpose had been served, our CP/M-86 and MS-DOS C compilers were withdrawn from the market for further development. In August 1983, just as we were about to release our new and substantially enhanced versions of these compilers, two reviews appeared in BYTE magazine on our preliminary releases. We were surprised to see these reviews in print because we had not been notified in advance by BYTE and the products being reviewed had not been available for five months.

Though the initial versions of our compilers did have some weaknesses that we acknowledge, at the time of their release they served a valuable purpose that easily outweighed their shortcomings: they sped C programmers into the rapidly emerging 16-bit world. This, our main consideration in releasing the products, was completely overlooked in the BYTE reviews. In addition, our new C compiler, greatly enhanced and uniformly available under CP/M-86, CP/M-80, and MS-DOS, has several strong points that make it the

most attractive C available. We are providing this new version to all purchasers of the preliminary CP/M-86 and MS-DOS C compilers at no charge.

Through our internal experience with Supersoft C, we consider it to have many advantages over other C compilers: these advantages include the widest array of library functions (all delivered in source form as well as library form), high reliability due to extensive testing, uniform availability under several operating systems, and close adherence to the Unix standard syntax. These advantages and others were largely overlooked by the BYTE reviewers. In addition, technical inaccuracies and omissions that appeared in the reviews actually gave our initial releases less credit than they were due.

We were disappointed that these untimely and misleading reviews should appear in a typically fine publication like BYTE. We hope that this letter and other follow-up editorial coverage can help repair some of the damage that has been done to these excellent products.

Stephen Hagler
Marketing Director
Supersoft Inc.
POB 1628
Champaign, IL 61820

Jerry Houston replies:

I am sorry that Supersoft considers my review of the CP/M-86 C compiler a disservice to BYTE readers, because considerable time and effort went into trying to produce the opposite result. If I failed to supply something useful, I apologize to BYTE's readers and to Supersoft.

A few words in defense of my review. Supersoft says that the version of the compiler I reviewed was "preliminary and temporary" and that a greatly improved version was released in August 1983.

The lead time for submitting articles to BYTE magazine is months, not weeks, in advance, and the review in question was submitted several months before August 1983. Lack of timeliness is the penalty for long lead times. The benefit is generally excellent editorial content.

We purchased our copy of the Supersoft C compiler COD in 1982 in response to an ad in BYTE. Nowhere did the ad or the documentation indicate that the product was in any way temporary or preliminary. In fact, the ad said of the \$500 C compiler: "The optimizer typically results in 40% code reduction. This means that compiled object code will run nearly as fast as that which was written in

New!

BYTEWRITER®

**DAISY WHEEL
 PRINTER/TYPEWRITERS**



- Full Olivetti typewriter warranty when purchased complete

Complete BYTEWRITER using:

Olivetti Praxis 30 portable	\$495
Olivetti Praxis 35 portable	\$545
Olivetti Praxis 40 office machine	\$645
Interface only-wired and tested	\$165

The parallel interface mounts entirely internally. Interconnecting cables available for most computers.

BYTEWRITER

125 NORTHVIEW RD., ITHACA, N.Y. 14850
 (607) 272-1132




Reach out and byte someone!

Your desk-top computer system is only a beginning — plug a low-cost UDS modem into the RS-232 port and a whole new world of communications opens up!

UDS modems add a new dimension to personal computers. For professional use, a modem permits two-way, hard-copy communication between home office and branches or among the branches themselves. Electronic mail becomes a reality. Sales, cost and inventory updates can be sent over ordinary telephone lines at economical, after-hours rates.

When you use your computer for personal applications, the modem allows you to access up-to-date market information, receive news and weather summaries, check airline schedules or even electronically scan out-of-town newspapers. Long-distance game playing and computer-age personal correspondence become instant realities.

The wide range of UDS modems includes one that fits your requirement perfectly. Top of the line is the micro-processor-based 212 A/D which communicates at 0-300 or 1200 bps, stores and automatically dials up to five 30-digit numbers and includes a complete prompting menu and full

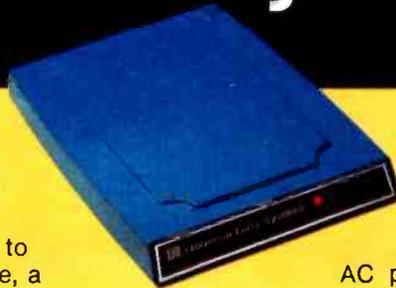

automatic test capabilities. Yet, with all these features, it costs only \$645.

At the other extreme is the \$145 103 LP, offering simultaneous two-way communications at 0-300 bps without an AC power cord. This unit siphons operating energy directly from the telephone line!

In between is a large variety of units — many of them in the LP no-power-supply design and all fully FCC certified for direct connection to the telephone system.

Don't be a computer hermit — treat your system to a UDS modem; then you can reach out and byte someone! For details, contact your favorite computer dealer or Universal Data Systems, 5000 Bradford Drive, Huntsville, AL 35805. Telephone 205/837-8100.

 **Universal Data Systems**



MOTOROLA INC.
Information Systems Group

Circle 369 on inquiry card.

The new 384K Quadboard by Quadram is the most comprehensive board you can buy for the IBM PC or XT. Now with added hardware features and advanced software. But our same low price.

NEW EXPANDED QUADBOARD
Quadboard now delivers 9 of the most needed PC functions/features. To let you get the most out of your Personal Computer. And help you work better and faster.

All of these features are standard on the new Quadboard:

- **Parallel Port:** With the new Quadboard, you get a Parallel Port. Perfect for operating most printers and other parallel devices.
- **Serial Port:** There's

a Serial Port, too. Fully programmable, use it to connect to plotters, modems, and other serial devices.

- **Chronograph:** And Quadboard's Chronograph (Real-time clock/calendar) keeps your system's clock up-to-date.

- **Game Port:** The new Quadboard has an IBM

compatible Game Port.

Plug in a joystick or game paddles, and fire away.

- **I/O Bracket:**

Quadboard now comes with a special I/O bracket. Use it to

organize your expansion port connectors. Snaps right onto the back of the PC.

THE WORLD'S BEST SELLING MULTIFUNCTION BOARD IS NOW EVEN BETTER

EXPANDABLE TO
384K

NEW

\$295

Socketed with no RAM installed

QUADBOARD™

• **Expandable to 384K:**

The new Quadboard is expandable in 64K increments for up to 384K additional RAM. With full parity checking standard. With the new Quadboard and a fully populated system board, you can take your PC's memory up to the 640K limit.

• **QuadRAM Drive:** Plus, with Quadboard you get advanced QuadMaster Software. Including the QuadRAM Drive program. Use it to set up multiple RAM Drives in Quadboard memory. Solid state drives that let you store and retrieve data quickly and easily. Or take advantage of QuadMaster disk caching. To access frequently

used data whenever you need it.

• **MasterSpool:** QuadMaster Software also includes MasterSpool. Use it to set up a software print buffer quickly and easily. This advanced spooler lets you pause at any time, back up or move forward in a file. Choose just the amount of buffer space you need and stop waiting on your printer.

• **Qswap:** Another feature of QuadMaster Software is Qswap. With Qswap change line printers 1 and 2 back and forth, with just a few keystrokes, as often as you like.

QUADBOARD STANDS OUT FROM THE PACK

Now more than ever Quadboard is the first and only board your IBM PC or XT may ever need. No other board even comes close. Because Quadboard is designed for performance. Engineered for dependability.

And built in the continuing tradition of Quadram Quality.



There are many imitators, but only one leader. So make sure you ask for Quadboard by Quadram, the leader in micro-computer enhancement products.

Compare. See why more Quadboards are bought than any other multifunction board...

Features/Functions	Quadboard	SixPakPlus
Memory Available	0-384K	0-384K
Parallel & Serial Port	Yes	Yes
Clock/Calendar	Yes	Yes
I/O Bracket	Standard	Optional
Game Port	Standard	Optional
Diagnostic Testing	Yes	Yes
Advanced Spooler	Yes	No
Simple Menu Setup	Yes	No
Disk Cache	Yes	No
LIST PRICE WITH 384K*	\$795	\$970

* Manufacturer's suggested list price for board with all available features/functions as shown (options included), SixPakPlus is a trademark of AST Research Inc.



4355 International Blvd./Norcross, Ga. 30093
(404) 923-6666/TWX 810-766-4915 (QUADRAM NCRS)

INTERQUADRAM In Europe

Interquadram, Ltd.
442 Bath Road/Slough, England
Interquadram GmbH.
FASANENWEG 7/6092 Kelsterbach/West Germany
Interquadram S.A.R.L.
41 Rue Ybry./92522 Neuilly/France

Circle 307 on inquiry card.

BY QUADRAM™

assembler." The documentation listed the version we received as "Version 1.1."

None of this suggested to us that the compiler was preliminary. In January 1983 we asked a representative of Supersoft whether a newer, more functional version of its compiler was coming out, and we were told that nothing was planned for about six months. Since our review was due in one month, we reviewed what existed, not what was planned.

Supersoft also states that, "We are providing this new version to all purchasers of the preliminary CP/M-86 and MS-DOS C compilers at no charge." On September 7, 1983, we phoned Supersoft, gave them our serial number, and asked what was involved in upgrading to the latest version of the compiler. We were informed that we should send our original disk plus \$50. This is a more than reasonable charge, but \$50 is not free.

Supersoft's claim to offer "close adherence to the Unix standard syntax" is not justified in the version reviewed. It fails to support longs, statics, or initializers. This is comparable to a version of BASIC that has no FOR statement.

Supersoft has some excellent products. The product I reviewed is not one of them. If my review conveyed that idea, then it was not

"misleading." If my article tended to lead potential unhappy customers away from the product under review, then I believe it was a service both to Supersoft and to BYTE's readership.

Watch the Fine Print

Recently I decided to abandon my Apple-based system and buy an IBM PC XT. It's not that I'm unhappy with my Apple. On the contrary, it has been a reliable tool that has paid for itself many times over during the last four years. However, the mining industry (for which I write software) has developed a case of IBM myopia that requires that I develop programs for the PC.

My first step in making the IBM transition involved obtaining information concerning the UCSD p-System (for which I have developed a large library of software). Although the sales representative was unfamiliar with the concept of an operating system, he was kind enough to send me IBM's "Software Fact Sheet" and a price list. This fact sheet contains some fine print concerning the p-System that

I would like to bring to the attention of your readers: "Neither the program nor its data files can be stored on a fixed disk." Incredible! Here's a big and powerful corporation with a sense of humor. Imagine if GM had the guts to include some jokes of this caliber in its sales literature like "The optional MZD Turbo engine only works in the neutral gear." Three cheers for IBM! Now, I've got to remember where I stored that literature on the Sage IV.

James P. Reed
Rockware Inc.
7195 West 30th Ave.
Denver, CO 80215

In Defense of the Model 16

Regarding the letter from Marvin Stone and Sam Harp (October, page 20) concerning the relative speeds of the MC68000 and Z80 in the Radio Shack Model 16 computer: Mr. Hurrell's response is quite correct about the particular benchmarks used. The Xenix MBASIC is very slow for floating-point

AZTEC C — 'C' PROGRAM DEVELOPMENT SYSTEM
PORTABLE SOFTWARE APPLE CP/M IBM

WHY PROFESSIONALS CHOOSE AZTEC C

SOFTWARE SYSTEMS
most complete implementation of UNIX V7 'C' available for microcomputers.

- AZTEC C is portable. 'C' code can be freely moved between UNIX V7 and microcomputer systems. AZTEC C is available for PC DOS (MSDOS), CP/M 86 (MP/M 86), CP/M 80 (MP/M 80), APPLE DOS, MODEL III (IV), COMMODORE 64, and ATARI. All versions of AZTEC C are source compatible.
- AZTEC C is a complete development system that includes relocating assembler, linkage editor, library utility, debugging aids, overlay support, interfaces to Microsoft and Digital Research development software, and run time routines for I/O, utility, and scientific functions. Source for all library routines is provided.
- AZTEC C generates fast native code for the 6502, 8080, Z80, 8088, and 8086.
- Cross compilers are available from PDP-11, 8086, 8080, and 6502 processors.
- Since its release in 1981, AZTEC C has been acquired by several thousand users. Commercial applications include a wide variety of business, scientific, word processing, database, entertainment and financial applications.

PRICE LIST

AZTEC C85	PC DOS (MSDOS)	\$249
AZTEC C86	CP/M 86 (MP/M 86)	249
AZTEC C 80	CP/M 80 (MP/M 80)	199
AZTEC C 85	APPLE DOS	199
AZTEC C65	COM 64 OR ATARI	199
AZTEC Cross Compilers	PDP-11	2,000
AZTEC Cross Compilers	Other	500

Order by phone or mail. Specify product and disk format. Check, Money Orders, COD, VISA, MC, and purchase orders are acceptable. NJ add 6% sales tax.

MANX SOFTWARE SYSTEMS
Box 55, Shrewsbury, NJ 07701

Order phone: (201) 780-4004
Tech information: (201) 530-7997
Tech support: (201) 530-7708

Shipping: COD, 2nd day delivery, or Canada, add \$5. Canada 2nd day or US next day delivery, add \$20. Outside North America, add \$20, and for 2nd day add \$75.

SEVEN ACES



CPU's nimble and swift — a card sharp's delight.

When CompuPro introduced the first CPU board with both 8- and 16-bit capabilities, it was like handing a royal flush to systems integrators. How could we top that?

You gave us the answer. "Make a CPU that will access 16 megabytes at a swipe," you urged. So we designed CPU 68K. "Make one for people who need top speed and 16-bit power," you pleaded.

CompuPro responded with CPU 286, the board with two brains: one to bundle bytes and the other to scan the conveyor belt ahead and fetch the necessary tools.

So, by giving you flexibility without sacrificing performance, quality or reliability, CompuPro has dealt all players a winning hand: Seven Aces. They're worth betting on.

CPU 8085/88
is CompuPro's pioneering dual processor, running the vast library of both 8-bit and 16-bit programs at clock speeds up to 8 MHz. *Maximum* software access. \$495, \$595 CSC.

CPU 86/87
uses Intel's widely favored 8086 chip, so you get the broadest range of time-tested 16-bit software. Includes sockets for the 8087 math co-processor and 80130 firmware chip. \$800 10 MHz, \$850 CSC 10 MHz. With 8087 chip, \$1050 5 MHz, \$1150 CSC 5 MHz.

CPU 68K
lets you rummage around in 16 Mbytes of memory at a time — not just the usual 64 Kbytes. Access huge databases, invert mammoth matrices, or turn titanic tables topsy-turvy. Includes socket for memory management unit. \$695 8 MHz, \$775 10 MHz, \$850 CSC 10 MHz.

CPU Z
brings the Z80 chip's sophisticated instruction set to bear on the whole range of 8-bit software at clock speeds of 6 MHz. Ideal for multi-user installations, with 24-bit addressing that handles up to 16 Mbytes of memory. \$325, \$425 CSC.

CPU 286
is CompuPro's most far-sighted processor. It handles all 8086/8088 software, but many times faster with the help of a unique look-ahead capability. A memory management unit is *built-in*. \$1595 8 MHz, \$1750 CSC 10 MHz.

CPU 16032
features true 32-bit internal architecture that makes your micro byte off bigger words, like a mini. Ideal for Unix and other large operating systems. Includes sockets for floating point unit and memory management unit. Handles clock speeds up to 10 MHz. \$695, \$845 CSC. MMU available.

SPU-Z
lets multiple users share expensive resources such as disk drives, printers and modems — not to mention data. Let our slave processor give individual attention where it's needed, freeing the more expensive CPU for bus management. \$695, \$795 CSC.

For your business, industrial and scientific computing solutions, call (415) 786-0909, ext. 206 today for the location of the Full Service CompuPro System Center nearest you.

CompuPro products are backed by a one-year limited warranty — two years for boards qualified under the Certified System Component high-reliability program.

CompuPro®

A GODBOUT COMPANY

3506 Breakwater Court, Hayward, CA 94545

Prices and specifications subject to change without notice.

©1983 CompuPro

Circle 66 on inquiry card.

For dealer locations, see page 439.

BYTE February 1984 25

PICK A PEN



HEI has a light pen with specs to suit your need, whether you're doing text editing, menu selection, or more complex graphics system work. Each pen is built with Integral hybrid circuitry. Each can be made with custom sensitivity and field-of-view tolerances.

HEI light pens feature:

- Two TTL outputs
- 100FL ambient light rejection
- Spot sensitivity of 7FL
- Power input of only 5VDC @ 125 ma.

Adjustable light sensitivity and coiled cord are standard on all models. Pens are available with cable connectors.

HEI light pens are rugged and dependable. Proven in a number of sophisticated applications for over ten years, with more than 24,000 units in the field. Go for the best in industrial quality CRT light pens.

PICK A PEN FROM HEI.



HEI inc.

**The Optoelectronic
Specialists**

Victoria, MN 55386
612-443-2500

Letters

computation. The increased accuracy is a blessing or a curse, depending on your needs.

The screen-updating benchmark timing cited is an unfortunate side effect of the hardware. The only way in which the 68000 can get to the screen RAM is via the Z80, and this added overhead can only slow down accesses, no matter how fast the 68000 may be.

As far as the SIN benchmark, perhaps Mr. Harp or Mr. Stone may want to consider switching to FORTRAN. I ran the published SIN benchmark (TRSDOS: 43 seconds; Xenix: 132 seconds) on a Model 16 under Trisoft CP/M-68K and ANSI FORTRAN-77. The time was 5.2 seconds!

James M. Knox
Trisoft
4102 Avenue G
Austin, TX 78751

The interesting thing to me about the Harp & Stone Benchmark study of the TRS-Xenix MBASIC was how slow *all* the listed processors were. I ran Benchmark I on the Z8000-based Olivetti M20, using Microsoft BASIC, in 8.9 seconds. Going to double precision by inserting "defdbl A-B, Z" at the beginning lengthened the time to 9.5 seconds. I believe the running time is this low because Olivetti MBASIC performs only trigonometry and exponential functions in single precision.

Examining Z after running the program shows a value of 0.998048.

S. Richard Mateosian
Consultant, Computer Systems
2919 Forest Ave.
Berkeley, CA 94705

After reading "TRS-80 Model 16 Problems" (Letters, October, page 20) and the response from Radio Shack, it is evident that a simple fact needs to be straightened out.

Suppose one used a Z80 to handle the I/O for a CRAY. Would it output characters any faster than a 68000 making similar requests?

This elementary consideration shows the absurdity of the Harp/Stone "benchmark." Their negative remarks about the capabilities of the Model 16 and Xenix are therefore worthless and should be retracted.

Joel Rice
486 Route 9W
Nyack, NY 10960 ■

Rana Systems. Always A Step Ahead.



And it's happening again with our IBM compatible Rana 2000. This 320K double density drive offers a large centering cone for problem-free diskettes and our exclusive silencing mechanism to make it the quietest disk drive you can buy.

At Rana we know the key to our success is providing the highest technology, on the best possible products, while filling the most possible user needs. That is why we spend so much time on research and development. Our world-renowned engineers were the first to offer increased capacity. The first to design a write protect feature. The first to use a metal band positioner and get 100%

data integrity, and a 3 to 4 times improvement in access speed. And, the first to bring you all this performance, quality and dramatic styling.

This is why our Elite One got the #1 rating from Softalk Magazine. And our Atari™ compatible Rana 1000 Slimline has turned a game computer into a sophisticated business tool. And soon we'll have a new Winchester drive and a new series of very high density minifloppies, for both IBM and Apple.*

So call or write for the nearest Rana retailer or computer store. We're Rana Systems. And we know that to keep a step ahead, we have to put you first.

RanaSystems



21300 Superior Street, Chatsworth, CA 91311 213-709-5484
Call toll free: 1-800-421-2207. In California only call: 1-800-262-1221
Source Number: TCT-654

*Apple is a registered trademark of Apple Computer, Inc. †Atari is a registered trademark of Atari, Inc. ‡IBM is a registered trademark of International Business Machines, Inc.

© 1983 Rana Systems

Circle 313 on inquiry card.



VISUAL 1050 Personal Computer System...

Complete Solution

The VISUAL 1050 is an advanced personal computer system designed especially for managers and professionals. It comes complete with top-rated software and high-performance hardware ... all fully configured for easy set-up and simple operation. The VISUAL 1050 costs much less than other full-feature personal computers and comes with everything you need to tackle important professional jobs, right out of the box.

Words, Numbers and Graphics

The VISUAL 1050 solves more professional problems than any other computer in its class. Whether you work with words, numbers, or graphics, the VISUAL 1050 speaks your language. You get *WordStar*,[™] *MailMerge*,[™] *Multiplan*[™] and Digital Research's *DR Graph*[™]... leading software packages for word processing, spreadsheet and graphics. And all have been specially adapted to share data and perform as an integrated software family.



	VISUAL 1050	IBM™ PC	Apple™ IIe	TRS-80™ Model 12	DEC Rainbow™
Base System Price ¹	\$2,695	\$2,750	\$2,390	\$3,999	\$3,495
Serial Port (RS232)	STANDARD	\$119	\$195	2 STANDARD	2 STANDARD
Parallel Port	2 STANDARD	\$119	\$180	2 STANDARD	STANDARD
Bit-Mapped Graphics	STANDARD	\$240	STANDARD	\$499	\$845
Word Processing Software	STANDARD	\$200-\$500	\$200-\$500	\$399	\$200-\$500
Spreadsheet Software	STANDARD	\$200-\$300	\$200-\$300	\$299	\$200-\$300
Business Graphics Software	STANDARD	\$200-\$400	\$200-\$400	\$200	\$200-\$400
Communications Software	STANDARD	\$100-\$200	\$100-\$200	\$100	STANDARD
COMPLETE SOLUTION PRICE	\$2,695	\$3,928-\$4,628	\$3,465-\$4,165	\$5,496	\$4,940-\$5,540
Dual Drive Capacity	800 KB	640 KB	280 KB	2.5 MB	800 KB
Graphics Resolution	640 x 300	640 x 200	280 x 192	640 x 240	800 x 240
Keys on Keyboard	93	83	63	82	105
Expandable Memory	YES	YES	YES	YES	YES
Optional Winchester	YES	YES	YES	YES	YES
Tilt and Swivel Display	YES	NO	NO	NO	NO

1—Includes CPU, 64K User Memory, Keyboard, Display, Two Disc Drives, and Operating System.
Based on manufacturers' information available August, 1983. VISUAL 1050 includes 128K User Memory standard.

the complete professional solution at an unbeatable price.

Communications, BASIC and More . . .

You get *Terminal Emulation* software which turns your VISUAL 1050 into a powerful ASCII terminal for dial-up access to remote computer resources. And you get *CBASIC*® for custom programming applications. *CP/M Plus*®, a new and improved release of CP/M, allows your VISUAL 1050 to support hundreds of popular third-party packages.

Unbeatable Value

\$2,695 is the total retail price for the VISUAL 1050. You get the best and most popular software packages, ready to run on hardware which offers the features and quality you should demand. Two high capacity disc drives. 128K memory standard, expandable to 256K. Fast, bit-mapped graphics. Full size green screen. Standard printer and communication ports. Rugged 93-key keyboard with special WordStar engravings. You can't buy a more complete hardware and software solution at anywhere near the price.



VISUAL

See for yourself

Visual Technology Incorporated
540 Main Street, Tewksbury, MA 01876
Telephone (617) 851-5000. Telex 951-539

Circle 375 on Inquiry card.



The Apple Macintosh Computer

Mouse-window-desktop technology arrives for under \$2500

by Gregg Williams

Apple established itself as one of the leading innovators in personal computing technology a year ago by introducing the Lisa, a synthesis and extension of human-interface technology that has since been widely imitated. Now the company has

strengthened that reputation with a new machine, the Macintosh (above). In terms of technological sophistication and probable effect on the marketplace, the Macintosh will outdistance the Lisa as much as the Lisa has outdistanced its predecessors.

The Macintosh arrives, finally, after a history of colorful rumors. It will cost from \$1995 to \$2495, weighs 22.7 pounds, and improves on the mouse-window-desktop technology started by the impressive but expensive Lisa computer. A system with printer and

second disk drive costs about \$900 more, but even at that price, the Macintosh is worth waiting for.

The Macintosh at Work

Before we look at the Macintosh (or Mac) in more detail, let's look at how it works. When you turn the Mac on, its screen tells you to insert a 3½-inch Sony floppy disk. When you do that, the Macintosh puts a disk icon on the screen along with the disk's name. As with the Lisa computer, you first select an object, then choose a menu item that works on the object. Say, for example, we choose the disk by moving the cursor to the disk icon and clicking the mouse button once (figure 1a). The disk "opens up," showing a window containing icons, each one of which corresponds to an item on the disk. To start using the Mac Paint program, we select the Mac Paint icon and choose the menu item "open," as shown in figure 1b. (We also could have opened Mac Paint by double-clicking on the icon.)

What follows is a brief example of how the Mac Paint program works. When we open the program, we get the screen of figure 1c. The large blank area is a window onto the drawing area, the boxes on the left are tools, the boxes on the bottom row are patterns, and the lines in the

corner are selections for the current line width. By selecting the "open oval" tool and the thickest line width, we can draw empty ovals with thick borders (figure 1d). By selecting the "paint bucket" tool and the "diagonal bricks" pattern, we can fill the oval with that texture (figure 1e). The "eraser" tool lets us erase part of the image (figure 1f); for finer control, we can give the FAT BITS command (figure 1g), which allows us to erase or paint on a pixel-by-pixel basis. When we are finished with our image and select the QUIT command, the program displays an alert box that asks if we want to save our changes (figure 1h).

Foundations of Macintosh Design

The Macintosh computer is built on three cornerstone ideas: second-generation Lisa technology, reliability and low cost through simplicity, and maximum synergy between hardware and software. Each of these ideas contributes significantly to the uniqueness of the Mac's design.

Second-Generation Lisa Technology

Without question, the strongest influence on the Mac is that of the Apple Lisa computer, which proved the viability of certain concepts in a

commercial product: the graphics/mouse orientation, the desktop metaphor, the data-as-concrete-object metaphor, and the shared user interface between programs. The Mac has inherited these concepts; for further details on them, see my article, "The Lisa Computer System" (February 1983 BYTE, page 33).

Four differences between the Lisa and the Mac make the latter a second-generation computer. First, the Mac runs at a higher clock speed, 7.83 MHz (compared to the Lisa's 5 MHz). Second, the Mac, which has a smaller amount of memory to work with than the Lisa, uses its memory more efficiently because its programs and subroutines are coded in 68000 assembly language (as opposed to the Lisa, which uses less efficient 68000 machine-language programs that are compiled from high-level Pascal source code). Third, the Macintosh eliminates add-on peripheral cards and uses instead a high-speed serial bus that implements what Apple calls "virtual slots." (I will talk about this in greater detail below.)

The final difference is actually an important limitation of the Macintosh: it allows only one major application program to be active at a time (the Mac BASIC and "desk ac-

At a Glance

Name

Macintosh

Manufacturer

Apple Computer
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010

Dimensions

9.75 by 9.75 by 13.5 inches

Weight

Main unit, keyboard and mouse—22.7 lbs.

Power Requirements

105–130 V AC, 60 Hz (U.S. model);
85–135 V AC, 50/60 Hz (international model)

Memory

128K bytes of RAM, 64K bytes of ROM

Standard Configuration

Main unit with 128K bytes of RAM, 64K bytes of ROM, integral Sony 3½-inch disk drive, 9-inch video monitor, two serial ports; external mechanical mouse; external keyboard

Mass Storage

One Sony 3½-inch disk drive; 3½-inch disk holds 400K bytes and is encased in a rigid plastic housing

Video Display

9-inch monitor, noninterlaced 60.15-Hz image, 512- by 342-pixel resolution

Pointing Device

Mechanical mouse

Keyboard

Detached keyboard; 58 keys [59 in international version]; autorepeat; two-key rollover

Hardware Options

Second disk drive, keypad, Imagewriter printer, security kit [for chaining computer to table]

Software Options

Mac Paint (drawing program), Mac Write (a simple word processor), Mac BASIC, Mac Pascal, others [see text]

Prices

Standard system, \$1995–\$2495; Mac Paint and Mac Write (together), bundled at no charge for the first 100 days, \$195 (for the two) thereafter; Macintosh Pascal, BASIC, Logo, Terminal, and Assembler/Debugger, \$99 each; Mac Draw and Mac Project, \$125 each; keypad, \$99; second disk drive, \$395; Imagewriter printer, \$495

Macintosh System Architecture

by Burrell C. Smith

Inside the Macintosh, hardware and software work together to provide a system capable of supporting high-performance graphics, built-in peripherals, and communication channels to the outside world. From the beginning of the Macintosh project, the product-design goals of small size, light weight, and moderate end-user cost encouraged us to create a low-power, low component-count design. The large number of I/O devices that are built into each unit, combined with our desire for high performance, caused us to explore many alternatives for each aspect of the hardware implementation. A cooperative spirit among the people working on the industrial design, analog electronics, digital electronics, and low-level software resulted in the synthesis of detailed implementations that combined strengths from each group, providing an integrated design solution for all aspects of the product.

The heart of the Macintosh digital electronics is the MC68000 processor and its memory (both RAM and ROM). In the Macintosh, the data-output lines from the system RAM drive a data bus separate from that used by the rest of the machine (see figure 2). The RAM is triple-ported; this means that the 68000, screen-displaying hardware, and sound-output hardware have periodic access to the address and data buses, so that the video, the sound, and the current 68000 task appear to execute concurrently.

ROM memory connects directly to the system data bus and is used by only the 68000. Much of the system's time-critical code, such as the low-level graphics primitives, operating-system routines, and user-interface routines, reside in ROM. Macintosh software calls this code through 68000 "line 1010 unimplemented" instructions, which get one of approximately 480 addresses from an address table stored in low memory; this effectively allows the ROM subroutines to function as extensions of the 68000 instruction set. Since the ROM data and address buses are used exclusively by the 68000, ROM is always accessed at the full processor speed of 7.83 MHz; consequently, the ROM can perform as a read-only cache memory.

The 512- by 342-pixel video display ap-

pears in memory as a linear array of 10,944 16-bit words of data, with the most significant bit representing the pixel farthest left. Each 512-pixel horizontal line consists of 32 words of data, with bits shifted out at 15.67 MHz (322.68 μ s per 512-pixel line) followed by 12 words of horizontal blanking (taking 12.25 μ s). The last memory bus cycle of each horizontal line is reserved for sound DMA, where a byte of sound data is fetched from the sound buffer and sent to the sound PWM (pulse-width modulator) for conversion into an analog level. The update rate of the sound channel is then equal to the video horizontal rate, or 22,254.55 Hz. In the vertical direction, 342 active scan lines are followed by a vertical retrace and enough inactive horizontal

The product-design goals of small size, light weight, and moderate end-user cost encouraged us to create a low-power, low component-count design.

lines to take up the same time as 28 horizontal lines, providing a vertical retrace time of 1.258 ms. Although screen-memory accesses may occur at any time, a vertical retrace interrupt is generated at the falling edge of the vertical sync pulse to allow screen animation to occur completely synchronous to the video beam movement.

Access to RAM is divided into synchronous time slots, with the 68000 and video circuits sharing alternate word accesses during the live portion of the horizontal video-display line and the sound circuits using the video time slot during the last memory bus cycle of the horizontal line. Although the access to RAM is divided three ways, the 68000's share is maximized by giving it access to unused cycles during horizontal and vertical blanking. This way, 68000 access to RAM averages to a speed of about 6 MHz.

For high-performance sound generation,









a tightly coded routine generates 370 samples of sound data and places them into the sound buffer just after a vertical retrace interrupt. The 68000's 32-bit registers are used to control pitch with 24 bits of precision, providing each of four possible voices with 16,777,216 possible frequencies. For simpler sounds, a timer in the system's VIA provides a square wave of programmable pitch. All sounds pass through a software-controlled volume adjustment that creates approximately 20 decibels of total amplitude variation in eight discrete steps.

The Macintosh disk controller is a single LSI (large-scale integration) component referred to as the IWM ("integrated Woz machine") chip. The device, a one-chip integration of the disk controller originally designed by Steve Wozniak for the Apple II, handles data at 500 kilobits per second. To control the disk drive's motor speed, a pulse-width modulator located on the digital board allows the disk to move at one of 400 possible disk motor speeds; the PWM is driven from a table in memory in a fashion similar to that of the sound system. By varying the motor speed, we created a more reliable disk drive that puts significantly more data on the same disk.

The Macintosh communications chip, the Zilog 8530 SCC (serial communications controller), provides synchronous and asynchronous data transmission at up to 230.4K bits per second using a self-clocking data format and up to 1 megabit per second using an external clock. The Macintosh's two serial ports are identical; each provides single-ended or differential signaling and multidrop (party-line) capability.

The 6522 VIA (versatile interface adapter) rounds out the I/O requirements of the machine by providing system timers, support for the mouse and keyboard, and general-purpose I/O lines for selecting various system functions such as alternate screen and sound buffers and for communicating with the system's real-time clock and parameter memory.

Burrell C. Smith is a member of the Apple Macintosh design team.

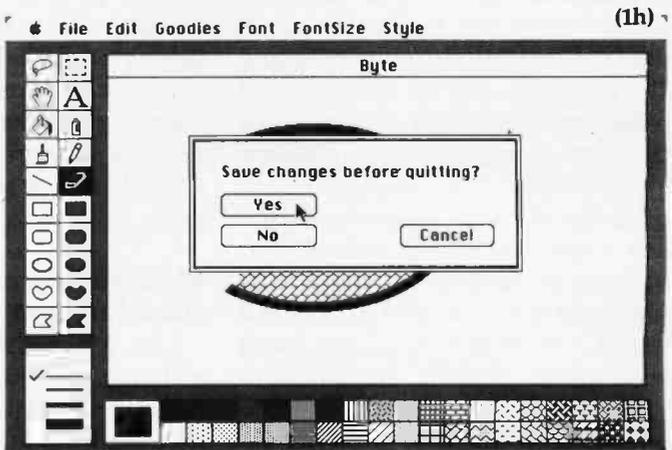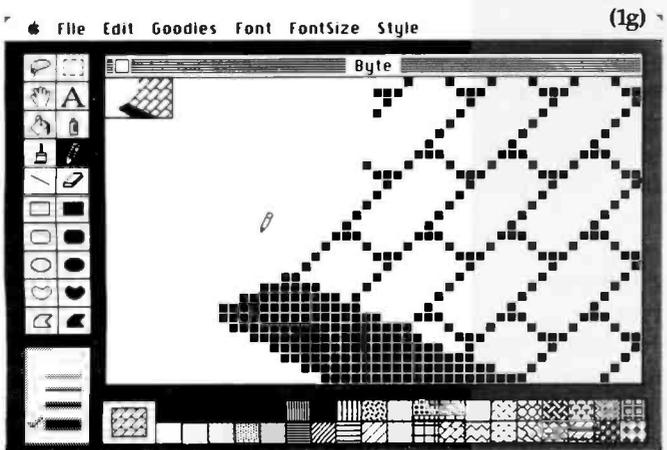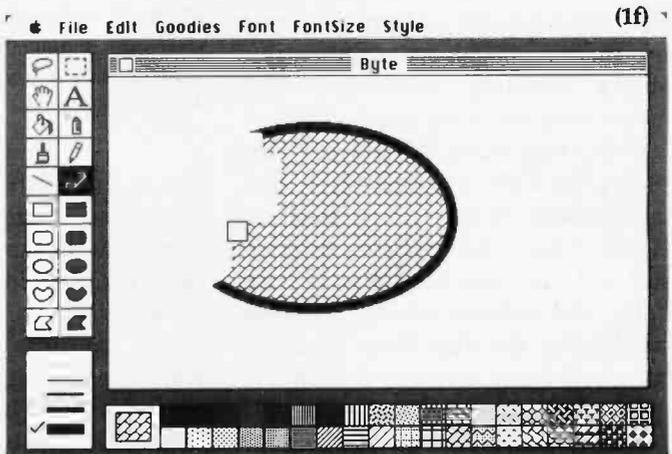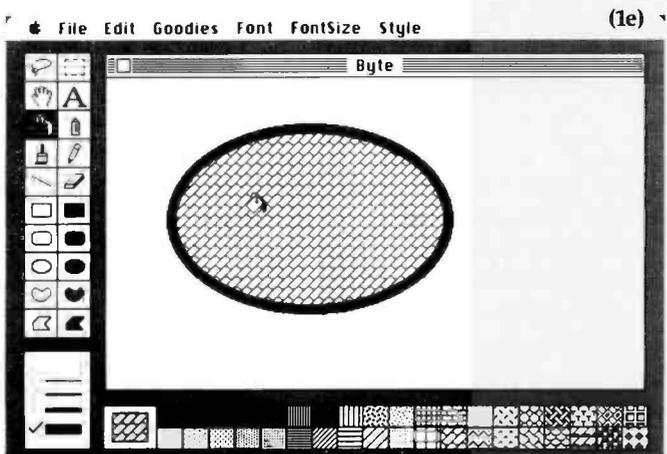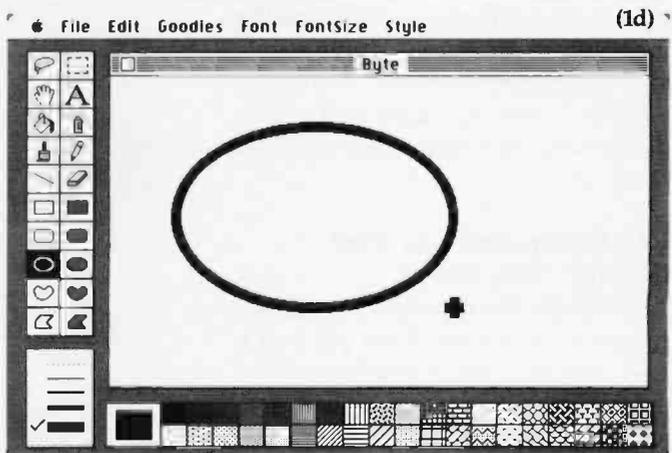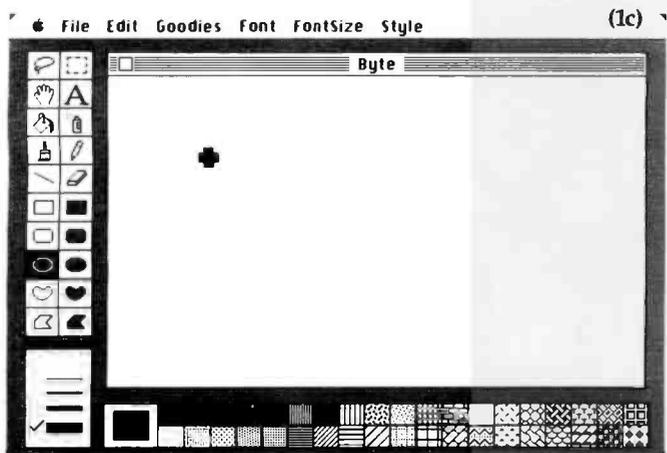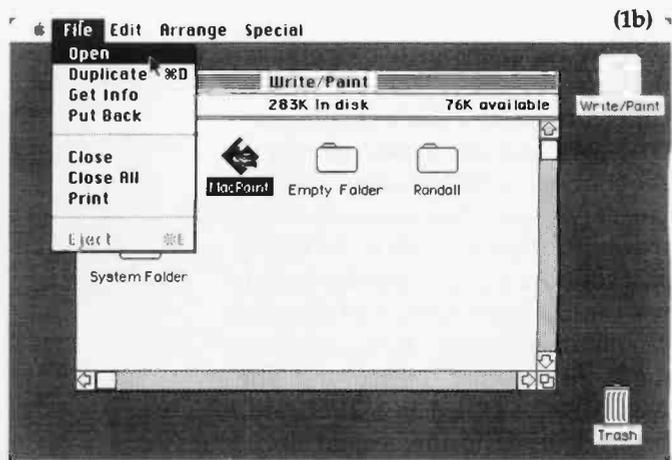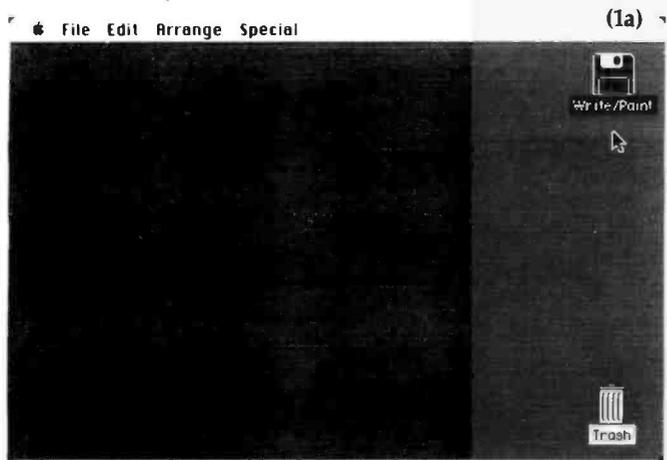

Figures 1a–1h: Working with Mac Paint on the Macintosh computer. See text for details.

cessory" programs are two exceptions that I'll cover later). This limitation is largely due to the Mac's small memory space and the overall design of the software, which assumes that the current program has access to all the machine's memory. This is not as bad as it sounds; a single application can use multiple windows, and material can be cut and pasted from one document to another by storing the material to be pasted on a "clipboard" before loading in the second document (which replaces the first). Still, the absence of hardware slots and the inability to run two applications simultaneously are two important ways in which the Macintosh is fundamentally different from the Lisa computer.

Reliability and Low Cost through Simplicity

Although the Macintosh costs approximately one-third the price of a Lisa, the Mac has much more than one-third of the Lisa's power. The idea of reliability through simplicity not only makes the Macintosh possible at a relatively low price but also produces a machine that has a reliability normally associated with much simpler computers.

One component of the Mac's simplicity is its low chip count—it contains about 50 ICs (integrated circuits), which decreases its physical size and price and increases its reliability. Mac reduces its chip count by combining the functions of many standard chips into eight programmable-logic arrays (PALs).

The Macintosh has only two circuit boards, one that holds all its analog circuitry and one that holds all its digital circuitry (see photos 2a and 2b). By partitioning its functions and reducing the number of connectors (by decreasing the number of boards to be connected), the designers have made the Mac both more reliable and less expensive. They carried this philosophy farther by eliminating hardware slots; you add peripherals to a Mac through its two high-speed serial ports.

The Macintosh was designed to reduce (or, in the case of the digital board, eliminate) the number of

(2a)

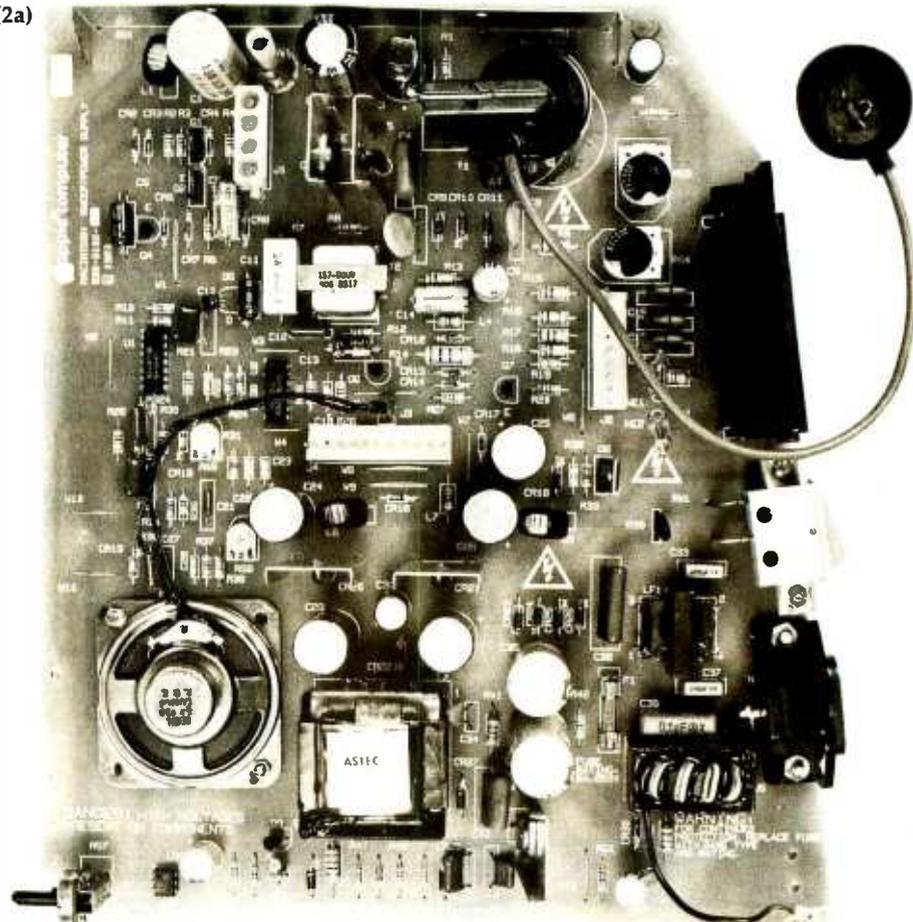


Photo 2: The Macintosh circuit boards. Photo 2a shows the analog board, while photo 2b shows the digital board. These two boards plus the video display, 3½-inch disk drive, and housing make up the main unit; only the keyboard and mouse are needed to make a complete Macintosh system.

places in which hardware must be fine-tuned during assembly. In some cases, the designers eliminated the need for adjustment through clever circuit design, which also means there's one less thing to go wrong with the computer once it is in the owner's hands. In other cases, Apple eliminated fine-tuning by requiring a vendor of externally manufactured subassemblies to tune the part before delivery; for example, the video-display tube and yoke are delivered pre-adjusted, and the Sony 3½-inch disk drive is delivered tested and with several Apple-specified modifications.

Maximum Synergy between Hardware and Software


The Macintosh's hardware and software were optimized for maximum performance. This means that the hardware and software evolved over a period of time in a process of

mutual give and take. For example, the pixels displayed on the Mac's video display are square (not rectangular, as in other computers); this greatly simplifies the software that draws squares and circles, scales text and graphics, and prints screen images.

Going for the World Market

Having learned from past experience, Apple designed the Macintosh so that it could easily be modified for all markets outside the United States. The following examples show how pervasive nation- or language-specific aspects of a computer design are and how Apple has minimized the changes needed.

•Except for the word "Apple" on the rear panel, the Macintosh has no English text

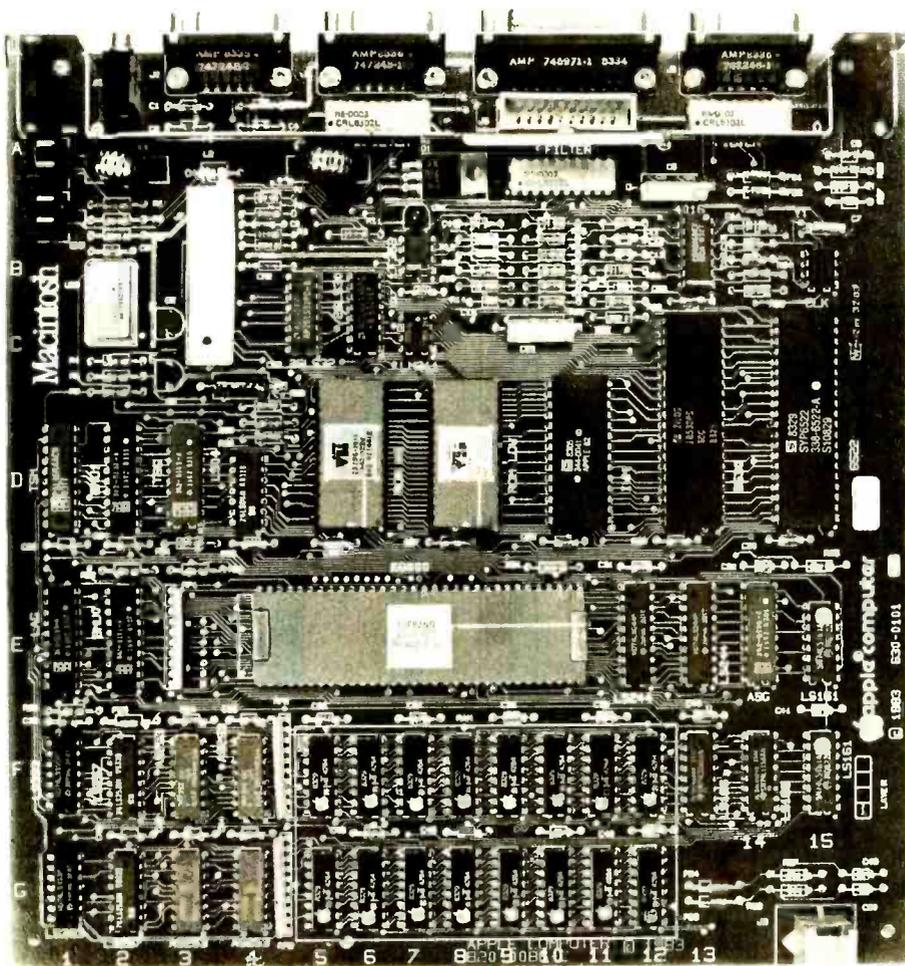

Hardware

The main unit of the Macintosh consists of eight parts: two circuit boards, a cable to connect them, a metal chassis, a 3½-inch disk drive, a video-display tube with yoke, and a plastic front bezel and rear housing (see photos 3a and 3b). An external

mouse and keyboard make for a total of 10 parts. The main unit takes up an amazingly small 10-inch by 10-inch area (it is 13½ inches high). True, the keyboard and mouse take up more area than that, but the footprint of the main unit is considerably smaller than that of comparable com-

puters. The Mac is also pleasantly compact and light; an entire Mac system in an optional padded satchel weighs 25.6 pounds (less than many transportable computers) and can be carried onto an airplane.

Figure 2 shows a block diagram of the Macintosh hardware; for more details, see the "Macintosh System Architecture" text box. For now, let's look at the machine's major subassemblies:

Processor: The Macintosh uses a Motorola 68000 processor running at 7.83 MHz.

Video display: The Mac has a 9-inch monitor that displays a non-interlaced image at 60.15 Hz. The resolution of the video image is 80 pixels per inch, so the overall screen is 512 by 342 pixels.

ROM: The Mac uses two 256K-bit ROMs configured as 64K bytes of memory. The ROM (read-only memory) contains most of the Mac's operating system and a "toolbox" of optimized 68000 user interface related routines (see the text box "The User Interface Toolbox" for more detail). The ROM is always accessed at full speed, 7.83 MHz.

RAM: The Mac has 128K bytes of memory; at some point (Apple says by the end of 1984), this will be expandable to 512K bytes (by substituting 256K-bit dynamic RAM (random-access read/write memory) chips for the 64K-bit chips currently being used). The screen display uses 21,888 bytes and is drawn using this memory and DMA (direct memory access) circuitry. Apple has an un-

Text continued on page 39

anywhere on the product or in the ROM. Each plug is labeled with a picture that identifies its function.

- The video-display rate of 60.15 Hz is generated internally instead of being derived from the line current. This allows the Mac to be used without modification in countries that have 50-Hz line current.

- Macintosh software has been designed so that all text messages, message layouts, and icons can be stored in a resource file, separate from the program itself. A designer can use a resource-editor program to change text (for example, to another language), icons, message layout, and the for-

mat of time, dates, numbers, and currency. With this method, the program itself does not have to be changed and recompiled to make these changes.

- The keys on the keyboard are defined by the software, thus allowing Apple to change the keyboard easily to accommodate the special characters needed by some languages. In addition, Apple has designed the Mac so that two keyboards (differing in only one key) can be used for all versions of the product; Apple customizes a keyboard for a given language by printing the necessary legends into the plastic keys. In addition, any Mac keyboard can produce

the full Macintosh character set; the only advantage to having the keyboard for a certain language is that the keyboard layout will be more appropriate for that language.

With these innovations, the most time-consuming part of modifying the Macintosh for another country is translating and printing the documentation. Apple reports that it will be shipping the Macintosh to several foreign countries "within several months of the Mac's introduction." (Companies never seem to meet such deadlines, so expect foreign versions to be shipped before the end of 1984.)

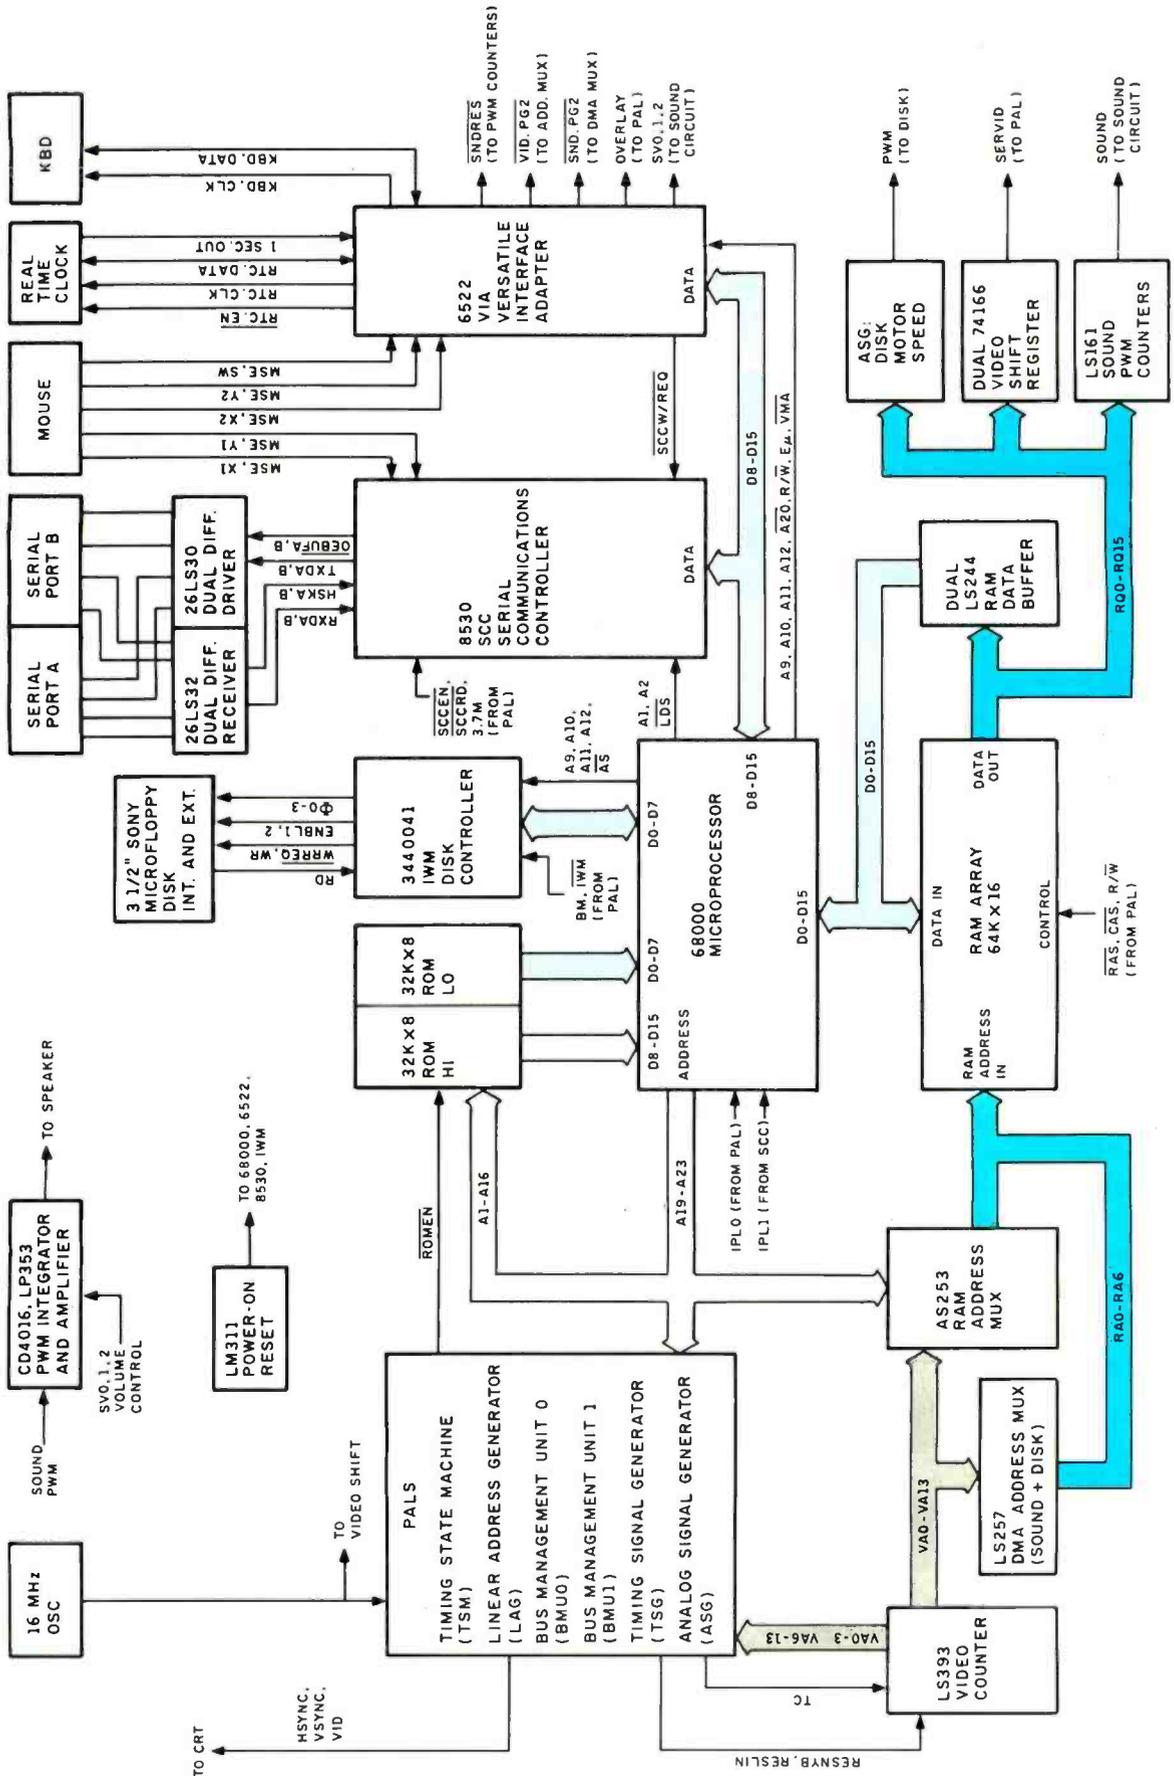


Figure 2: A block diagram of the Macintosh hardware. For more details, see the "Macintosh System Architecture" text box.

The User-Interface Toolbox

The toolbox (which occupies two-thirds of the high-speed 64K-byte ROM inside the Macintosh) includes optimized 68000 machine-language routines that handle all aspects of the Macintosh user interface—things like windows, text, the mouse, pull-down menus, desk accessories, dialogue boxes, and fonts. The figure below shows the relative relationships among the different units (or packages of routines). Here is a brief description of each unit, starting with the lowest-level unit and working up:

•**Resource Manager:** These routines coordinate the use of resources, which are data structures such as text strings, menus, and icon and font definitions. These resources are kept separate from the actual code of an application, which means that the resources of an application can be modified without forcing a recompilation (or modification) of the application program. The Resource Manager is usually called by higher units like the menu and font managers.

•**Font Manager:** This unit supports the use of various text fonts. It calls the resource manager when it needs to use a font not already in memory, and it is usually called by the Quickdraw unit.

•**Quickdraw:** Quickdraw is a graphics package that is at the heart of both the Lisa and Macintosh computers. Bill Atkinson, its creator, worked for 3½ years on the code, rewriting it many times and reducing it from a 160K-byte compiled Pascal program to a 24K-byte package of highly optimized 68000 code. Atkinson, who was involved in the early design of the Lisa's user interface, designed and optimized Quickdraw for the Lisa computer; he later joined the Macintosh design team. Quickdraw is very fast—for example, it can print to the screen more than 7000 characters per second. Two of its most interesting capabilities are its ability to fill in any arbitrary shape with a pattern and its ability to "clip" an image to correspond to the boundaries of an arbitrary masking shape.

The latter ability is needed to correctly display window contents when one window overlaps others. The source code for Quickdraw is identical in both the Lisa and the Macintosh.

•**Event Manager:** All system events (e.g., keypresses and mouse button presses) are received and interpreted through this unit, which mediates between the application program and the outside world.


•**Toolbox Utilities:** These routines handle miscellaneous tasks that include string operations, fixed-point arithmetic, and bit-wise logical operations.

•**Window Manager:** Since all action on the Macintosh display occurs within windows, this is a very important unit that is used a lot. The Window Manager allows the application program to interact with windows on a high level while it takes care of the low-level details automatically. It allows you to create different kinds of boxes (document, dialogue, and alert boxes, for example), delete them, move them, change their size, and make an inactive window active and vice versa. The Window Manager ensures that the computer automatically redraws the necessary screen areas when some aspect of a window is changed.

•**Control Manager:** This unit controls the use of software buttons, check boxes, and dials, all of which can be called on to show and alter the status of certain variables.

•**Menu Manager:** Given a two-dimensional matrix of menu items (each column is a menu title followed by its selections), this unit controls the display and behavior of that matrix of pull-down menus.

•**Text Edit:** These routines control elementary text entry and editing. Text Edit is designed with lots of software "hooks" so that you can modify its behavior but still use it. An external unit called Core Edit, which must be loaded into RAM, contains more sophisticated entry and editing routines; Core Edit can handle different fonts, sizes, and text styles.

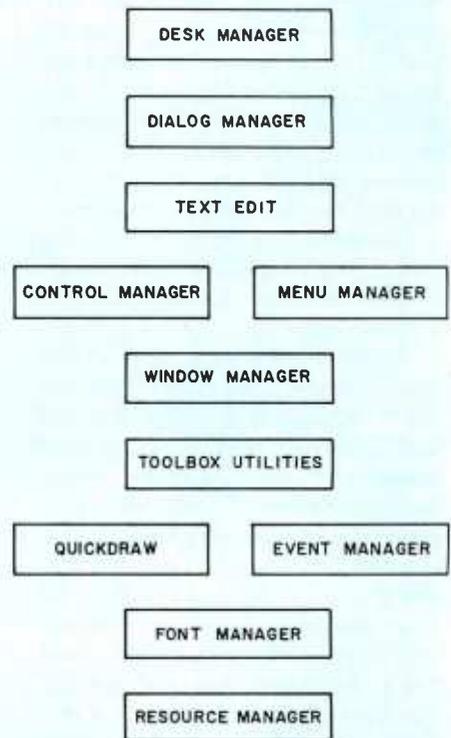

•**Dialog Manager:** Dialogue boxes are text boxes with several check boxes; usually, clicking the mouse button near a box selects it (and the action or condition associated with it) and unselects the previously checked box. An alert box (as in figure 1h) alerts you to a potentially dangerous situation and forces you to click on one of two buttons, "Cancel" or "OK." The Dialog Manager handles the display of and user response to a dialogue or alert box.

•**Desk Manager:** This unit allows the application program to use the desk accessories, which are resources that are called in from disk if they are not currently in memory.

Applications can be written in Mac BASIC, Mac Pascal, or 68000 assembly language (usually one of the latter two). Both Mac Pascal and Mac BASIC are designed so that their keywords directly call most of the toolbox routines. Most applications that use the routines are essentially an endlessly repeating loop that waits for an event, determines what kind of event it is, and then processes the event.

Macintosh System Software Overview

by Andy Hertzfeld

The Macintosh is more than a powerful, inexpensive 68000-based desktop computer. It comes with a built-in personality provided by 64K bytes of handcrafted system software contained in two ROM chips on its digital board. Besides performing traditional operating-system functions such as memory and file management, the Macintosh ROM includes the revolutionary Quickdraw package and a User-Interface Toolbox to help programmers develop applications that share a consistent, advanced user interface.

The Macintosh ROM can be thought of as an extension to the 68000 instruction set, augmenting its 56 basic instructions with more than 480 new instructions designed for implementing fast mouse-based applications. It is implemented entirely in 68000 assembly-language code that has been handcrafted and optimized over a period of almost three years. We chose assembly language over a higher-level language because it was very important for the system to be small and fast. The Macintosh is intended to be a very high-volume product, and we could afford to lavish time and attention on every rou-

time, making each one as efficient as possible, knowing that our efforts would be multiplied by the millions of units that we will eventually ship.

It is somewhat risky to put 64K bytes of intricate system software in ROM on a disk-based system, but we did it because we wanted the machine to have a built-in standard user interface. By using our ROM-based toolbox, a programmer saves development time and precious memory space; this provides a positive incentive for doing it our way. Also, the price per bit of ROM is significantly less than that of RAM, and not having the operating system load in from disk saves space on every disk you have. Application programs never reference the ROM directly; instead, they use compact "trap" instructions that are interpreted by the system dispatcher. This allows us to intercept any routine to fix the program bugs that will inevitably arise.

The Mac's system software design philosophy emphasizes simplicity, flexibility, and high performance. We chose the single-application-at-a-time philosophy to help keep things relatively simple. The user-

interface software is designed to be flexible because we are still learning how to make systems easier and more fun to use. Another reason for designing the software this way is that trying to live for years with what we thought was best at any given time would doom us to eventual failure. High performance is extremely important in an interactive system; people won't enjoy using a system unless it is very responsive.

About one-third of the ROM is devoted to what we call the Macintosh Operating System, which contains many components found in more traditional systems. It includes the low-level device drivers and interrupt handlers, an asynchronous I/O system, a memory manager, a simple, fast file system, a segment loader, and various utility routines. The I/O system supports swappable, RAM-based device drivers as well as its built-in serial, disk, and sound drivers. Most I/O and file-system calls can be made asynchronously, which allows an application to overlap I/O tasks with other tasks. The memory manager minimizes the fragmentation of available memory into small pieces by supporting relocatable objects that are always accessed indirectly; the memory manager also provides an automatic caching scheme by optionally

(3a)



(3b)

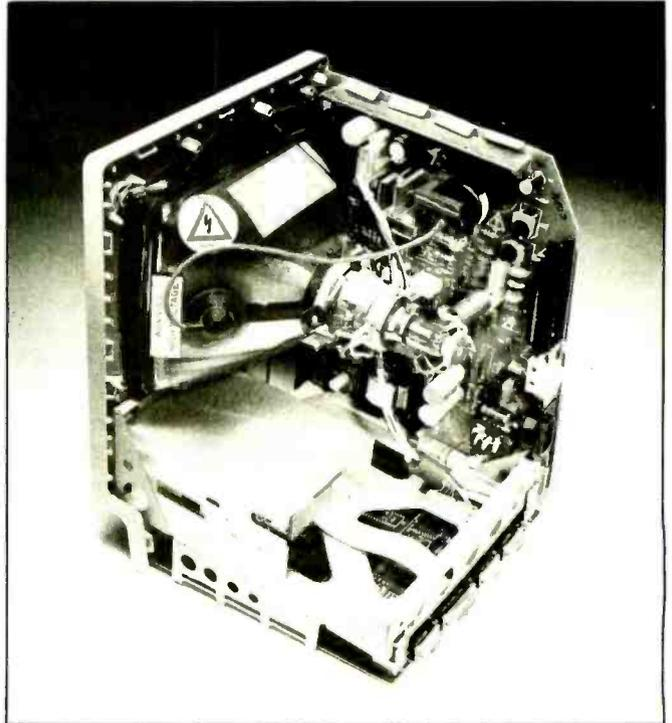


Photo 3: Inside the Macintosh computer. From the front (photo 3a), you can see the video display and the 3½-inch disk drive. From the rear (photo 3b), you can see the two main circuit boards (right and bottom), the rear of the video-display tube, the 3½-inch disk drive, and a row of connectors at the bottom of the unit. The connections go, from left to right, to the mouse, a second disk drive, two peripherals (these are two serial ports), and an external amplifier (for sound output).

purging objects as memory grows fuller. The file system ensures against loss of data by maintaining tags on every block; these allow the contents of a disk to be pieced back together even if the directory is destroyed.

Another third of the ROM is occupied by Bill Atkinson's Quickdraw graphics package. Quickdraw, which is the cornerstone of Apple's "Lisa technology," is responsible for the Mac's extremely fast user interaction. It draws practically everything you see on the screen, including text (in a variety of typefaces and styles) and both filled and unfilled rectangles, lines, and ovals. It also is capable of representing arbitrary areas of the screen called regions in a very compact data structure. All Quickdraw calls are clipped to the intersection of up to three regions, providing the fundamental capability necessary for overlapping windows. Quickdraw also is capable of recording any sequence of procedure calls and saving them as a picture. Pictures provide an easy, powerful method for transferring graphics between applications.

The final third of the Macintosh ROM is occupied by the User-Interface Toolbox, a collection of various managers and services intended to help a programmer develop applications that conform to the Macintosh standard user interface. Its principal com-

ponents are resources, windows, menus, controls, dialogues, and a text-editing package. The window, menu, and control managers contain little information on how individual windows, menus, or controls look or behave. Instead, this information is encapsulated in definition functions, which are kept as resources and swapped into memory as necessary to implement messages sent by the various managers. This provides a very flexible structure capable of evolving as we learn how to improve the user interface.

Another important goal of the Macintosh system software is to facilitate the passing of data between applications. A scrap manager is provided to help applications share data. It defines two data types that every application is requested to support (simple ASCII text and Quickdraw pictures) and lets applications define their own custom types. It provides routines for transferring data in and out of the scrap.

As stated above, Macintosh supports only one application running at any given time. This restriction is mainly due to limited available memory. By making a few simple calls to the desk manager, an application may allow many useful mini-applications to run concurrently with itself. These small programs are called

desk accessories and are capable of cutting and pasting data with each other as well as with the major application. We currently provide five desk accessories (calculator, clock, notepad, control panel for default system parameters, and scrapbook).

By the spring of 1983, it became apparent that we would not be able to fit all the routines that we had hoped to into our 64K-byte ROM space. We designed a facility to allow some system code (in the system resource file) to be swapped in from disk to RAM when needed. We now use five such RAM-based packages, including a fully IEEE-standard floating-point numeric package, a standard file dialogue package, and an international string package that deals with various formats for date and time display.

In summary, the 64K bytes of ROM-based firmware provide Macintosh with a unique personality and user interface, forming the foundation for the development of communicating applications that share a common user interface. The Macintosh firmware is very fast and flexible, and it will be exciting to see all the applications that develop from it in the years to come.

Andy Hertzfeld is a member of the Apple Macintosh design team.

Text continued from page 35:

disclosed proprietary technique for phase-locking the 68000 to less expensive memory, which lowers the product cost without sacrificing the speed of memory access.

When the Mac is drawing a horizontal line of the video display, the 68000 and the video DMA circuitry alternate (interleave) their accesses to the RAM address and data lines. Since these two can never access RAM simultaneously, the 68000 can never produce hashing or other glitches in the video display by accessing RAM at the wrong time. Because of this interleaving, the 68000 accesses RAM at 3.92 MHz, half of the full 7.83 MHz rate, during the display of a horizontal line of the screen. This is done in the following way: the DMA circuitry puts a word from RAM into the video shift register; while the register is sending out those 16 bits serially to the screen, the 68000 uses RAM for its own purposes; then the cycle begins again with the DMA circuitry.

When the video display is doing a horizontal or vertical retrace, however, the 68000 gets exclusive use of the RAM at its full speed, 7.83 MHz. This has a significant effect on the average speed of RAM access. Out of the 45 μ s (microseconds) for each horizontal display line, over 12 μ s (about 27 percent of the time) are occupied by horizontal retrace. Of these 12 μ s, about 0.5 μ s is used to send data to the sound and disk-speed circuitry, while the rest is available to the 68000. Furthermore, out of the 16.626 ms (milliseconds) used to draw each complete screen, 1.258 ms (about 7.6 percent of the time) are devoted to vertical retrace. Of this, about 14 μ s are used for sound and disk-speed control (representing the equivalent of 28 unused horizontal lines of video), leaving more than 1.244 ms for the 68000 to access RAM at full speed.

To summarize, the ROM is always accessed at 7.83 MHz, regardless of

screen display. The RAM is accessed at 3.92 MHz during screen display and at 7.83 MHz otherwise. The average speed of the system is around 6 MHz.

One memory area of interest is the sound buffer. Along with associated hardware, this buffer enables you to create four channels of arbitrary sound while using no more than 50 percent of the 68000's computing power. The 68000 performs look-up operations every 44 μ s on up to four 256-byte waveform tables; the result of these lookups is placed in a 370-byte sound buffer, from which the sound hardware fetches 1 byte every 44 μ s to deliver to an 8-bit digital-to-analog circuit (DAC). An internal VIA (versatile interface adapter) can also be used to generate a single square-wave tone while using an insignificant part of the 68000's computing power.

Mass storage: The Macintosh uses a custom version of the Sony 3½-inch disk and drive (see photo 4). The

QUARK INTRODUCES CATALYST™ IIe.

The Only Hard Disk
Program Selector
for the Apple IIe and
Apple II Plus.

A hard disk makes your Apple IIe or 64K Apple II Plus even more powerful. And makes you even more productive. But you still have to load a new floppy and reboot when you need to change programs. And the more programs you have, the more time you waste.

That's why Quark developed Catalyst™ IIe. A unique ProDOS program selector that lets you switch between even copy-protected programs. Without rebooting. A few keystrokes move you from Word Juggler IIe to your spreadsheet, then to your file management system, and so forth. Just boot Catalyst IIe when you turn on your machine, and you may not need to touch another floppy all day.

The convenient menu lists the programs you've stored on your hard disk, organized in any way you wish. You can automatically install virtually any programs which use Apple's new ProDOS operating system.* Including software from Quark, Apple Computer and other leading manufacturers.

Catalyst IIe is an affordable \$149. So see your favorite dealer today for a complete demonstration. And while you're there, look into Quark's other office automation tools for the Apple IIe and Apple III. Powerful programs that are easy to learn. And use. At prices that are as intelligent as the software.

*Not compatible with programs written for DOS 3.3, Pascal, CP/M or any other Apple operating system.

Quark, Catalyst and Word Juggler are trademarks of Quark Incorporated. Apple, ProDOS and ProFile are registered trademarks of Apple Computer, Inc.

For the name of the Quark dealer nearest you, call 1 (800) 543-7711.



Photo 4: The Sony 3½-inch disk is encased in a rigid plastic housing, and the oval window through which the magnetic medium is accessed is protected by a metal shutter that slides out of the way when the disk is inserted in the drive. These factors help protect the disk from casual use.

drive can store 400K bytes on a single-sided 3½-inch disk; the Mac is designed to be able to use double-sided drives to get 800K bytes per disk, an option that Apple may pursue at a later date. The standard Sony 3½-inch disk (used to date by Hewlett-Packard and other vendors) puts

70 tracks of data at 135 tpi (tracks per inch) onto each disk. At Apple's urging, Sony now makes the drive in another model that has 80 tracks of data at 135 tpi. As a comparison, the Hewlett-Packard HP 150 uses the 70-track version and conventional sectoring to get 270K bytes per single-sided disk.

Sharing Data among Programs

Macintosh programs, if they are designed in accordance with Apple guidelines, will be able to trade data among themselves without one program having to know anything about the nature of the others. This is done through use of a shared memory area called the clipboard and the standardization of the data that can be stored in it.

The clipboard is a relocatable piece of memory that is not erased when a new program replaces an older one. It is used as follows: the first program copies data into the clipboard, the second program replaces the first with its own code and data, and the data in the clipboard is added to the data now in memory. The clipboard can contain a variable number of data items, though every item must be of a different type. Each data item consists of a four-character data-type identifier, a 32-bit length (in bytes), and a stream of bytes that

makes up the actual contents of the data item.

Programs are free to implement their own data types. Apple has defined two—text and Quickdraw pictures—and encourages every program to be able to read both and write at least one of these data types. Text is a simple ASCII string of characters without any information on the size, font, or position of the text. Quickdraw pictures are defined as a sequence of commands that can be understood by the Quickdraw routines. A Quickdraw picture can contain displayable text (which does include information on text size, font, and position on the screen), a sequence of elementary graphics commands that will recreate the image, or the image described as a stream of bits. These two data types provide a guaranteed means of communication among Macintosh programs.

In addition to the change to 80 tpi, Apple contracted Sony to modify the drive in several other ways. Two changes allow the Sony drive to mimic the behavior of the Lisa "twiggy" drives (which were originally chosen for use in the Mac): disk ejection under software control and variable disk-rotation speed. The first change allows the Mac to ensure that a disk is correctly updated before it is surrendered to the user (that is, you can't take a disk out of the drive until the Mac software permits it). The second change enables the Mac to record onto the disk at a constant linear density (which means you can put more data on the outermost tracks), as opposed to the constant radial density approach most computers use (which puts the same amount of data on each track regardless of position).

The Macintosh's drive rotates under software control between 390 and 600 rpm (revolutions per minute) and transfers data at the rate of 489.6K bits per second (bits as recorded on the disk, not decoded data bits). Most computers use a disk-controller chip instead of the processor to control the drive. The Mac (like the Apple II) uses its processor to directly control the drive. Because the Macintosh can control more disk-related parameters than the Apple II (the variable motor speed, for example), Macintosh owners will be treated to an even greater wealth of copy-protection schemes than Apple II owners enjoy. Also, the Macintosh drive uses *modified group code recording* to encode data onto the disk. This technique, invented by Steve Wozniak for use with the Apple II, encodes 6 bits of data into an eight-transition group that is recorded onto the disk surface.

Keyboard: The keyboard has 58 keys; the left Shift key is split on the international version of the Macintosh, giving it a total of 59 keys. The keyboard includes Return, Caps Lock, and Shift keys in their usual places, two Option keys, and a cloverleaf command key (see photo 5). Combinations of the Shift, Caps Lock, and Option keys give each key up to six meanings; the command key

acts as a modifier and is often used with a letter key as the keyboard substitute for a mouse-selected menu item. The keyboard contains an 8021 microprocessor and is connected to the main box by a four-wire bidirectional serial connection. The connections on both ends use the same kind of square modular plug found in most telephones.

Mouse: The Mac's one-button mechanical mouse, about the size of a pack of cigarettes, is essentially the same as the Lisa's; it differs only in the shape of the plastic housing. The mouse is used to position the cursor on the screen; when you slide the mouse over a horizontal surface, the cursor moves in the same direction on the screen.

Serial bus: The Macintosh's serial bus is very important because it is the way that most future peripherals (except the second 3½-inch disk drive and the keypad) will connect to the computer. The bus can run in two modes: with an external clock, it can transfer data at up to 1 megabit per second; with internal clocking (which embeds clock bits in the data stream itself), it can transfer data at up to 230.4K bits per second. The latter

scheme will be used to connect most peripherals, which need only a low to medium data-transfer rate, to the Macintosh in a passive daisy-chained line. This scheme implements what the Mac's designers call "virtual slots."

Virtual slots have several advantages over conventional hardware peripheral slots. They reduce the potential problems inherent in any added mechanical connection (a serial interface connector has fewer pins than a typical interface board). They reduce RFI (radio-frequency interference) by keeping the main box leakproof and allowing easy, inexpensive shielding of the serial line. By deciding that peripherals will supply their own power, the Macintosh designers were able to streamline the power supply of the main box without worrying about the power needs of unspecified future peripherals. Finally, virtual slots eliminate the need of peripheral cards to insert themselves somewhere in the computer's memory map; the unchanging memory map creates a known, unchanging system architecture that all software designers can be assured of, regardless of

the peripherals connected.

The virtual-slot scheme is both practical and elegant; it offers a simple, standard way to connect unspecified future peripherals. The 230.4K bit-per-second data-transfer rate is high enough to meet the needs of most peripherals—printers, modems, plotters, music synthesizers, and so on. However, one class of add-on card will not work using this scheme: processor cards like the Microsoft Softcard, which allow a computer to run another processor's software. Such cards require full access to the data and address lines and will not work via a serial "virtual slot." As a result, despite some rumors to the contrary, the Macintosh will never use IBM PC- or MS-DOS-based software.

Power supply: Apple designed two power supplies for the Macintosh. The first one uses a 60-watt switching power supply similar to one used in the Apple II family; it can operate on 85 to 135 V AC at either 50 or 60 Hz. For technical reasons, use of this power supply would have delayed the introduction of the machine, so Apple designed and produced a simpler nonswitching power supply



Photo 5: *The Macintosh keyboard.*

(105 to 130 V AC, 60 Hz) for initial use in the first U.S. models of the Macintosh. The first switching power supply will be used later in the year for the international model and possibly for the U.S. model.

The supply was designed to drive two twiggy disks; when the design was changed to include two 3½-inch disks instead, the supply had a sizable margin of unused power.

System Software

As stated before, the Macintosh contains 64K bytes of ROM accessed

at 7.83 MHz. The ROM contains most of the Mac operating system and a set of optimized 68000 routines called the Macintosh User-Interface Toolbox. The operating-system software interacts at the lowest level with the hardware; it includes such things as device drivers and memory- and file-management routines. The toolbox contains various routines that let you manipulate windows, text, the mouse, pull-down menus, desk accessories, dialogue boxes, fonts, and other aspects of the Mac user interface. These are high-level routines

that perform the details of such complicated operations with minimum programming on the application designer's part. For example, the window-management routines take care of correctly redrawing the display when a window is moved or changed. For more details, see the text box "The User-Interface Toolbox."

The designers intend for you to access all ROM routines indirectly via the 68000 "line 1010 unimplemented" instructions, which receive their addresses from a table in RAM; this table can be changed to point to other routines, thereby allowing future versions of Mac software to patch the inevitable bugs that will be found in the Mac ROM. Because the application drives the ROM routines (instead of the other way around), the Macintosh is an "open" system whose behavior is completely determined by the contents of the disk inserted into it—that is, software designers can use the ROM routines to create a "standard" Macintosh application, or they can write their own code to create an application that behaves the way they want it to.

Although the designers of the Macintosh have a general philosophy of allowing only one application program to be open at a time, they have included in the main menu a collection of short, useful programs that can run without forcing you to end your current program. Apple calls these programs *desk accessories*. Many of the accessories are simply conveniences—the clock accessory, for example, shows you the current date and time—but a very powerful accessory is called the *scrapbook*. Ordinarily, you can cut and paste data from one document to another by cutting the data into the clipboard, loading in the new document, and pasting in the data; this process would be tedious if you had several items of the same type to cut and paste. The scrapbook is a sequence of data items—text or graphics—that can be stored or recalled together, thus minimizing the number of document changes and allowing you to recall often-used data items easily. The scrapbook is actually implemented as a disk file; as a result, it

SEATTLE GIVES YOU AN EDGE IN S-100 SYSTEM DESIGNS

You can unlock new system capabilities with high-performance S-100 boards from Seattle Computer. All are IEEE-696 compatible. But, for innovative systems that demand performance beyond the limits of conventional S-100 boards, you'll want to know more about these Seattle Computer products. For example, with our 8 MHz 8086 CPU, you'll be able to build systems that run faster and consume less power than before. Take a closer look:

8086 CPU Set: 8 MHz 8086 CPU • CPU Support board includes a console serial port, a second serial port, Centronics parallel port, vectored interrupt controller, four 16-bit timers and EPROM monitor for 8086 • MS-DOS 2.0 plus development utilities • 8087 numeric coprocessor is optional
• **Single Qty: \$595.00**

64k Static RAM Fully static design makes interfacing easy • Compatible with a variety of CPU and DMA devices • High-speed (85 ns) RAMs operate to 10 MHz with no wait states • 16k, 32k, and 48k OEM versions are available
• **Single Qty: \$495.00 (64k)**


Disk Master™ Controls as many as four 8" and four 5.25" floppy disk drives simultaneously, in any combination • Uses 1793 disk controller chip • Can be used with 10 MHz CPUs • **Single Qty: \$325.00**

Multi-Port Serial Card 2- and 4-port versions are available • These RS-232 ports operate as either "data sets" or "data terminals" • 36" cables included
• **Single Qty: \$280.00 (4-port)**
\$210.00 (2-port)

For the whole story on high-performance Seattle Computer S-100 boards, call:

1-800-426-8936

Dealer and OEM inquiries are invited.

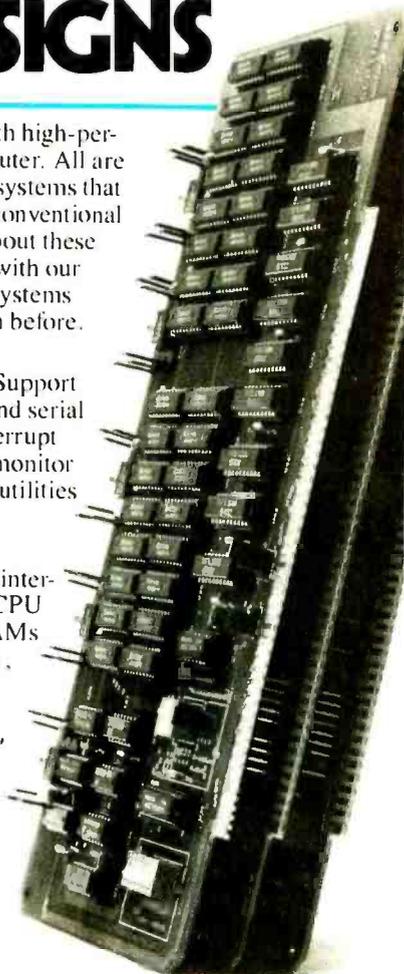

**SEATTLE
COMPUTER**
114 Industry Drive
Seattle, WA 98188

KNOWLEDGE SYSTEMS INC.

Information Processing Components,
Selected for Performance and Value.

NO SURCHARGE FOR MASTER CARD AND VISA

PREPAID PRICES INCLUDE SHIPPING AND INSURANCE, UPS Ground Continental USA only.

SOFTWARE

Ashton Tate	
Base II	389
Tridays	184
Software Arts	
K Solver	215
Solver Pac	88
Sorcim	
Super Calc III	294
Micro Pro	
Vordstar	258
Mail Merge	131
Spellstar	131
II in one pack	475
MBSI	
Real World GL	533
Real World AR	533
American Training	
For most Programs	Call
Hayes	
Smart Com	71
Micro Stuff	
Crosstalk	134
Remote	100
Rose Soft	
Prokey	60

TERMINALS

Televideo	
10	533
25	753
50	950
Teletex	
000	494


MODEMS

Hayes	
00	207
200	493
200B	432
Micro Modem II w/T	242
US Robotics	
Password	340
Auto Dial 212A	460
Novation	
Access 1-2-3	Call
Apple Cat II	282
Promethius Products	
200	365
Rixon	
12A	Call
200	Call

PRINTERS

Leading Edge	
8510A	363
1550	668
F10-40	1079
F10-55	1415
A10-18	625
We Know How to make your Prowriter IBM Compatible	
Okidata	
92A	430
93A	770
92IBM	486
IBM Printer ROM	45
2350	2090
2410	2380
Star Micronics	
Gemini 10X	300
Gemini 15X	444
Delta 10	494
NEC	
3550	1888
7710	2095
Brother	
HR1	607
HR25	786
Dynax	
15	462
Key Board	149
IDS	
Prism 132 Color	1578
Prism 80 Color	1419
Transtar	
315 Color	480
Silver Reed	
550	599
500	431
Juki	
6100	492
Teletex	
1014	455
IBM PC ACCESSORIES	
AST Research	
6-Pack 64K	269
Combo Plus 64K	269
Mega Plus II	269
Micro Graphics	
RGB. Monochrome, Printer	398
Plantronics	
Color Plus	375

SPECIALS

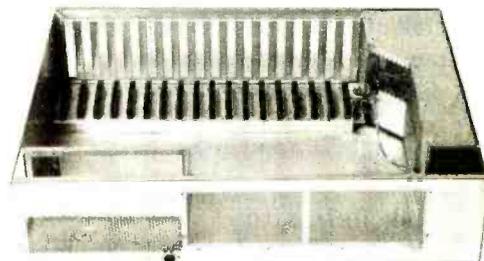

12 Slot Chassis, 125 Watt Power Supply &
IBM Compatible CPU

IMP SYSTEM \$1200

The S-100 Concept for
IBM Compatible Systems

TAVA-PC \$1995

DISK DRIVES 5 1/4 DSDD

TEAC 55B	\$225
PANASONIC/SHUGART	\$205
TANDON T100-2	\$238

MONITORS

Amdek	
300A	143
300G	133
310A	175
Dynax	
12" Green	127
12" Amber	138
Taxan	
RGB III	446
RGB 420	Call
Sanyo	
8112 Hi/Res	195
USI	
PI 2 12" Green	125
PI 3 12" Amber	142
Princeton Graphics	
PGS HX 12	485
Sony	
RGB	Call
NEC	
JB 1201	162
JB 1205A	172
JC 1410	817

California Residents add 6.5% States Sales
Tax
Shipping extra for outside USA. FPO and
APO
Please include an address reachable by
UPS, no P.O. boxes, and your phone
number where you can be reached during
the day.

(213) 344-4455

Knowledge Systems Inc.
19707 Ventura Blvd.
Woodland Hills
CA 91364

ORDERING TERMS

Prepaid: Money Orders, Cashier's Checks,
Certified Checks, Bank Wire Transfers,
Master Card, Visa, AMEX (add 3% for
AMEX) and Personal Checks (allow 15
banking days for all personal checks).
Please include Valid Driver's License #
and Major Credit Card for Identification.

Circle 205 on inquiry card.

tends to be rather large.

System software reacts to all peripherals on an asynchronous basis—peripherals compete for the attention of the 68000 by sending it interrupts, which the 68000 services according to the level of the interrupt. This keeps the 68000 from being tied exclusively to a peripheral—for example, to the 3½-inch disk drive waiting to get up to its full speed—when it could be doing something more useful. The Mac's designers have managed to do this even with high-speed peripherals that usually require the full attention of a processor. For example, disk and serial-port routines have been dovetailed to permit the use of both peripherals at the same time.

Disk Reliability

Reliability was one of the main reasons that Apple decided to use the 3½-inch Sony disk drive instead of the 5¼-inch twiggly drive. (A projected shortage of twiggly drives was another reason.) Apple is expecting the Macintosh to be the first real consumer-oriented computer, and it

sees the magnetic medium as being more likely to fail than the electronics. The Sony 3½-inch disk is better suited to the consumer environment. The drive can hold an acceptable amount of storage per disk, and the small disk, with its rigid shell and normally closed access window, is less likely to suffer from bad handling than a conventional 5¼-inch floppy disk. In addition, the magnetic medium is connected to a steel hub that the drive mates with and rotates. This is an improvement over 5¼-inch floppy-disk drives, which clamp the Mylar edge of the center hole. The 3½-inch disk hub is needed to get accurate enough disk-head placement to make a data density of 135 tracks per inch possible.

The data on the disk is encoded in a way that enables the Macintosh to recover from some disk medium or disk file errors. The file directory is duplicated in a normal disk file (which can be used if, for some reason, the directory is damaged). Also, each block of data on the disk includes a 12-byte identifier that gives

the file number, sequence-within-file number, and date/time stamp for the data in the rest of that block; this can be used in many situations to recover most or all of the data on the disk.

Applications and Languages

Neither application software nor a language is included in the basic Macintosh package. However, a two-program set will be available for \$195; both programs require the recently introduced Imagewriter printer to print things out. The first program is Mac Paint, the drawing program we looked at earlier. Created in house at Apple, Mac Paint is limited to drawings that will fit on one 8½- by 11-inch page. Mac Paint is unlike the Lisa drawing program (Lisa Draw) in that it manipulates the drawing on a bit-by-bit level (a Lisa Draw drawing is stored as a collection of elementary objects—circles, text, boxes, etc.). This representation makes some things, such as arbitrary erasures, easier on the Mac and other things, such as deleting a single object within the drawing, harder.

GET THE SAME VIDEO TRAINING THE PEOPLE AT SONY GET.


Now you can be trained by Sony even if you aren't employed by Sony.

Because we're making our vast library of training videotapes available to you. The very tapes that teach our own engineering, service and sales personnel.

The tapes cover the products and concepts of video and its related technologies. You can learn the basics of video recording. Color systems. Digital video and electronics. Television production. And more.

Plus you can learn how to service cameras, VTR's, and other video products. As professionally as Sony does.

The tapes are produced entirely by Sony and contain up-to-the-minute information. They communicate clearly and simply. And some of them are even programmed for interactive learning.

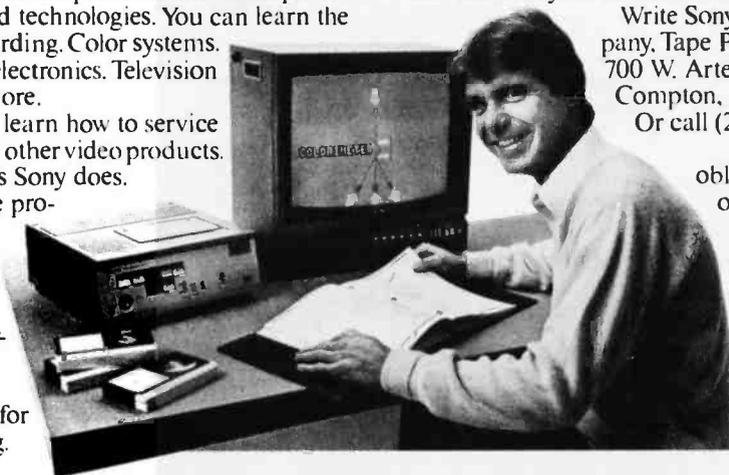

And learning through video can be done at your own pace, in the convenience of your home, shop or school. Reviewing is quick and easy. And the tapes are always available for reference.

Send for your catalog, which lists more than 250 titles. In your choice of 3/4" or 1/2" formats.

Write Sony Video Products Company, Tape Production Services, 700 W. Artesia Boulevard, Compton, California 90220. Or call (213) 537-4300.

Of course, there's no obligation. Except the obligation you have to yourself: to find out about the best training available in one of the country's fastest-growing, most lucrative fields.

SONY
Video Communications
Sony is a reg. trademark of Sony Corp.


DISCOVER THE DYSAN DIFFERENCE

Dysan Software Duplication:

It's your name on the package label. And your company's reputation on the line. Whether your program retails for \$40.00 or \$400.00, or is for company internal distribution, the cost of duplicating it on diskettes is just a fraction of the value of your product. Doesn't it make sense to protect the time, money and talent invested in your software with the finest and most complete software duplication services available?

Quality Software Deserves the Quality Media.


Dysan's software duplication services are unsurpassed for fidelity of reproduction. Not only is your program copied unerringly onto the finest media made—the Dysan diskette—but it's also copied on proprietary equipment manufactured by Dysan, exclusively for Dysan. Plus Dysan offers you the widest variety of support services available—from software protection to serialization and packaging.

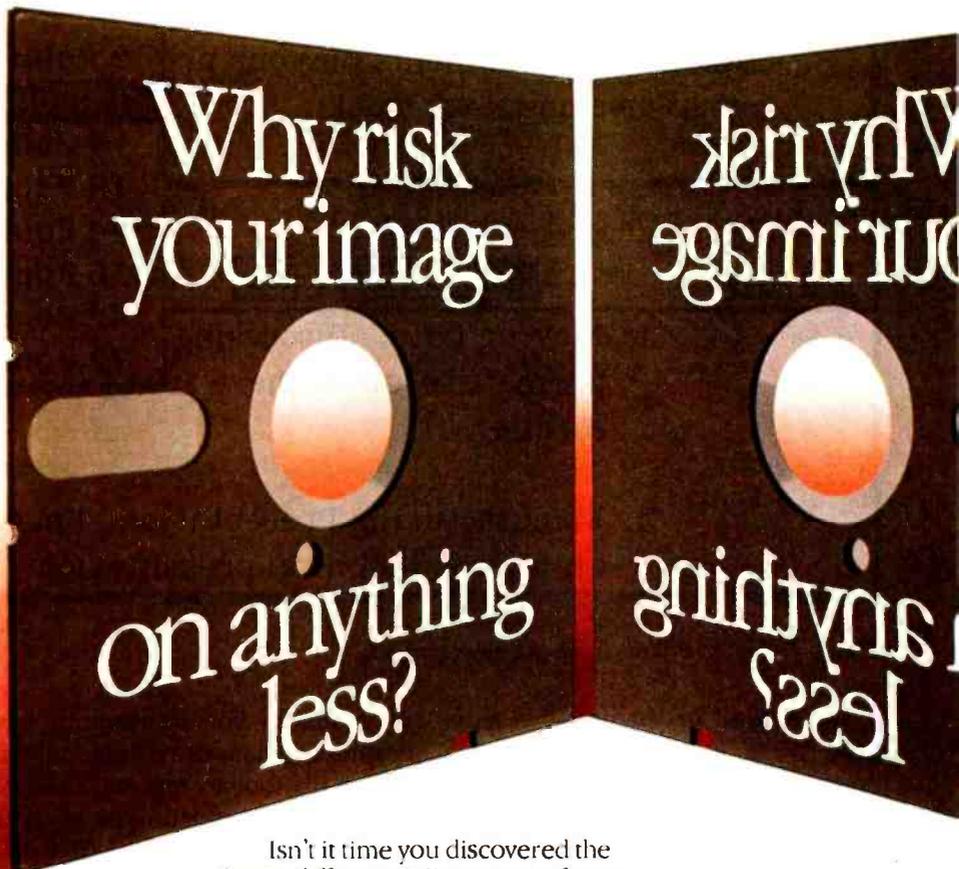

Isn't it time you discovered the Dysan difference? For more information on Dysan software duplication, fill out and return this coupon today, or call (800) 551-9000.

dysan **Dysan**
CORPORATION

Circle 403 on inquiry card.

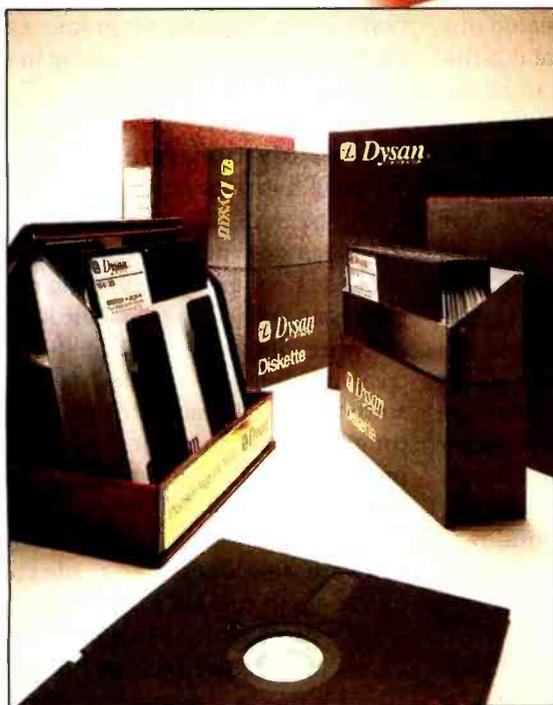

Dysan Software Duplication Division
5201 Patrick Henry Drive
Santa Clara, CA 95050
(800) 551-9000
(408) 988-3472

Please send me more details on
Dysan's Software Duplication Services.

B2

Name: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: (____) _____

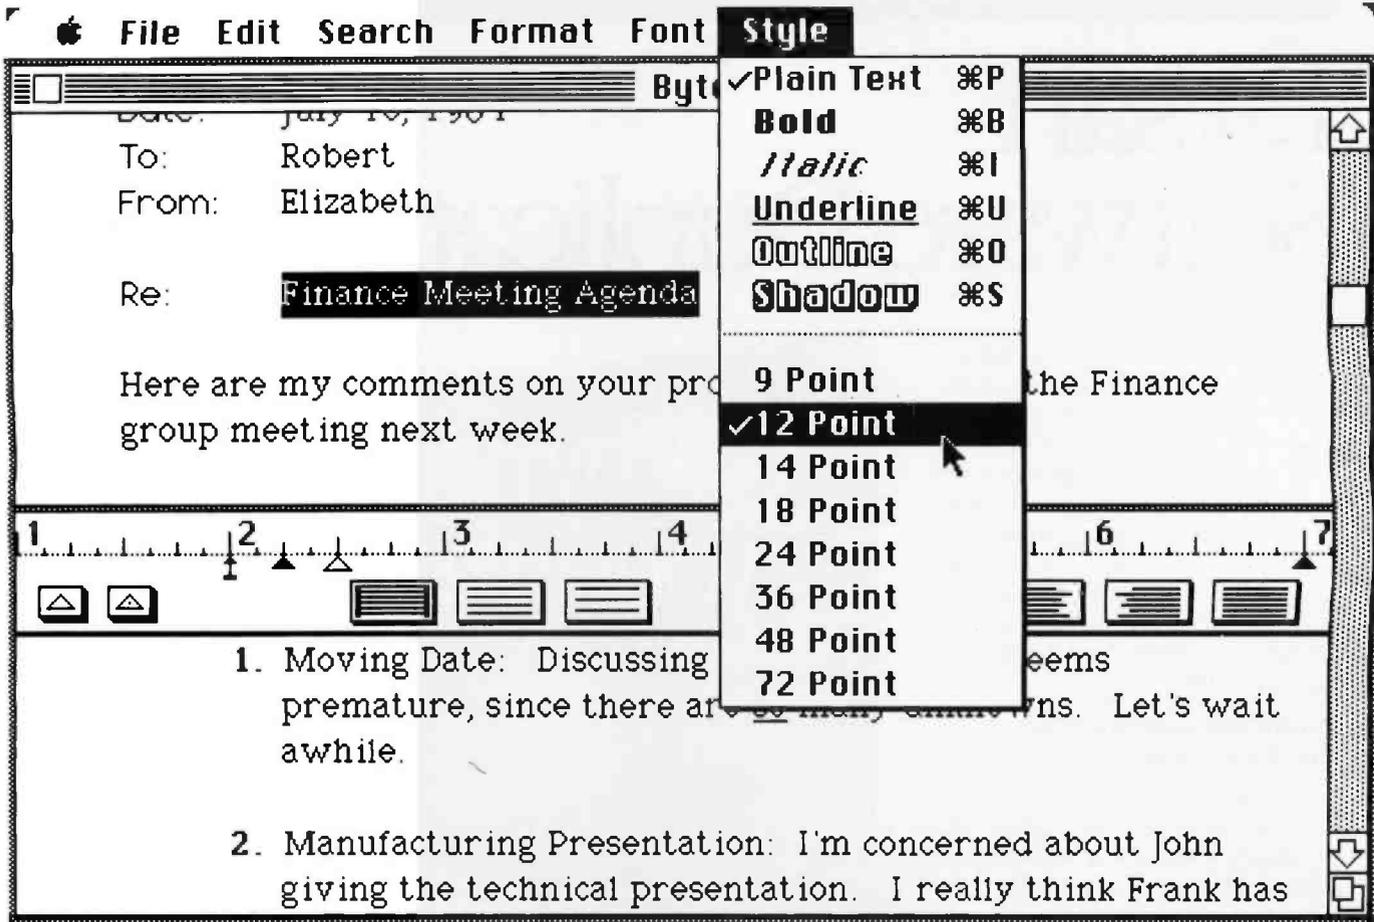


Figure 3: The Mac Write word-processing program.

The second program in the set is Mac Write (figure 3), which was created out of house for Apple and can handle documents up to 10 single-spaced or 20 double-spaced pages. Like Lisa Write, Mac Write can handle multiple fonts and sizes as well as variations achieved by adding any combination of five modifiers—underline, bold, italic, outline, and shadow.

Apple Macintosh Pascal, Assembler/Debugger, BASIC, and Logo will cost \$99 each; the first two will be available during the second quarter of 1984, and the other two will follow in the third quarter. The Logo is from LCSI, which developed Apple II Logo. Both the BASIC and Pascal compile on a line-by-line basis into an intermediate pseudocode, which gives them the speed of compiled languages while retaining the interactive nature of interpreted languages. Both languages use separate windows for program source code and output, and both can be debugged

on a line-by-line basis. Both have graphics and mouse commands that call on the toolbox routines in ROM, and both use floating-point arithmetic routines (in RAM) that meet the IEEE-754 floating-point standard.

Mac Pascal, which was created out of house, is interesting in that it is the only Pascal I know of that can be executed interactively. Another nice feature is its syntax checker, an item that can be called from its "Run" menu. This menu item is often handy for finding those petty syntax errors to which Pascal code is prone.

Mac BASIC was created in house by Donn Denman, who worked on Apple III Business BASIC. An interactive, multitasking BASIC, it can execute multiple copies of the same program or multiple programs simultaneously; each program and each running task has its own window.

Other Apple programs announced for delivery in 1984 include Mac Terminal (which emulates the DEC VT-52 and VT-100 and Teletype ASR33

terminals—available first quarter, \$99). Also planned are Mac Draw (an object-oriented drawing program) and Mac Project (a scheduling and project-management program). These are both Macintosh versions of two Lisa application programs; each costs \$125 and will be available in the third quarter of 1984.


Third-Party Software

Apple has not spent all its energy trying to write all the software that the Macintosh needs. Instead, it has created two exemplary Macintosh packages and gone to third-party software developers to get them to create the bulk of available Macintosh software. Apple estimates that by the time you read this, the Mac will be in the hands of more than 100 software vendors.

At the time this was written, some software developers had made commitments to market Macintosh software. Microsoft Multiplan and BASIC will be available at the Mac's

Bored Waiting? Here's The Board You've Been Waiting For.

Now
Available!

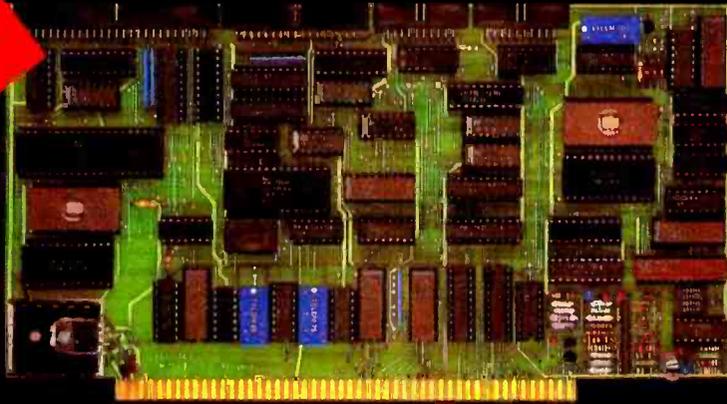

A hard disk and cartridge tape controller together on one board? Magic? Not really. It's Teletek's HD/CTC. The hard disk and cartridge tape drive controller provide the support necessary to interface both rigid-disk drives and a cartridge tape deck to the S-100 bus.

- A Z-80A CPU (optionally Z-80B) providing intelligent control of the rigid-disk and cartridge tape drives.
- Support of 5 1/4" rigid-disk drives with transfer rates of

5 megabits per second. Minor changes of the on-board components allow the support of other drive types/sizes and transfer rates up to 15 megabits per second. (Interface to disk drive is defined by software/firmware on-board.)

- Controller communications with the host processor via 2K FIFO at any speed desirable (limited only by RAM access time) for a data block transfer. Thus the controller does not

constrain the host processor in any manner.


- Two 28-pin sockets allowing the use of up to 16K bytes of on-board EPROM and up to 8K bytes of on-board RAM.
- Individual software reset capability.
- Conforms to the proposed IEEE-696 S-100 standard.
- Controller can accommodate two rigid-disk drives and one cartridge tape drive. Expansion is made possible with an external card.

Teletek's HD/CTC Offers A Hard Disk
Controller, Plus Cartridge Tape Controller,
All On One Board.

TELETEK

Listing 1: Graphics (listing 1a) and text (listings 1b and 1c) as printed by the Macintosh and the Imagewriter printer. The text shown in listings 1b and 1c is representative only; some of the fonts shown may not be included with Mac Write or may have different names. Listing 1b is text printed out in high-resolution mode; listing 1c shows the same text printed out in medium-resolution mode. These print samples are reproduced at the same size as the originals.

(1a)

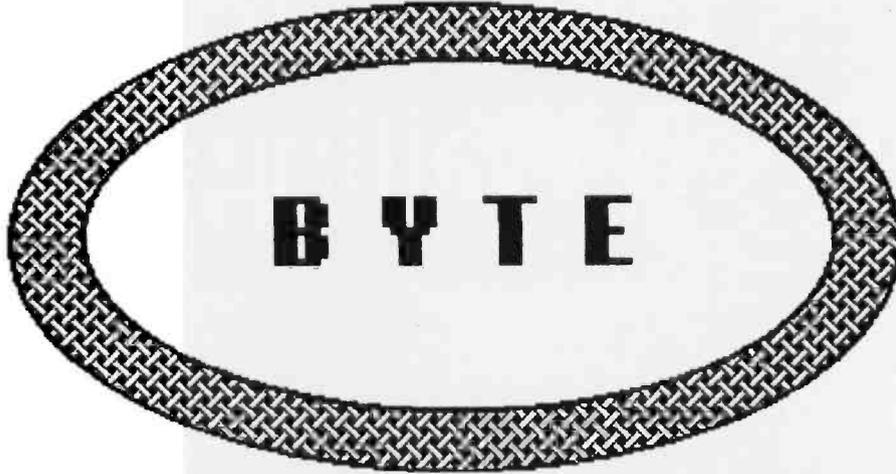

The Small Systems Journal

(1b)

This is 9-point Rosemont
This is 12-point Old English
 This is 12-point City
 This is 12-point Overbrook
This is 12-point System
 This is 12-point Rosemont
 This is 12-point Ardmore
 This is 12-point Merion
 This is 12-point variants:
 -- Rosemont bold
 --*Rosemont italic*
 --Rosemont underline
 --**Rosemont outline**
 --**Rosemont shadow**
 --**Rosemont out-**
 line shadow
 bold
 These are size variants:
 --14-point
 --18-point
 --24-point
 -36-pt.

(1c)

This is 9-point Rosemont
This is 12-point Old English
 This is 12-point City
 This is 12-point Overbrook
This is 12-point System
 This is 12-point Rosemont
 This is 12-point Ardmore
 This is 12-point Merion
 This is 12-point variants:
 -- Rosemont bold
 --*Rosemont italic*
 --Rosemont underline
 --**Rosemont outline**
 --**Rosemont shadow**
 --**Rosemont out-**
 line shadow
 bold
 These are size variants:
 --14-point
 --18-point
 --24-point
 -36-pt.

By the Way. . .

•No, we didn't misspell the name. "McIntosh" is the apple, but "Macintosh" is the Apple computer. The product's original code name was misspelled by its first users, and Apple decided to stay with that spelling.

•The Mac Write program was originally named "Macauthor," and the Mac Draw program was originally named "Mackel-

angelo." People at Apple decided that the names were too cute to use; they were right.

•Apple is one of those exceptional companies that gives its employees credit instead of commanding them to work in anonymity behind the corporate name. The names of the hundred or so employees who worked on the Macintosh are molded into

the inside face of the plastic rear housing. Don't try to look for them, though; the Mac is not supposed to be opened except by repair people.

•The Macintosh is not going to be strictly a "serious" computer. Some of the software engineers at Apple are very excited about the great games that could take advantage of the Mac's computing power and high-resolution graphics. I saw an incredible game that has Alice (of Wonderland fame) dodging animated chess pieces in 3D.

introduction; Microsoft File, Chart, and Word will be available by mid-February. Lotus is working on converting its popular 1-2-3 spreadsheet program. Software Publishing Corporation will have its PFS File and PFS Report programs available sometime in April.

Optional Hardware

The Macintosh uses Apple's new \$495 dot-matrix Imagewriter printer, the only printer that is supported by the current print driver within the Macintosh. To get its level of graphics and text quality (see listings 1a through 1c), the Imagewriter usually stays in a graphics mode that prints a single column of dots for every byte sent to it by the Mac. However, the Imagewriter can print text in three modes: a high-resolution mode (listing 1b), a medium-resolution mode (listing 1c), and a draft mode that uses the printer's built-in character set for quick text-only printing. (I found I prefer the medium- over the high-resolution text.) Although the Imagewriter could hardly be called fast, it is not unacceptably slow, and it is considerably faster than the Apple Dot-Matrix Printer running under the Lisa computer's parallel port.

Two other pieces of hardware are an external disk drive (at \$395, available during the first quarter) and a numeric keypad (\$99, at introduction). The external disk driver connects to the main unit via a dedicated "second disk" connector in back. When the keypad is connected, the keyboard line runs from the Mac,

through the keypad, and into the keyboard itself. Another product, announced but not scheduled, is external hardware that will give the Mac IBM 3270 emulation capability.

Documentation and Training

In its ads, Apple is stressing the necessity of going to a Macintosh dealer and trying the computer out. Once you have bought it, though, you will probably be learning how to use the Mac on your own. Apple will help you in this process by providing you with a cassette/disk combination. You boot up the 3½-inch disk tutorial and listen to the interactive lesson provided on the cassette. (Of course, you have to have a cassette player.) Although I have not seen the cassette/disk tutorial program, I think it will work well; text-only tutorial programs are fine, but many buyers of the Mac will benefit from the warmth of a human voice teaching them.

I saw final-draft copies of only two Macintosh product documents. *Explore Mac Paint* is a booklet (about 25 pages) that teaches you about Mac Paint by showing you what it does. It is very easy to read because it has more pictures in it than text. *Mac Write* is much longer and looks more like conventional documentation. It is sensibly divided into three sections: "Learning Mac Write" (a do-by-example tutorial that shows you most of the features of the program), "Using Mac Write" (a "cookbook" showing you how to accomplish many common tasks), and "Reference." All in all, the documentation should be quite good.

Service

The Macintosh has no user-serviceable parts. Unlike the Lisa computer, the Mac is *not* meant to be opened by the user; you are expected to return your Mac to an authorized Apple service center for repair. The Mac comes with Apple's standard 90-day parts-and-labor warranty. You can also buy a one-year maintenance contract. According to Apple, other service plans will be available, including options for large-volume purchasers of the Macintosh.

Caveats

I wrote this article after two days of meetings with various members of the Macintosh staff, studying preliminary Mac documentation, making numerous phone calls to Apple, and working for several days (over a period of weeks) with a Macintosh computer. I used several final-draft versions of Mac Write and Mac Paint, though I occasionally found operating-system features that "crashed" the system or weren't yet implemented. Apple was still making minor changes to both software and pricing when this was written.

Commentary

There is a lot to like about the Macintosh; it is a superb example of what American technology can do when given the chance. The simple, compact, economical design, the virtual slots, and the enhanced performance of 128K bytes of memory because of the 64K-byte ROM code are all important innovations done well.

I'm glad that Apple decided to go

— THE 2720 S. Harbor Blvd., Suite E, Santa Ana, CA 92704

PRINTER STORE

SERVICE, COMPUTER AND SOFTWARE COMPATIBILITY, and LOW PRICE,


are among the many factors to consider when purchasing a printer. At the **PRINTER STORE** we specialize in printers, so our professional staff can help you choose the right printer for your personal and business needs. Every **Printer Purchase** includes:

- 1) Low Prices
- 2) Same Day Shipping
- 3) Free Technical Support
- 4) Full Service Option



IDS 480

- 110 CPS, Bi-Directional, Logic Seeking
 - 24 x 9 Dot Matrix, 10, 12, 16.7 CPI, Plus Proportional Spacing
 - Parallel and Serial Port Standard
- \$ 395**



BROTHER HR-15

- 13 CPS - Bi-directional - Super & Subscript
 - 10, 12, 15 and Proportional Spacing Pitch
 - Optional Tractor, Sheetfeed and Keyboard
- \$ 485**

DOT MATRIX PRINTERS

EPSON SERIES

- FX 80 \$ CALL
- FX 100 \$ CALL

OKIDATA SERIES

- 92A \$ CALL
- 93A \$ CALL
- 84 \$ CALL

C. ITOH SERIES

- 8510 Prowriter \$ 395
- Prowriter II \$ CALL

MANNESMANN TALLY SERIES

- Spirit 80 \$ CALL
- MT 160 \$ CALL
- MT 180 \$ CALL

IDS SERIES

- Microprism 480 \$ 395
- Prism 80, 132 \$ CALL

GEMINI SERIES

- Gemini 10X \$ CALL
- Gemini 15X \$ CALL
- Delta 10 \$ CALL

Toshiba P 1350 \$ CALL

LETTER QUALITY PRINTERS

BROTHER SERIES

- HR-1 \$ CALL
- HR-15 \$ 485
- HR-25 \$ CALL

COMREX SERIES

- CR-1 \$ CALL
- CR-2 \$ CALL
- CR-25 \$ CALL

C. ITOH SERIES

- F-10 40 CPS \$ CALL
- F-10 55 CPS \$ CALL

NEC SERIES

- 2010 \$ CALL
- 2030 \$ CALL
- 2050 \$ CALL
- 3510 \$ CALL
- 3530 \$ CALL
- 3550 \$ CALL
- 7710 \$ CALL
- 7730 \$ CALL

NEC Accessories \$ CALL

We carry a full line of Cables and Accessories
Call (714) 241-0701 and ask us about...

PHONE REBATE:

We are so confident of our LOW PRICES and SUPPORT that we are going to ask you to make the initial investment by calling us. In return, when you buy your printer from us, we will rebate the cost of your call and deduct it from your invoice.

HOW TO ORDER: Our phone lines are open from 8 a.m. to 6 p.m. PST. Monday - Friday. We accept VISA, MASTERCARD (at no extra charge), personal checks take two weeks to clear. COD's accepted. Same-day shipment on orders placed before 1 p.m. Manufacturer's warranty applicable on all equipment. Prices subject to change.

with a Sony 3 1/2-inch disk (as compared to the Lisa 1, which needs special, expensive, hard-to-get twiggy floppy disks). However, I'm disappointed that both Apple and Hewlett-Packard have used nonstandard formats that are incompatible with each other. It would have been nice to start the widespread use of the Sony microfloppy with a standard disk format, but the incentive to sacrifice standardization for performance is one of the drawbacks of a competitive industry.

I also feel strongly that the basic Macintosh package should include two disk drives. With a one-drive system, it will take at least eight disk swaps to back up a 3 1/2-inch disk. How many people (especially novices) will go to this trouble, and how many will suffer when they don't? (I am not alone in feeling this way; the first thing two BYTE editors said when they first saw the Macintosh was, "Only one disk drive? You've got to be kidding!" After numerous disk swaps when trying to load Mac Paint from one disk and a drawing from another, I am convinced that most users will eventually buy the second disk drive.)

At the time this was written, Apple was committed to a totally unbundled pricing of the Macintosh—that is, the basic Macintosh package (at \$1995 to \$2495) includes the main unit, the keyboard, the mouse, necessary cables, a tutorial disk, and a disk containing the operating system. Everything else—Mac Write, Mac Print, all languages, the ImageWriter printer, and the second disk drive—is priced separately. Since manufacturers want to claim the lowest possible price for their products, unbundling is common (IBM, for example, introduced the IBM PC with a low-end model, 16K bytes of memory, and a cassette port for \$1265). True, the low-end Macintosh is far more complete than most manufacturers' low-end products, but Apple has taken unbundling farther than any other microcomputer vendor—no one has sold a computer without BASIC (or some other language) in years.

A usable Macintosh system with

Mac Write, Mac Draw, a programming language, and the Imagewriter printer costs from \$2589 to \$3189; a second disk drive will add another \$395. Apple would be wise to make this package available at a discounted package price, just as it now does for the Apple IIe. Apple contends that the Macintosh will become a home machine because office users will take it home a few times and like it enough to buy themselves one for their personal use. However, the Mac is still too expensive to penetrate the home market significantly; that will be left to less expensive machines, such as the Commodore 64, the IBM PCjr, the Apple II family, and the Coleco Adam.

Finally, I have to point out that, although Apple's advertisements call the Macintosh a 32-bit system, its MC68000 processor is generally regarded as a 16-bit processor (the limiting factor is its inability to deal with multiplicands greater than 16 bits). This is no different from the

vendors of some other 68000-based microcomputers, but I hate to see Apple hyping a machine that easily stands on its own merits.

Conclusions

Exactly a year ago, in a product description of the Apple Lisa computer, I said, "Technology, while expensive to create, is much cheaper to

The Macintosh is still too expensive to penetrate the home market significantly; that will be left to less expensive machines.

distribute. Apple knows this machine is expensive and is also not unaware that most people would be incredibly interested in a similar but less expensive machine. We'll see what happens."

Now we have seen what has happened, and it is rather impressive. The Lisa computer was important

because it was the first commercial product to use the mouse-window-desktop environment. The Macintosh is equally important because it makes that same environment very affordable. It is also important because it is a second-generation design that, in several areas, improves on the original.

The Macintosh will have three important effects. First, like the Lisa, it will be imitated but not copied. In the year since the Lisa was announced, dozens of hardware and software companies have announced products that duplicate part of the Lisa user environment—the mouse, the windows, the integrated software. Some, like Microsoft's mouse-based series of packages and Visicorp's Visi On, have tried to mimic that environment on a smaller, less expensive machine (the IBM PC) with only partial success.

In a similar way, companies will be out to imitate the Macintosh, but their attempts will be less successful. Those companies that try to imitate

GTEK INC. DEVELOPMENT HARDWARE/SOFTWARE

EPROM PROGRAMMER

HIGH PERFORMANCE/ COST RATIO (601) 467-8048

Compatible w/all RS-232 serial interface port • Auto select baud rate • With or without handshaking • Bidirectional Xon/Xoff and CTS/DTR supported • Read pin compatible ROMS • No personality modules • Intel, Motorola, MCS86, Hex formats • Split facility for 16 bit data paths • Read, program, formatted list commands • Interrupt driven, program and verify real time while sending data • Program single byte, block, or whole EPROM • Intelligent diagnostics discern bad and erasable EPROM • Verify erasure and compare commands • Busy light • Complete w/Textool zero insertion force socket and integral 120 VAC power (240 VAC/50Hz available)

DR Utility Package allows communication with 7128, 7228, and 7956 programmers from the CP/M command line. Source Code is provided. PGX utility package allows the same thing, but will also allow you to specify a range of addresses to send to the programmer, Verify, set the Eprom type.

MODEL 7316 PAL PROGRAMMER
Programs all series 20 PALS. Software included for compiling PAL source codes.

Software Available for CPM,¹ ISIS,² TRSDOS,³ MSDOS.⁴

1. TM of Digital Research Corp.
2. TM of Intel Corp.
3. TM of Tandy Corp.
4. TM of Microsoft.

Post Office Box 289
Waveland, Mississippi 39576
(601)-467-8048

Avocet Cross Assemblers are available to handle 8748, 8751, Z8, 6502, 680X, etc. Available for CP/M and MSDOS computers. Order by processor type and specify kind of computer.



Model DE-4 U/V Products hold 8, 28 pin parts. High quality professional construction.

\$879 stand alone
MODEL 7956



MODEL 7956 GANG PROGRAMMER
Intelligent algorithm. Stand alone. Copies eight EPROMS at a time. With RS-232 option \$1099.


\$549
MODEL 7316

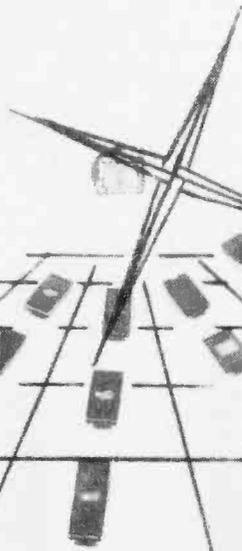

MODEL 7228 EPROM PROGRAMMER
All features of Model 7128 plus Auto Select Baud... super fast adaptive programming algorithms, low profile aluminum enclosure. Programs 2764 in one minute!

\$549
MODEL 7228

\$1195
MODEL 7324



MODEL 7324 PAL PROGRAMMER
Programs all series 20 & 24 PALS. Operates stand alone or via RS232.

MODEL 7128 EPROM PROGRAMMER
Programs and Read:

NMOS	NMOS	CMOS	EEPROM	MPU'S
2508	2758	27C16	5213	8748
2516	2716	27C32	5213H	8748H
2532	2732	C6716	X2816	8749H
2564	2732A	27C54	48016	8741
68766	2764		12816A	8742H
68764	27128			8741H
8755	27256			8751
5133				

Model 7128-L1, L2, L2A	\$239.00
Model 7128-24	\$329.00
DR8 or DR5	\$ 30.00
DR8PGX or DR5PGX	\$ 75.00
Cross Assemblers	\$200.00
XASM (for MSDOS)	\$250.00
U/V Eraser DE-4	\$ 78.00
RS232 Cables	\$ 30.00
8751 adapter	\$174.00
8755 adapter	\$135.00
48 Family adapter	\$ 98.00

the Mac on other machines will have trouble matching its price/performance combination. So far, attempts to imitate the Lisa by enhancing an existing computer (usually an IBM PC) have been given the benefit of the doubt because they are less expensive than the Lisa; attempts to imitate the Macintosh will now have a harder time because the Mac with software is about as cheap as the host hardware alone.

The only other way to match the Mac would be to design an entirely

new system that would be comparably priced. This will probably not be attempted; only a few corporations have the ability to duplicate Apple's design and manufacturing effort, and still fewer will make such a large financial commitment. (Apple is the only American company that does not live under the tyranny of next quarter's profits; if any company tries to duplicate Apple's effort, it will probably be a Japanese one.) Those that try will find it hard to create similar technology that competes

with the Macintosh in size and price; Apple is confident that a number of its components and manufacturing techniques will be difficult to copy. Even though Apple has suffered from carbon-copy Apple II machines, it does not expect to have the same thing happen with the Macintosh.

Second, the Macintosh will secure the place of the Sony 3½-inch disk as the magnetic medium of choice for the next generation of personal computers. I was disappointed when I first saw that the Mac used the 3½-inch disk—"Another disk format to contend with," I thought, "and you can't use disks from the Lisa." (You will be able to use Mac disks with the new Lisa 2; see "Apple Announces the Lisa 2," on page 84.) Once I had heard Apple's line of reasoning, though, I had to agree with its choice. Hewlett-Packard's HP 150 is the only other major computer to use the Sony 3½-inch disk to date; Apple's use of it will tip the scales in Sony's favor, and other manufacturers will follow.

Third, the Macintosh will increase Apple's reputation in the market; in fact, to some people Apple will be as synonymous with the phrase "personal computer" as IBM is synonymous with "computer." The Mac will compete with IBM's PC, not its cheaper sibling, the IBM PCjr. Many business users will stay with the "safer" IBM PC. However, people new to computing and those who are maverick enough to see the value and promise of the Mac will favor it. The Mac will delay IBM's domination of the personal computer market.

Overall, the Macintosh is a very important machine that, in my opinion, replaces the Lisa as the most important development in computers in the last five years. The Macintosh brings us one step closer to the ideal of computer as appliance. We're not there yet—at least, not until the next set of improvements (which, in this industry, we may see fairly soon). Who knows who the next innovator will be? ■

Gregg Williams is a senior editor at BYTE. He can be reached at POB 372, Hancock, NH 03449.


Announcing 4 New Collector Edition

BYTE COVERS


The 4 Byte covers shown below are the newest additions to the Collector Edition Byte Cover series. Each full color print is 11" x 14", including a 1 1/2" border, and is part of an edition strictly limited to 500 prints. Each print is a faithful reproduction of the original Byte painting, printed on museum quality acid free paper, and is personally inspected, signed and numbered by the artist, Robert Tinney. A Certificate of Authenticity accompanies each print.

Collector Edition Prints are carefully packaged flat to avoid bending, and are shipped first class within one week of receipt of order. The price of each print is \$25. All 4 prints are available as a set (Set 21-24) for only \$80.

Other Collector Edition Byte Covers are also available from Robert Tinney Graphics. For a color brochure, or to order one or more of the prints shown, please check the appropriate box in the coupon below.

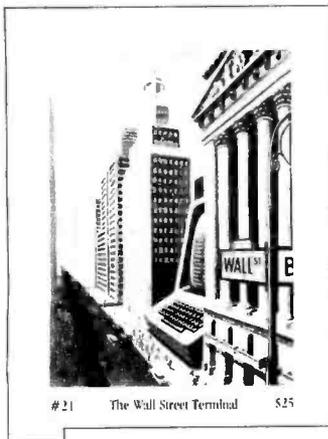

21 The Wall Street Terminal \$25

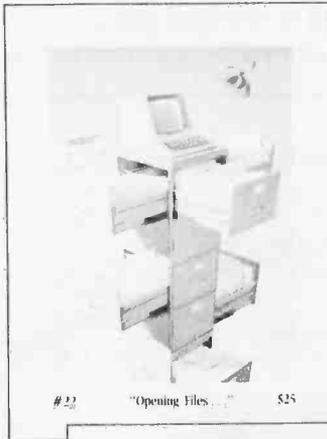

22 "Opening Files" \$25



23 The Stacks \$25



24 Inside IBM \$25

Please send me the following Prints (\$25), or Sets (\$80)			<input type="checkbox"/> I have enclosed check or money order. <input type="checkbox"/> Visa <input type="checkbox"/> MasterCard	
QTY.	TITLE & PRINT NO.	AMOUNT	Card No.	
_____	_____	\$ _____	Exp. Date	_____
_____	_____	\$ _____	SHIP MY PRINTS (OR BROCHURE) TO:	
_____	_____	\$ _____	Name	_____
_____	_____	\$ _____	Address	_____
postage & handling \$3.00 (Overseas \$8.00)			City	_____
TOTAL \$ _____			State	_____ Zip _____
<input type="checkbox"/> Please send me your color brochure.			Mail this coupon to: robert tinney graphics 1864 N. Pamela Drive Baton Rouge, LA 70815	
			FOR VISA OR MASTERCARD ORDERS or for more information CALL 1-504-272-7266 Daytime or Evenings	

**286K
per 3"
disk
cartridge!**

NOW AVAILABLE



AFTER YOUR FIRST DRIVE GO WITH AMDISK.

The AMDISK-I Micro-floppy disk system is an engineering breakthrough in disk size, storage capacity, media protection and user convenience. It's fully compatible with your Apple II*® and Apple IIe and is furnished with an interconnect cable. Enjoy a full 286K storage† capability and the extra convenience of the new 3" hard plastic encased diskette. Packed 10 per box, the disk cartridge fits into a shirt pocket and is easy to mail.

Suggested Retail Price \$299 (3" cartridge \$6.99 ea.)

The Amdisk Single Drive system is ruggedly constructed for years of trouble-free operation and is backed with our 90 day warranty on parts and labor.

Just circle the reader service number for complete specifications.

* Apple II is a registered trademark of Apple Computer, Inc.
† Requires recording on both sides

2201 Lively Blvd. • Elk Grove Village, IL 60007
(312) 364-1180 TLX: 25-4786

REGIONAL OFFICES: Calif. (714) 662-3949 • Texas (817) 498-2334

AMDEK CORP.

Amdek . . . your guide to innovative computing!

We were born out of a million hard(ware) luck stories.

You've probably got your own tale of woe.

It goes something like this: the people who sold you your hardware and software told you to call them with the slightest problem. Not to even hesitate. No matter how trivial. Day or night.

But that was *before* you purchased, while you were still tomorrow's challenge.

Now you're yesterday's conquest, and things have changed a little.

It's not that you're being totally ignored — nothing that damning.

But you've discovered that most of your questions deal with "after products," an area the manufacturer cares little about.

He's not exactly a storehouse of knowledge. His inventories are only so-so. And he's definitely not price competitive.

What you need is a supply store. One that's tailored to the computer age.





Introducing the Moore Business Center. A supply store for the computer age.

The quickest way to define us is as an afterthought. Why? Because we're all the things you don't think about until *after* your computer is purchased, installed and on line.

After that, comes the flexible disks, comes the printer ribbons, comes the printout labels.

Comes the imprinted forms, comes the storage binders, comes the computer furniture.

And the cleaning kits and the expandable racks and the dust covers and the glare shields and the outlet strips.

That's right: After all the hard and software has been locked into place, then comes the hundreds of accessory products needed to support them.

And that's where the Moore Business Center comes in. With over 100 years of dependable service to the business community. With retail shelves lined to display a mind-boggling array of quality products. With a style and commitment that's never been seen before in a computer supply store.

So forget all the hard(ware) luck stories of the past. From now on, it's strictly RAMs to riches.



MOORE BUSINESS CENTER

PHONE 800-238-2300 EXT. 41 FOR A STORE LOCATION OR CATALOG.

Circle 257 on Inquiry card.

www.americanradiohistory.com



Left to right: Andy Hertzfeld, Chris Espinosa, Joanna Hoffman, George Crowe, Bill Atkinson, Jerry Manock.

An Interview: The Macintosh Design Team

The making of Macintosh

On October 14, 1983, the design team for Apple Computer Inc.'s new Macintosh computer met with BYTE Managing Editor Phil Lemmons at the company's Cupertino, California, headquarters. In the dialogue that followed, Bill Atkinson, Steve Jobs, Andy Hertzfeld, Larry Kenyon, Joanna Hoffman, Burrell Smith, Dave Egner, Chris Espinosa, Steve Capps, Jerry Manock, Bruce Horn, and George Crowe discussed the evolution of their brainchild.

BYTE: How did the Macintosh project begin?

Jobs: What turns on Andy and Burrell and Chris and Bill and Larry and everyone else here is building something really inexpensive so that

everyone can afford it. It's not very many years ago that most of us in this room couldn't have afforded a \$5000 computer. We realized that we could build a supercheap computer that would run Bill Atkinson's amazing

Quickdraw and have a mouse on it—in essence, build a really cheap implementation of Lisa's technology that would use some of that software technology. That's when the Macintosh as we know it was started.

Hertzfeld: That was around January of 1981.

Smith: We fooled around with some other ideas for computer design, but we realized that the 68000 was a chip that had a future and had...

Jobs: Some decent software!

Smith: And had some horsepower and enough growth potential so we could build a machine that would live and that Apple could rally around for years to come. So we looked at what the Lisa group was doing and knew that the designers were onto some really hot ideas. They have a lot of very advanced things they want to do with Lisa. Mac basically does one thing at a time as opposed to doing several things simultaneously. The memory-management unit that's critical for a Lisa application, for example, becomes something we can do without very nicely. Our real goal was to design a great system with just a bit map and based on a 68000 but also a really cheap system. Could we write incredibly great software that wouldn't chew up megabytes of memory? To do what used to take megabytes in a very tiny machine?

Atkinson: It's not like we didn't want a memory manager in it or didn't want lots of memory or didn't want hard disks. What we wanted was for lots of people to be able to own these things. We saw something beautiful that we built and we said, "How can we get this out to a lot of people?"

Espinosa: It doesn't matter how great the computer is if nobody buys it. Xerox proved that. The key thing you've got to remember is that back then, if you told anybody you could build a computer using a 68000 with anything under a hundred integrated circuits, they would have said you were crazy.

Kenyon: Most people have twice as many chips just for central processing unit support on the 68000. So nobody had ever conceived that you could build a cheap system...an Apple II chip-count system with a 68000.

Atkinson: We want the most computer that you can get for the least dollars so that the most people can have it. . . and then you can concen-




Bill Atkinson.

trate on making the world's best software for it.

Espinosa: And you look at this board, and every chip on there is pretty expensive. There's not a lot of jellybean TTL [transistor-transistor logic] running around, not a lot of little off-the-shelf chips. Everything on there costs \$4 to \$9 apiece, and that's expensive for a chip. But we've got so few of them; instead of taking up board space with a lot of stuff that you just don't need and making it unreliable because you've got to have connectors and you've got all these problems with soldering. If you just carefully pick what chips you want to use and you've got somebody like Burrell who's genius enough to put

the right ones together in the right way and make them do things they've never done before, then you can come out with something that's small and inexpensive and incredibly powerful.

Smith: What gets me is that a lot of programmers will have this long laundry list of things they must have before they will sit down and allow fingers to touch the keyboard. I was really lucky because these guys are the best programmers I've ever seen anywhere, not just with Apple. They walk around between the Apple divisions, contributing this amazing graphic stuff to Lisa—and then help out on the Mac, too. Everybody had this common goal of making the Mac

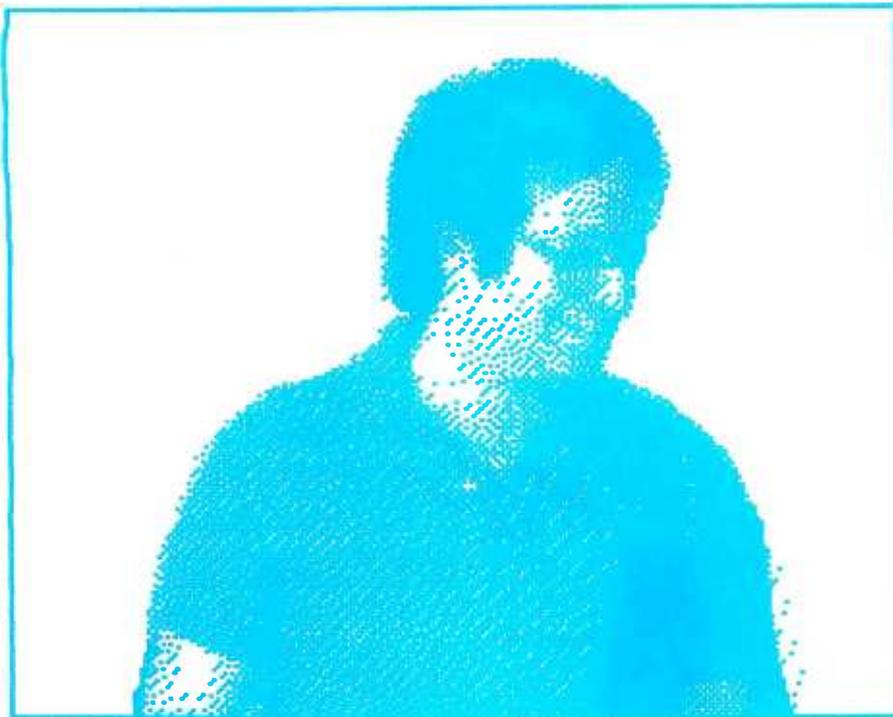

Andy Hertzfeld.

flexible and general-purpose because we didn't know what we might want to do five years from now. We knew the kind of direction we were going, so instead of building in a graphics controller that takes 25 chips and then trying to figure out some way to soup up the architecture so that it actually would work with it, we relied a lot on the processor assembly-language code in ROM [read-only memory]. And it turns out that we can make the whole system go faster by eliminating a lot of the bus traffic that normally slows the machine down.

Jobs: We learned a lot on Lisa.

Atkinson: We're still learning a lot!

Jobs: If you read the Apple's first brochure, the headline was "Simplicity is the Ultimate Sophistication." What we meant by that was that when you first attack a problem it seems really simple because you don't understand it. Then when you start to really understand it, you come up with these very complicated solutions because it's really hairy. Most people stop there. But a few people keep burning the midnight oil and finally understand the underlying principles of the problem and come up with an elegantly simple solution for it. But very few people

go the distance to get there.

One of the things we really learned with Lisa and from looking at what Xerox had done at PARC [Palo Alto Research Center] was that we could construct elegant, simple systems based on just a bit map. . . no character generators. . . and save tons of chips if we had software fast enough to paint characters on the screen, given the processor. Apple was the first company to figure out how to do that with a microprocessor. . . and really still is the only company that's doing it with a microprocessor. That's what Bill figured out how to do with Quickdraw.

The real reason that we chose originally to use the 68000 was so we could pick up Quickdraw. Macintosh uses the exact same graphic structure and package, the exact same code, as Lisa does. So, by paying a little more for the microprocessor, not only were we able to give the customer an infinitely more powerful chip than, say, an 8-bit chip or one of Intel's baby micros, but we were able to pick up this amazing software, and that allowed us to throw tons of chips out of this thing. We didn't have to get special custom text or graphics chips. We just simplified the system down to where it's just a bit map on the

screen, just Bill's amazing software and Burrell's amazing hardware, then in between that the other amazing software that we have. We tried to do that in every single way, with the disk and with the I/O. . . rather than slots.

When we first started off with Apple II, the variability—how you customize your machine—was with hardware; you plugged in a card. And because we didn't have any idea what these computers were going to be used for, that variability was very important. But now we have a much greater understanding of what people are using these products for. And the customization really is mostly software now. The way I customize my machine to do what I want is by sticking in a disk more than anything else.

Atkinson: We've already built in the hardware that most people want.

Jobs: Right. Most of the options on other computers are in Mac. So Andy and Burrell really came up with an I/O scheme that was serial. We don't have slots. . . slots cost a lot of money, they make the box much bigger, and you need a much bigger power supply because you never know who's going to plug in what. Do you realize that in an IBM PC the video board, just the black-and-white video plug-in card, has got way more chips than the entire Macintosh? Anyway, so the Mac's got most of the stuff built in. Rather than putting in serial ports that operate at 9600 or 92,000 bits per second, we paid more money and we put in this super chip. We used the Zilog SCC chip that Burrell picked out, and Larry Kenyon and Andy wrote the software to make this chip sing. And it goes up to, what, 230 kilobits per second?

Smith: It can go up to a megabit per second with external clock.

Jobs: And it does all the asynchronous and tons of synchronous protocols all inside the chip. So we've got superhigh-horsepowered serial ports.

Smith: The whole idea is that later on we'll be able to have logical slots instead of physical slots. We'll be able to have multiple devices per port; we'll use a port a lot like the way you have slots in Apple II. But one of the other advantages that Steve didn't

mention is that you don't have to change the memory map of the computer. Andy and Larry Kenyon worked on the system and the driver software and things like that. They said, well, gee whiz, on the Apple II you keep having the rug sort of changed on you; someone plugs in a new card or, worse yet, on other micros people are plugging in different software and different hardware, and it's hard to keep track.

Atkinson: You get into incompatible combinations; you just can't use this card with that card.


Jobs: The other thing about the hardware is that when Apple II was designed, a microcomputer system cost a lot of money to build. I mean, to get a microprocessor and RAM [random-access read/write memory] and ROM might have cost \$50, \$60. You obviously wanted to share that among the peripherals, which is what the Apple II did, what any slotted system generally does. Now you can buy a microprocessor and RAM and ROM in a single-chip micro for about \$4. So giving each of the off-board peripherals its own little microprocessor system is adding \$5 to the cost of the peripheral. And the cost for providing them with the bandwidth that's needed for most of the peripherals that are not on this board is very low. Add a \$5 bill to the peripheral, put a single-chip micro in it, and then talk serially, rather than have every single user pay an extra few hundred dollars for the price of the slots that may never get used.

Atkinson: One way to look at the bandwidth thing is real simple: if there are 128K bytes, that's an eighth of a megabyte. There's 1 megabit in the machine, so the worst transfer you could think of, transferring the entire contents of the machine, takes one second. You transfer the entire contents of the Mac through that serial port in one second.

BYTE: What are the serial connectors?

Jobs: There are two connectors, DB9s...

Atkinson: They're tricky. They can run anything from 300 baud on up; you can use them as RS-232C or RS-422A.

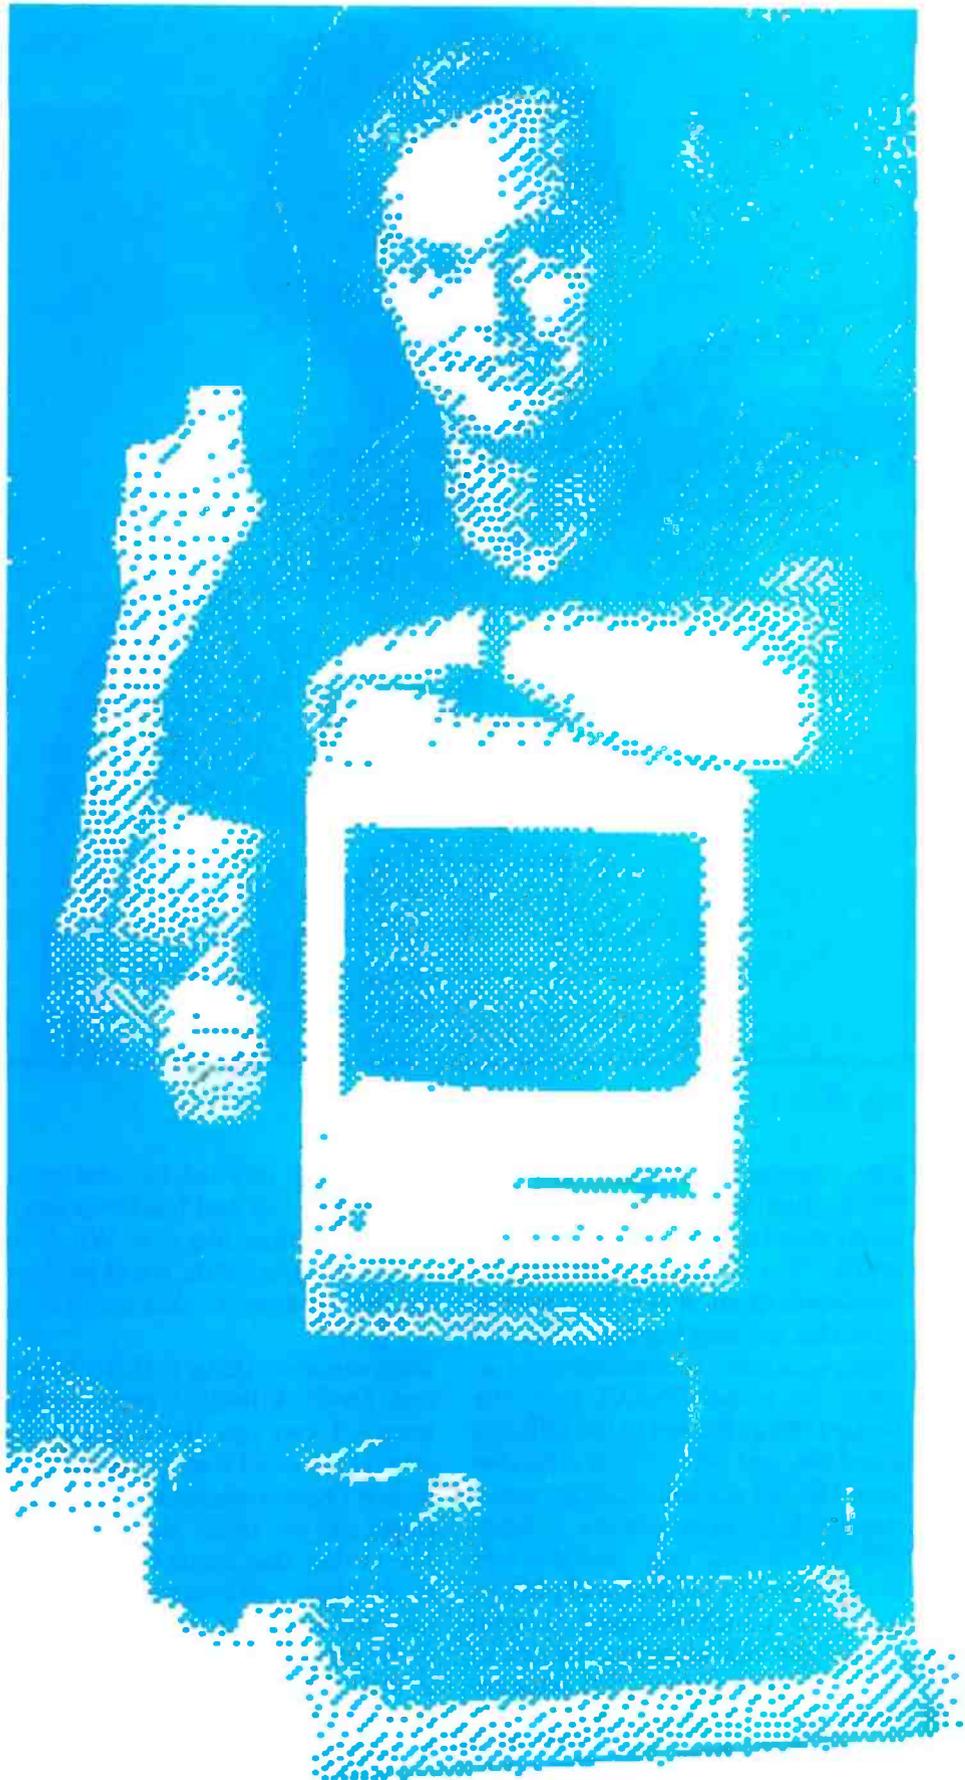

Burrell Smith.



Jerry Manock.

Jobs: Are you familiar with RS-422A?
BYTE: Just that it's a high-speed serial standard.

Smith: You can do point-to-point communications at very high speeds with Mac without having to add, for example, a fancy transmitter/receiver thing. We realize RS-232C is an important thing. It's sort of the industry standard, and a lot of stuff talks that way, but we wanted to allow something a little more whizzy. It turns out that RS-232C was created before the concept of a bidirectional pin was invented, which hampers it with things like not knowing the sex of devices and terminals. . . . It gets confused as to whether they're computers or not. We wanted Mac to talk to those devices. We wanted to provide for the future so that, for example, if I ever get a spare moment, I

can go back into the lab and make video digitizers and hard-disk interfaces and things like that. When we want the bandwidth, it will be there for the applications that we need to support.

Jobs: Another thing is that you can run RS-422A twisted pairs, which means I can run these things for several hundred meters. I can string lines if I have a laboratory and a computer on my desk, do whatever I want to do. They aren't DB-25s. We've been living with giant connectors now for years but using only a few of the pins. So, again, we tried to save a little bit of space in the back because the connector space we have is limited. We tried to cut down the cost to the customers again, and so, for connecting to devices like printers and modems, which we offer and

which are the most prominent, we just supply the cables. We also will supply cables from one of these things to a variety of DB-25s. . . for the modem version, the printer version. . .

Atkinson: Lines 2 and 3 are switched on a modem versus a printer, so you just use a modem cable or a printer cable.

BYTE: From a very early time you knew that you wanted to take advantage of Lisa's software technology, and you also had the goal of making that possible at low cost. When did you have a consensus on exactly what this hardware would have to be to achieve that goal?

Smith: In 1981 we started looking at the Lisa. I came up with a proposal that said it ends up costing \$14 more to use a 68000 with 64K bytes of memory than it does with 6809-based machines, if you count power supply. It turns out that it's actually easier to interface memory to a 68000 than to a 6809. So in January we started really looking at the 68000 and the work that Bill was doing.

In June of 1982 we finally decided on what we thought was enough video. It turns out that the original machine had 384 by 256 pixels. We chose that because we thought we had a shot at squeezing the machine down into 64K bytes, and we didn't want to throw away a quarter of the memory just for the screen.

Atkinson: The thing that drove us is the 80 columns. In a word processor, we really wanted the lines to break on the screen at the same place they break on the printer. There are two kinds of word processors. There are the ones where you just have a string of characters and you see them however they wrap on the screen. Screen wrap is a function of the screen, and how characters wrap on the printer is the printer's doing. Then there are word processors where what you see is what you get. You lay out a line and you know it's going to break at the same place on the printer as the screen, so you can do columns and tabs and a couple of columns of numbers. Then you have to have enough pixels to generate a full printer line across. We thought we could do it

The Wizards behind the Macintosh

Bill Atkinson nearly had his Ph.D. in neurochemistry before he admitted to himself that his real love was computers. He "got a quick E.E." and started his own company. He was happily minding his own business when his friend Jeff Raskin asked him to come see what was happening at Apple, which was then six months old. Bill wasn't really interested, but airplane tickets showed up in the mail, so he took a look. What he saw was "several years reaching into the future" of anything he could do where he was. He stayed to write Apple's Pascal and later became Mr. User Interface for Lisa before he moved over to the Mac team.

Andy Hertzfeld says, "The Apple II changed my life." The computer people at Berkeley were a little narrow-minded about letting a grad student really get into the computer as Andy wanted to. So he spent nearly all the money he had in the world on an Apple II and had a computer he could control completely. He decided the Apple was more interesting than his classes and began writing programs for magazines. When Apple bought one of Andy's programs, Steve Jobs offered him a job, which he took when he finished school. He worked on silent-type printers and Apple III demos until a shake-up in his part of the company shook him loose. He looked around and decided to go with Mac.

Larry Kenyon arrived at Apple from Andahl with a double degree in psychology and computer science. He was working on Apple II/Apple III products when the same shake-up that shook Andy loose freed him, too. Andy asked Larry to join the Mac crew because he was one of the few people who understood the arcane art of making the Apple II work with printer peripherals, and anybody who can do that has to be good. No one in the company

really believed that Mac was a product when Larry joined the Mac team. It was just a research effort, and there was some risk involved—would you still have your job in a few months?

Joanna Hoffman is still on leave from her Ph.D. program in archaeology at the University of Chicago. She has a background in anthropology, physics, and linguistics. She came to Apple because of Mac. After using her computer skills in the field of archaeology for so long, she was tired of looking at the past and turned to the future. She was Mac's entire marketing department for more than a year. She wants to make Mac a tool that feels natural for international users by making it speak their languages.

Burrell Carver Smith encountered the Homebrew Computer Club in 1975, got hooked on microprocessors, and moved to the Bay Area. Just riding around in a borrowed truck one day, he saw Apple and decided to drop in. The only job Apple had available was in the service department, repairing Apple IIs. He took the job and fixed at least a thousand Apple II boards and got involved in other projects before Jeff Raskin and Bill Atkinson recruited him for Mac. He talked the Lisa engineers out of some chips and stuff and got a prototype running over Christmas 1979. He was the first full-time Mac person after Jeff Raskin.

Chris Espinosa says, "There was no life before Apple." At 13 years old he could be found cruising up and down the bus line in his home town, spending a few hours at each Byte Shop on the line until the owner threw him out. He discovered the way to keep from getting thrown out was to write demo programs for the machines, so he wrote for whatever was lying around—Altairs, IMSAIs, or this weird

new machine called Apple I. His mom worried when he was offered a ride to the Homebrew Computer Club meeting with two scruffy characters named Jobs and Wozniak, but she gave in, and the rest is history. Chris spent a Christmas vacation debugging Apple's BASIC in exchange for a whole row of 4K-byte RAM chips, which he thought was a pretty good deal. He worked part-time during college writing BASIC programs and reference manuals and signed on full-time when he graduated. He likes being in on the design process—"If the machine is designed right in the first place, you don't have to write a lot about it."

Jerrold C. Manock was a freelance product-design consultant with a Stanford education who finally joined Apple when he saw that three-quarters of his billing was to Apple anyway. He worked on the Apple II, the Disk II, the III, and Lisa before designing Mac. In Macintosh, he says, "The outside matches the inside in elegant simplicity."

Bruce Horn grew up at Xerox PARC, much the same way Chris grew up at Apple, and later attended Stanford. Bruce started working at Xerox when he was 14 years old—he was one of the kids Xerox brought in to test Smalltalk. Turns out he was brighter than most and became a systems wizard who actually implemented Smalltalk on a variety of different processors. Bruce is all of 23 years old now, but he spent seven years at Xerox PARC and brought Apple that perspective.

George Crowe and **David Egner** designed the analog board in the Macintosh.

Steve Capps assisted Andy Hertzfeld with the systems software.

with 384, and we tried it with real live documents—and we couldn't do it. You could do it with 512, but you couldn't do it with 384.

Smith: The diagonal lines look better, too; the jaggies are removed somewhat, and things like that. So, with that, we said, OK, what's that going

to mean? And we ended up with 128K and . . .

Atkinson: 22K bytes on the screen, and in a 64K-byte machine you couldn't have afforded it. That drove us to 16 RAM chips instead of 8.

Hertzfeld: By then, we knew we were going with 128K bytes anyway,

to run the applications.

Jobs: I just thought I'd show this to you. This is the IBM video board; it's only video, nothing else. It's 69 integrated circuits, more chips than an entire Macintosh, and it basically does nothing. And it doesn't even do that very well.

Espinosa: Forty percent more chips than the Mac.

Jobs: So that sort of gives you a feeling. And again, that just has the video on it. Macintosh, in addition to having video that's far higher in resolution and far faster, has a 32-bit microprocessor, 128K bytes of RAM, 64K bytes of ROM, two serial ports, the mouse, the serial, keyboard, and mouse interface, the incredible sound, the clock/calendar, the disk controller. . .

Smith: We rolled the whole disk controller into one chip.

Hertzfeld: And it has Lisa's graphics and user-interface software built into every board.

Jobs: Andy was sort of the software technical leader behind the project, from its inception. As Andy puts it, software sometimes stands on its head to get rid of a chip in the hardware. And so, with a system as powerful as this, we wanted to take advantage of all the features, for instance, in the serial chip and the disk and stuff. We really wanted to be able to have the serial ports reading while

the disk is spinning, while the mouse is moving, while it's making sound. You know, all with that single board.

BYTE: What were the roots of that operating system?

Kenyon: When we started, of course, we were looking at the work Lisa was doing, and the Lisa group was rolling its own operating system, and it just didn't seem appropriate. We took the graphics software, which was perfect for our machine.


Capps: The Lisa's operating system took a lot of the user interface. For the window manager, even the memory manager, we started with what Lisa had.

Hertzfeld: It turns out that Quickdraw is built on top of what Lisa would call the intrasegment memory manager. You relocate little objects. We took that because Quickdraw required that support, and we sort of turned it into our system-wide memory manager. Even the Lisa group uses it only for the intra-application memory manager. Someone mentioned a neat way to do a file system, and we thought about it and said,

"Gee, that's a good way of doing it," and so we did. A lot of it was experience on the Apple II, knowing what was sort of bad there—what we wanted to do great here. That at least was the conception of the asynchronous I/O. I knew from the Apple II that when you make a disk request it waits there for a whole second, a million microseconds, just waiting for the disk to come up to speed. We should be able to do other useful work while that's happening. On the Apple II if you want to make a beep, the whole processor, the entirety of the machine, is devoted to making a beep. And when you've got all the horsepower of the 68000 there, you don't want to waste it all on making sounds.

Atkinson: We still make a beep with the processor.

Hertzfeld: But we time-slice the processor such that you can be doing other things. It happens on the interrupt level instead of being dedicated. Macintosh uses the processor for everything, just like the Apple II does. In terms of the disk, we have

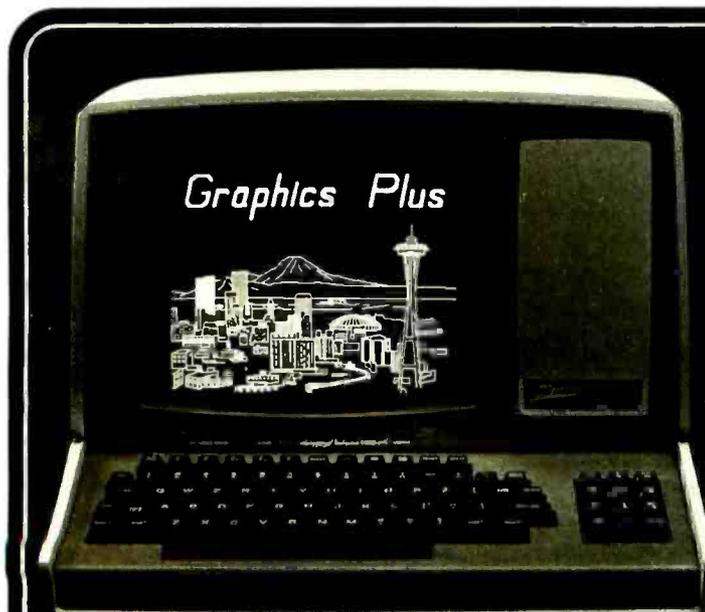

GRAPHICS-PLUS is a field installable enhancement board for the popular Zenith¹ Z19 video terminal adding many powerful features found only on terminals costing much more. GRAPHICS-PLUS provides Tektronix² 4010 compatible vector drawing graphics, VT100³ compatible 80 and 132 column display formats, off-screen scrolling memory, programmable function keys, "Plain English" menu-driven Set-up mode, and a host of other enhancements. Installation can be accomplished within 15 minutes using only a screwdriver.

GRAPHICS-PLUS an enhancement For Z19 Terminals from Northwest Digital Systems

- Tektronix² 4010 Compatible Graphics
- 512 Horiz by 250 Vert Resolution
- 80/132 Col and 24/49 Line Text Displays
- Seven Page Off-Screen Text Memory
- Menu-driven "Plain English" Set-up Mode
- 16 Programmable Keys- 128 Chars Each
- Optional Hardcopy Port
- Simple Field Installation

1 TM Zenith
2 TM Tektronix
3 TM DEC

GP-19 Upgrade for Z19 Terminal	\$ 849
Z19 Terminal With GP-19 Installed	\$ 1495



Northwest Digital Systems

P.O. Box 15288, Seattle, WA 98115 (206) 362-6937

THE ULTIMATE MULTI-PROCESSOR BUILDING BLOCKS


SBC 300
single board computer

VFW-III
floppy/Winchester disk controller

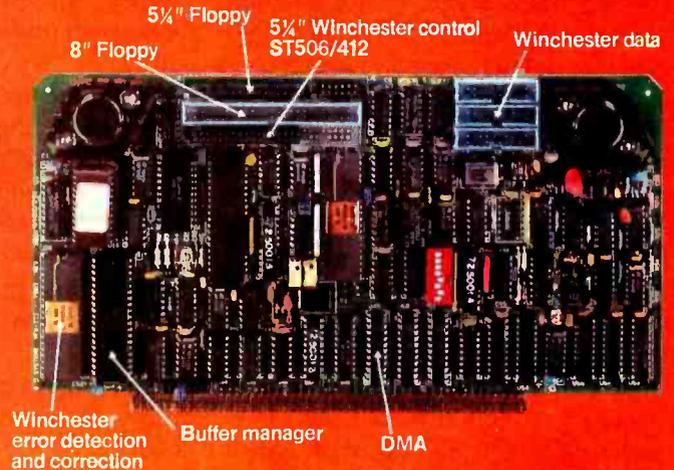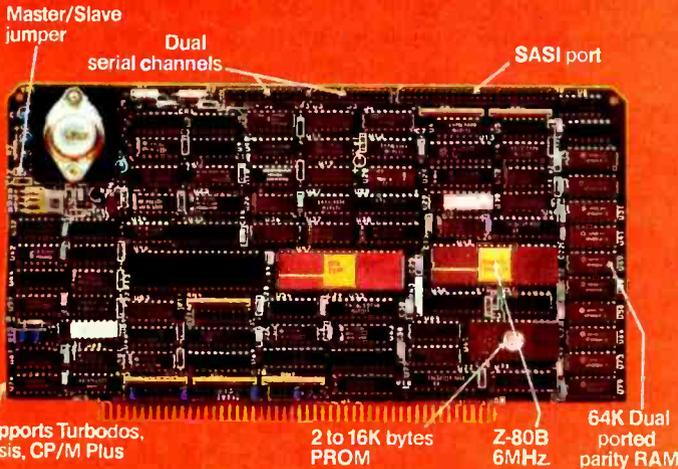


AND HERE'S WHY!

Our Competitors:

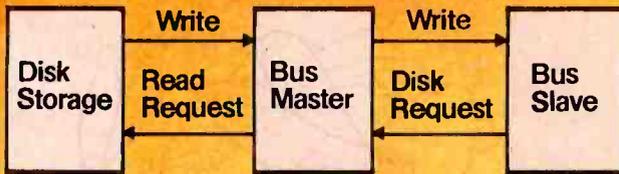

The SDSystems Advantage:

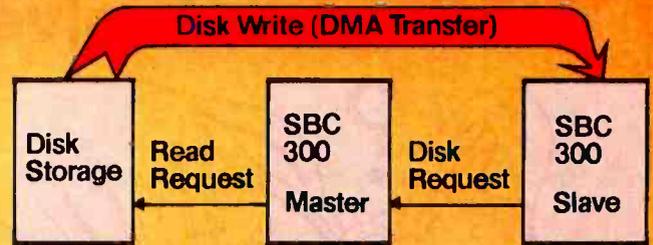

The SBC 300 offers you 64K bytes of dual ported parity RAM. Dual porting allows DMA transfers from disk storage *directly* to an individual slave processor. This maximizes multi-processor system performance.

Performing the DMA transfers is the VFW-III peripheral controller. It is quite possibly the only S-100 disk controller you'll ever want to buy. With the VFW-III you'll have simultaneous control of up to three 5 1/4" Winchester drives and up to four 5 1/4" and 8" floppy drives.

Together they are the ultimate multi-processor building blocks. Systems integrators appreciate our strict adherence to the IEEE-696 specification and our complete line of high quality S-100 bus products. Evaluation hardware is available for qualified OEM's. Call, write, or circle the number below to receive technical information on these and other fine SDSystems products.

Z80 product Zilog Corp. Turbodos is a trademark of Software 2000, Inc. Oasis is a trademark of Phase One Inc. CP/M Plus is a trademark of Digital Research, Inc.

P.O. Box 28810

Dallas, Texas 75228

214-340-0303

Telex 682 9016

Circle 461 on inquiry card.

SDSYSTEMS

the same disk-controller architecture as the Apple II, but we are just a little more sophisticated in how we use interrupts. We give the time back to the applications while the I/O is going on.

BYTE: Can you say more about the custom disk controller?

Smith: Sure. A long time ago we sort of figured that everybody who was doing designs at Apple with disks loved what Woz [Steve Wozniak] had done on the Apple II. I'll never forget, the first time I looked at the Woz controller I said, "OK. Well, this must be the interface disk controller. Where's the disk controller?" I never found the disk controller. And we've just been in love with the way that that's done. It's used to modify group code. One of the things we knew, though, was that disks would be going faster in the future. So we initially designed this chip so the whole company would be able to have an ultra-low-cost way of using Wozniak's disk technology for every product. But we knew that we weren't just going to be going at 4 microseconds per bit, that

twice that would become an industry standard . . . at least an Apple internal standard. So we built in a mode, a high-speed mode, so that it can go twice as fast.

Atkinson: While you're getting input from the serial port at 19,200 bps, you can be writing to the disk and not missing a beat. It's not the buffer that's doing that. It's Larry Kenyon. Every 4 nibbles, you look to see if there's something on the port, because in one sector's time, 24 bytes go by.


Jobs: After we reexamined everything, including the disk format, we said, "Do we want to go to MFM [modified frequency modulation]?" And the more we reexamined it, what became clear was that the original idea that we had for a disk in 1978, which we are still using, is great.

Atkinson: We get 400K bytes on this thing, while most people get only 270.


Jobs: As an example, our scheme has twice the margin of MFM. In other words, when you're shipping a mil-

lion or two million computers a year, which we intend to do, when people are buying media from 10 different sources and they expect to take disks out that were recorded in Alaska in really cold weather and stick them into machines in Florida in a heat wave and have them work, that margin is really important. If you want to equate that to reliability, we are significantly more reliable than any other disk system on the market, while having higher capacity. So that was the key decision, to stick with the same encoding format and the same scheme that we've used since 1978. So, while everyone else is running at roughly the same rates as Apple II, the IBM PC, and everything else, we doubled it on Macintosh. We set a new internal standard with the 3½-inch disk and this new single-chip controller. And every new 32-bit product at Apple will use that new standard. The media, the sector format on that media, the disk controller, and the routines and everything to drive them is a new Apple 32-bit standard that you'll see com-

\$100 system integrators... Integrand solves EMI problems!

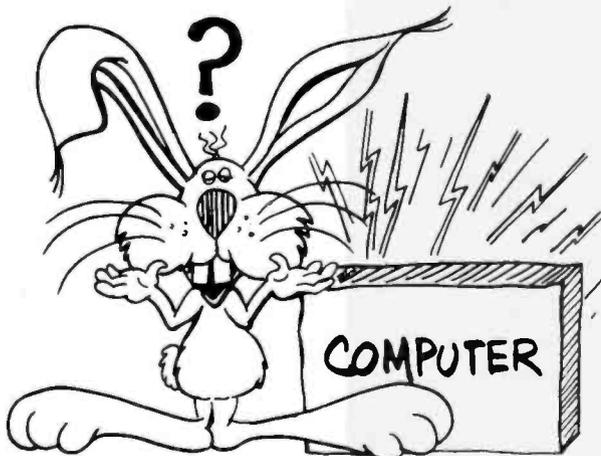

BEFORE

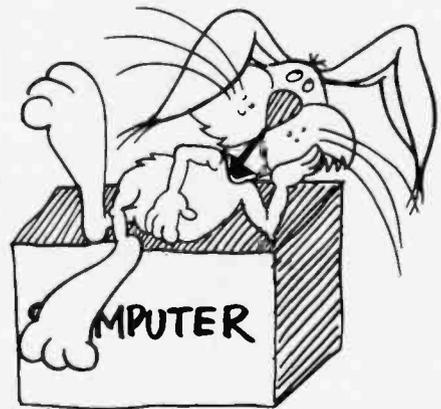

AFTER

System integrators, do like Ronny Rabbit. Eliminate frustration with Integrand's low-cost FCC verification service. We offer a one stop service that SPECIALIZES in EMI testing of \$100 computers.

Write or call for our Verification Brochure including application note: Ronny Rabbit's Radiation Reduction Repertoire. Be sure to ask for our free 32 page MAIN/FAME catalog.

INTEGRAND

8620 Roosevelt Ave./Visalia, CA 93291
209/651-1203

We accept BankAmericard/Visa and MasterCard

PICK UP WHERE IBM® LEAVES OFF.

Portable or desktop, you're way ahead when you pick up a **corona PC**™. Because we give you everything you've ever wanted in an IBM¹-compatible PC and more. For a great deal less.

COMPATIBLE AND MORE.

Our systems run all software that conforms to IBM PC programming standards. And the most popular software does.

We deliver twice the memory, with room for eight times as much.

We deliver a fast-access 320K floppy drive, a communication port and an improved IBM PC keyboard with indicator lights.

Our systems include high-resolution monitors (12" desktop, 9" portable) for crisper, cleaner displays, and both have built-in high-resolution graphics (640 x 325).

You get a complete system, ready to go to work.



MORE VERSATILITY.

With all the necessary features built into the main unit, the four expansion slots can be used for your special needs. For example, color or our optional 10MB hard disk.

Circle 92 on inquiry card.



MORE SPEED.

Our RAM-disk software gives you temporary disk-type storage that works many times faster than disks.

PLUS SOFTWARE.

Our systems come with the operating system: MS-DOS² A programming language:

GW BASIC² A training course: PC Tutor.³ A professional word processor: MultiMate.⁴ Plus DOS utilities and demonstration programs. Or you can get the p-System⁵ from N.C.I. and write or run portable Pascal packages.

ALL FOR A GREAT DEAL LESS.

Even with all the extra features and performance, our systems still cost significantly less than the equivalent IBM PC.

Drop by your nearest **corona PC** dealer for a very convincing demonstration. Or contact us at 31324 Via Colinas, Westlake Village, CA 91361. (213) 991-1144 or (800) 621-6746 toll-free. Telex 658212 WSLK, in Europe 76066 CDS NL.



© Corona Data Systems 1983. 1. TM International Business Machines. 2. TM Microsoft. 3. TM Comprehensive Software Support. 4. TM Softword Systems. 5. TM University of California.



corona™
data systems, inc.

ing out in every future product that we do in that family.

Smith: There were some voices within the company that said, "Oh, you guys ought to go with standard formats and things like that." We looked at doing that and it turns out that it takes more chips to interface to a standard floppy-disk controller, and we have. . .

Jobs: Well, I can go get the IBM floppy board. It looks to have about 45 to 50 chips on it. . .

Espinosa: I'll come and help you carry it.

Jobs: . . . including an LSI [large-scale integration] disk controller—far less performance, far less capacity, far higher cost.

Atkinson: And less reliability.

Jobs: Oh, far less reliability. Larry's software senses the disk speed, and Burrell's hardware can adjust to one of four hundred speeds. So if it's written on something that's a little out of whack, we can just adjust right down to the necessary speed and read it. Everything on the Macintosh board—the serial timing, the disk timings, the microprocessor timings, the video timings, the sound timings—comes from one crystal oscillator and is synchronized from one source. And, again, it's better, of course, technically to do it that way. Everything works much better, but it also saves parts, and we can offer this thing cheaper to customers. And most of this stuff customers will never ever realize or care about anyway. I mean, who cares how many crystal oscillators you have? But you *do* care about how big your computer is. You do care about how much it costs, and you do care about how well it works.

Atkinson: If you ever drop your computer you find out quickly how many crystal oscillators you have.

BYTE: So with the variable speed in the disk drives, I guess there's no problem having two drives that are 3 percent different in speed.

Jobs: We read it and adjust it so that the speed is accurate relative to that crystal. That crystal on the board is superaccurate. We can adjust the disk drive relative to that superaccuracy.

Atkinson: You force all the disks to

go at exactly the same speed by having the software constantly monitoring the speed and saying, "Ah, it's running a little slow; jack it up a little bit," so that each disk doesn't have to be adjusted at all. You switch disk drives, and the new one will run at exactly the same speed because you force them all to.

Smith: It turns out that the speed variations occur partly because you plug in a new cassette that loads the motor down in a different way and also because of temperature variations that cause very long-term drifts in the disk speed. Using a little bit of the processor to fix that doesn't cost us any performance at all on the system.

BYTE: What about the display electronics?

Atkinson: Where is the display controller?

Hertzfeld: It's hidden.

Jobs: If you bite into that IBM display board, it'll totally flicker if you do it at the wrong time. You've seen that, right? Woz just came up with this really brilliant way to do the Apple II. He realized that memory was about twice as fast as the microprocessor needed it and twice as fast as the video needed it. So he put the microprocessor over here and he put in essence the video over here, and he put some multiplexers in the middle. He shared the exact same memory between the two in a way such that this one thought it had all the memory all the time and this one thought it had all the memory all the time, yet they shared the same memory! All this thing had to do was write into certain memory locations and, magically, it would appear on the screen. The microprocessor never even had to think about the screen. All it did was look at memory locations.

Atkinson: And there was no way to glitch the video because accesses were mutually exclusive.

Jobs: Right. And so it turns out that, try as we might, we have never been able to find a better way to do it.

Atkinson: At the same time that the processors have gotten faster, memory's gotten faster; the memory is still twice as fast as the processor.

Jobs: And so, again, it gives you greater performance, because you don't have to write only at special times and slow yourself down. It cuts the chip count way down because you don't need two banks of RAMs, so the customer's not paying for these extra chips, and it just makes a more elegant product.


BYTE: How far does the similarity extend between the Apple II video and the Mac's video?

Smith: We have a three-part memory architecture on Mac. We have a DMA window for sound, video, and CPU. . . shared by three devices. Also, what we do that is a little more sophisticated than Apple II is return memory cycles to the processor during horizontal and vertical retrace. And with the analog design we're able to lengthen the horizontal retrace interval, which gives us more performance for graphics by making more time available to the processor from memory and giving the analog electronics more time to retrace the beam. On the Apple II, Woz sort of designed this logic board and the power supply was kind of added. On Mac, we really designed the entire system as a complete system from the ground up, so we used different constraints. I would say there's not much similarity. The great thing about Mac as a product is that it really wasn't designed as just this piece over there and this piece over there and this other piece. . . All of it was designed in parallel, everybody knowing what everyone else's job was.

BYTE: How did you decide on the appearance of the machine?

Manock: Our goal in the beginning was portability. We actually had this cardboard model that looked amazingly like the Osborne. And that was way before the Osborne came out. As I said, portability was primary here, and this version had an attached keyboard that had a sort of rubber boot around it that would fold up and give you protection over the screen. Steve really changed the emphasis of the product one day when he said that we didn't want portability to be the primary aspect of this, but we did want it to take minimal desk space. With that goal in mind,

3" Compact Floppy Disk Drive

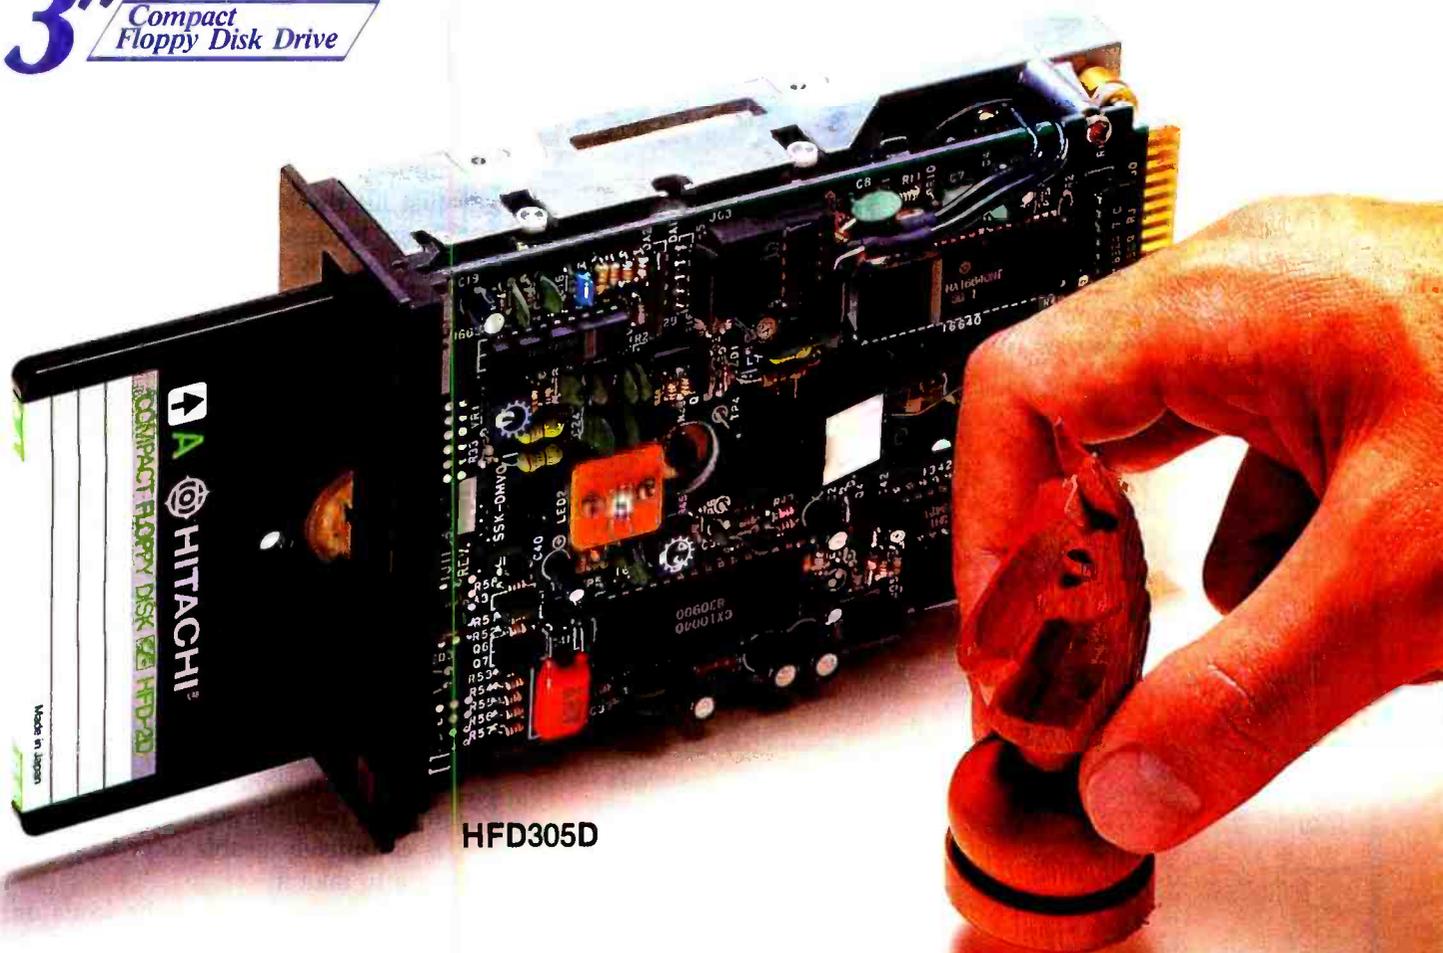

HFD305D

The winning move.

Hitachi's 3" floppy.

It's clear that the 3" floppy will become the new standard. Compact, easy to carry and mail, dust-proof and non-bendable, the 3" floppy has the powerful advantages that mean success.

To develop your share of the new 3" drive market, Hitachi's drives are the wise choice. Now double-sided and with LSI's, reduced access time and low power consumption, Hitachi's drives are better than ever.

Hitachi's resources and experience are your guarantee of quality. Over 200,000 drives will be rolling off our lines in 1983 alone. That's why choosing Hitachi is a profitable choice. No doubt about it: the format of the future is yours today with Hitachi's dependable drives.

Specifications: Storage capacity unformatted: 500 K bytes. Total no. of tracks: 80. Recording density: 9,830 bpl. Track density: 100 tpi. Transfer rate: 250 K bits/sec. Track-to-track positioning time: 3 ms/track. Dimensions (W x H x D) mm: 90 x 40 x 150. Wt.: 550g.

Floppy disk marked  can be used with this floppy disk drive.



A WORLD LEADER IN TECHNOLOGY

Circle 169 on inquiry card.

For further information:

Mr. Takao Ichiki, Eastern Regional Office, Hitachi Sales Corporation of America, 1290 Wall Street West Lyndhurst, N.J. 07071 Phone: (201) 935-8980 Fax: (201) 935-4869
Mr. T. Kodera, New Jersey Office, Hitachi America, Ltd., 59 Route 17, Allendale, N.J. 07401 Phone: (201) 825-8000 Fax: (201) 825-4781

PURCHASING AGENT works for you!

We can buy any microcomputer product for you from our 288 participating wholesalers. Here are the net prices on a few of the 7,000 products we can buy for you, acting as your purchasing agent.

COMPUTERS

Altos 580-10	4,199
586-10	5,650
586-20	6,018
586-14/40	8,270
Basis-108	2,146
CompuPro Godbout	
Sys 816A**	4,000
Sys 816A**	3,850
Sys 816A RAM 21**	4,075
Sys 816A RAM 21**	3,925
Sys 816AH**	6,630
Sys 816C RAM 21**	6,632
Sys 816C RAM 21**	6,470
Sys 816CH**	9,211
Sys 816D RAM 21**	10,324
Sys 816D RAM 21**	10,052
816 08 RAM 17**	6,471
816 16 RAM 21**	10,052
816 68K RAM 21**	798
816 68K RAM 21**	6,632
*Completely Assembled	
**Unassembled Components	
M-Drive-H	1,100
CPU 68K	500
CPU 2, 6 Mhz	234
RAM 21, 128K, 14 Mhz	6,470
RAM 22, 256K	1,292
Disk 2, Hard Disk Contr.	500
Pragmatic 20 meg.	2,990
Pragmatic 40 meg.	4,686
Columbia Sys., 2-320K	2,779
Sys., 12 meg.	4,119
Sys., portable	2,390
Corona desktop, 2-320K	2,487
desktop, hard disk	3,545
portable, 2-320K	2,437
Eagle 1620	3,450
1630	4,699
PC-2	2,699
PC-XL	3,448
Molecular SM 8 10 meg.	4,648
Morrow Micro D, MD-2	1,341
Micro D, MD-3	1,319
Micro D, MD-11	2,385
Morrowflex	
MW1-MP100	1,856
MW1-MP200	2,243
MW1-MP300	2,441
MW2-MP100	2,321
MW2-MP200	2,596
MW2-MP300	2,786
NEC APC-H01	2,088
APC-H02	2,544
APC-H03	2,999
APC-H04	2,699
APC-H12	
Color Graphics	618
APC-H26, 10 meg.	2,172
APC-WPS 1	4,534
APC-WPS 2	5,013
APC-WPD 4	5,622
8801A, 64K	947
8831A, 2-320K	950
8881A, 28	1,575

COMPUTERS

Northstar Advantage	
w/Dual Floppies	2,107
w/5 meg.	3,249
w/15 meg.	4,315
8/16 upgrade	309
Onyx 8001 MU 20, 256K	10,454
8002 MU 20, 512K	14,338
C5002A, 256K, 14M	9,022
Pied Piper	995
PMC Micromate 101	CALL
Sage IV, Low Profile	3,470
IV, w/06 meg.	5,385
IV, w/12 meg.	6,123
IV, w/18 meg.	6,275
Sanyo 1250	2,433
4000	2,677
Seattle Gazette, hard disk	5,970
Televideo TS-802	2,525
TS-803	2,027
Vector 4-20	3,637
Zenith ZF-100-21	2,245
ZF-110-22	2,712
ZF-120-22	2,789
ZW-110-32	4,261
ZW-120-32	4,339

HARD DISKS

Cameo	CALL
Chatsworth 4200	3,340
Corvus 6 meg., w/o Int'l	1,629
Davong, 5 meg. Univ.	1,395
NEC APC 10 meg.	2,172
Pragmatic 10 meg.	2,445
Santa Clara Sys., 10 meg.	1,970
Tailgrass Technology	
6 meg.	1,781
6 meg. w/tape	2,322
20 meg. w/tape	3,097
35 meg. w/tape	4,337
70 meg. w/tape	5,112
IBM Interface	1,116
Trantor 10 meg.	1,737

IBM PERIPHERALS

Hayes 1200 B Modem	449
Keytronic 5150 Keyboard	189
Plantronics Color Plus	CALL
Quadlink	549

MODEMS

Hayes 1200	499
US Robotics Auto 212A	479
Password	349

DATABASE SOFTWARE

Condor III	437
DBase II	450
Personal Pearl	199

MONITORS

Amdak 300 G Hi-Res	130
300 A Hi-Res	145
310A	165
RGB II	450
BMC 12" Green	65
Kimtron 85 AH	CALL
NEC 1201	154
1203	536
1205	162
1260	115
1410 RGB	780
Princeton RGB w/cable	465
Quadram Quadchrome	510
Sanyo 12" G Hi-Res	181
Taxan 12" Amber	125
RGB 3	499
USI 12" Amber	155

PRINTERS

Anadex 950 I	1,300
9620	1,399
9625A	1,515
WP6000	2,599
Brother, parallel, daisy	695
C. Itoh A-10-20	534
8510 Pro-I, par.	379
8600	1,017
F-10, 40 cps	1,050
F-10, 55 cps	1,425
C-1-300, 300 ipm.	4,295
Daisywriter 2000, 48K	1,150
Datsouth DS-180	1,150
Diablo 620, 25	875
630 API	1,710
Epson FX-80	571
FX-100	750
MX-100	657
Florida Data OSP-130	3,700
GE (General Electric) CALL	
Gemini 10	309
15	454
Gorilla Banana	199
IDS Prism 132 all options	1,395
NEC 2010	995
3510	1,365
7710	1,900
8023	499
Okidata 80	CALL
82A	CALL
83A	CALL
84P	CALL
84S	CALL
92P	CALL
92S	CALL
93P	CALL
93S	CALL
2350P	CALL
2350S	CALL
2410	CALL
Gantex 6000 P	1,086
7020	1,235
7030	1,548
7040	1,703

PRINTERS

Oume 11/40 w/intl	1,395
11/55 w/intl	1,558
Tally 160L, w/tractor	569
180L, w/tractor	784
Spirit 80	299
Texas Instr. T1810 basic	1,323
T1810 LO	1,789
T1855	799
Toshiba P-1350, parallel	1,499
P-1350, serial	1,499
Transar 130	693
140	1,199
315, color	549

PLOTTERS

Amdak, X-Y	592
Houston Instr., DMP 29	1,778
DMP 40	771
DMP 42	2,321
Hi-Pad	763
Strobe M 100	461
M 260	772
Sweet P	573

TERMINALS

Adds Viewpoint A1	445
Viewpoint A3 +	499
Amper Dialogue 80 amber	720
Ann Arbor Ambassador	1,355
C. Itoh 80A	1,016
101E	1,278
Hazeltine Esprit I	478
Esprit II	540
Oume QVT102A	542
QVT102G	538
Televideo 914	555
924	713
925	715
950	905
970	1,015
Visual 330G	932
Wyse WY-100	680
WY-200	1,020
WY-300	1,020
Zenith Z-29	635

ACCOUNTING SOFTWARE

Altos Accountant	1,899
CYMA, each module	750
Graham Dorian ea. mod.	420
IBSI, each module	455
Micro Computer	
Consultants, ea. mod.	450
Microtax	CALL
Open Systems, ea. mod.	568
Structured Systems, each module	
Systems Plus	735
	345

CALL US FOR YOUR NET PRICE ON ANY OF 7,000 OTHER PRODUCTS WE CAN BUY FOR YOU.

F.O.B. shipping point. Prices subject to change without notice.

B-84-2

Since 1980



THE PURCHASING AGENT, INC.

574 Weddell Drive, Suite 5
Sunnyvale, CA 94089

(408) 744-0646

Open Monday thru Friday, 8-5 PST

we realized that the keyboard didn't have to be exactly the width of the computer.

Jobs: To use the earlier design you had to have some sort of arrangement to tilt it up. And what we noticed was, well, fine, what if you just lift the back up here like this? Then, because you have all this space underneath, you could put the floppy disk underneath. So you make a unit that's more vertical, has a smaller footprint.

Atkinson: It has to be up enough so your eyes can see it anyway; you need the height.

Manock: Steve thought, too, I think—in a gut reaction sort of way—that everybody was going low profile and wide, and we never have wanted to be a "me, too." I think our vertical format is correct when you think of human factors.

Hoffman: Jerry, you might want to turn the back around. We made it truly international. I think it's one of the few products aside from Lisa that is completely usable anywhere you care to take it.

Manock: Did you see the icons on the back?

Hoffman: We started out with the case and went from the outside in, trying to make it more and more international the more we thought about it. And Jerry was just great as soon as he realized that we really did want to bring it to the whole world. He had marvelous ideas on how to eliminate every word of text, take everything off the package so that we don't have to be an American product anywhere that we go.

Jobs: In Mac, there's no English on the outside of the case. Everything's iconic. And there is absolutely no English in the ROM. It is universal in nature. When the thing comes on it puts a few icons on the screen. If something goes wrong, it can't boot or something, it puts a frowning Mac on. If it's booting it puts a happy Mac on. It loads all the languages, all the country-specific stuff, off the disk. So, because the keyboard is detachable and mapped anyway, to localize Mac all you do is change the keyboard, manuals, and the disks. Nothing in the box has to change.

New!

Three Winchester Internal Hard Disc Drive Systems!


Now you can choose from three low-power 10 Mega-byte systems that convert your IBM® PC to perform just like the PC XT!

Maynard Electronics introduces three Winchester Hard Disc Drive Systems — the only drive systems to offer you 10 Mega-bytes of formatted capacity with complete internal installation! These systems offer the user countless benefits and features: capability of booting off the hard disc; additional functions while requiring only one card slot in your PC; and, use of available power, thereby preventing overheating problems which have affected other drives. Handling heavyweight data was never easier.

All three systems are quality engineered and work with DOS 2.0 without any special software drivers and also run with other operating systems designed to make use of the XT hard drive system. All you need is the IBM® DOS 2.0 Manual and you're ready to run!

Each system is equipped with a low-power hard disc drive, complete software, cable, a SandStar™ Card and Hard Disc Controller Module. SandStar™ is the first family of modular peripherals created for the IBM® PC. Simple instructions for easy installation are included and all components are backed by an Unconditional One Year Parts and Labor Guarantee.

WS 1

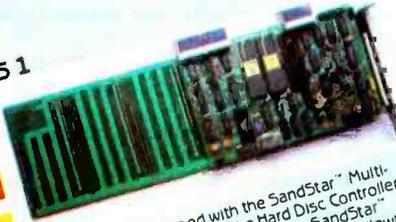


This System is equipped with the SandStar™ Multi-function card. In addition to the Hard Disc Controller Module, you can add up to three other SandStar™ Modules while using only one card slot. The following modules are available: Serial Port, Parallel Port, Clock Calendar, Game Adaptor, SASI Host Adaptor and Prototyping Module.

WS 2



This System is equipped with the SandStar™ Floppy Drive Controller Card. The Card can control. In addition to the Hard Disc Drive, two floppy drives mounted inside your PC and optionally two additional 5¼" or 8" drives mounted externally. This leaves three system slots for other expansion boards.

WS 3

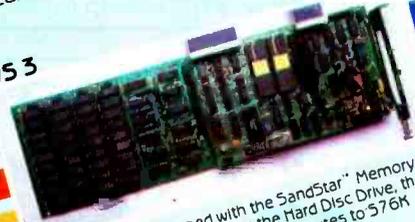

This System is equipped with the SandStar™ Memory Card. In addition to controlling the Hard Disc Drive, the Memory Card allows you to add 64K bytes to 576K bytes of memory using only one card slot.

NOW!
Compatible
with
COMPAQ!™

To expand your PC to perform like the PC XT, one of our Winchester Hard Disc Drive Systems is right for you. And if you have already made the wise decision to install any of Maynard's SandStar™ Cards, the SandStar™ Hard Disc Controller Module may be purchased separately.

TO ORDER, CONTACT YOUR LOCAL DEALER OR DISTRIBUTOR.



MAYNARD ELECTRONICS
400 East Semoran Blvd. • Suite 207
Casselberry, Florida 32707
305/331-6402

We make modern times better.

Circle 232 on Inquiry card.

IBM is a trademark of the International Business Machines Corporation.
COMPAQ is a trademark of the COMPAQ Computer Corporation.

And another real breakthrough is this thing called Resources that Bruce Horn invented.

Hertzfeld: The data is factored out from the code. You know, most programs are a mixture of control logic and just raw code.

Atkinson: The virtual-memory architecture on the data parts of the program allows us to factor it out so that, without rewriting a program at all, without recompiling or relinking the program, I can take a copy of Mac Paint and in 15 minutes make a German version.

Hertzfeld: Because all the text is kept in a well-known, well-defined place.

Horn: Until December, people didn't really know what the resource manager was, because they really hadn't had any contact with it, besides me. I knew what I wanted from it because I had to do Finder and all that other stuff. Andy just looked at it over time and figured out what you could do with it. And I was trying to say, well, this can do this and this. . . It was really Andy having the biggest view of the system saying

that this could really be a great thing for a lot of stuff.

Hertzfeld: Another thing to ask Bruce about is the Finder, which is our most important application, the first thing that comes up on the machine. That's the program with all the little icons, the desktop manager, I guess we're calling it. That's Bruce's conception and communication.

'In Mac, there's no English on the outside of the case. Everything's iconic.'

Hoffman: There are numerous subtleties with this. Picture a dialogue box, for example. A dialogue box, when you put English text in German, starts overflowing its limits and starts looking very different. You have a button that says, "Put this away." In German, that takes a paragraph and overflows the box. . . . But Resources lets us change not only the text but also the physical

look of those dialogue boxes, or anything, through something called Resource Editors.

Jobs: Otherwise, you'd have to get into the source listing. You'd have to change not only the languages, as Joanna said, but also the geometries of the dialogue boxes and make them bigger. It would take you awhile; it's not something that's impossible, but it's something that never gets done. And it's certainly something that you have to be the originator of the program to do. What we've done by pulling all the language-specific stuff out, through this beautiful mechanism called Resources, is write these other programs called Resource Editors. By running a Resource Editor, you could, if you knew German, simply run a program on the program, get in there—literally on the screen—and just stretch the boxes bigger. You could select a text and retype it in German and move things around if you wanted. You can examine every icon, every dialogue box, every alert box, every pull-down menu, everything, without being a programmer,

"PortaPac™?"



PLAIN TALK.

Contrary to popular belief, PortaPac™ is not something you take with you camping. PortaPac is a portable data container with multiple uses. Have you ever tried taking 50 pages of notes or manuscripts with you on the road, on business calls? Well, that's how much you can put in a model P2064 PortaPac that measures 4 inches by 9 inches. That's approximately the size of 2 packs of cigarettes. Except PortaPac is thinner — it's only 1 inch thick. And what about versatility? PortaPac uses the industry standard RS232C communication protocol. No more worries or fuss about single density, double density, soft sector, 10 hard sector, 16 hard sector, and other mumbo jumbo disk formats. PortaPac can function as data terminal equipment, i.e., similar to your terminal, or as data communication equipment, i.e., similar to your computer or modem. Or, if you like, it can be put inline between your terminal and your computer. Totally transparent. Maintenance? There is virtually none. All you do is change the battery when the low battery light comes on — every 1 to 5 years depending on the model! What's more, your PortaPac automatically retains its contents when power goes out.

What can PortaPac do for you, you ask? How about transferring information (including programs) between computer systems? At 19,200 sustained rate! No more staying up all night just to get your data reliably thru the modem at 1200 baud. How about taking it with you on sales calls? Display your information on the client's computer or terminal, turn around and enter orders into PortaPac for later processing. And what about your customer engineers? How about putting your diagnostic program in the PortaPac, and download it into the computer? The uses just go on and on. . .

TESTIMONY

Here's how some of our customers are using their PortaPac. . .

- Transferring manuscripts prepared on Osborne to IBM and Xerox systems
- As a portable storage device for the Tandy model 100 computer
- Demonstrate hardware with demonstration package stored in PortaPac
- Transferring information between NorthStar Advantage, Morrow Design Micro Decision, and DEC PDP 11 machines
- As a replacement for floppies on machine tools control computers
- The list just goes on and on. . .

AND HERE'S MORE. . .

Our model P2064F is a dedicated version of the model P2064. Once started, it will always retain the last 64K characters of information passing thru it. Put it inline between your computer and terminal. No more cussing because you just lost the last 4 hours of work doing data entry when the power went out or the diskette went bad.

AND AN ADDED BONUS. . .

The PortaPac can function as a printer buffer! So now you can take the PortaPac to a high speed serial printer and get your reports quick! Again and again if you wish.

Want to know more? Write or call us and we'll send you additional information. Pronto!

Cryptronics, Inc.

17111 Coly River Circle, Suite 7
Fountain Valley, CA 92708
Phone: (714) 540-1174

PortaPac™ is a trademark of Cryptronics, Inc.

A real fish story.

by Brett Kirk
Owner
Poseidon Aquatics

"Our business is wholesaling tropical fish to pet stores. We're not a large-sized company, but we have one whopper of an inventory-control problem. That's where dBASE II® comes in."


The one that didn't get away.

"We needed a fast program, and dBASE II, the relational database management system from Ashton-Tate, gave us the speed we needed to quickly log in our weekly live-fish shipment in terms of total numbers received, the kind and numbers of each different type, the cost per fish—all critical factors in determining our pricing and being able to pass along savings to our customers whenever possible without hanging us out to dry profitwise.

"We're sure glad we bought dBASE II when we did. I think our customers are glad, too."

**Once you try dBASE II,
you'll be hooked.**

If you're up to your ears with data

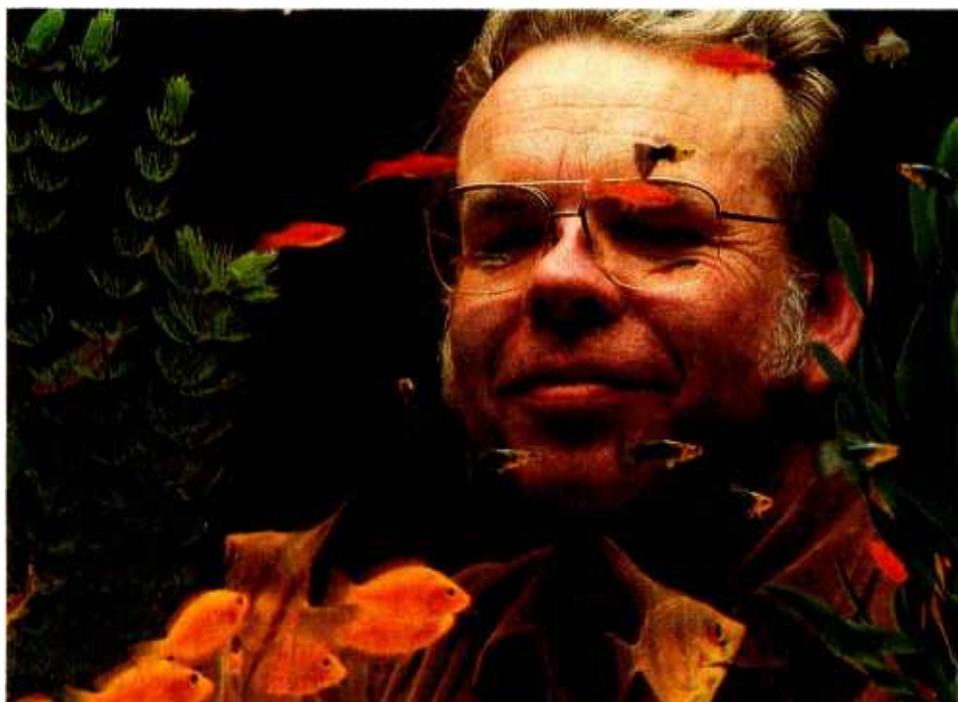

that has to be managed quickly and efficiently, dBASE II can really help you stay afloat.

For all the particulars, contact Ashton-Tate, 10150 West Jefferson Boulevard, Culver City, CA 90230. (800) 437-4329, Ext. 212. In the U.K., call (0908) 568866.

ASHTON · TATE 

Suggested retail price, \$700.
dBASE II is a registered trademark of Ashton-Tate.
©Ashton-Tate 1983

without getting the source code, and very quickly, too, using the user interface of the Macintosh.

Atkinson: Anything that XYZ software company put together, even though the company didn't think about Taiwan, will run in Taiwan.

Jobs: But do we want it to run in Taiwan?

BYTE: Are you going to market it aggressively in Japan?

Jobs: Yes.

Hertzfeld: My favorite thing about Resources, being selfish, is that the same facilities that allow us to translate English into 7, 10, 20, a million different languages are the same facilities we use to translate technish to English in the first place.

Hoffman: The other component of this is that it allows us to not just introduce products that feel to the native user like a native machine, natural to them, but also that we can start coming very close to making simultaneous product introductions. The software that is developed in the U.S. can fly over there for them, for the fragmented markets in Europe, for example. Europe does not allow for the same kind of development of software houses as the U.S. because the markets are all so fragmented you can't amortize development of the software over as large a user base. But given that the Europeans now have the capability of using a localized, *globalized* software, if you will, their market grows because each individual software developer in France now can view the whole world as a market. We feel that it will give an impetus to the development of software developers, third parties, in Europe, and in more fragmented markets as well.

Smith: An international power supply, too, so the exact same unit basically can be used anywhere in the world.

Egner: It doesn't care whether it's 50-Hz input.

Manock: Just one additional thing on these: the icons on the back are from the International Electrotechnical Commission (IEC). We didn't invent all these ourselves... wherever possible we used symbols that already existed—for example, AC line power

—that are world standards. Where we didn't have symbols that existed, we used the IEC's closest symbol as best we could and then added what we thought made sense. For example, we needed a symbol for a modem, so we started with IEC's telephone symbol. We tested them to make sure there was good recognition. We'll submit these new icons to the IEC to have it suggest that they be the standards added to its encyclopedia of symbols.

BYTE: What is this machine going to make possible that other comparably priced machines have not made possible? How will it change the personal computing scene?

Jobs: Right now, as you know, when you use a word processor, it will do two or three things. The first thing Macintosh will do is make the existing types of applications an order of magnitude easier and more approachable for people. Therefore the available market for this machine is going to be giant compared to the available market for the people who are willing to invest 40 to 100 hours learning to use their computers. That's the first thing.

The second thing is that there are going to be new types of applications available that could not be available on the current generation of personal computers—it is technically impossible to do. The perfect example is Paint. Paint is impossible to do on an Apple II or an IBM PC or any of the other first-generation products. You can do a mockery of it, but you can't really do it. And there are going to be lots of applications like that. You've seen Lisa Project. That, of course, will be running on Mac. And we don't even know the kinds of applications that are going to come out in six months to a year. As an example, we'll be able to laser-print output from this thing by next June, and that is pretty exciting to us. So, if we sell these on a university campus, you'll be able to take your disk into the library and get output off a laser printer, which will be approaching typeset quality. That's the kind of stuff we're doing; you just can't do that on a current-generation personal computer.

And then the third thing is what Burrell and Larry and Andy and the other software people have done. When we shipped the Apple II, we fundamentally shipped about 2K bytes of ROM with system code. The IBM system's got 8K bytes, but it's really kind of loose as a goose; it's about 4K bytes by our standards of code. Mac has 64K bytes of the tightest, most elegant code that this company's ever written. Most of the computers now are basically shipping a file system and a few drives, but what's really interesting is that on top of that, we've layered on memory management and on top of this is Quickdraw.

Jobs: Mac's a completely open machine—we've got a book called *Inside Macintosh* that tells all the secrets of it. But we're going to try to get a little uniformity through the carrot rather than the stick. And the carrot is that there's a finite amount of RAM in this machine, and we've done all these things for you in ROM. Now, you can do them yourself, there's nothing that says you can't do them yourself, but if you do, you've got to write them, which is going to take time and means you're going to be slower to get to market; you've got to chew up precious RAM space, and the chances are pretty good that we did a better job than you'll do. So we're going to try through the carrot to get a little bit of uniformity in the user interface in some of the ways the things are done.

Hertzfeld: See, we're really a 192K-byte machine, and if the programmers want to throw away 64K, then they're doing a dumb thing.

Jobs: We're a 192K-byte machine that deep-freezes 64K.

Hertzfeld: Highly tuned, tested, debugged, highly compact, very fast, very high-quality consistent code.

BYTE: What are all the factors in this that make it go so fast?

Hertzfeld: Sweat.

Jobs: Burrell, Andy, Larry, Bill—how long did you work on Quickdraw?

Atkinson: Four years.

Hertzfeld: All of us care a lot about performance. Surprisingly, that's unusual. A lot of people don't care if their system's...



Encounter REVELATION

For \$950, Revelation Software by Cosmos will give your PC capabilities that no microcomputer has ever had before. Through a versatile, high performance Relational Data Base Management System developed by Cosmos, Revelation will give your microcomputer all the power and sophistication of a minicomputer.

Revelation features a data base with variable-length fields and records, (up to 64K), and unlimited files and accounts. File size is

limited only by disk size.

Also featured: A powerful, hybrid programming language.

A fourth generation applications and program generator
Our programs write programs!

Communications functions that give your PC the power to utilize applications, programs, and data from thousands of existing mainframe and minicomputers.

8087 math chip support

Revelation co-exists with MS/DOS™ or PC/DOS™ 1.0, 1.1,

2.0 versions, and is compatible with the IBM PC™ XT™ COMPAQ™, Corona™, Columbia Multi-Personal® and the Eagle 1600™. It's also compatible with mini-computers utilizing the PICK Operating System™. Minimum configuration requires 320K memory and 8087 math chip.

MS/DOS™ of Microsoft Corp. IBM PC Registered TM of International Business Machines Corp. COMPAQ™ of COMPAQ Computer Corp. PICK Operating System™ of

PICK SYSTEMS. Eagle 1600™ of Eagle Computers. Corona PC™ of Corona Data Systems. Columbia Multi-Personal™ of Columbia Data Products Inc.

COSMOS

P. O. Box AH, Morton, WA 98356

Telephone 1-800-422-2511
Inside Washington 206-496-5974.

Atkinson: Like Quickdraw. I won't even count the first runs in Pascal, but the first runs in assembly language were running 160K bytes, before I added a lot of the new features. It's now down to 24K bytes with lots more stuff in it. Character-drawing speed is one you look at for drawing an arbitrary size character, an arbitrary starting pixel clipped to an arbitrary area. We were running, when it was being developed on Lisa, about 1000 characters per second the first time. Well, I got that up to 4000. Mac is running about 7000. That's seven times 9600 baud. This is typical of all of our software packages here. You go through, get the best algorithms first, get the stuff right. Then crunch it down, make a first pass in Pascal, get the algorithms right, find the cleanest algorithms, find all the corners, and make sure they're tested. Then I translate it into loose assembly language to get down into assembly language and get it working. Then I'll go through and get all the bugs out again, and I'll go through and do fine register alloca-

tion to figure out what's the most important thing. This little baby, the 68000, has sixteen 32-bit registers sitting there, and the way you get performance out of that is to keep them full. Keep the registers full of important stuff all the time. That's the way you make this processor sing. So you go down and you do register alloca-

'Optimization without measuring is wasted time. Find out where the application's really spending time and go whump on that code.'

tion, and then you don't stop. Then you feed it back, you get your people to use it.

Quickdraw was designed by "pull" from applications rather than "push" from the design team. You provide a facility, watch the applications group try to use it, understand where they misunderstood something—maybe you've got a bad model, you want to make it simpler and cleaner—or

where they don't have enough performance. And then you go back and you measure, measure, measure, measure. Optimization without measuring is wasted time. Find out where the application's really spending time and go whump on that code. And any other cases they're very seldom using, squeeze them down in size, and stretch the other ones. There's always a trade-off between size and speed. Stretch out the common cases, let them be bigger and much faster, and then keep the generality by squeezing down the infrequent cases. So play your odds. People draw characters in OR mode a whole lot, and OR mode is about twice as fast as the other modes, so 95 percent of all characters are drawn in OR mode. Statistical measuring of the use of the thing allows you to get much more performance on your average throughput than you can if you don't go back and measure.

I think we all believe that system software should be done in assembly language at this stage of the game because high-level languages can't

FREE SHIPPING
Order line: 800-354-7330

SANYO SUPER SYSTEMS

SYSTEM #1 \$1195
SANYO MBC-550

- SANYO GREEN MONITOR
- GEMINI 10 X • SOFTWARE •

Sanyo MBC-550 Single Drive Computer • Sanyo CRT-36 Monitor • Star Micronics Gemini 10X • Cabling • WordStar • CalcStar • Easywriter • MS-DOS • Sanyo Basic •

SYSTEM #2 \$1525
SANYO MBC-555

- SANYO GREEN MONITOR
- GEMINI 10X • SOFTWARE •

Sanyo MBC-555 Dual Drive Computer • Sanyo CRT-36 Monitor • Star Micronics Gemini 10X • Cabling • WordStar • CalcStar • SpellStar • InfoStar • Mail Merge • Easywriter • MS-DOS • Sanyo Basic •

PRINTERS

C. ITOH	
Prowriter 8510	\$345
F-10 Serial or Parallel	\$940
B510SP (Prowriter SP)	\$565
COMREX	
CR-2	SAVE
DIABLO	
620 RO	\$860
630 RO	\$1715
S-11	\$560
P-11	\$560
EPSON	
RX-80	SAVE
RX-80 F/T	SAVE
FX-80	SAVE
FX-100	SAVE
JUKI	
6100	\$480
NEC	
2010	\$780
2050	\$905
8023A	\$385
3510	\$1370
3550	\$1715

PRINTERS

SILVER REED	
EXP 500	\$390
EXP 550P	\$580
EXP 550S	\$610
STAR MICRONICS	
Gemini 10X & 15X	SAVE
Delta 10	SAVE
OKIDATA	
B2A	SAVE
B3A	SAVE
B4P	SAVE
B4S	SAVE
92	SAVE
93	SAVE
QUME	
11/40 w/Interface	\$1370
11/55 w/Interface	\$1570
TALLY	
MT 160L w/tractors	SAVE
MT 180L w/tractors	SAVE
Spirit 80	SAVE
TOSHIBA	
1350 Serial or Parallel	\$1450
TRANSTAR	
130P	\$675
120P	\$450
T315	\$450

TERMINALS

TELEVIDEO	
910	\$555
914	\$540
924	\$670
925	\$705
950	\$905
970	\$980
COMPUTERS	
HYPERION	
Single Drive System	\$2325
Dual Drive System	\$2665
PIED PIPER	
Communication I	\$850
TELEVIDEO	
803	\$1799
SANYO	
MBC-550 System	\$1195
MBC-555 System	\$1525
MODEMS	
HAYES	
1200	\$490
1200B	\$435
300	\$205

DISK DRIVES


RANA	
Elite 1	\$243
Elite 2	\$383
Elite 3	\$487
1000	\$270
MONITORS	
BMC	
12" Green	\$89
13" Color	\$210
TAXAN	
12" Amber	\$125
ZENITH	
12" Green	\$95
12" Amber	\$120

Prices reflect 3% to 5% cash discount. Product shipped in factory cartons with manufacturer's warranty. Free shipping is on UPS ground only. Prices & availability subject to change without notice. Send cashier's check or money order...all other checks will delay shipping two weeks.



SILICON SPECIALTIES
2034 WEST SOUTHERN
MESA, ARIZONA 85202
602-969-0909

SemiDisk™ and SemiSpool:™ SURE-FIRE WAIT-REDUCTION!

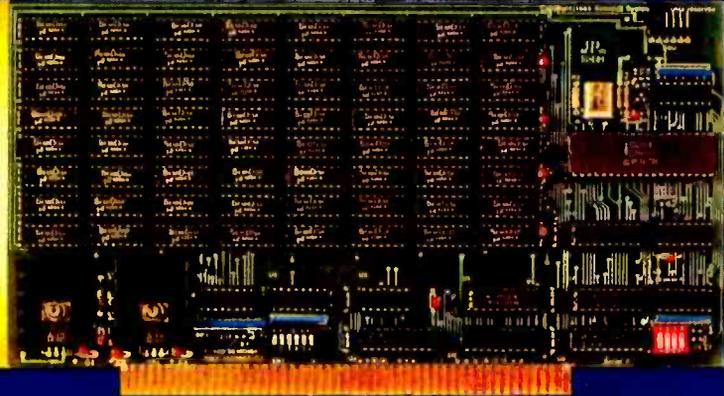

512Kbyte SemiDisk™ I \$1095

Time was, you thought you couldn't afford a SemiDisk. Now, you can't afford to be without one.

	256K	512K	1Mbyte
SemiDisk I, S-100	\$895	\$1095	\$1795
IBM PC		\$1095	\$1795
TRS-80 Model II		\$1095	\$1795
SemiDisk II, S-100		\$1395	\$2095
Battery Backup Unit	\$150		

Time was, you had to wait for your disk drives. The SemiDisk changed all that, giving you large, extremely fast disk emulators specifically designed for your computer. Much faster than floppies or hard disks, SemiDisk squeezes the last drop of performance out of your computer.

Time was, disk emulators were afraid of the dark. When your computer was turned off, or a power outage occurred, all your valuable data was lost. But the SemiDisk changed all that. Now, the optional Battery Backup Unit helps take the worry out of power interruptions. It keeps the SemiDisk powered for up to 5 hours during a power failure.

Time was, you had to wait until your printer finished printing to use your computer. That's changed, too. Now, the SemiSpool print buffer in our Version 5.0 software, running under CP/M 2.2, frees your computer for other tasks while your data is printing. With a capacity up to the size of the SemiDisk itself, you could implement an 8 Mbyte spooler!

But one thing hasn't changed. That's our continuing commitment to supply the fastest, highest density, easiest to use, most compatible, and most cost-effective disk emulators in the world.

SemiDisk.
It's the disk the others are trying to copy.

SemiDisk Systems, Inc.

P.O. Box GG Beaverton, OR 97075 (503) 642-3100

Call 503-646-5510 for CBBS®/NW, a SemiDisk-equipped computer bulletin board. 300/1200 BAUD

SemiDisk trademark of SemiDisk Systems, Inc. Copyright © 1983 SemiDisk Systems, Inc. CP/M Trademark Digital Research.

Circle 331 on Inquiry card.



NO WAITING

give you the performance and the code density that you can get out of assembly language.

BYTE: So far, it has seemed that with all the systems that have mice, all those that are on the market, you pay a great price in terms of performance to get ease of use.

Atkinson: You make a responsive system; it isn't just draw some characters out there. It's also, remember where you put them because if the guy touches on them you want to light them up. There's a lot more guts in that application.

Jobs: It's not just systems that have mice. What's happening is there are a whole bunch of things that go with the mouse. It's not just hanging a mouse on a first-generation personal computer and using the same old, fixed-pitch text and things like that, just replacing four cursor keys. What we've done here is take a quantum leap, where, in addition to having the mouse be the major pointing device, we've gone to full proportionally spaced fonts, totally software-painted on the screen, any size, any shape. . .

totally new architecture for displaying things to the user.

Atkinson: But the responsiveness is where the code goes.

Jobs: The responsiveness and the fact that there isn't a mouse-based system out yet that uses a 68000. We're obviously using the power of the 68000 in addition to this code.

Smith: There are some tricks we played in the hardware, too. For example, we knew that the ROMs would have real important things in them. So we made the ROMs sort of read-only cache memory, whereas the RAM has to contend with video and sound for access, so we cut that down to the bare bones, but the code that's in ROM, like Bill's graphics and the other stuff, can run as fast as you can run a 68000.

Jobs: If you look at the really great applications, even on first-generation personal computers, most of them are written in assembly language—Visicalc, 1-2-3—it's like if you're going to sell a million of something, it pays to handcraft it in assembly. If you're going to sell 10 of something, it prob-

ably doesn't. If we'd written this in Pascal, we would have been able to fit a fourth as much code in the ROM or would have to have four times the ROM, and you wouldn't have had the performance. Because we're going to sell 10 million of these things in the long run, it pays to superhandcraft it; we only have to do it once. Every time these ROMs are burned, it doesn't cost us any more engineering. . . it's all been done up front.

Capps: Because we cared enough to do it as well as we possibly could.

Jobs: We took a 12K-byte Pascal program running on a Lisa and we said we want to do this in 2K and make it faster. But we had that extra year to do that. And we also had the motivation, of course.

Atkinson: When you're writing assembly, you know each instruction is going to take 2 microseconds, it's going to take 4 bytes of memory. In Pascal, you're removed from that, so you don't concentrate on performance as much. When I'm doing I/O stuff in assembly language I look at

Quality you expect, at a price you don't.

BECK DOUBLE DENSITY DISKETTES

SINGLE SIDED **\$2.19** / **\$2.79** DOUBLE SIDED
ea. / ea.

Our message to you is simple. If you like the quality of Dysan, Verbatim, 3M, et al, you'll like the quality of Beck soft sector

Why does Beck cost less?

Our philosophy is: Excellent quality and reliability, at a cost that beats the jackets off other diskettes. We can do it because we (1) put our money into the product, not mega-marketing schemes and fancy packaging, and (2) sell our money-saving 25-diskette pack to you direct via a toll free order line, so you get fast, door-to-door service efficiently.

When you buy Beck, you've got the best. Beck Quality. Beck Reliability. And, of course, Beck Price.

1D, soft sector 5 1/4" diskette \$2.19 each
2D, soft sector 5 1/4" diskette \$2.79 each

For IBM, Apple, TRS and 97% of popular microcomputers.



5 1/4" flexible diskettes. The only major difference is cost. We're less expensive. In fact, a lot less expensive.

What about quality and reliability?

At Beck, our success as a diskette manufacturer depends upon our ability to provide you with a fully reliable, quality diskette - every time. For that reason we take no shortcuts. You get the best because we are committed to excellence. Every diskette is manufactured to very strict quality standards. We test and retest 21 times throughout the manufacturing process to insure compliance with no less than 42 rigid specifications. We make sure you get the very best - a 100% certified, 100% error free diskette.

Our satisfaction money-back guarantee and full 7 year warranty are proof of our commitment to excellence and confidence in our product.

Order Now Toll Free

VISA MasterCard
COD'S CASH ONLY
Corporate Accounts Welcome

1-800-BECK-MFG

Door to Door in 48 hrs.
(in New Hampshire call 924-3821)

Order Toll Free 1-800-232-5634. Available in 25 pack only, plus freight. Complete with hub reinforcing rings, Tyvek envelopes, color coded user labels, and nonmetallic write protect tabs. All Beck Diskettes meet or exceed ANSI specifications.



SALVO Shatters The Information Barrier!

At last. Create your own applications in a fraction of the time compared to BASIC, COBOL or any data base language. You know exactly what you want. Now, let your personal computer generate that information by using SALVO, the fourth generation information manager from Software Automation, Inc. It's Better. Faster. And Easier to use.

Natural Language Interpreter. Unique to SALVO, this allows you to enter the following type command, "List my customers and their orders." Watch as SALVO generates the application. *It truly shatters the information barrier.* In minutes you get what you want, the way you want it. Inventory, Accounting, Mailing Lists, Sales Reports and more.

Fourth Generation Language. SALVO is a powerful nonprogrammer's language combined with a true relational DBMS. This method increases your productivity 10 to 20 times normal! People in all

professions can benefit from SALVO. Regardless of their level of expertise.

Applications Development Package. SALVO is a complete tool for information management. Develop your own applications. Maintain your data base. Retrieve information using natural language. All of these functions can be performed by nonprogrammers. SALVO is also a complete application generator for advanced users and professional programmers. SALVO's secret is simple. Technological innovations including artificial intelligence (expert systems, natural language processors) combined with relational data structures.

SALVO runs on most personal computers. Compatible with MS-DOS, PC-DOS and CPM. SALVO requires only 64K memory. SALVO is available at your local computer store or you may contact us for information on how to get your own personal preview copy.



Software Automation Inc

14333 Proton Road, Dallas, Texas 75234
(214) 392-2802

See SALVO At Softcon Booth L4023
New Orleans Feb. 21-23.

Less for Your Money

If you do word processing on your personal computer, you probably know that there are many programs for sale to help you with your spelling. But the biggest spelling error you'll ever make is paying too much for your spelling correction software. The Random House ProofReader gives you less for your money — less trouble, that is, and fewer spelling errors. The Random House ProofReader is based on the world famous Random House Dictionary. It contains up to 80,000 words, depending on your disk capacity. You can add new words with the touch of a key. It shows you the error and the sentence it's in. It instantly suggests corrections. It even rechecks your corrections. And it costs half as much as other programs with far less power. The Random House ProofReader is compatible with all CP/M 2.2®, MS-DOS® and IBM Personal Computer® systems.

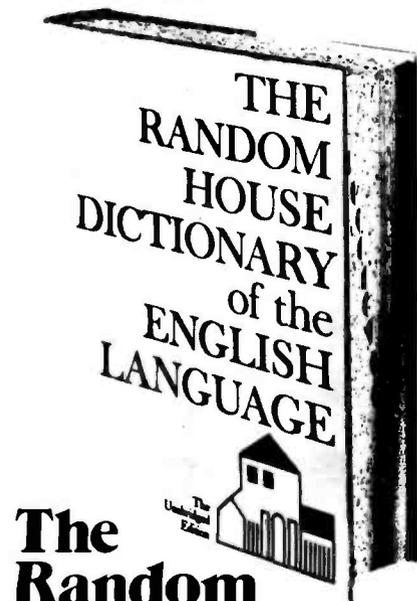

The Random House ProofReader \$50

For orders or information, see your local dealer or call 505-281-3371. Master card and VISA accepted. Or write Random House ProofReader, Box 339-B, Tijeras, NM 87059. Please enclose \$50 and specify your computer model, disk size and memory.

Random House and the House design are registered trademarks of Random House, Inc. CP/M is a registered trademark of Digital Research, Inc. IBM and IBM Personal Computer are registered trademarks of International Business Machines, Inc. MS-DOS is a registered trademark of Microsoft, Inc.

the theoretical maximum speed you can run at. Why not do it as fast as you can possibly do it? Especially when you're doing disk I/O stuff. How fast can you get into an interrupt and out?

BYTE: Andy, let's talk about the early days, after it had become Macintosh.

Hertzfeld: I don't know, there's something that makes a job a little more fun to work on when the odds are against you. And that's sort of how it was in the early days. I was maybe the fifth or sixth person to come work on it. Steve took me over to this little building separate from everywhere else, where there were these incredibly great people working on this little wire-wrap PC board. All it could do when you turned it on was write "hello" on the screen about 80 times. And everyone was incredibly excited to see it write "hello" on the screen because it meant that the central processing unit was there and all that potential was there to be mined. I spent my time mining that potential.

The very first time we got an early version of Quickdraw running, and we got the mouse going—that's just an incredible thrill. Or getting back the first PC board—we all went out for pizza on Friday night. We got the boards in about four o'clock Friday afternoon, and Steve said, "Well, if you get these done before midnight, we'll take you for pizza," and we stayed there...not because we wanted the pizza, but because we wanted to see that board working. And I think that none of our Mac PC boards have ever had to have a wire run to fix something, which is pretty amazing. That's the attention to detail that you just can't get people to do for money. We do it for love...this is the most important thing in our lives...to make that great computer.

It's fun for me because I like operating on a systems program where I can operate in an environment where there's not that much support. In the early days when I first started here, the first thing I did was come in and write all kinds of crazy demos, stretching things around on the screen and making balls bounce, and

one reason to do it was that I didn't want to write the system code until I was good at writing 68000 programs. So I just wanted to learn by having fun, and the other reason is that it gets people excited about it. Just this raw hardware sitting there doesn't do too much, but once you start making this fun thing happen and that fun thing happen, the excitement starts getting generated. You get to attract other good people, and one by one we picked up on more and more people. We were very, very selective; it was very hard to find people to work on Mac software, because on one hand we had the very high goals of doing this research, Xerox PARC-like stuff with uncommon, high technical standards. On the other hand, we had a very inexpensive, limited-memory machine. So all the Xerox PARC-type guys who came and interviewed said, "Oh, you don't have 2 megabytes? Forget it, I don't want to work on this thing." They're all used to their Dorados. But gradually we found great people like Larry and Bruce who were turned on by the dream, and they came and joined our band, and I guess we reached critical mass.

Atkinson: Most of the early people were recruited from Apple...and we have a pirate's flag that we sometimes put on the roof. The idea is we're pirates and we go around and try to steal the best we can from anywhere we can get it, and mostly that's been from Lisa. A lot of it's been from Lisa, but it's true in initially putting together the team, too; we try to get the best people we can from anywhere in the company.

Hertzfeld: One of the slogans Steve came up with when we had a retreat in January was "Let's be pirates," the idea being that we were mavericks out to blow people's minds and overturn standards, create new standards, not do things like everyone else.

Atkinson: There was always the thrill that this was going to be the one project that was probably the most amazing thing you were going to be doing in your life.

Hertzfeld: And the other slogan was "The journey is the reward." ■

DIMENSION. THE MOST POWERFUL, MOST COMPATIBLE PERSONAL COMPUTER YOU CAN BUY.

Introducing the capability the world has been waiting for. A single personal computer able to handle Apple[®], IBM[®], TRS-80[®], UNIX[™] and CP/M[®] based software.

The Dimension 68000 Professional Personal Computer does it all. It actually contains the microprocessors found in all of today's popular personal computers. And a dramatic innovation creates the environment that these systems function merely by plugging in the software.

Add to this the incredible power of a 32 bit MC68000 microprocessor with up to 16 megabytes of random access memory.


Dimension. At about the same price as the IBM[®] PC, it's obviously the best value you can find. For more information ask your dealer or call us at (214) 630-2562 for the name of your nearest dealer.

dimension




68000

A product of
Micro Craft Corporation
4747 Irving Blvd., Suite 241
Dallas, Texas 75247. ©1983

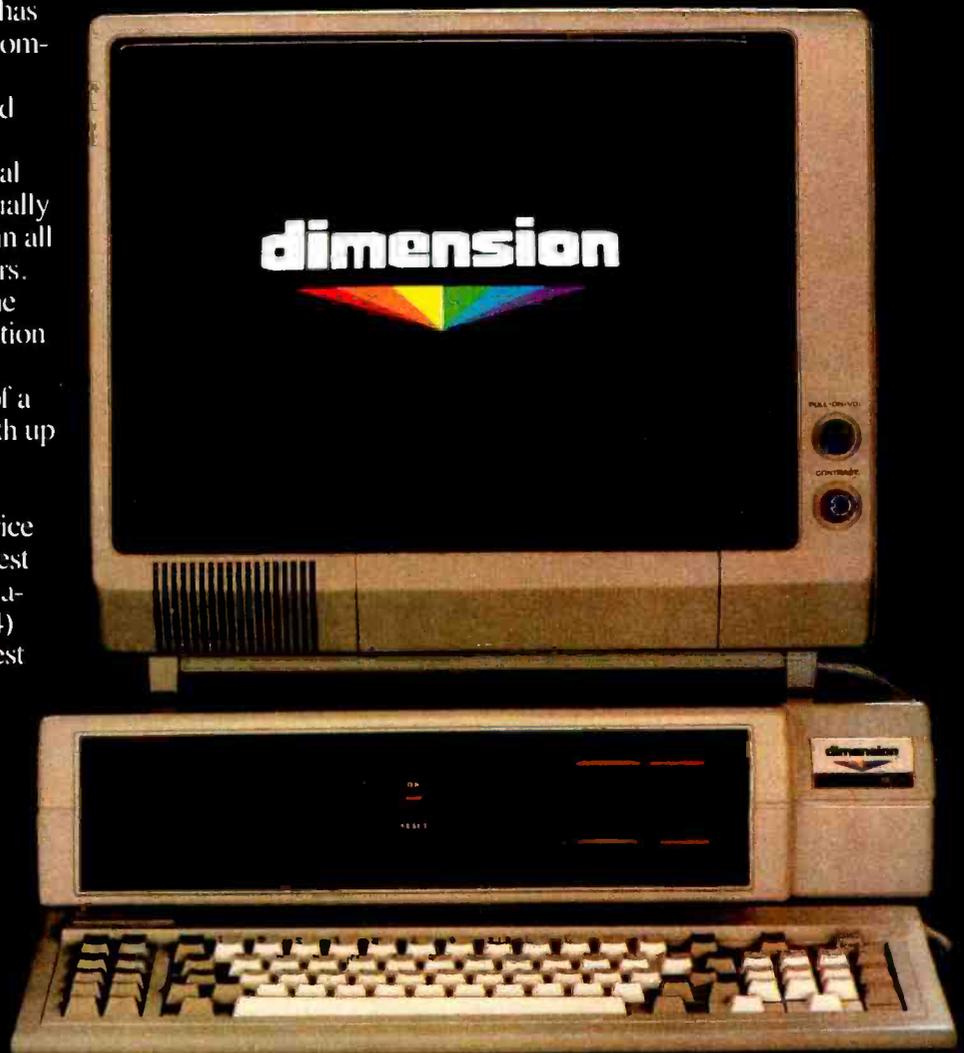

Apple is a registered trademark of Apple Computer, Inc.; IBM is a registered trademark of International Business Machines Corporation; TRS-80 is a registered trademark of Radio Shack, a Tandy Corporation company; UNIX is a trademark of Bell Laboratories, Inc.; CP/M is a registered trademark of Digital Research Corporation.

GLOBAL THERMONUCLEAR WAR!™

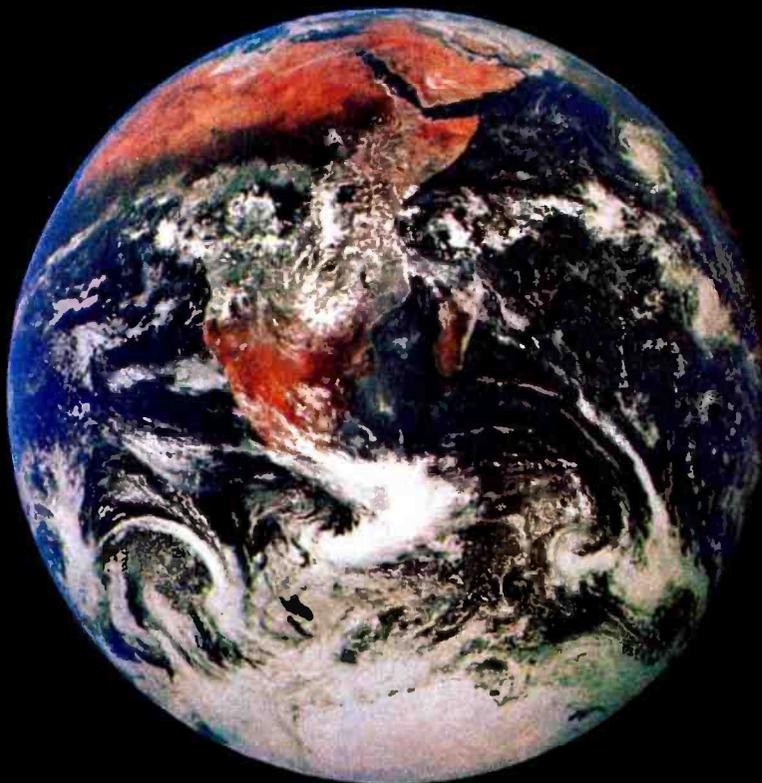

A fast-action, high-strategy game with full color graphics, exciting animation, and realistic sound effects. Features include HAL™ speech synthesis (without special hardware), option to play as enemy or defender, and top ten score display.

Action begins with you at the controls of the Defense Command Computer. A random error causes the computer to secure your nation's defense for full scale nuclear attack. You have 30 seconds before the first ICBM is launched at your enemy's capital. Decipher the secret code for aborting missile launch or prepare to fight World War III.

At launch, you discover the computer has deleted all targeting data for your weapons. Presented with NORAD style strategic displays, you watch the

trajectory of the missile track across the globe as you frantically retarget your weapon systems and prepare for your enemy's attack. Do you strike before or after the enemy launches its first wave? Do you target for military, industrial, or civilian targets? Perhaps some combination? You watch enemy strikes against your homeland and the casualties grow to staggering proportions as you attempt to deter or conquer the enemy before you are completely destroyed. The war has begun and your nation's destiny, even the destiny of the world, is in your hands.

Ask for Global Thermonuclear War™: \$34.95 at your local dealer or order direct. Visa, MasterCard, Money Orders, Checks accepted (Calif. residents please add 6 1/2% sales tax), foreign orders add 15%, U.S. currency only. Dealer inquiries invited.

Global Thermonuclear War™ is available for your IBM PC or XT (64K, disk drive), Apple II+ or IIe (48K, disk drive, DOS 3.3), Commodore 64 (cassette or disk drive), Atari 400 and 800 (48K, disk drive). Joystick play optional in each version. TRS-80 version to be released soon.

STARFIRE GAMES
Division Omnisoft Corporation

Dept. B1, 9960 Owensmouth Avenue, Suite 32
Chatsworth, CA 91311 (213) 709-4900

Global Thermonuclear War is a trademark of Omnisoft Corporation. IBM PC and XT, Apple II+ and IIe, Commodore 64, Atari, and TRS-80 are registered trademarks of IBM Corp., Apple Computers Inc., Commodore Business Systems Inc., Atari Inc., and Tandy Corp., respectively.

Circle 274 on inquiry card.

WASHINGTON (UPI) — The U.S. Air Force/NASA have developed an experimental spacecraft given the title XTM. Due to the vague description as to the design or purpose of the XTM, the press is still in the dark about many aspects of the craft or its intended mission. It has been discovered, however, that at least three pilots have been lost in the current flight testing program of the mysterious

TIME MACHINE I

Starfire Games offers you the ultimate challenge in adventure games: Time Machine I. First in a series of time travel episodes, Time Machine I catapults you into mind bending mystery where the extraordinary is commonplace and dangers are as real as any human experience.

You are the fourth test pilot to fly the joint Air Force/NASA XTM series experimental "craft", a vehicle which transverse through time, the true last frontier. Provided with the newly modified but still untested version of the craft, XTM-3, your mission is to rescue the three previous test pilots who are lost somewhere in the infinity of time itself.

Not far into the mission, you discover this task is more than you could have imagined. Never knowing what you will encounter next, you maneuver your ship from one


adventure to another. You draw upon every resource to survive events ranging from battles with Vikings in the past to outwitting aliens in the future for your ship, the lost pilots, even your very life. But prepare, your final challenge is to return to your own time era safely, a feat which has not been accomplished by any pilot before you. Time Machine I is available for your IBM PC or XT (64K, disk drive), Apple II+ or IIe (48K, disk drive, DOS 3.3), Commodore 64 (cassette or disk drive), Atari 400 and 800 (48K, disk drive). TRS-80 version to be released soon.

Ask for Time Machine: \$34.95 at your local dealer or order direct. Visa, Mastercard, Money Orders, Checks accepted (Calif. residents please add 6½% sales tax). Dealer inquires invited.

Circle 275 on Inquiry card

STARFIRE GAMES, Division Omnisoft Corporation
Dept. ST3, 9960 Owensmouth Avenue, Suite 32
Chatsworth, CA 91311
(213) 709-4900

IBM PC and XT, Apple II+ and IIe, Commodore 64, Atari, and TRS-80 are registered trademarks of IBM Corp., Apple Computers Inc., Commodore Business Systems Inc., Atari Inc., and Tandy Corp. respectively.

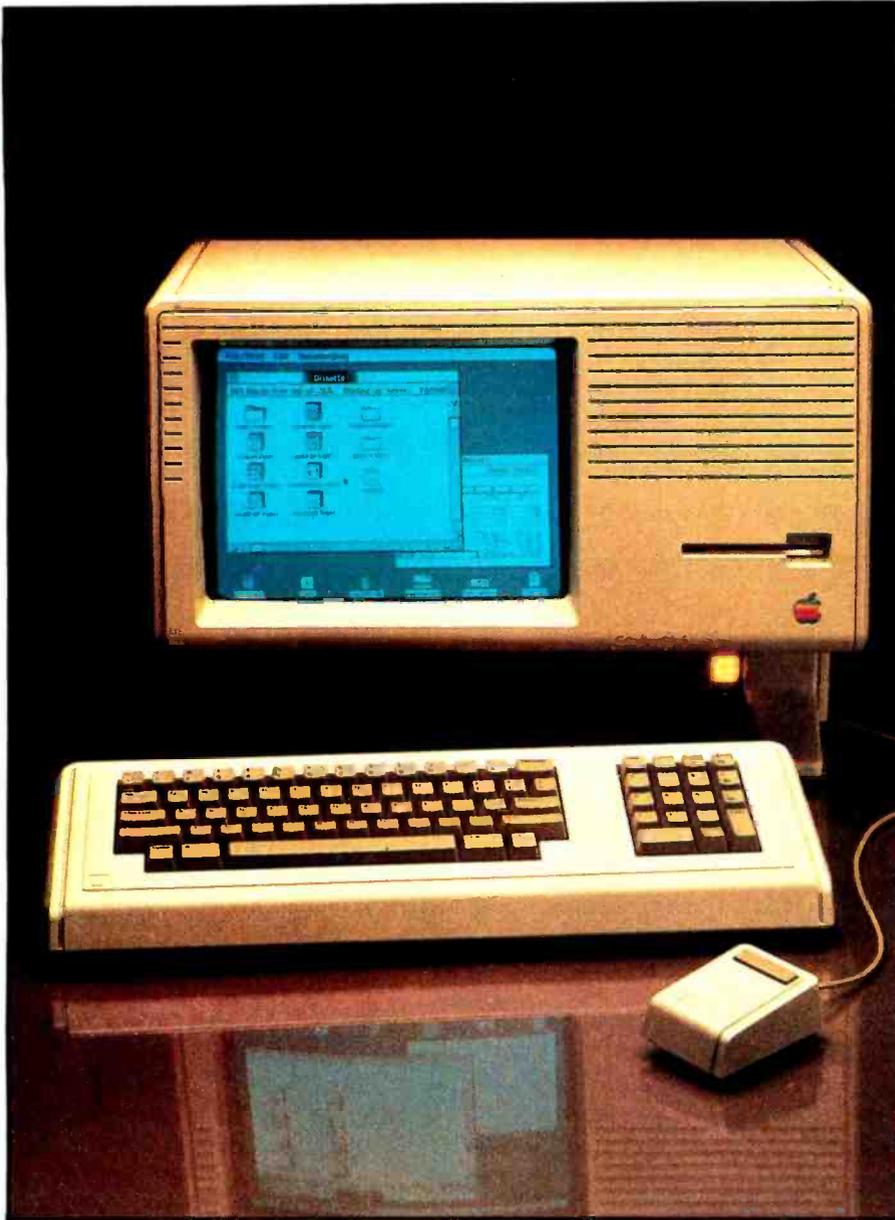

The Lisa 2.

Apple Announces the Lisa 2

by Gregg Williams

When several of us at BYTE saw the Macintosh, we were seriously concerned about the fate of the Lisa in the face of the Macintosh, a machine that is one-third its price and clearly superior in some areas. Apple has answered these concerns by announcing two versions of the Lisa 2, along with the Macintosh, at its annual stockholders' meeting on January 24.

New Features

The Lisa 2 will use the same modified Sony 3½-inch floppy-disk drives as the Macintosh. It will be sold with a new, faster operating system, one 3½-inch floppy disk, and 512K bytes of memory (the single drive takes the place of the two 5¼-inch drives in the Lisa 1). The Lisa 2 includes a mouse, detached keyboard, built-in 12-inch

video display, and can be expanded to 1 megabyte (the memory capacity of the Lisa 1); it will cost "under \$4000," according to Apple (the exact price had not been decided when this was written). The Lisa 2/10 will add an internal 10-megabyte Winchester hard disk and will sell for "under \$5500." All the Lisa application programs will be available separately for \$200 to \$400 each. Apple planned to have the Lisa 2 available by January 24.

Software

Aside from the availability of a larger hard disk, the most welcome feature of the Lisa 2 family is that it will be able to run all Macintosh software as supplied on 3½-inch disks. When the Lisa 2 boots a Macintosh program, the system will look and behave like a Macintosh, except that it will automatically take advantage of all the extra memory in the Lisa 2. Since literally hundreds of companies are developing Macintosh software, the Lisa 2's ability to run it greatly increases its software base and, therefore, its usefulness.

Both the Lisa 2 and the 2/10 come without an operating system. Lisa 2 owners will need to buy the Macintosh operating system (unpriced at the time this was written); Lisa 2/10 owners can buy that operating system or the multitasking Lisa operating system (for about \$300). With the Lisa operating system only, you will be able to have multiple windows, each of which can contain a separate application.

Apple is planning two new releases of Lisa software as well. The first release, available in late January, has optimized various parts of the operating system to make Lisa programs run faster and use the 10-megabyte hard disk. This software release will be free for anyone who bought the Lisa before September 12, 1983 (when the price was reduced and the software was unbundled), and available at a nominal fee for buyers of unbundled Lisa software.

The second release of Lisa software will come sometime during the second quarter of 1984. This software will increase the integration among

Lisa products (for the first time, you will be able to move graphics from Lisa Draw to a text document in Lisa Write, data from Lisa Calc to Lisa List, and data from Lisa Terminal to Lisa Calc, for example). It will also include enhancements in many of the Lisa application programs. For example, Lisa Write will include a spelling checker and the ability to process form letters, Lisa Graph will allow data to be graphed in new ways, all programs will support a \$5000 laser printer and a 70-megabyte hard disk to be introduced by Apple, and Lisa Draw and Lisa Graph will support color printing. The second release of Lisa software will be available to owners of previous versions for a nominal fee.

Upgrading

Lisa 1 owners have two upgrading paths. Apple will let them upgrade to a Lisa 2 for free or to a Lisa 2/10 for \$2500 (both upgrades involve replacing parts in the Lisa 1, not swapping the Lisa 1 for a new Lisa 2). In both cases, Lisa 1 owners will keep their 5-megabyte Profiles, thus allowing them to transfer all their information to the new system (by copying all such data from 5¼-inch floppy disks to the Profile before converting to the Lisa 2).

Conclusions

With the announcement of the Lisa 2 and 2/10, Apple has made the Lisa computer both more competitive and part of an innovative, powerful, but still affordable family of computers. The reduced price and Macintosh software compatibility of the Lisa 2 make it far more attractive to potential buyers than the Lisa 1 was. The features added to the Lisa application programs make them even more useful than they currently are. Finally, Apple's upgrading policy is commendable because it does not leave behind the Lisa 1 owners who supported the machine in its early days. ■

Gregg Williams is a senior editor at BYTE. He can be reached at POB 372, Hancock, NH 03449.



PREVENT THE DISASTER OF HEAD CRASH AND DROPOUT.

The war against dust and dirt never ends. So before you boot-up your equipment, and everytime you replace a cassette, disk or drive filter, be sure to use Dust-Off II; it counteracts dust, grit and lint. Otherwise you're flirting with costly dropouts, head crashes and downtime.

Dust-Off II is most effective when used with Stat-Off II. Stat-Off II neutralizes dust-holding static electricity while Dust-Off II blasts loose dust away. There's also the Dual Extender and Mini-Vac for vacuuming dust out of hard-to-reach places.

Photographic professionals have used Dust-Off brand products consistently on their delicate lenses and expensive cameras for over ten years. They know it's the safe, dry, efficient way to contaminant-free cleaning.

Cleaning not provided by liquid cleaners.

Dust-Off II's remarkable pinpoint accuracy zeros in on the precise area being dusted. And you have total control—everything from a gentle breeze for



Stat-Off II neutralizes dust-holding static electricity from media and machines.

delicate computer mechanisms to a heavy blast for grimy dirt.

Don't let contamination disrupt your computer operation. Stock up on Dust-Off II—the advanced dry cleaning system, at your local computer or office supply dealer.

Or send \$1.00 (for postage and handling) for a 3 oz. trial size and literature today.



Dust-Off II

The safe dry cleaning system

Falcon Safety Products, Inc., 1065 Bristol Road, Mountainside, NJ 07092

Epson. For those who need it, simplicity.

One computer.

Two points of view.

The Epson QX-10 personal computer. To many, the Epson represents the ultimate in simplicity.

Just press a single key for the function you require: word processing, scheduling, business graphics, address book or file management. One key-stroke produces your program. There are no rigamaroles to remember. No disks to change.

The result: you start to work immediately. And you start being productive, immediately. With step-by-step prompts. In plain English, not computerese.

Simplicity itself.

Or is it?

The plain fact is that the ease of operation the Epson offers today is accomplished with a degree of technological sophistication most other computers can only promise for tomorrow — specifically, fully integrated software, operating in an interactive environment.

The few other computers offering such "simplicity" cost \$5,000 to \$15,000 more. And most other computers can't offer it at any price. Which makes one wonder exactly what they do offer, in terms of either simplicity, or performance.

HOW MUCH CAN YOU DO ON THE EPSON? HOW MUCH ARE YOU READY TO DO?

The Epson's ease of operation may spoil you, but it certainly won't limit you.

Case in point: every Epson comes complete with an integrated software system — *Valdocs*® — to effortlessly provide the basic functions for which most people buy computers. But it is important to note that the Epson also comes with *CP/M*®-80 2.2. So you can choose from hundreds of programs: *dBase II*®, *Wordstar*®, *Personal Pearl*®, *Supercalc*®, *Microplan*®, *MBA General Ledger*®, *Multiplan*®, *Peachtext*®, *Spellwriter*®, and *Dataview*®, just to name a few.

Or, you can write your own, utilizing a variety of programming languages such as *COBOL 80*, *FORTRAN 80*; or *Microsoft*® *BASIC*, which is included, free.

Best of all, you will run the software of your choice on the computer of choice. The high-performance Epson. With 256k random access memory. 128k dedicated video memory. The breathtakingly sensible *HASCI*® keyboard. Dual 380k double density disk drives.



Graphics capabilities unequalled in its price range. A high resolution monitor, 640 by 400 pixels, for clarity few computers in any price range can offer. Plus, an RS-232C interface, a parallel printer interface, and internal space for up to five peripheral cards so you can expand your Epson as your needs require.

One further point: all these features, and quite a few more, are included in the Epson's \$2,995 price. Some com-

Epson. For those who can handle it, performance.

puter companies ask you to pay extra for features like these. Most can not offer them at any price.

That, too, is performance. The kind of performance that can make choosing a personal computer very simple, indeed.

**EPSON QUALITY. OR, WHY
WONDER WHAT TERRIBLE
KLUDGES LURK IN WHICH
SLEEK BOXES.**

If you know computers, you know Epson. Epson printers set the industry standard for quality, reliability and value. Rest assured, the same can be said for the Epson personal computer.

The satisfying silence of the slim, Epson-designed disk drives is one way for you to judge or, for an inside-out perspective, here is an excerpt from a review by Jim Hanson in the April, 1983 issue of *Microcomputing**

"The Epson QX-10 is soundly designed and executed. I looked hard and found no evidence of kludging or shorting out anything in the name of economy. All the connectors have gold on them and are of quality manufacture. The printed circuit boards are heavy, with soldermarks on both sides of double-sided boards. The circuit boards are completely silk-screened with component labels, and the layout is as professional and clean as you will find anywhere."

Isn't this what you expect? After all, it's an Epson.

**A WORD TO THE WISE:
GET YOUR HANDS ON
THE EPSON.**

Is the Epson a simple, easy-to-use computer for beginners? Or a sophisticated high-performance computer for the experienced? The answer is "yes." And when you think about it, aren't those two computers the one you need now.

For technical specifications, and the complete, 3-part *Microcomputing* review, along with the name of your nearby Epson dealer, call toll-free (800) 421-5426. California residents, call (213) 539-9140.

*Excerpt reprinted by permission of *Microcomputing* Magazine. All rights reserved.

CP/M is a trademark of Digital Research, Inc.

Valdocs and HASCI are trademarks of Rising Star Industries.

dBase II is a trademark of Ashton-Tate.

Wordstar is a trademark of Micropro.

Personal Pearl is a trademark of Pearlsort.

Spellwriter and Supercalc are trademarks of Sorcim.

Microplan is a trademark of Chang Labs.

MBA General Ledger is a trademark of Micro Business Applications.


Applications

COBOL 80, FORTRAN 80, Microsoft, and Multiplan are trademarks of Microsoft.

Peachtext is a trademark of Peachtree Software.

EPSON

STATE-OF-THE-ART...SIMPLICITY.

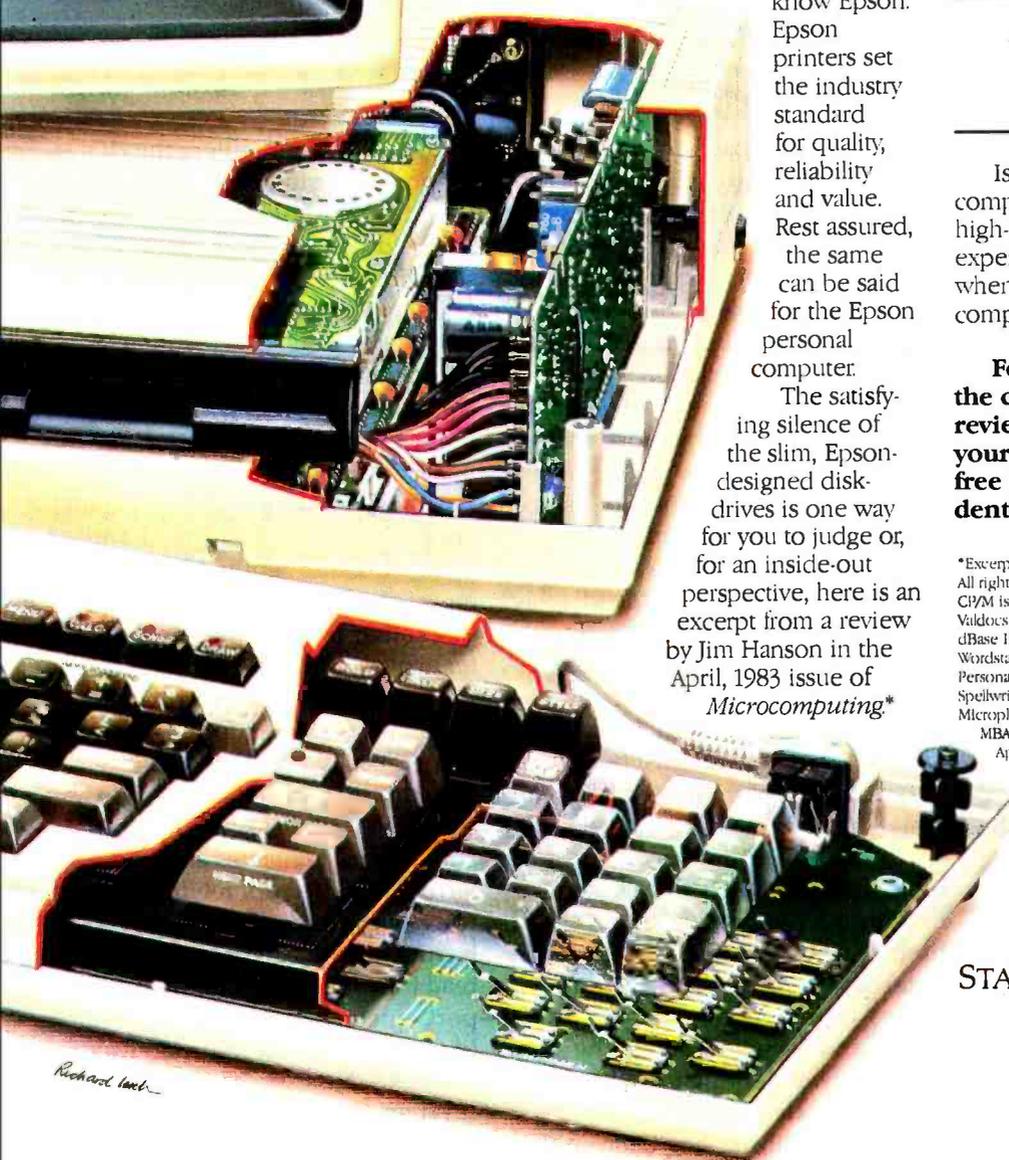

Richard Lamb

Build the Circuit Cellar Term-Mite ST Smart Terminal

Part 2: Programming and Use

The supplied standard control software supports several character attributes and various configuration options

by Steve Ciarcia

Last month, in Part 1, I introduced you to the Term-Mite ST intelligent video-display terminal, shown in photo 1. It is designed around the new National Semiconductor NS455 Terminal-Management Processor (TMP). This self-contained terminal-controller chip permits the essential features (see table 1) to be provided by only 21 integrated circuits.

This month I'd like to pick up the story beginning with a discussion of the firmware, that is, the program logic inscribed in ROM (read-only memory) inside the NS455A that runs on the internal microprocessor to control all the terminal's functions. We'll look at the functions of the firmware, the configuration-switch settings, the Escape sequences and control functions, and, finally, demonstrate putting a few characters on the screen.

Factory-Supplied Control Program

The control program has four main sections: the initialization code,

the main keyboard-scanning and wait loop, the display-processing routine, and the interrupt-processing routines. (Since keyboard scanning may be a new technique to some of you, the logic flow of this code section will be described in detail.) The program is constructed in a modular fashion; a general flowchart is shown in figure 1, while a memory map is shown in figure 2.

The initialization routine is executed when the terminal is first turned on or when it is reset. The routine first checks all the display memory and the serial I/O (input/output) circuits; then it reads the configuration switches and loads the NS455A's registers with their initial values. Many values must be loaded into registers before the terminal can work: among them are the timing-chain constants that specify character-cell parameters; values for cursor definition, horizontal, and vertical timing; values for the character attributes and other display controls; values to determine character positions; and values that set the data rate, parity, full- or half-duplex transmission mode, etc.

After everything has been initial-

ized, the program enters the character-processing loop, which is often referred to as the *main wait loop*. If a scanned keyboard is being used, scanning occurs every 10 milliseconds (ms) during this loop. When the hardware detects a character, a branching instruction passes control to the display-processing routine. (A more definitive explanation of keyboard scanning follows.)

Characters typed on a parallel-encoded keyboard are handled somewhat differently, as are characters received from the host computer or another terminal. When a character arrives from one of these sources, the hardware of the Term-Mite ST generates an interrupt, and control automatically passes into one of the interrupt-handling routines. In the case of the parallel keyboard, its data-strobe signal generates an external interrupt (an interrupt relying on hardware outside the processor); the interrupt handler causes the TMP to read the typed character from the I/O port, queue it for display, transmit it (if necessary), and return to wait for the next character.

When the hardware receives data on the serial input line, it generates

an internal interrupt. Control branches to several routines that determine what type of interrupt occurred and take appropriate action. The first test checks for received characters in the buffer of the UART (universal asynchronous receiver/transmitter). If a character is found in the buffer, it is queued for display (i.e., placed in the holding area for data to be shown on the screen). If no character is found, the register contents are tested for a match with the special value that indicates an empty-transmit-buffer condition, in which case the program tries to fill the transmit buffer. The final test is for the internal timer; timer interrupts happen every 10 ms and are used to trigger the keyboard scanning. If the Term-Mite ST is not set up to use a scanned keyboard, the internal-timer interrupt produces no activity.

Because of the operating differences between scanned and encoded keyboards, the control program contains two routines for reading a keyboard character. The encoded keyboards are handled by the external-interrupt routine. Very few processor instructions are required to fetch the character, since the data comes in from the I/O port already encoded as values in the ubiquitous ASCII (American National Standard Code for Information Interchange) character set established by ANSI (the American National Standards Institute). In contrast, getting a character from the scanned keyboard takes a fairly lengthy subprogram, which must examine the switch matrix of the keyboard for closures and convert that data into a meaningful ASCII character. The two keyboard routines, however, merge at the point where the character has been identified; a common section of code is used to display, transmit, and queue the character.

The display-processing subroutine is entered from the main wait loop when the program finds that the input-character buffer is not empty. If the character appearing in the buffer is part of an Escape sequence, the processing routine decides whether to wait for additional information (more characters) or to take immedi-

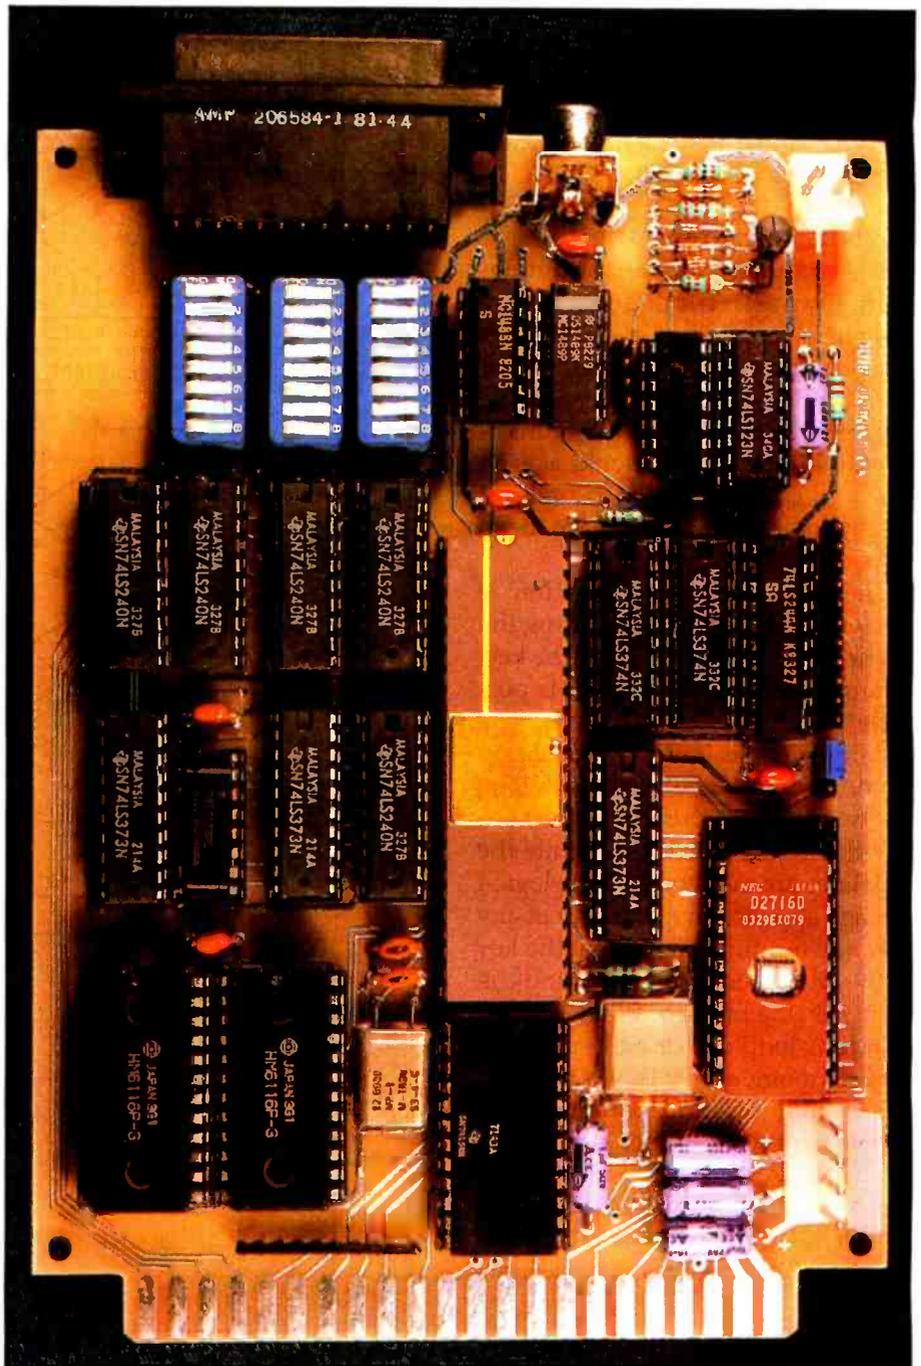


Photo 1: A prototype of the Term-Mite ST circuit board, measuring only 4½ by 6½ inches. The design incorporates the National Semiconductor NS455A Terminal Management Processor.

1. 24 lines of 80 characters each, uppercase and lowercase
2. supports either scanned or parallel-encoded keyboards
3. selectable data rate, parity, cursor, and display options
4. attributes: reverse-video, half-intensity, double-height, double-width, underlined, blinking and/or blanked character
5. line (block) graphics
6. 21 Escape functions
7. 14 control functions
8. twenty-fifth-line reverse-video status display
9. self-test
10. separated-sync or composite-video output

Table 1: The features of the Term-Mite ST intelligent video-display terminal.

ate action. ASCII control codes are processed immediately. If the received character is an ordinary displayable character, it is simply displayed and possibly transmitted through the serial port.

Keyboard-Scanning Logic

The scanned keyboard is fundamentally a set of push-button switches arranged in a set of rows and columns and wired together with diodes. Every 10 milliseconds, triggered by the internal-timer interrupt, the Term-Mite ST looks at each row and column in turn to find out if any of the switches have been closed.

The basic scanning algorithm is shown in figure 3. The first thing the routine does is check to see if the keyboard is currently enabled (it is possible to turn the keyboard off). The scanning loop is initialized for 16 columns of key switches. The wire along the first column is driven to the voltage that represents logic 1 while the row lines are monitored. If the logic-1 voltage appears on the output of any row, the terminal knows that the key at the intersection of that row and column is being pressed. Whenever the scanning loop detects a hit, program control momentarily leaves the loop while the row and column coordinates are used to look up the appropriate ASCII value in a code-conversion table. The lookup routine also notes the current status of the Control, Shift, and Caps-Lock functions.

The key value is compared to the value found during the last scan; if they are the same, the routine assumes that the key simply has not yet been released from the previous stroke and ignores the key-pressed condition. (When typing, most people hold down each key long enough for many scans to occur. Except when the Repeat key is in use, the terminal assumes that continued closure of the key switch should not produce further output.) If the scanning routine finds that the most recently read key value is indeed a new character, it stores the value and resumes scanning. If two key switches are found simultaneously closed in one

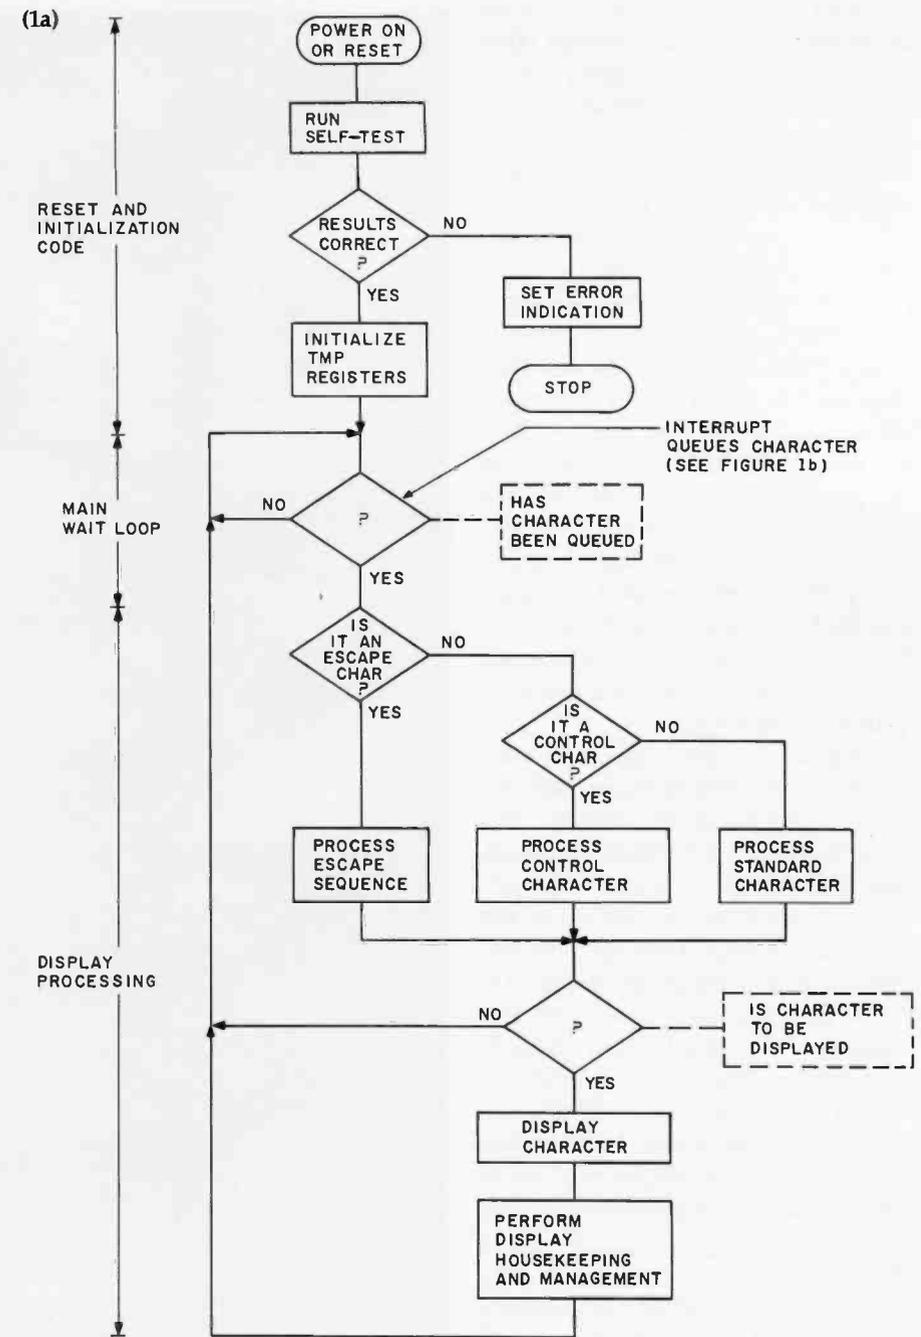


Figure 1: A flowchart of the control program supplied standard by National Semiconductor for the NS455A. The main code is shown in 1a while the interrupt sections are in 1b.


column, the two characters are processed in turn before the scan is restarted.

After all the columns have been scanned, the routine checks the character-value storage to see if any keys were pressed. If the number of "hits" found is greater than four, it exits with no output. Valid characters, produced by one to four key presses per scan, are queued in the keyboard buffer for display and output. The


routine also checks the Repeat key; if it is being held down, the program initially delays 1 second and then begins to queue the same character again at intervals of 0.1 second. If no keys were detected during the scan, the program cleans out the keyboard-buffer storage area, resets the interrupt mask, does some housekeeping, and returns from the interrupt.

(Note: The keyboard-scanning rou-

(1b)

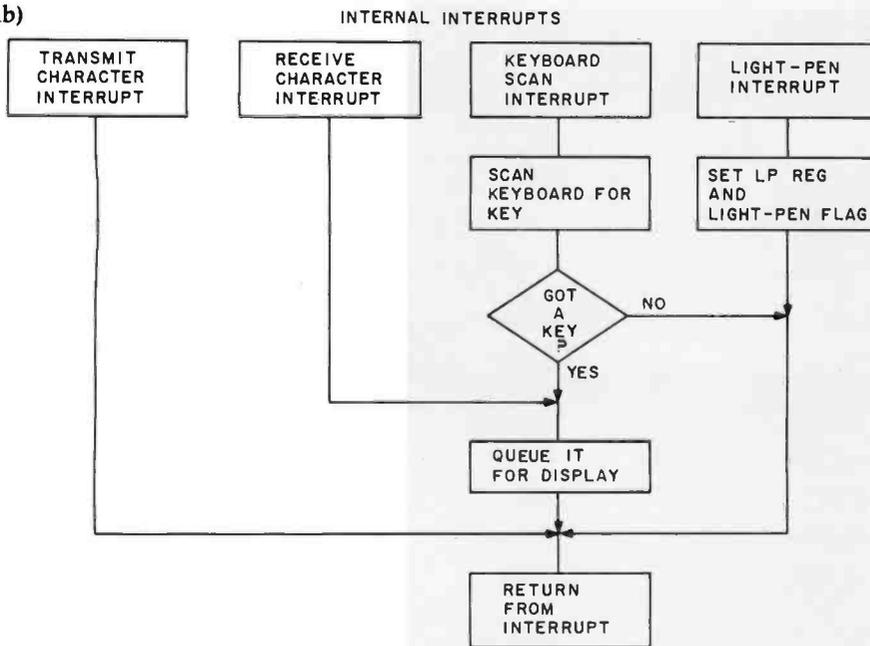

EXTERNAL INTERRUPTS (ENCODED KEYBOARD ONLY)

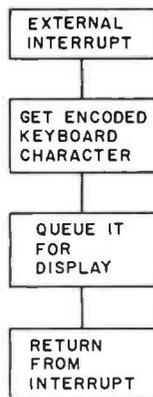

tine is somewhat hardware-dependent. A numeric keypad and separate input lines for Control, Shift, Repeat, and Caps-Lock keys may not be available or work the same way in all keyboards. The standard program is written to operate with an Oak full-travel membrane (FTM) keyboard. Other keyboards, including the one shown in photo 2, can be made to work with the standard NS455A, but the Oak keyboard can be used with a minimum of trouble.)

Configuring for Use

The biggest annoyance of today's advanced intelligent terminals is that they can be complicated to use. When you unpack a new unit you

can expect to spend at least an hour trying to set the switches for all the proper optional modes and functions. At such times I fondly recall first plugging in my completed TV Typewriter in late 1973 (see references 2 and 4). There were no confusing configuration switches or Escape sequences. I just typed.

The Term-Mite ST, though small, was designed to be powerful, so it has to include some options that you set before use. I have tried to keep them as simple as is compatible with flexibility. These options are both hardware- and software-configurable.

In the Term-Mite ST, three eight-position DIP (dual-inline pin) switches let you set up the unit to

assume certain operating conditions and parameters when you first turn it on. Once the terminal has been turned on, most of the switch-preset parameters can be changed by on-line commands received either from the keyboard or through the RS-232C port. In this same manner, some additional parameters that don't have switches can be set up. The commands are sequences of ASCII characters, either single nonprinting control codes or ordinary characters preceded by an Escape character (Escape sequences).

Control codes, as in most ASCII-encoded applications, are generated at the keyboard by simultaneously holding down the Control key and one other alphabetic or character key. The binary value emitted is within the special low range of ASCII codes designated for the control of devices. These codes do not normally cause any symbol to be printed or displayed, so they are referred to as *non-printing*. A list of the control codes as used by the Term-Mite ST (running with the standard firmware) is shown in table 2 on page 96. An ASCII control code is often abbreviated by the corresponding printing character preceded by a caret or an up-arrow; thus "[^]G" stands for Control-G.

Escape sequences are more complex. These consist of characters that are mostly in the range of regular ASCII values, but the normally printable codes are transmitted following the special ASCII Escape character (decimal 27). This Escape character is so named because the characters that follow it "escape" from their normal meanings. (In the context of an Escape sequence, almost any meaning is possible for any character, although some Escape sequences are widely used, and one set has achieved the status of an ANSI standard equal to ASCII itself—see reference 1.) In the Term-Mite ST, an Escape sequence consists of at least two keystrokes: the Escape key followed by an uppercase letter (in the set A through Z, with some unused). The Escape sequences activate various functions of the Term-Mite ST. Only direct cursor addressing and the set-attribute-value function re-



Photo 2: The Term-Mite ST can be connected to the stack-pole keyboard shown here, but the NS455A can be used more easily with an Oak full-travel membrane (FTM) keyboard from Oak Switch Systems Inc., POB 517, Crystal Lake, IL 60014. An enclosure from Pac Tec (Enterprise and Executive Aves., Philadelphia, PA 19153) enhances the terminal's appearance.

HEXADECIMAL LOCATION	HEXADECIMAL LOCATION
	000
	INTERRUPT VECTORS AND SELF-TEST CODE
065	
	INITIALIZATION CODE
14D	100
	INTERNAL-INTERRUPT ROUTINES
181	
	SCANNED-KEYBOARD CODE
209	200
	MISCELLANEOUS SUBROUTINES
32A	300
	EXTERNAL-INTERRUPT ROUTINE
360	
	CHARACTER AND DISPLAY PROCESSING
3EA	400
	CONTROL-CODE PROCESSING
54C	500
	ESCAPE-CODE PROCESSING
6E0	700
	STATUS-LINE HANDLING
7FF	800

Figure 2: Memory use by the NS455A control program.

quire more than one character following Escape.

When power to the Term-Mite ST is first turned on, the three groups of *configuration switches* are read and their values stored in appropriate registers in the TMP. The switches appear to the processor as memory-mapped I/O devices; logic 1 is considered to be the on or closed position. (National Semiconductor's software refers to the groups as switches 4, 5, and 6, so I have used the same designations in the Term-Mite schematic.) Their configurations and various settings are shown in tables 4, 5, and 6 and in figures 4, 5, and 6.

Programming the Term-Mite

Your use of the Term-Mite ST can be simple or complex, depending on how you write your host software: to use the control commands and Escape sequences extensively or not

WHEN YOU'RE READY OUR PC PLUS KIT WILL BE WAITING



10mb Internal Upgrade

When you're ready to boost your storage capacity from 640K to 10mb without boosting power and without eating up desk-top space, our internal PC PLUS will be just a phone call away.

Waiting to give you all the capacity of the *XT at a price that saves you hundreds of dollars compared to the cost of trading up.

The DSS PC PLUS kit uses a half-height 10mb Winchester disk drive that gives you all the benefits of Winchester technology — increased data integrity,

faster access — without taxing the power supply. It also includes a Winchester disk controller that is IBM formatted.

The DSS PC PLUS kit presents the storage solution you need now. What are your data storage needs? At DSS, we do much more than sell components. We create solutions.

The DSS PC PLUS kit includes:

- 10mb half-height disk drive
- DSS Controller
- Full height front bezel
- Mounting hardware
- Cables

Features and Benefits

- Increased capacity
- Increased access time
- Upgradeability
- No additional power requirements
- Enhanced cooling
- One board controller solution
- Operates with 1.25 MS-DOS through 2.0 MS-DOS
- Internal upgrade
- 1 10mb half-height Winchester = 31 floppy's
- Increased data integrity

Retail price: \$2250
from the dealer nearest you

DSS

2907 N. 55th St., No. 5 Boulder, Colorado 80301 303/449-7587 Toll Free: 800-851-PLUS
Data Storage Solutions, Inc.

*XT is a registered IBM trademark


Circle 410 for Dealer Inquiries. Circle 411 for End-User Inquiries.

BYTE February 1984 93


Your computer's telephone. Hayes™



What will counteract NDC 74-0054-60?

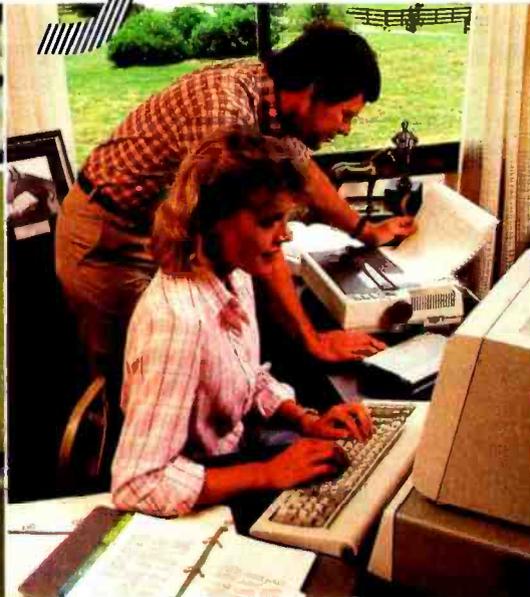

Gary: The pedigrees for next week's auction are as follows...

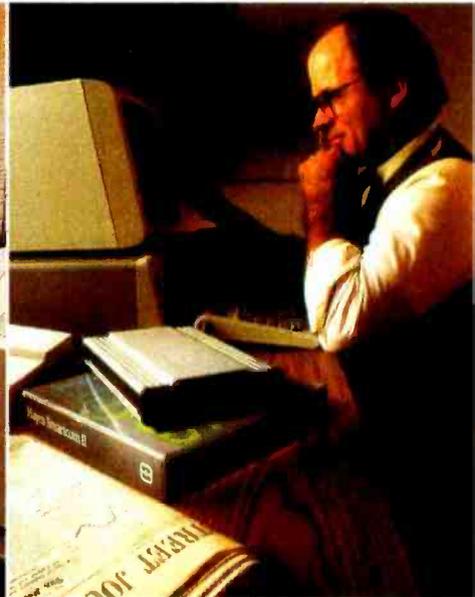

Sold 1000 shares at 33 for net profit of 6000. Richard.

Wouldn't it be great if you could use your IBM®PC to tap into vast resource libraries across the country? To transfer files to your partner, upstate? Or from your broker, down the street?

It's possible. All you need is a modem, to connect your computer to others. Down the hall. Or thousands of miles away.



Hayes Smartmodem. Think of it as your computer's telephone. Hayes Smartmodem 300™ and the faster Smartmodem 1200™ allow you to communicate over ordinary phone lines.

But any modem will send and receive data. Smartmodems also

dial, answer and disconnect calls. Automatically. And without going through the telephone receiver, making them far superior to acoustic coupler modems.

Choose your speed; choose your price. The lower-priced Smartmodem 300 is ideal for local data swaps and communicates at 300 bps. For longer distance and larger volumes, Smartmodem 1200 operates at baud rates of 300 or 1200, with a built-in selector that automatically detects transmission speeds.

Both work with rotary dials, Touch-Tone® and key-set systems; connect to most time-sharing systems; and feature an audio speaker.

Smartmodem 1200B™ is also available as a plug-in board. Developed specifically for the PC, it comes packaged with Hayes' own communications software, Smartcom II™

Smartcom II. We spent a lot of time developing it, so you can spend less time using it. Smartcom II prompts you in the

simple steps required to create, send, receive, display, list, name and re-name files. It even receives data completely unattended—especially helpful when you're sending work from home to the office, or vice versa.

If you need it, there's always "help." This feature explains prompts, messages, etc. to make communicating extra easy.

With Smartcom II, it is. Case in point: Before you communicate with another system, you need to "set up" your computer to match the way the remote system transmits data. With Smartcom II, you do this only once. After that, parameters for 25 different remote systems are stored in a directory on Smartcom II.


Calling or answering a system listed in the directory requires just a few quick keystrokes.

You can store lengthy log-on sequences the same way. Press one key, and Smartcom II automatically connects you to a utility or information service.



Smartmodem 300, 1200 and 1200B are FCC approved in the U.S. and DOC approved in Canada. All require an IBM PC with minimum 96K bytes of memory; IBM DOS 1.10 or 1.00; one disk drive; and 80-column display.

Smartmodem 1200B. (Includes telephone cable. No serial card or separate power source is needed.)

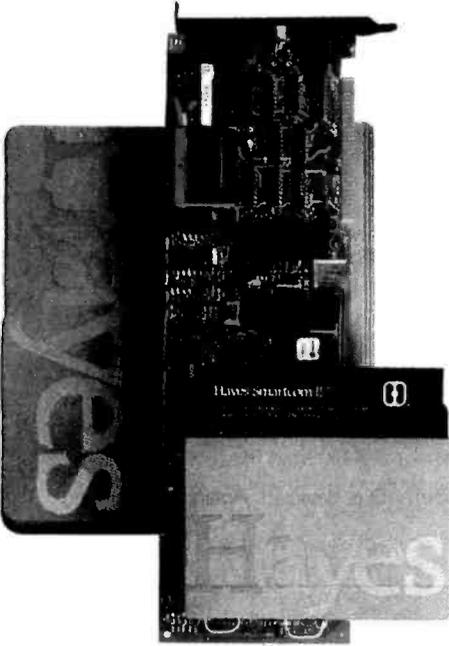

Smartcom II communications software.

NOTE: Smartmodem 1200B may also be installed in the IBM Personal Computer XT or the Expansion Unit.

In those units, another board installed in the slot to the immediate right of the Smartmodem 1200B may not clear the modem; also, the brackets may not fit properly. If this occurs, the slot to the right of the modem should be left empty.

And, in addition to the IBM PC, Smartcom II is also available for the DEC Rainbow™ 100, Xerox 820-II™ and Kaypro II™ personal computers.

Backed by the experience and reputation of Hayes. A solid leader in the microcomputer industry, Hayes provides excellent documentation for all products. A limited two-year warranty on all hardware. And full support from us to your dealer.

So see him today. Break out of isolation. Get a telephone for your personal computer. From Hayes.

Hayes Microcomputer Products, Inc., 5923 Peachtree Industrial Blvd., Norcross, GA 30092. 404/441-1617.

Smartmodem 300, Smartmodem 1200, Smartmodem 1200B and Smartcom II are trademarks of Hayes Microcomputer Products, Inc. IBM is a registered trademark of International Business Machines, Corp. Touch-Tone is a registered service mark of American Telephone and Telegraph. Rainbow is a trademark of Digital Equipment Corporation. Xerox 820-II is a trademark of Xerox Corporation. Kaypro II is a registered trademark of Non-Linear Systems, Inc.
©1983 Hayes Microcomputer Products, Inc.

Circle 166 on inquiry card.

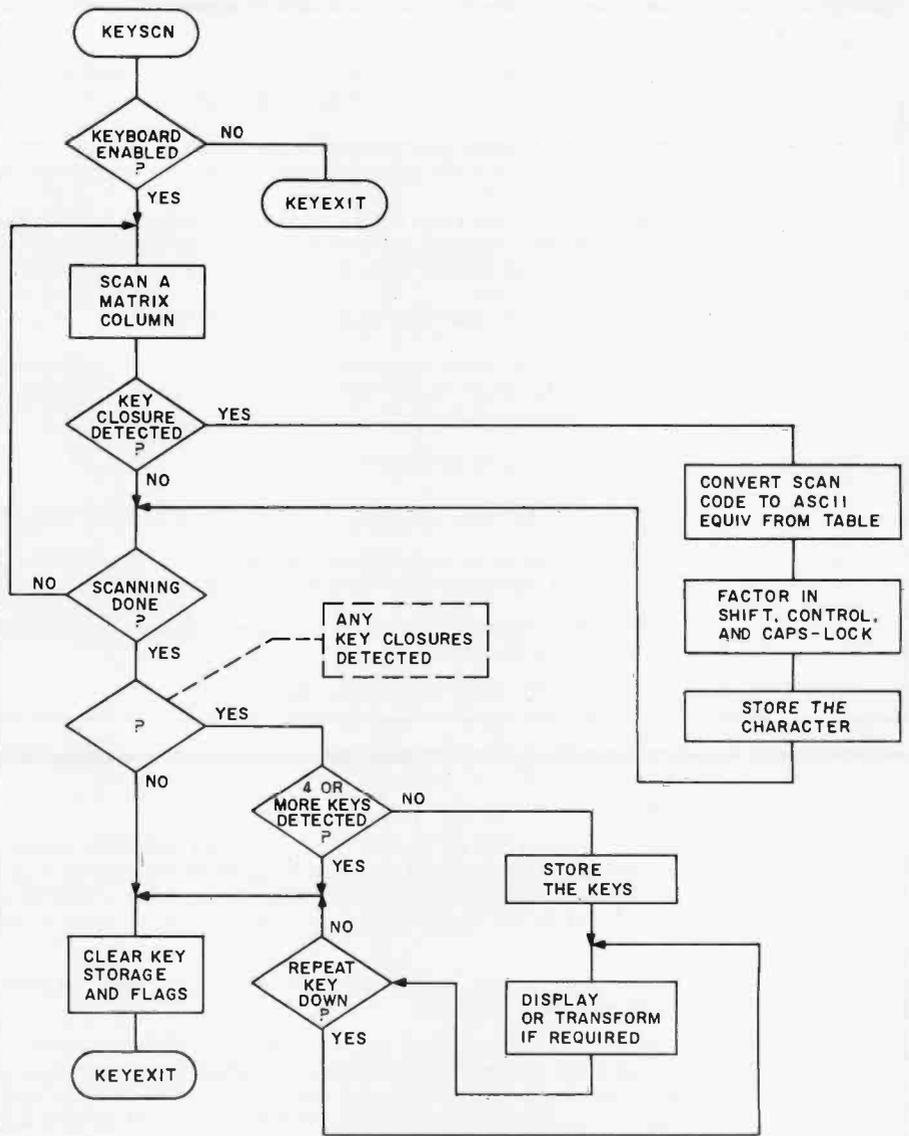


Figure 3: A flowchart of the keyboard-scanning routine.

at all. If you just want to write BASIC programs, you'll probably never have to do more than use the default switch settings. If, however, you want to use the terminal as part of a screen-template inquiry-transaction system, you'll want to use all the character attributes and graphics options.

Some forms of the Escape sequences cannot be generated through the keyboard (ones with leading-zero attribute values, for example); these must be supplied by the host computer. One of the easiest ways to do this is to use the CHR\$ function in BASIC, giving the decimal values of the required characters. I used a Radio Shack TRS-80 Model 100 port-

able computer to generate the displays depicted in the accompanying photos. With these few simple examples, I'll try to give you a feel for the use of the control functions. The communication protocol is peculiar to the Model 100, but the basic approach and much of the code can be used on other machines.

The first example is shown in listing 1 on page 102, a demonstration of displaying blinking characters. Lines 20 and 25 in this BASIC program clear the screen with a Control-L, then position the cursor at the sixteenth line with a sequence of the type ESC, M, x, y. An ESC, I, 251 sequence sets the blinking attribute for the single word "BLINKING" (attribute bit 2 set

Control Code	Effect
Control-G	<i>Ring the bell.</i> The ^G code causes a strobe pulse to be sent out bit 5 of the I/O port to trigger a 100-ms one-shot multivibrator, which can be connected to a piezoelectric transducer.
Control-H	<i>Backspace.</i> The destructive backspace moves the cursor to the left; the new position is blanked. Wrap-around occurs from line to line, including a screen wrap from the home (upper left) to last position.
Control-I	<i>Horizontal tab—fixed every eight locations.</i> The tab function is handled by the Tab key or by the ^I code. Each line is divided up into fixed eight-character tab zones. Each Tab received causes the cursor to jump from its current position to the start of the next tab zone, proceeding to the right. Screen scrolling occurs at the bottom of the screen.
Control-J	<i>Linefeed.</i> ^J is the standard ASCII Linefeed character.
Control-K	<i>Vertical tab—fixed every eight lines.</i> ^K moves the cursor down the screen eight rows. If the cursor is at the bottom of the screen, the display scrolls by eight lines. Intervening lines are always blanked. The cursor column position <i>always</i> remains the same after ^K; no carriage return is performed.
Control-L	<i>Clear screen and home the cursor.</i>
Control-M	<i>Standard ASCII Return character.</i> ^M moves the cursor to the leftmost column.
Control-N	<i>Cursor up.</i> The cursor is moved up one line by the ^N code. The movement is nondestructive, and the cursor will wrap around the screen from top to bottom when the top line is reached.
Control-O	<i>Cursor down.</i> Similarly, the cursor moves down one line, nondestructively, when ^O is detected. Again, wrap-around from bottom to top occurs.

Table 2: *The functions of ASCII control codes in the Term-Mite.*

Escape Sequence	Effect																		
ESC, A	<i>Auxiliary (printer) port on.</i> An ESC, A sequence will turn on the auxiliary printer port, if it exists (the port hardware is not implemented in Term-Mite). Everything displayed on the screen will go out the auxiliary port as well. Note that Return and Linefeed characters are not sent to the display routine unless the terminal is in Control mode. (All control characters are then put on the display graphically.) The "AUX ON" message is displayed on the status line when this Control mode is active.																		
ESC, B	<i>Display switch-register status in status line.</i> An ESC, B causes the UART configuration switch and data-rate code to be displayed on the status line.																		
ESC, C	<i>Control mode on.</i> An ESC, C sequence causes the unit to enter the Control mode. This mode of operation permits you to see all the normally nondisplayable ASCII characters (e.g., Return, Linefeed) on the display screen. The control characters are displayed as reverse-video, half-intensity uppercase letters. "A" through "Z" plus some punctuation are used. In addition, the message "CTL MODE" is displayed on the status line.																		
ESC, D	<i>Toggle on-line/local mode.</i> You can set the terminal to on-line or to local mode from the keyboard using this Escape sequence. It is a toggle function; i.e., each use causes the terminal to change from the current state to the other one. The status line also displays the current state.																		
ESC, E	<i>Toggle full/half-duplex mode.</i> This is also a toggle function (see ESC, D) except that you can go from full-duplex (FDX) to half-duplex (HDX) communication and back. The terminal's current state is displayed on the status line.																		
ESC, F	<i>Control mode off.</i> ESC, F turns the Control mode off. The ASCII control characters now resume their normal operation and function. The message disappears from the status line.																		
ESC, G	<i>Set graphics mode on.</i> The ESC, G sequence flips the status line to normal video and enables the graphics attribute for characters specified in the AL1 register. This is the mode to use when doing forms drawing with the supplied terminal software. This state remains in effect until turned off by another Escape sequence (ESC, H).																		
ESC, H	<i>Set graphics mode off.</i> To turn off the graphics or line-drawing mode, the ESC, H sequence is used.																		
ESC, I, v	<i>Set Attribute Value.</i> You can set attributes to any combination by using the ESC, I, v sequence. If internal attributes are being used, the contents of AL1 are replaced with the 8-bit binary value v. When using external attributes, the value v is loaded into the current-attribute-value register. All subsequent characters will have this value loaded into their external attribute memory unless it is changed by another ESC, I, v. Bits are added together to obtain v for each combination of attributes as shown below.																		
	<table border="0"> <thead> <tr> <th>Attribute Bit</th> <th>Attribute</th> </tr> </thead> <tbody> <tr> <td>bit 7</td> <td>graphics</td> </tr> <tr> <td>bit 6</td> <td>blanked</td> </tr> <tr> <td>bit 5</td> <td>underlined</td> </tr> <tr> <td>bit 4</td> <td>double width</td> </tr> <tr> <td>bit 3</td> <td>double height</td> </tr> <tr> <td>bit 2</td> <td>blinking</td> </tr> <tr> <td>bit 1</td> <td>half intensity</td> </tr> <tr> <td>bit 0</td> <td>reverse video</td> </tr> </tbody> </table>	Attribute Bit	Attribute	bit 7	graphics	bit 6	blanked	bit 5	underlined	bit 4	double width	bit 3	double height	bit 2	blinking	bit 1	half intensity	bit 0	reverse video
Attribute Bit	Attribute																		
bit 7	graphics																		
bit 6	blanked																		
bit 5	underlined																		
bit 4	double width																		
bit 3	double height																		
bit 2	blinking																		
bit 1	half intensity																		
bit 0	reverse video																		

Table 3: *The effects of Escape sequences in the Term-Mite ST.*


Control Code	Effect																
Control-P	<i>Cursor left.</i> ^P moves the cursor left one column, nondestructively. Screen wrap-around from right to left will cause the cursor to move up a line each time the wrap-around occurs.																
Control-Q	<i>Cursor right.</i> The fourth cursor-movement code is ^Q. The cursor moves right by one column, nondestructively, and screen wrap-around happens as above. Wrap-around moves down a line until the end of the screen is reached, and then the cursor moves back to the top of the screen. No scrolling is done.																
Control-R	<i>Cursor home.</i> The ^R code moves the cursor to the home (uppermost left) position. Nothing else happens.																
Control-S	<i>Send a "break" signal on serial line.</i> ^S generates a "break" signal (300 ms of "spacing" condition) on the RS-232C line.																
Control-T	<i>Change and display data rate.</i> The data rate for the RS-232C lines can be changed via the ^T code. Each time ^T is entered, the data rate is displayed (in 00 to 15 code form) after being bumped to the next higher rate. Both receive and transmit rates are affected. They are as follows:																
	<table> <tbody> <tr> <td>00 = 110 bps</td> <td>08 = 3600 bps</td> </tr> <tr> <td>01 = 134.5 bps</td> <td>09 = 4800 bps</td> </tr> <tr> <td>02 = 150 bps</td> <td>10 = 7200 bps</td> </tr> <tr> <td>03 = 300 bps</td> <td>11 = 9600 bps</td> </tr> <tr> <td>04 = 600 bps</td> <td>12 = 19,200 bps</td> </tr> <tr> <td>05 = 1200 bps</td> <td>13 = 19,200 bps</td> </tr> <tr> <td>06 = 1800 bps</td> <td>14 = 19,200 bps</td> </tr> <tr> <td>07 = 2400 bps</td> <td>15 = 4800 bps</td> </tr> </tbody> </table>	00 = 110 bps	08 = 3600 bps	01 = 134.5 bps	09 = 4800 bps	02 = 150 bps	10 = 7200 bps	03 = 300 bps	11 = 9600 bps	04 = 600 bps	12 = 19,200 bps	05 = 1200 bps	13 = 19,200 bps	06 = 1800 bps	14 = 19,200 bps	07 = 2400 bps	15 = 4800 bps
00 = 110 bps	08 = 3600 bps																
01 = 134.5 bps	09 = 4800 bps																
02 = 150 bps	10 = 7200 bps																
03 = 300 bps	11 = 9600 bps																
04 = 600 bps	12 = 19,200 bps																
05 = 1200 bps	13 = 19,200 bps																
06 = 1800 bps	14 = 19,200 bps																
07 = 2400 bps	15 = 4800 bps																

Escape Sequence	Effect
	A logic 0 in a bit position enables the corresponding attribute.
ESC, K	<i>Keyboard enable (X-on).</i> The keyboard can be selectively enabled or disabled. ESC, K performs the X-on or enable function.
ESC, L	<i>Return light-pen value.</i> An ESC, L sequence causes the currently latched values in the horizontal light-pen register (HPEN) and the vertical light-pen register (VPEN) to be transmitted back to the host system via the main RS-232C port. HPEN is sent (one binary character) followed by VPEN (also one binary character). Term-Mite does not support the light-pen hardware.
ESC, M, x, y	<i>Load cursor position (x,y).</i> The cursor position is dynamically alterable by means of this Escape sequence. The two parameters following the basic Escape code are used to set the x and y (respectively) positions of the cursor. The x value is the column position. Up to 79 columns are allowed. The y value specifies the row or line number, 0 through 23 being valid. The origin point is the home position on the screen (upper-left corner) and all the values are calculated as offsets from that point. The actual parameter values begin with the displayable ASCII character set, that is, blank through lowercase "o." To specify cursor position (5,6), for example, the parameters would be the two characters "%0&" (hexadecimal 25 and 26). The 80 x values would run from blank (hexadecimal 20) through "o" (6F) and 24 y values from blank (hexadecimal 20) through "7" (37).
ESC, O	<i>Keyboard disable (X-off).</i> The ESC, O sequence disables the keyboard from further operation. This is essentially an X-off function. It must be reenabled by an ESC, K sent from the host system or entered from the keyboard itself.
ESC, P	<i>Print screen contents.</i> You can dump the entire displayed contents of the screen to the auxiliary or printer port by typing the ESC, P key sequence.
ESC, Q	<i>Run self-test diagnostic and reset.</i> ESC, Q causes the system to rerun the self-test and initialization routines. All current machine status conditions will be replaced by the power-on defaults. The current screen contents are lost.
ESC, R	<i>Block send the current row.</i> This is one of the Block Send commands. An ESC, R sequence causes the current line (from left margin to the cursor position) to be transmitted character by character to the host system. If the cursor is on the left margin (i.e., there's nothing on the line yet), nothing is transmitted.
ESC, S	<i>Block send the current screen.</i> The other Block Send command is ESC, S. This command transmits the data on the screen, character by character, from the home position to the current cursor location over the RS-232C link to the host system.
ESC, T	<i>Erase to end of line.</i> An ESC, T erases the current line from the cursor position to the right margin. It includes the cursor position in the erase operation.
ESC, W	<i>Wipe switch-register status from status line.</i> The switch-register and data-rate information can be wiped from the status line by entering ESC, W.
ESC, X	<i>Auxiliary port (printer) off.</i> This reverses the effect of ESC, A.
ESC, Y	<i>Erase to end of page.</i> You can erase the entire screen from the present cursor location to the end of the screen by typing ESC, Y. The present cursor location is included in the erase function.

SERIAL PORT EXPANDER AND MORE



BTA's MODEL 524 MULTIPOINT CONTROLLER is a code activated one to four serial port expander — but that's not all since it has separate and independent UARTS, buffers and handshaking each port can operate with a different configuration, i.e. different baud rates, stop bits, etc. These features also permit two or more devices to communicate with the 524 simultaneously.

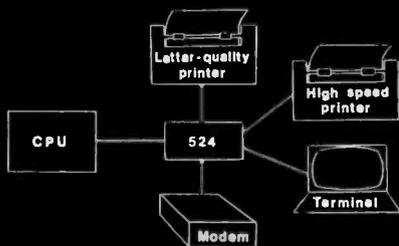

Full duplex with EIA RS-232 protocol

Baud rates up to 19,200

Expansion to 16 ports by cascading

Peripheral ports may be configured by user software

One year warranty



- **MODEL 524** \$249.00
- **MODEL 524A** \$279.00
same as model 524 except has 256 byte rx/tx buffers per port
- **MODEL 524 D** \$269.00
same as model 524, plus continuous polling of each peripheral device for data transfer requests. The device is automatically connected when its 'turn comes up'. ON, BUSY and OFF messages are sent to the peripheral device.
- Other models available — Contact us or your dealer for additional information.

BTA BAY TECHNICAL ASSOCIATES, inc.
 HIGHWAY 803, P.O. BOX 387
 BAY ST. LOUIS, MISSISSIPPI 39520
 (601) 467-8231

SWITCH 4

SWITCH POSITIONS							
8	7	6	5	4	3	2	1
50/60Hz	LUPMOD	EXTTST	CURSOR SELECT	REVVID	EXTATT	SLFTST	

Figure 4: The assignments of the switch positions in configuration switch 4. (Switches 1, 2, and 3 do not exist.)

SWITCH 5

SWITCH POSITIONS							
8	7	6	5	4	3	2	1
AUTLF	KEYENC	LINLOC	FDXHDX	XMTRCV	SPLT BR	WRDLEN	

Figure 5: The assignments of the switch positions in configuration switch 5.

SWITCH 6

SWITCH POSITIONS							
8	7	6	5	4	3	2	1
DATA RATE				PARITY SELECT		PAR ENA	STP BIT

Figure 6: The assignments of the switch positions in configuration switch 6.

to 0). An ESC, I, 255 restores the normal character display for the final word.

Listing 2 functions in a similar manner to show off the reverse-video attribute. In this instance, the reverse-video attribute is activated by an ESC, I, 254 sequence (attribute bit 0 set to 0). The result is shown in photo 3a on page 108.

Listing 3 on page 104 combines four attributes. It starts by clearing the screen, positioning the cursor at column 21, row 6 (21,6), and printing "WE CAN PRINT THE REGULAR WAY"; next, the cursor is repositioned to (0,10) and the sequence ESC, I, 230 is sent. The value of 230 (bits 0, 3, and 4 set to 0) sets the double-width, double-height, and reverse-video attributes. Photo 3b on page 108 shows the appearance of the screen.

A few peculiarities do apply to the use of the double-width and double-height characters. The ASCII value of any character to be displayed in

either or both of these attributes must be written in *all* the character positions that the expanded character will occupy. For example, if you wish to print "TEST" in double width, the BASIC PRINT statement should actually send the string "TTEESSTT", since the wide characters will occupy two regular character positions. In double height, the duplicate characters should be written one above the other. The other catch to using double height is that the second row of characters must also have the *blanked* attribute set. In the example of listing 3, with the attributes set for double height, double width, reverse video, and (on the second display line) blanked, the string "OR THIS WAY FOR SPECIAL EMPHASIS" is printed in large letters. After the pyrotechnics, another Control-I is used to reset the attributes.

One final demonstration program, shown in listing 4, shows many of the characteristics already mentioned with the addition of line graphics.

ENTER... THE FUTURE!

TURBO PASCAL

Introductory offer

\$49.95

THIS IS THE PASCAL COMPILER EVERYBODY'S BEEN WAITING FOR... EVERYBODY EXCEPT THE COMPETITION!

Extended Pascal for your IBM PC, APPLE CP/M, MS DOS, CP/M 86, CCP/M 86 or CP/M 80 computer features:

- Full screen Interactive editor providing a complete menu driven program development environment.
- 11 significant digits in floating point arithmetic.
- Built-in transcendental functions.
- Dynamic strings with full set of string handling features.
- Program chaining with common variables.
- Random access data files.
- Full support of operating system facilities.
- And much more.

ORDER YOUR COPY OF TURBO PASCAL TODAY TO TAKE ADVANTAGE OF OUR INTRODUCTORY SPECIAL.

For Visa and MasterCard orders call toll free

1-800-227-2400 X 968

IN CA: 1-800-772-2666 X 968

(lines open 24 hrs. a day, 7 days a week)

Dealer & Distributor Inquiries welcome.

	Turbo Pascal	IBM Pascal	Pascal MT+
PRICE	49.95	300.00	595.00
Compile & Link speed	1 second!!!	97 seconds	90 seconds
Execution speed	2.2 seconds	9 seconds	3 seconds
Disk Space 16 bit 8 bit	33K w editor 28K w editor!	300K + editor Not Available	225K + editor 168K + editor
8 and 16 bit	YES	NO	YES
built-in editor	YES	NO	NO
Generate object code	YES	YES	YES
One pass native code compiler	YES	NO	NO
Locates RunTime errors directly in source code	YES	NO	NO

Benchmark data based on EightQueens in "Algorithms + Data Structures + Programs" by N. Wirth, run on an IBM PC. Turbo Pascal is a trademark of Borland International. MT+ is a trademark of MT MicroSystems. IBM is a trademark of International Business Machines.

LEARN TO WRITE A SPREADSHEET

Our Introductory offer includes MICROCALC, a spreadsheet written in Turbo Pascal. It's on your disk, and ready to run. And we've included the source code to show you exactly how a spreadsheet is written! (Introductory offer expires March 1, 1984)

Turbo Pascal includes a 250 page bound manual with extensive explanations and many illustrative examples.

Turbo Pascal \$49.95 + \$5.00 shipping per copy.

Check _____ Money Order _____
VISA _____ MasterCard _____

Card #: _____
Exp date: _____ Shipped UPS

BORLAND INTERNATIONAL

Borland International
4807 Scotts Valley Drive
Scotts Valley, California 95066

My system is: 8 bit _____ 16 bit _____

Operating system: CP/M 80 _____

CP/M 86 _____ MS DOS _____ PC DOS _____

Computer: _____ Disk Format: _____

Please be sure model number and format are correct.

NAME: _____

ADDRESS: _____

CITY/STATE/ZIP: _____

TELEPHONE: _____

California residents add 8 1/4% sales tax. Outside North America add \$15.00. Checks must be on a U.S. bank, and in U.S. dollars. Sorry, no C.O.D.

Switched Signal	Effect
50/60 Hz	Because the NS455A is designed for worldwide distribution, provision has been made for handling operation at either 50 Hz or 60 Hz. A logic 1 specifies 60 Hz, while a logic 0 sets 50-Hz operation.
LUPMOD	This bit affects the loop-back mode of the serial I/O line. When it is 0, the serial output line is logically connected to the serial input line inside the chip. A logic 1 sets the serial line to normal mode.
EXTTST	The external test flag is used to force a jump to external memory located at hexadecimal address 800. This test is only made if SLFTST is also selected. The author of the self-test code must take care of either returning to the supplied standard program or handling all processing from that point on.
CURSOR SELECT	There are four types of cursors that can be selected on the Term-Mite: a solid underline, a blinking underline, a solid block, or a blinking block. The binary codes are as follows: 00 = solid underline cursor 01 = blinking underline cursor 10 = solid block cursor 11 = blinking block cursor
REVID	A logic 0 will cause the display to switch to black characters on a white field. The default value of logic 1 specifies normal video, white on black.
EXTATT	A 0 in this position lets you use the external attribute memory, bits 8 through 15. A logic 1 sets the system up for internal attributes.
SLFTST	A logic 1 in this bit causes the self-test routine to be skipped on reset or power up. It must be set to logic 0 in order for the self-test to be performed. This does not affect the ESC, Q command to execute a self-test.

Table 4: *The functions of the switch positions in configuration switch 4.*

Switched Signal	Effect
AUTLF	This is the Auto-Linefeed flag. When set to a logic 0, a Linefeed character is sent whenever a Return character is detected. This operates for both the transmitted data and the displayed information. A logic 1 causes no Linefeed to be sent.
KEYENC	The encoded keyboard is selected by a logic 0. A logic 1 indicates that the scanned keyboard is to be handled.
LINLOC	This is the Online/Local default. When this flag is set to logic 0, Local mode is chosen, and no data is sent to the host machine. A logic 1 puts the terminal into Online mode and data is then transmitted.
FDXHDX	The full-duplex/half-duplex flag is used to set the communication protocol. When set to logic 0, the communication through the serial port is half duplex; data is both transmitted to the host and sent to the CRT display. A logic 1 will select full duplex. Data is then transmitted but not automatically sent to the display.
XMTRCV	The split-data-rate function uses this flag to decide whether the transmitter (logic 0) or the receiver (1) is to operate at the slower data rate.
SPLT BR	This field sets the split-data-rate divisor to one of four values. The divisor divides the affected rate by a factor of 1, 4, 16, or 32. More divisors are allowed, but they are not implemented in the standard program. 00 = divide by 32 10 = divide by 4 01 = divide by 16 11 = divide by 1 (default)
WRDLEN	The word-length flag specifies the number of bits in the serial character, either 7 or 8 bits excluding parity. A default of 1 selects 7 bits, and a logic 0 selects 8 bits.

Table 5: *The functions of the switch positions in configuration switch 5.*

When attribute bit 7 is set to a 0, the Term-Mite displays certain control characters as graphic symbols. These are shown in table 8 on page 108. The program draws the display shown in photo 4.

In Conclusion

Since building the Term-Mite ST, I've been finding all kinds of old and new uses for it. For instance, it makes a perfect status and command display for a Micromint Z8-BASIC Com-

puter/Controller system (see reference 3). Also, I've been hesitating to spend \$1000 for a regular video terminal that would be dedicated to a constant display of the time of day and my appointment schedule, but

VisiCalc®, Lotus™ 1-2-3™ and Multiplan® users endorse Dow Jones Spreadsheet Link™...



“The analysis I do with Spreadsheet Link would be impossible any other way.

I track more than 200 securities. This software really gives me a handle on my investments. I can download stock quotes and fundamental information from Dow Jones News/Retrieval® directly into my spreadsheets, and analyze it using my own formulas.”

Ronald Eldredge
Lockhart Financial Services



“The speed of collecting and entering data is invaluable.

Spreadsheet Link does exactly what I want it to do. It's a tremendous help in manipulating data. I think anyone who does spreadsheet analysis will find this an important addition to their software library.”

Anne Freilich
Wensley Management Corporation



“The comprehensive information I get from Dow Jones News/Retrieval is a real plus.

Without Spreadsheet Link, I'd have to enter data keystroke by keystroke into my templates. This software makes spreadsheet analysis much easier and more useful to me. I'm getting very satisfactory results, and I'm still exploring the possibilities.”

Douglas Gill
Grayson Gill, Inc.



Compatible with Apple II and IBM personal computers.

**For a free brochure, call
1-800-345-8500 ext. 165
(Alaska, Hawaii and foreign call 1-215-789-7008 ext. 165)**

Copyright © Dow Jones & Co., Inc., 1983. All rights reserved.

DOW JONES SOFTWARE™

... Plan on it.

VisiCalc is a registered trademark of VisiCorp.
Lotus and 1-2-3 are trademarks of Lotus Development Corporation.
Multiplan is a registered trademark of Microsoft Corporation.



TECHNICAL INFO — (602) 842-1133

Call for programs not listed. We will try to meet or beat any legitimate price for CP/M or IBM PC Software.

— MOST DISK FORMATS AVAILABLE —
DATA BASE MANAGEMENT SYSTEMS.

BUY OF THE YEAR!

DBASEII+Everymans data base primer +Extra diskette with DBase Accounting, Mail List and Inventory Programs. IBM PC and CP/M — Call for our special price.

- Fox and Geller Quickcode \$175
- DB+SORT \$99
- Condor III \$375
- NWA Statpack \$349
- TIM III \$285
- Infostar \$259
- PFS File \$95
- WORD-PROCESSING PACKAGES**
- Wordstar, Mail Merge, Spellstar, Index \$375
- Wordstar \$245
- Mail Merge \$135
- Spell Star \$135
- Microsoft Word W/Mouse \$299
- Lexisoft Spellbinder \$270
- IBM PC Volkswriter \$115
- Aspen Spellchecker \$36
- Metasoft Benchmark \$285
- Multimate \$295
- Peachtext 5000 \$265
- SPREADSHEETS**
- Calcstar CP/M \$95
- Super Special Calcstar IBM PC \$65
- Supercalc II \$159
- Supercalc 3 \$235
- Microsoft Multiplan \$159
- ITK Solver \$215

ACCOUNTING

TCS*Equivalent of Peachtree*Specialty Augmented By Warehouse Software Customized For Your IBM Terminal and Printer-GL, AR, PA, AP, CP/M, XT, DOS 1.1, 2.0. Each Module \$75 ... For All Four \$275

- CYMA Call
- Peachtree GL, AR, AP \$265
- Home Accountant Howardsoft \$95
- TRANSFER PROGRAMS**
- Move-It for IBM PC \$95
- Hayes Smartcom Program \$80
- Microstuff Crosstalk \$109

Best Price in U.S. for IBM PC or Clones

Seven Function Board—Includes Async Adapter, Parallel Adapter, Clock with Battery Back-Up and Software, Game Port, 64K Memory Expandable to 512K. 1 year warranty \$277

- Hayes 1200 Modem \$485
- Hayes 1200B Modem \$430
- Anchor Signalman 1200B Modem.. \$285
- Disk Controller For IBM PC \$175
- Plantronics Color + Board \$365
- CDC 320K D/S D/D Drives \$250
- Toshiba 1/2 height Drives Call
- 256 K Ram Board \$299
- AST Six Pack Board \$265
- TAXAN RGB Color Monitor \$450
- Corona Computer - Por. or Desk Top. Call

The Mercedes Benz of Portable Computers. IBM compatible - Hyperion — 2 Disc Drives — Software — List \$3590 **Sale \$2995**

- PCDOS**
- Versaform \$275
- Lifeboat C Compiler \$295
- Microsoft C Compiler \$345
- Microsoft Pascal Compiler \$245
- Prokey \$55
- Norton Utilities \$55
- Copy II PC Program \$34
- Microsoft BASIC Compiler \$285
- Howard Tax Preparer 83 \$185
- Microsoft Flight Simulator \$38
- CP/M 86 for IBM PC \$49
- CBasic 86 \$165
- CIS Cobol 86 \$595
- Pascal MT*86 \$415

TERMS: Prices include 3% cash discount. Add 3% for charge orders. Shipping on most items \$5.00. AZ orders +6% sales tax. Prices subject to change.

TOLL FREE ORDER 1-800-421-3135

WAREHOUSE SOFTWARE
4935 West Glendale Ave., Suite 12
Glendale, AZ 85301

Communication

Parameter	Explanation																																				
DATA RATE	Four bits select the data rate used by the serial-I/O section. The available rates are shown below:																																				
	<table border="0"> <tr> <td>position 8765</td> <td></td> <td>position 8765</td> <td></td> </tr> <tr> <td>0000</td> <td>110 bps</td> <td>1000</td> <td>3600 bps</td> </tr> <tr> <td>0001</td> <td>134.5 bps</td> <td>1001</td> <td>4800 bps</td> </tr> <tr> <td>0010</td> <td>150 bps</td> <td>1010</td> <td>7200 bps</td> </tr> <tr> <td>0011</td> <td>300 bps</td> <td>1011</td> <td>9600 bps</td> </tr> <tr> <td>0100</td> <td>600 bps</td> <td>1100</td> <td>19,200 bps</td> </tr> <tr> <td>0101</td> <td>1200 bps</td> <td>1101</td> <td>19,200 bps</td> </tr> <tr> <td>0110</td> <td>1800 bps</td> <td>1110</td> <td>19,200 bps</td> </tr> <tr> <td>0111</td> <td>2400 bps</td> <td>1111</td> <td>4800 bps</td> </tr> </table>	position 8765		position 8765		0000	110 bps	1000	3600 bps	0001	134.5 bps	1001	4800 bps	0010	150 bps	1010	7200 bps	0011	300 bps	1011	9600 bps	0100	600 bps	1100	19,200 bps	0101	1200 bps	1101	19,200 bps	0110	1800 bps	1110	19,200 bps	0111	2400 bps	1111	4800 bps
position 8765		position 8765																																			
0000	110 bps	1000	3600 bps																																		
0001	134.5 bps	1001	4800 bps																																		
0010	150 bps	1010	7200 bps																																		
0011	300 bps	1011	9600 bps																																		
0100	600 bps	1100	19,200 bps																																		
0101	1200 bps	1101	19,200 bps																																		
0110	1800 bps	1110	19,200 bps																																		
0111	2400 bps	1111	4800 bps																																		

PARITY SELECT There are four parity options:

position 43

- 11 = Parity is forced to a space level if enabled.
- 10 = Parity is forced to a mark level if enabled.
- 01 = Parity is even if enabled.
- 00 = Parity is off if enabled.

PARENE The parity-enable flag is used to enable or disable the parity function. If the switch is a 0, parity is disabled. A value of 1 enables parity.

STPBIT This flag specifies the number of stop bits to be sent with each character. A logic 1 will cause one stop bit to be sent; a 0 will send two stop bits.

Table 6: The functions of the switch positions in configuration switch 6.

Switch 4	Switch 5	Switch 6
11111100	10100111	00111010

Table 7: For general use, typical settings of all three switches might be as shown here (most significant bits to the left).

Listing 1: A BASIC program to produce blinking characters on the Term-Mite.

```

10 OPEN "COM:38N1D" FOR OUTPUT AS 1
20 PRINT #1,CHR$(12):REM CLEAR SCREEN
25 PRINT #1,CHR$(27);"M0+"
30 PRINT #1,"THIS IS HOW WE PRINT IN ";
40 PRINT #1,CHR$(27);"I";CHR$(251);"BLINKING ";
50 PRINT #1,CHR$(27);"I";CHR$(255);"CHARACTERS"
100 CLOSE #1
110 STOP
    
```

Listing 2: A program to produce reverse-video characters on the Term-Mite.

```

10 OPEN "COM:38N1D" FOR OUTPUT AS 1
20 PRINT #1,CHR$(12):REM CLEAR SCREEN
25 PRINT #1,CHR$(27);"M0+"
30 PRINT #1,"THIS IS HOW WE PRINT IN ";
40 PRINT #1,CHR$(27);"I";CHR$(254);"REVERSE VIDEO ";
50 PRINT #1,CHR$(27);"I";CHR$(255);"CHARACTERS"
100 CLOSE #1
110 STOP
    
```

UNSURPASSED



Circle 118 on inquiry card.

BROTHER has done it again. Not content to ride on the phenomenal success of the HR-1, Brother now brings you the HR-25. A machine so improved and technically advanced, with a price/performance ratio that sets it apart in a class by itself.

Although the HR-25 has been designed to fulfill the demands of the high volume user, its price is affordable for even the smallest business groups. And the HR-25 will assure you the highest letter-quality printing at speeds of 23 cps, making it the fastest printer in its price range on the market today.

The BROTHER HR-25 is unsurpassed in every respect, and is backed by the DYNAX reputation for quality and service response.

Options Available: Tractor Feed, Auto Cut Sheet Feeder

Dynax, Inc.

5698 Bandini Blvd., Bell, CA 90201
(213) 260-7121

brother HR-25 ■ from the manufacturers of "OFFICIAL TYPEWRITER OF THE LOS ANGELES 1984 OLYMPIC GAMES"

Listing 3: A BASIC program to demonstrate reverse-video, double-height, double-width characters on the Term-Mite.

```
10 OPEN "COM:38N1D" FOR OUTPUT AS 1
20 PRINT #1,CHR$(12):REM CLEAR SCREEN
25 PRINT #1,CHR$(27);"M5&";
30 PRINT #1,"WE CAN PRINT THE REGULAR WAY"
40 PRINT #1,CHR$(27);"M *";CHR$(27);"I";CHR$(230);
50 PRINT #1,"OORR TTHHIISS WWAAYY FFOORR SSPPEECCIIAALL EEMMPHHAASSIISS"
60 PRINT #1,CHR$(27);"M +";CHR$(27);"I";CHR$(166);
70 PRINT #1,"OORR TTHHIISS WWAAYY FFOORR SSPPEECCIIAALL EEMMPHHAASSIISS"
80 PRINT #1,CHR$(27);"I";CHR$(255)
90 CLOSE #1
100 STOP
```

Listing 4: A program to demonstrate all internal character attributes and the drawing of borders with line-graphics characters.

```
10 OPEN "COM:38N1D" FOR OUTPUT AS 1
20 PRINT #1,CHR$(12)
30 PRINT #1,CHR$(27);"I";CHR$(127)
35 PRINT #1,CHR$(27);"M%#";
50 PRINT #1,STRING$(70,23)
60 PRINT #1,CHR$(27);"M$*";
70 PRINT #1,STRING$(71,23)
80 PRINT #1,CHR$(27);"M$-";
90 PRINT #1,STRING$(71,23)
100 PRINT #1,CHR$(27);"M$5";
110 PRINT #1,STRING$(71,23)
120 FOR I% = 3 TO 21
130 PRINT #1,CHR$(27);"M$";CHR$(32+I%);
140 PRINT #1,"J"
150 PRINT #1,CHR$(27);"Mk";CHR$(32+I%);
160 PRINT #1,"J"
170 NEXT I%
180 FOR I% = 10 TO 13
190 PRINT #1,CHR$(27);"M5";CHR$(32+I%);
200 PRINT #1,"J"
210 PRINT #1,CHR$(27);"MG";CHR$(32+I%);
220 PRINT #1,"J"
230 PRINT #1,CHR$(27);"MY";CHR$(32+I%);
240 PRINT #1,"J"
250 NEXT I%
251 PRINT #1,CHR$(27);"M$#X";CHR$(27);"Mk#L";
252 PRINT #1,CHR$(27);"M$5";CHR$(21);CHR$(27);"Mk5";CHR$(22);
253 PRINT #1,CHR$(27);"M$*";CHR$(28)
```


Listing 4 continued on page 106



FUTECH 2000 SERIES
ADVANCED INDUSTRIAL GRADE
S-100 MAIN FRAMES

The most advanced industrial grade high-tech, high quality, sleek style S-100 bus main frame.


- Front panel LED display for TIME/DATE and temperature of internal system air flow...
- Heavy duty power supply meeting today's standards for multi-user multi-tasking high speed CPU applications...
- A variety of front panels for floppy and winchester configurations...
- Synthesized warning voice indicator...

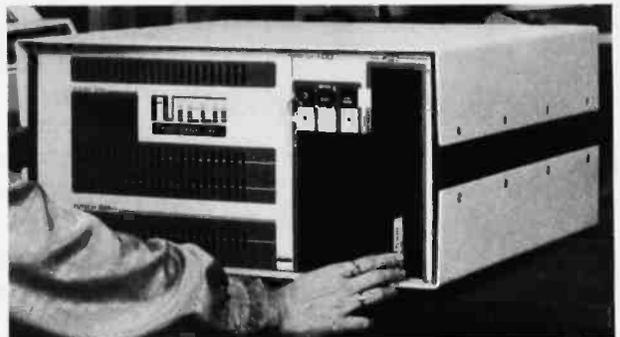

2100 N. Hwy. 360, Suite 1807, Grand Prairie, Texas 75050, (214) 660-1955, Telex 703033

Most Local Area Networks Can't Pass This Simple Test...

Match the computer network to the application.

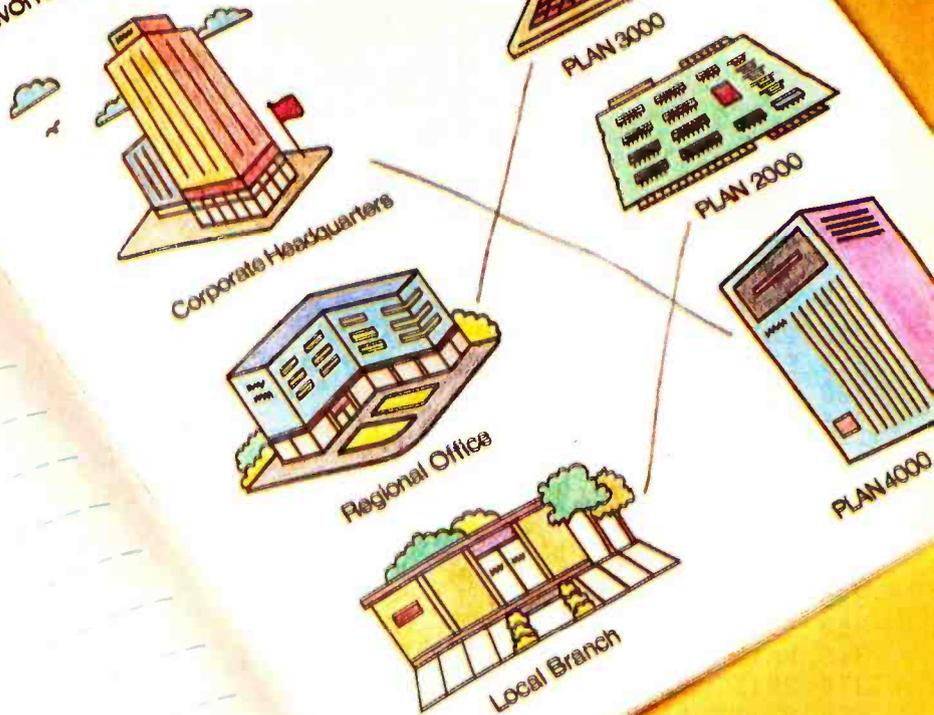

But Nestar's PLAN Series™ of networking products for microcomputers will work for your headquarters in Manhattan, New York, *and* your local branch in Manhattan, Kansas—as well as your regional office in Chicago. Here are some technical details:

Our PLAN 2000™ links IBM PCs. Use our PLAN 2000 to link as many as 255 IBM PCs or XT's in a token passing network that can cover several miles. Any one station can access up to three printers and eight hard disks at a time.

Our PLAN 3000™ is a bargain for IBM PCs and Apples. You can get a file server, a print server, 3270, 3770 and 3780 emulation, electronic mail, Apple and IBM PC support, 6 operating systems, multi-level file structures, multi-level password protection, disk capacity as small as 10 Mbytes, high-speed digital tape back-up, and more! Best of all, a 10 Mbyte file server costs less than \$10,000.

Our PLAN 4000™ grows from 30 to 548 Mbytes. It offers all the features of the PLAN 3000, and has enough capacity to handle very large organizations.

Don't buy more or less networking than you need. Contact Nestar Systems, 2585 East Bayshore Road, Palo Alto, CA 94303, (415) 493-2223, Telex: 171420-NESTAR PLA. In Europe contact Nestar Systems Limited, 122/3 High Street, Uxbridge, Middlesex UB8 1JT, United Kingdom, Tel: Uxbridge (0895) 59831, Telex: 896607.

PLAN Series model	PLAN 2000	PLAN 3000	PLAN 4000
Typical number of users	2-4	3-12	10-100
Maximum number of users	255	255	255
Speed	2.5 Mbits/s	2.5 Mbits/s	2.5 Mbits/s
Maximum distance	22,000 ft.	22,000 ft.	22,000 ft.
Minimum file server cost	\$500	\$9,995	\$15,995

© Nestar 1984

NESTAR


Listing 4 continued:

```

254 PRINT #1,CHR$(27);"Mk*";CHR$(29)
255 PRINT #1,CHR$(27);"M$-";CHR$(28)
256 PRINT #1,CHR$(27);"Mk-";CHR$(29)
257 PRINT #1,CHR$(27);"M5*";CHR$(31);CHR$(27);"M5-";CHR$(30)
258 PRINT #1,CHR$(27);"MG*";CHR$(31);CHR$(27);"MG-";CHR$(30)
259 PRINT #1,CHR$(27);"MY*";CHR$(31);CHR$(27);"MY-";CHR$(30)
260 PRINT #1,CHR$(27);"I";CHR$(255)
270 PRINT #1,CHR$(27);"MF%";
280 PRINT #1,"THE"
285 PRINT #1,CHR$(27);"I";CHR$(231);
290 PRINT #1,CHR$(27);"M='";
295 PRINT #1,"TTEERRMM--MMIITTEE SSTT"
300 PRINT #1,CHR$(27);"I";CHR$(167);
305 PRINT #1,CHR$(27);"M=";
310 PRINT #1,"TTEERRMM--MMIITTEE SSTT"
315 PRINT #1,CHR$(27);"I";CHR$(251);
320 PRINT #1,CHR$(27);"M*+";
325 PRINT #1,"BLINK"
330 PRINT #1,CHR$(27);"M(,";
335 PRINT #1,"ATTRIBUTE"
340 PRINT #1,CHR$(27);"I";CHR$(223);
345 PRINT #1,CHR$(27);"M:+";
350 PRINT #1,"UNDERLINE"
355 PRINT #1,CHR$(27);"M:, ";
360 PRINT #1,"ATTRIBUTE"
365 PRINT #1,CHR$(27);"I";CHR$(253);
370 PRINT #1,CHR$(27);"MJ+";
375 PRINT #1,"HALF INTENSITY"
380 PRINT #1,CHR$(27);"ML, ";
385 PRINT #1,"ATTRIBUTE"
390 PRINT #1,CHR$(27);"I";CHR$(254);
395 PRINT #1,CHR$(27);"M";CHR$(92);"+";
400 PRINT #1,"REVERSE VIDEO"
402 PRINT #1,CHR$(27);"M";CHR$(92);", ";
404 PRINT #1," ATTRIBUTE "
406 PRINT #1,CHR$(27);"I";CHR$(255);
408 PRINT #1,CHR$(27);"M)"/";
415 PRINT #1,CHR$(27);"M00";
425 PRINT #1,CHR$(27);"I";CHR$(239);
430 PRINT #1,CHR$(27);"M'3";
435 PRINT #1,"DDOOUUBBLLLEE WWIIDDEE,, ";
440 PRINT #1,CHR$(27);"I";CHR$(247);
445 PRINT #1,CHR$(27);"M@2";
450 PRINT #1,"DOUBLE HEIGHT,"
455 PRINT #1,CHR$(27);"I";CHR$(183);
460 PRINT #1,CHR$(27);"M@3";
465 PRINT #1,"DOUBLE HEIGHT,"
470 PRINT #1,CHR$(27);"I";CHR$(255);
475 PRINT #1,CHR$(27);"MO3";
480 PRINT #1,"and";
600 PRINT #1,CHR$(27);"I";CHR$(231);
605 PRINT #1,CHR$(27);"MS2";
610 PRINT #1,"DDOOUUBBLLLEE SSIIZZEE"
615 PRINT #1,CHR$(27);"I";CHR$(167);
620 PRINT #1,CHR$(27);"MS3";
625 PRINT #1,"DDOOUUBBLLLEE SSIIZZEE"
630 PRINT #1,CHR$(27);"I";CHR$(231);
650 PRINT #1,CHR$(27);"I";CHR$(191);
655 PRINT #1,CHR$(27);"MB";CHR$(34);"BLANK FAILURE";
660 PRINT #1,CHR$(27);"MG7";CHR$(27);"I";CHR$(255);
665 CLOSE 1
670 STOP

```

IF YOUR DATA'S WORTH REMEMBERING, IT'S WORTH PROTECTING.

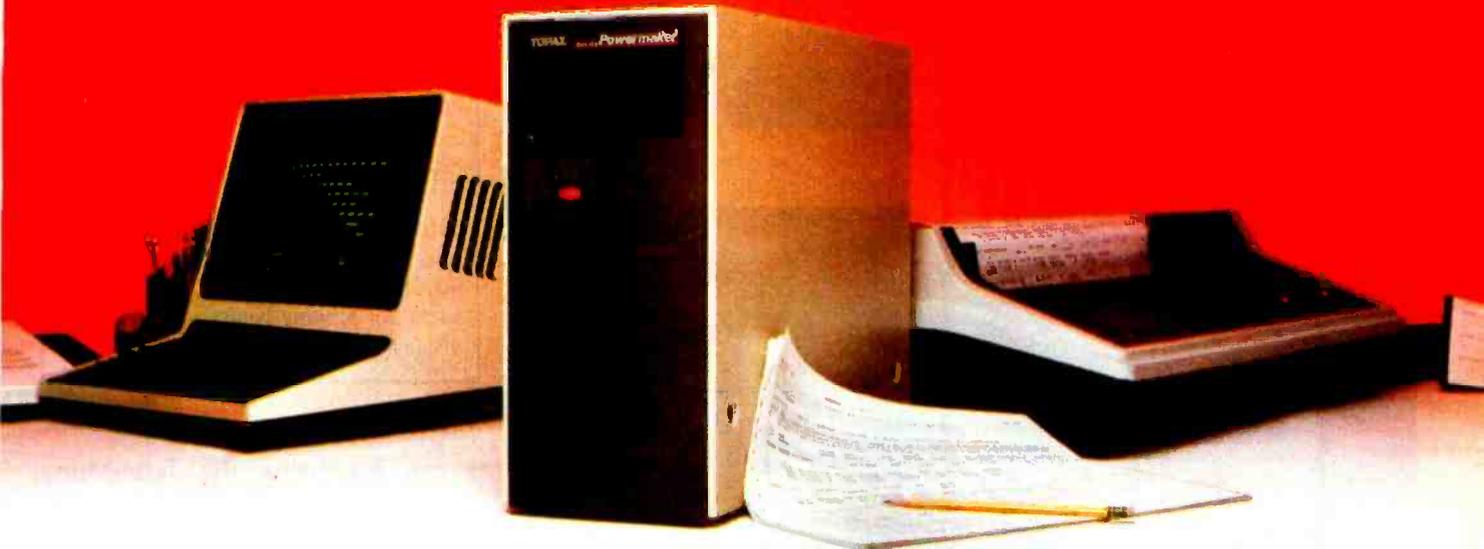

POWERMAKER[®] MICRO UPS

A split-second blackout or a sudden voltage sag can shut down your small business computer, completely wiping out critical data. Inventories, payrolls, receivables — whatever is in the memory may be lost instantly.

Although this type of data is just as important to a small business as it is to a large corporation, blackout protection has always been far too costly for small business applications. But now there is the Powermaker Micro UPS, an inexpensive standby power source specifically designed for small business computers.

This new rechargeable power system provides up to 35 minutes of steady sine-wave power, enabling even the most sensitive small computers to ride through blackouts and voltage sags completely unaffected.

Why sine-wave power? Because square-wave power impairs the performance of many printers, viewing screens and timing circuits. A Powermaker Micro UPS produces a sine wave that exactly matches the waveshape of

commercial power, ensuring compatibility with any computer system.

In addition to providing highly reliable blackout and brownout protection, a Powermaker system also protects against electrical noise, one of the major causes of computer errors and component malfunction. A Powermaker UPS is portable, completely automatic, maintenance free and plugs into any standard 120V outlet.

No matter how small your computer, your data is worth remembering. Protect it with an affordable Powermaker Micro UPS.

For complete information about the new Powermaker Micro UPS from Topaz, please fill out this coupon or call us.

**TOPAZ; 9192 TOPAZ WAY
SAN DIEGO, CA 92123-1165
PHONE: (619) 279-0831
TWX: (910) 335-1526**

- Please send me complete information about Powermaker[®] Micro UPS.
- Please have a representative call me.

Name _____

Title _____

Company _____

Address _____


City _____ State _____

Zip _____ Phone _____

TOPAZ[®]
SQUARE D COMPANY

Circle 357 on inquiry card.

(3a)

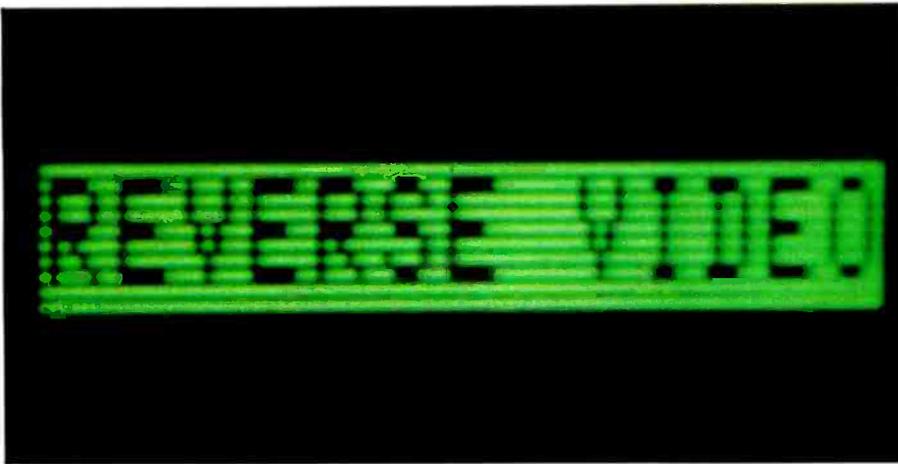

(3b)



Photo 3: The Term-Mite can display several character attributes singly or in combination, such as reverse video (3a) and reverse, double width, double height (3b).



Photo 4: The Term-Mite can display certain control characters such as line-graphics symbols for screen templates and other basic uses. This display was produced by the program of listing 4.

~U	L	~[+
~V	┐	~	┌
~W	—	~]	└
~X		^^	⊥
~Y	┌	~-	┐
~Z	└		

Table 8: In the line-graphics mode, certain control characters produce visible displays of corners, lines, and crosses useful for forming borders on the screen display (^ is Control-Caret).

Text continued from page 100:

I can see using the Term-Mite's graphics and attributes for this and other applications. (I already have eight cathode-ray tubes staring at me in the Circuit Cellar. What's one more?)

Perhaps by building the Term-Mite you can put to good use that bargain keyboard and old monitor you've had sitting around for years. Be warned, however, that the unit's 25-line by 80-column display requires too great a bandwidth for satisfactory connection to a regular TV set. A 12-MHz monochrome monitor is the better choice, as shown in photo 5.

Since the Term-Mite's control software is stored in what is actually an EPROM (an erasable programmable ROM), it would be possible to add commands or modify the operation of its functions. National Semiconductor will eventually have complete documentation available for the NS455A TMP, including a listing of the standard supplied control program and the processor's instruction set. Within the 6K yet-unused bytes of program address space, some pretty fancy terminal software could be written, perhaps even to emulate the command protocols of various commercially sold terminals. The only



Photo 5: The Term-Mite ST circuitry described in these articles is used with a separate keyboard and video monitor to form a complete functional terminal. Here a Jameco JE610 keyboard works with the Term-Mite, a NEC (Nippon Electric Company) green-phosphor monitor, and the Circuit Cellar MPX-16 computer.

modification would be a simple EPROM change.

Next Month:

A new chip from Silicon Systems Inc. has prompted another project on speech synthesis. ■

Editor's Note: Steve often refers to previous Circuit Cellar articles as reference material for each month's current article. Most of these past articles are available in reprint books from BYTE Books, McGraw-Hill Book Company, POB 400, Hightstown, NJ 08250.

Ciarcia's Circuit Cellar, Volume I covers articles that appeared in BYTE from September 1977 through November 1978. Ciarcia's Circuit Cellar, Volume II contains articles from December 1978 through June 1980. Ciarcia's Circuit Cellar, Volume III contains articles from July 1980 through December 1981. Ciarcia's Circuit Cellar, Volume IV, soon to appear, will contain articles from January 1982 through June 1983.

Special thanks to Bob Harbrecht of National Semiconductor Corporation for his help on this project.

Steve Ciarcia (pronounced "see-ARE-see-ah") is an electronic engineer and computer consultant with experience in process control, digital design, nuclear instrumentation, product development, and marketing. In addition to writing for BYTE, he has published several books. He can be contacted at POB 582, Glastonbury, CT 06033.

References

1. ANSI X3.64-1979: Additional Controls for Use with the American National Standard Code for Information Interchange. New York: American National Standards Institute, 1979.
2. Ciarcia, Steve. "Build the Circuit Cellar Term-Mite ST Smart Terminal, Part 1: Hardware Description." BYTE, January 1984, page 37.
3. Ciarcia, Steve. "Build a Z8-Based Control Computer with BASIC." Part 1, BYTE, July 1981, page 38. Part 2, BYTE, August 1981, page 50.
4. Lancaster, Don. "TV Typewriter." *Radio Electronics*, September 1973, page 43.


To receive a complete list of Ciarcia's Circuit Cellar project kits available from the Micromint, circle 100 on the reader service inquiry card at the back of the magazine.

The following items are available from:

The Micromint Inc.
561 Willow Ave.
Cedarhurst, NY 11516
(800) 645-3479 for orders
(516) 374-6793 for information

1. Complete Term-Mite ST video-display terminal kit including NS455A, printed-circuit board, IC sockets, DB-25S connector, and all other components but without keyboard or CRT monitor. Board size is approximately 4½ inches by 6½ inches with a 0.156-inch 44-pin edge connector.
Price \$239
2. Assembled and tested Term-Mite ST video-display terminal, without keyboard or CRT monitor.
Price \$279

Please add \$5 for shipping in the continental United States, \$25 elsewhere. New York residents please include 7 percent sales tax. Allow 4 to 6 weeks for delivery.

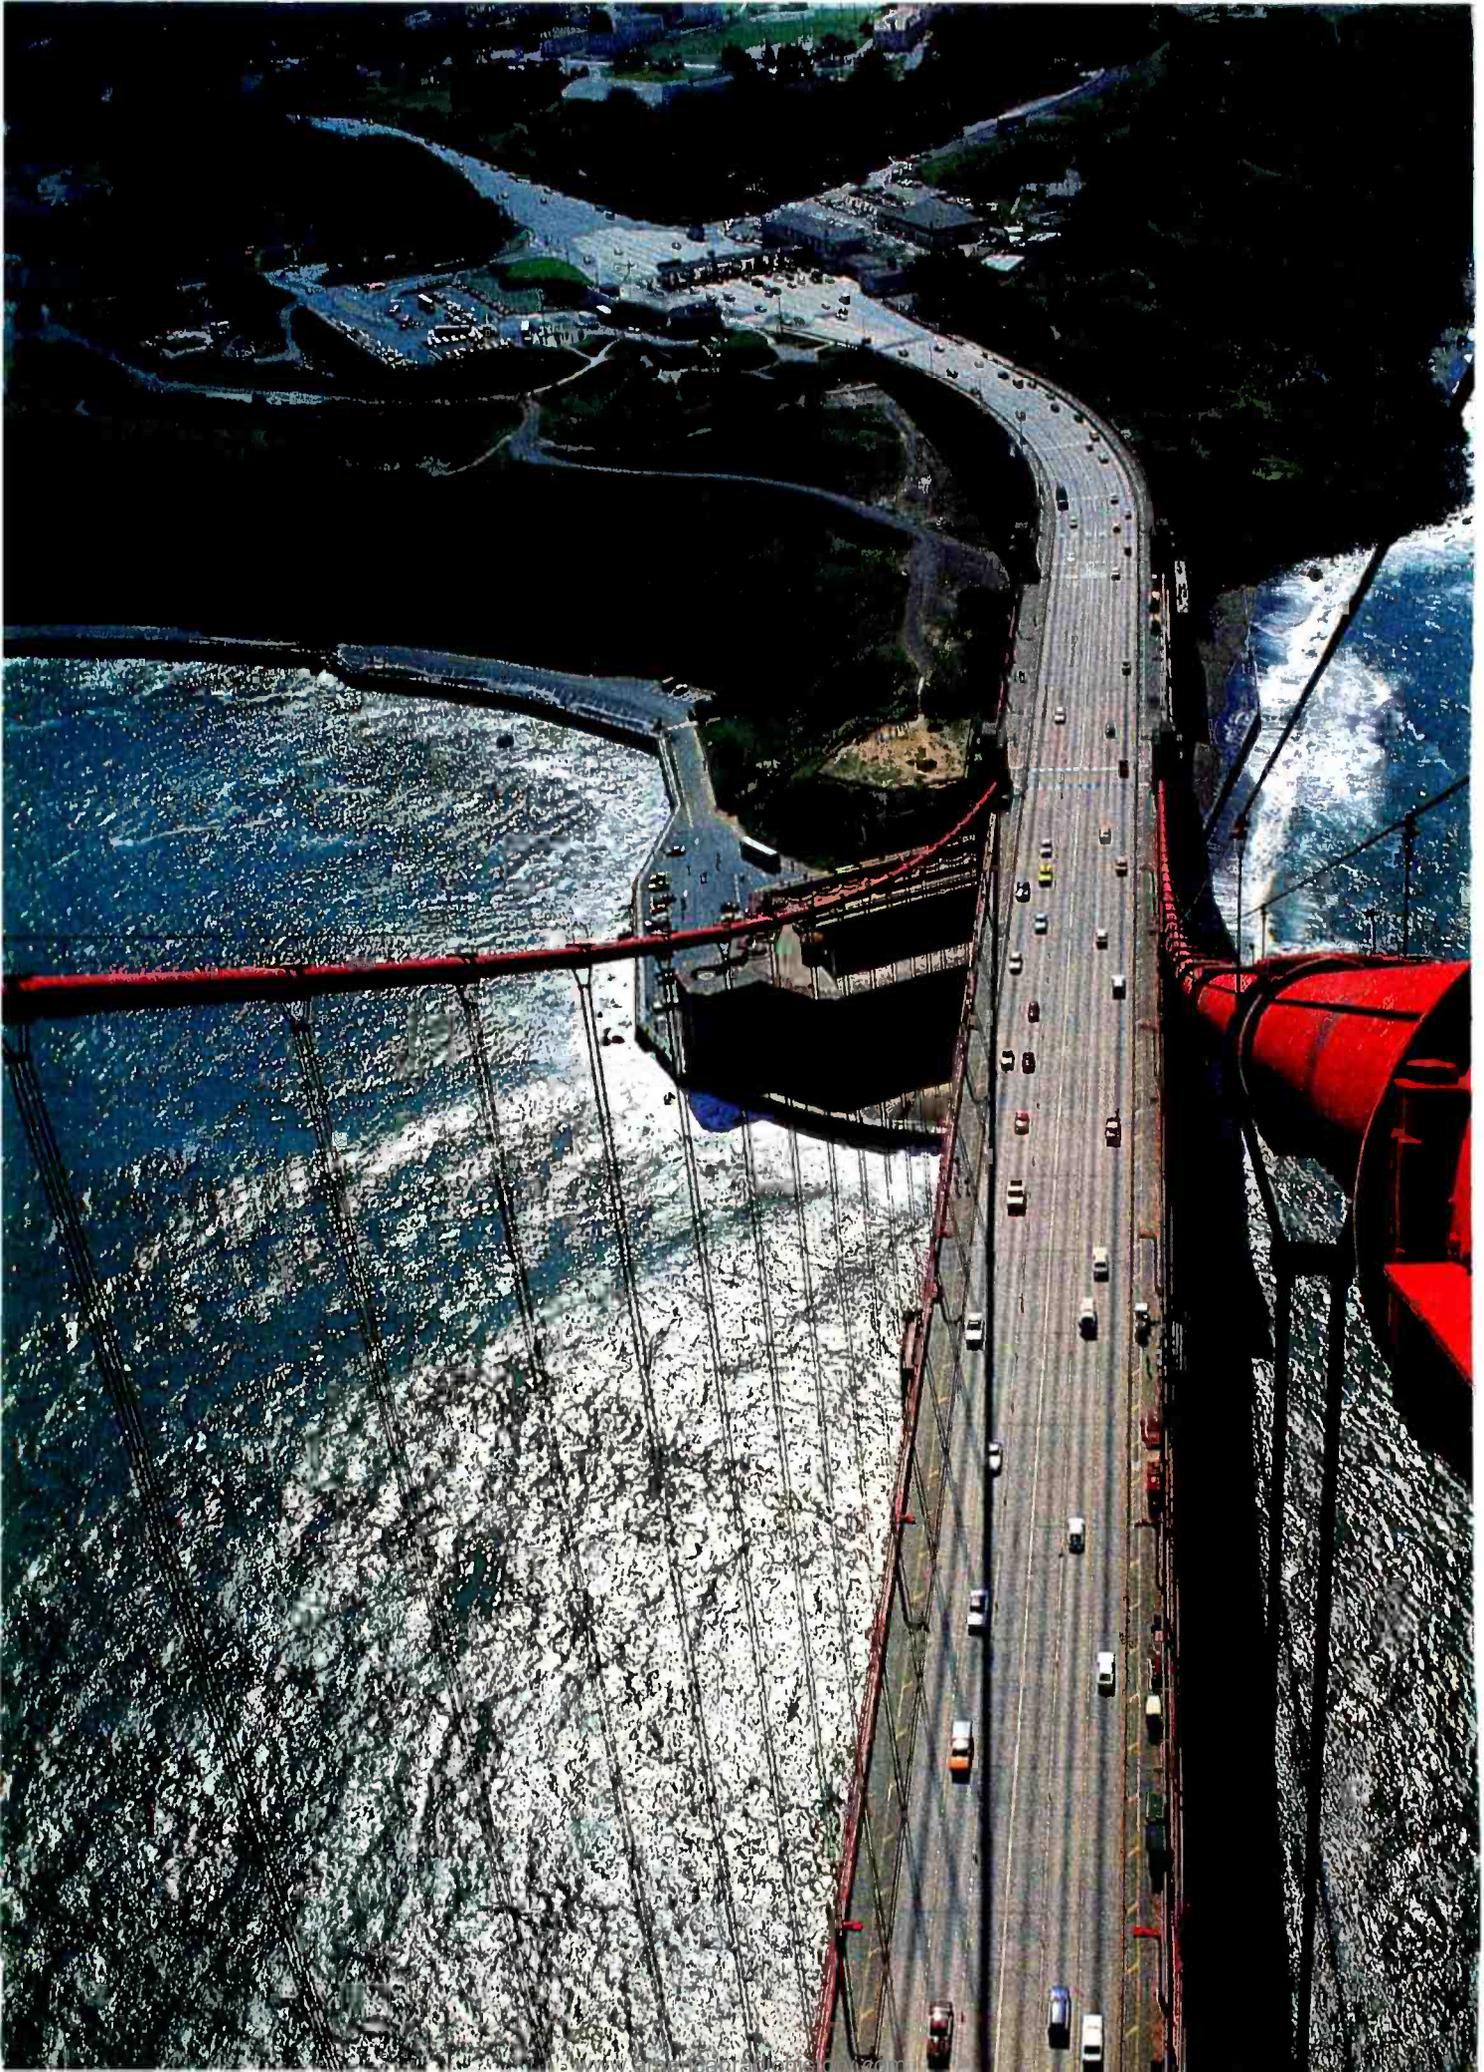


With a complete set of tools, you can build almost anything.

While other companies offer OEMs a few tools to build with, Cadmus provides the complete set.

For example, the Cadmus 9000 combines all the power of a mainframe, the speed of a mini, the price of a micro and the unlimited application flexibility of UNIX™ System V with Berkeley 4.2 enhancements.

All in a distributed environment.

In fact, the system's unique UNISON™ networking software provides the full resources

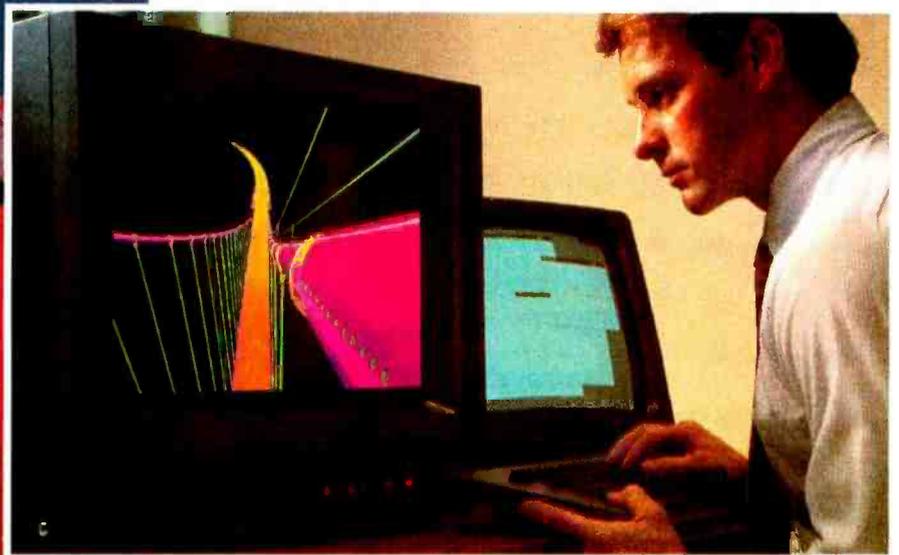

of the entire network to any computational node through network-wide virtual memory with demand paging.

A 10 Mbit Ethernet™ or 50 Mbit fiber optic LAN serves as the interprocessor bus.

And comprehensive graphics, development and decision support tools facilitate graphics applications in a windowed, multiple process environment.

In addition, we support every Cadmus 9000 with Thunderbolt™ service that puts an engineer at your door anywhere in the country within 24 hours. Guaranteed.

To get the complete picture on this high powered graphics-oriented distributed system, call Cadmus at 617-453-2899.

The Cadmus 9000. Finally, you've got a complete set of tools.

CADMUS The Distributed
Mainframe.™
COMPUTER SYSTEMS

600 Suffolk Street, Lowell, MA 01854

USENET: ...!wivax!cadmus TELEX: 948257

UNIX is a trademark of Bell Laboratories. Ethernet is a trademark of Xerox Corporation.

Circle 44 on inquiry card.

Now 60 MHz or 100 MHz Tek quality is just a free phone call away!

**New lower price!
100 MHz 2235
now just \$1650.**



Tek has expanded its best-selling 2200 scope line up to 100 MHz. And brought it all as close as your phone. Tek's revolutionary, reduced-component architecture brings unprecedented quality, reliability and affordability to the 60 MHz 2213 and 2215, and now, the 100 MHz 2235.

All three of these lightweight (13.5 lb.) scopes feature 2 mV/div vertical sensitivity and 5 ns/div sweep speeds, plus a complete trigger system for stable triggering on digital, analog or video waveforms.

Scopes with a comprehensive 3-year warranty*... probes... and expert advice. One free call gets it all! You can order, or obtain literature, through the Tek National

	2213	2215	2235
Bandwidth	60 MHz	60 MHz	100 MHz
No. of Channels	2	2	2 + Trigger View
Alternate Sweep	—	Yes	Yes
Vert/Trig B/W Limit	—	—	Yes—20 MHz
Single Sweep	—	—	Yes
Accuracy: Vert/Horz	3%	3%	2%
Delay Jitter	1:5,000	1:10,000	1:20,000
Trigger'g Sensitivity	0.4 div at 2 MHz	0.4 div at 2 MHz	0.3 div at 10 MHz
Input R-C	1M Ω -30pf	1M Ω -30pf	1M Ω -20pf
Variable Holdoff	4:1	4:1	10:1
Price	\$1200†	\$1450†	\$1950† Now \$1650†

Marketing Center. Technical personnel, expert in scope applications, will answer your questions and expedite delivery. Direct orders include operating and service manuals, two 10X probes, 15-day return policy, and worldwide service back-up.

**Call toll-free:
1-800-426-2200,
Extension 129.**

In Oregon, call collect:
(503) 627-9000, Ext. 129.

†Price F.O.B. Beaverton, OR.
*3-year warranty includes CRT and applies to 2000 family oscilloscopes purchased after 1/1/83.
Scopes are UL Listed, CSA and VDE approved.

Tektronix
COMMITTED TO EXCELLENCE

Chaos Manor Gets Its Long-Awaited IBM PC

Of mice and men, Eagles, Shirley, the ol' mailbag, and much more

by Jerry Pournelle

Well, the big news is that our IBM PC arrived two days before Halloween. We had paid for it in June, and even after IBM notified us that it had been shipped to the local Computerland there were some, uh, interesting escapades suggesting shuffle and jive, but we do have it. Alas, within days we had major problems.

First, the video monitor developed a high-pitched whine from the fly-back transformer. That soon became intolerable. Computerland in Woodland Hills gave us no difficulty at all; we returned the monitor, and they loaned us a replacement and sent ours off somewhere to be fixed.

We bought a bare-bones PC, one disk drive, and 64K bytes of memory. As soon as we got it, we added memory chips, bringing the PC's internal memory up to a full 256K bytes. The memory chips are available for about \$7 each. It takes 27 of them (in blocks of nine; eight 1 by 64K bytes for memory, and one more for parity checking), so the upgrade will cost you \$189; IBM charges a *lot* more.

It turns out there's no trick at all to adding the chips. You have to take the PC apart, but that's a simple matter requiring no tools but a Phillips screwdriver. (Our friend Noor Singh calls the two kinds of screwdrivers "plus" and "minus.") Then you have to adjust a couple of

switches. The IBM system manual—the one you get whether you want it or not—not only tells you what switches to throw, but shows you a picture. You'd have to be pretty dense not to understand.

Indeed, there's a good solid feel to everything about the IBM PC. My initial impression is that I still prefer the Eagle 1600, but I must admit: the IBM screen is rock steady, the character set is aesthetically pleasing, and the keyboard has a pretty good feel even if the layout is rotten.

However, a day or so after we added the memory chips, the PC stopped working.

The IBM PC does a memory test whenever you turn it on. If it finds a memory error, it tells you "PARITY ERROR 1" and refuses to do anything else. There are no programs to tell you *which* memory chip is defective. Since we'd added a lot of memory chips, we figured chances were good that one of ours wasn't working.

It's a fair amount of work to swap out chips one at a time until the bad one is located; it would be much easier if we could figure out which bank the bad chip was in. The IBM manuals carefully explain how to set the internal switches to tell the machine how much memory it has available, which suggested a simple solution to our problem. We simply

set those switches to indicate there was *no* additional memory, in other words, that the PC had aboard only the soldered-in 64K bytes that it came with.

On power-up we got the same PARITY 1 error. Since we couldn't possibly swap out the soldered-in chips, out to Woodland Hills Computerland went our PC.

They had it fixed the next day. Seems it was one of our chips.

"How can that be?" I asked. "We set the switches to eliminate that memory." Woodland Hills Computerland fixed the machine for us, but they had no answer.

Time to dig, so I called my sane friend, the one who's an IBM engineering executive. I explained the problem.

"It just could be that the new ROMs don't pay much attention to those switches," he said with a chuckle. "When they changed from 16K-byte to 64K-byte memory chips, they switched motherboards. What you have is an XT board in a normal PC."

Which is another undocumented feature. I wonder how many more I'll discover in my long-awaited PC?

Meanwhile, the undocumented feature brought about another problem. As regular readers of this column must know, I have no great

love for the IBM PC keyboard layout with its silly “\” key where the Shift key ought to be and the Return key way over where I can’t reach it. The IBM Selectric keyboard is the world’s best, bar none; why did they have to muck up success? But they did.

Fortunately, there’s a remedy. Jim Baen’s Magic Keyboard program re-assigns those keys, turning the “\” into Shift, and the “~” (tilde) into Return and such like. To get the “\” and the squiggle back, use the Alt key. The result is that I end up with a Selectric keyboard layout, which is what I want. Magic Keyboard is nearly invisible and can be made to run on start-up; it takes a lot of the sting out of the PC.

However, although Magic Keyboard works fine on older IBM PCs, it wouldn’t work with mine!

In a little-publicized move, IBM stopped putting 16K-byte chips in the PC and used 64Kers instead, which is why we could get 256K bytes on the motherboard. What IBM did was use a modified PC XT motherboard. This means that software (like Magic Keyboard) designed for *just* the PC won’t work; you must use XT-specific software (MagicXT). I don’t know if anyone else wrote software that specific; it was necessary for M.K. The good news is that MagicXT works fine, and you get both when you buy Magic Keyboard from Workman.

Other First Impressions

There are things to recommend the PC and even MS-DOS. There are machines that are built as well (Eagle), machines with better keyboards (both Eagle and TI PC), and machines that run faster (Eagle and Compupro), but no other with those magic initials.

Screen: the black-and-white screen is rock steady and the character set is pleasing.

Expansion: we already have three boards in our PC, and we haven’t even got started yet. No wonder the breadbasket boards sell so well. Getting a 512K-byte board will bring your memory up to its theoretical maximum. I don’t know if the PC won’t address more, or if the 768K-byte limit is artificial.

Disk drive: we bought a PC with a single disk drive. It’s built by Control Data Corporation (CDC) and it’s very quiet and nice. Then we went to Priority One and bought a Tandon drive, which plugged in and ran with no trouble; but it’s much more noisy than the one IBM supplied. I’m told that IBM is no longer using Tandon drives. Ours was cheap and works fine, though.

Software: we bought both DOS 1.1 and 2.0. Everything that runs on 1.1 is supposed to run on 2.0; we’ll see if that’s true. You also get a disk of diagnostic programs with DOS 2.0, but alas, ours was defective; it wouldn’t copy (“Unrecoverable Read Errors”), it wouldn’t boot, and it wouldn’t run. Fortunately, my IBM engineer friend was able to supply me with a copy of his diagnostics disk.

When I tried to copy my defective disk, it reported “8 sectors/track,” but when I copied his (known working) diagnostics disk, it reported “9 sectors/track.” However, it boots and runs. The first time I ran the diagnostics, it reported a CRC error on the main drive and some other error on the new Tandon drive. The diagnostic program has an option to let it run forever, stopping only for errors; I set it up to do that, and Lo!, it ran for hours without errors, except for one “Error Keyboard 301” that was never repeated. There were no more drive errors.

I presume there was something spurious about those early errors, but it’s one more thing to annoy us.

My son Alex wants to call our PC Lucy Van Pelt because it’s a definite fusbudget. Two major repairs in a week! Plus a defective master disk, spurious errors, and we had to wait for it for four months after we paid.

Alex’s Notes

Alex, a senior in computer science at UCSD, had a few hours to play with the IBM PC. Here are his notes.

“There is no honest-to-Krelden reset switch. You can press three keys together (Ctrl, Alt, and Del) and sometimes get out of situations, but not always, as for instance with that defective diagnostics disk. Other-

wise, you must turn off the power, wait 10 to 20 seconds (there’s a timer or something), turn it back on, wait through the self-check (up to 90 seconds), reload, etc. This can be a comprehensive drag on large programs.

“Memory checks are nice, but they can take a long time. With no Reset button, some way to defeat the memory check, or at least a faster memory check, would be nice. It’ll be even worse when we have 768K.”




The Logitech Mouse

We’ve also fired up Concurrent CP/M, which works, and connected the Logitech mouse, which also works; you just plug it in. Alex’s comment is,

“The Logimouse is neat. I will have to experiment with it awhile to see about setting the push keys for different things. You can rerun a command just by moving the mouse; through experimentation I discovered that the arrow keys will do the same thing, so it must be a MS-DOS function. Anyway, the mouse currently writes arrow keys as if the keyboard did them; this is real nice in Lotus 1-2-3 and such. I’ll want to scale the mouse’s movement more since it’s too sensitive.”

I’m quite pleased with the Logimouse, although, as Alex says, it’s scaled a little too fast. However, changing that is no problem at all. Moreover, the three buttons on the mouse can be set to make any characters you want, such as carriage returns or spaces or periods (for games) or any of the user-defined functions. You can set them so that more than one character per key is sent, too. Even better, the MS-DOS SUBMIT facility—that is, the ability to set up a chain of programs that run automatically with a single command—is pretty good, so that you can include a Logimouse redefinition in it.

A SUBMIT file (named AUTO-EXEC.BAT, for batch) can be run on start-up. This means we can have the machine ask who has turned it on, and adjust the mouse commands to suit the user! We can also include mouse redefinitions in a SUBMIT file to invoke just about any program,

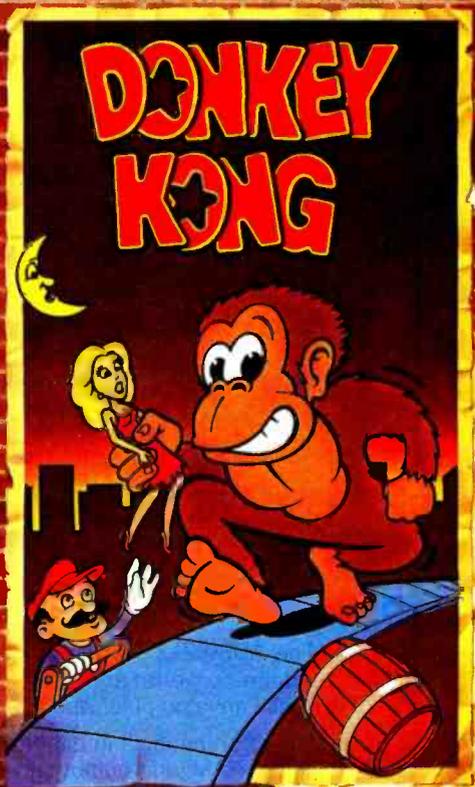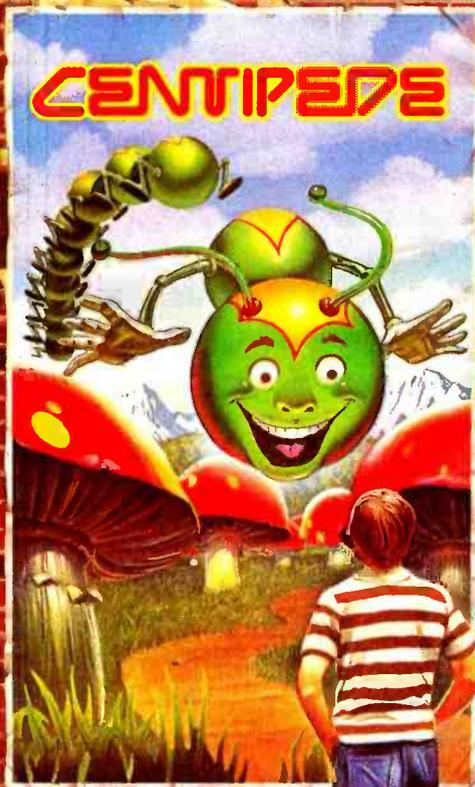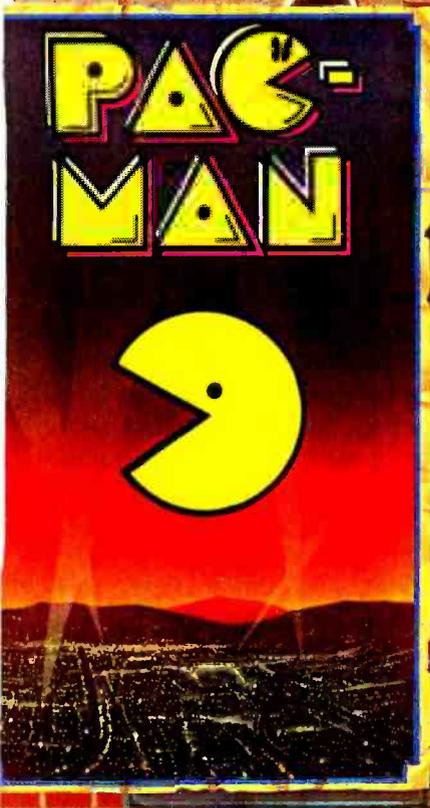

The arcade classics. Now playing on home computers everywhere.

If you own a Commodore VIC 20 or 64, a Texas Instruments 99/4A, an IBM or Apple II, we've got what you've been waiting for!

The biggest arcade hits ever, the classics. DONKEY KONG by Nintendo, CENTIPEDE, PAC-MAN, DEFENDER, ROBOTRON: 2084, STARGATE and DIG DUG. (On the TI 99/4A you can also play Protector II, Shamus, Picnic Paranoia and Super Storm.)

And the hits will keep on coming. Soon you'll be able to play JOUST, JUNGLE HUNT, MOON PATROL, POLE POSITION, MS. PAC-MAN™ plus others on your home computer. Some games also available on Colecovision and Intellevison.

The Arcade Classics from ATARISOFT.™ They could be playing where you live. Today.


ATARISOFT™
Now your computer fits the arcade hits.



DONKEY KONG and NINTENDO are trademarks and © Nintendo 1981, 1983. DEFENDER is a trademark and © Williams 1980, manufactured under license from Williams Electronics, Inc. ROBOTRON: 2084, MOON PATROL and JOUST are trademarks and © of Williams 1982, manufactured under license from Williams Electronics, Inc. DIG DUG is created and designed by Namco, Ltd. manufactured under license by Atari, Inc. Trademark and © of Namco 1982. PROTECTOR II, SHAMUS and PICNIC PARANOIA are trademarks of Synapse Software Corporation, manufactured under license by Atari, Inc. SUPER STORM is engineered and designed by Synapse Software Corporation, manufactured under license by Atari, Inc. JUNGLE HUNT is a trademark and © of Iain America Corp. 1982. POLE POSITION is engineered and designed by Namco Ltd. manufactured under license by Atari, Inc. Trademark and © Namco. STARGATE is a trademark and © Williams 1981, manufactured under license from Williams Electronics, Inc. MS. PAC-MAN, PAC-MAN and characters are trademarks of Bally Midway Mfg. Co. sublicensed to Atari, Inc. by Namco-America, Inc. ATARISOFT™ products are manufactured by Atari, Inc. for use on the above referenced machines and are not made, licensed or approved by the manufacturers of these machines. COMMODORE 64, VIC 20, TEXAS INSTRUMENTS 99/4A, IBM, APPLE, COLECOVISION and INTELLIVISION are respectively trademarks of Commodore Electronics Limited, Texas Instruments, International Business Machines Corp., Apple Computer, Inc., Coleco Industries, Inc. and Maitel, Inc. A Warner Communications Company. © 1983 Atari, Inc. All rights reserved.

Circle 31 on inquiry card.

DATA EXCHANGE/64K SPOOLER

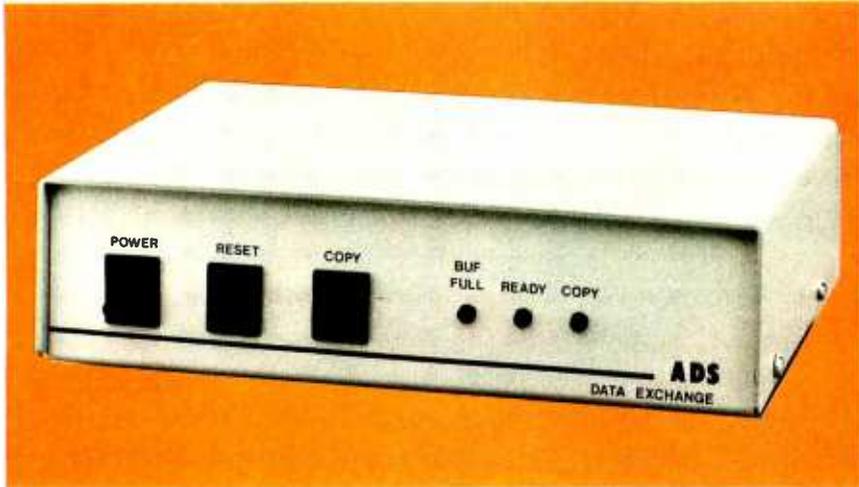

The ADS-8212 DATA EXCHANGE/64K is a computer independent interface converter and print spooler. It can be installed between virtually any computer and any peripheral.

Data can be input in either serial or parallel, stored in its 64K bytes of RAM, and output serial or parallel. Serial ports support baud rates from 50 to 19 200 and both hardware and software handshaking. The input and output ports are completely independent; input data with one protocol and baud rate and output it with a different protocol and baud rate. Selections are dip switch selectable.


A unique feature is its ability to make unlimited numbers of copies. Hitting the copy button will send another copy to the printer. When done making copies, hit the reset button to clear the memory.

Included with the DATA EXCHANGE/64K are two 4 foot output cables, one parallel cable with standard Centronics type connector and one serial cable with standard DB 25 connector. Standard plugs are supplied for input ports.

RS-232 HANDSHAKING:
RDY/BSY (DTR)
Xon/Xoff
ETX/ACK

Suggested list price: \$339.00

Dealer inquiries welcome.

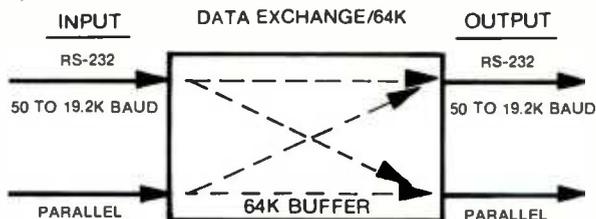

Available at your local dealer or contact:

ADS ANTEX DATA SYSTEMS
A Division of International Antex Inc.
2630 California Street
Mountain View, California 94040 ■ Phone: (415) 941-7914
Telex: 704 969 INTERAX UD

such as Lotus 1-2-3, games, or word processors, making the mouse buttons do what you'd want them to do in that particular context. This deserves a bit more thought; more next month. The bottom line is I like the Logimouse quite a lot.

That's a bit of a surprise, because I didn't think I'd like mice all that much. There are two generic problems with mice: (1) you need a clean, flat surface near the keyboard, and (2) you have to take your hands off the keys to use the mouse.

Number (1) is a problem in Chaos Manor; there are *no* clean, flat surfaces of any size, near the keyboard or away from it. It's a law of nature: a flat surface collects papers. As for (2), taking your hands off the keyboard can be a nuisance, but not when you've written the text and merely want to edit.

I do wonder: why hasn't someone developed a keyboard with a small thumb ball along one edge? You could move your hand to the thumb ball to drive the cursor; and there could be two or three buttons, of the mouse kind, where your fingers naturally rest when you've put your hand on the thumb ball. I'd sure like a keyboard like that. . . .

Coming Attractions

At present our PC is in need of expansion cards and the like, all of which we intend to add, after which comes a full report. I've also had a call from Steve Ciarcia about his wonderful new Quicksilver card and program; he's sending me one Real Soon Now, as soon as there's one available. As I said last month, Steve's card is the first thing one ought to add to an IBM PC, and I don't say that because Steve's a friend and colleague; it's a brilliant idea that makes your IBM PC into a new—and much faster—machine. More on that when I have a test model.

The Eagle Flies Again

We love our Eagle 1600. We truly do. It's faster than the IBM PC, and the keyboard is laid out better. It has a nice screen. The microprocessor chip is an 8086, which gets data 16 bits at a time. Compare this to the

The Complete Application Development System With Features You Most Desire

Unequaled power with extreme ease of use

Is Easy to Use:



Fully menu driven to remove the guesswork.

Full use of function keys with the assignments always displayed. All cursor movement and editing functions on the keyboard are supported.

Provides full color support and screen style customization.

System Features:

A list of users can be kept, with passwords and security levels.

The print style is customizable. Data can be interchanged with mainframe computers, other data bases or spreadsheet programs.

Data base back-up and restore functions are integrated to reduce errors.

System Requirements:

Available on the IBM-PC, DEC Rainbow, Wang/TI Professional, Victor 9000, etc. Compatible with MS-DOS and CPM/86.


Supports floppy or hard disk drives.

Any popular printer can be optionally supported.

It Provides

A Complete Range of Features:

- Lay out forms on the screen. Define data-entry fields anywhere using: 8 field types; table look-ups; calculations; range checks; choice fields; defaults. Revise your forms simply.
- Easy, fast and accurate data-entry. View and update your records in the same simple manner.
- Define reports/transactions using the unique English-like, optionally menu driven query language. Access data from all your files; select records any number of ways; group/sort on any number of levels, perform calculations, obtain subtotals, totals and statistical summaries. Delete/update selected records. Post information between files.
- Use system defined/custom report formats. Create mailing labels/form letters. Use pre-printed forms.
- To format a report complete with text, data, and graphs; use the optional WORDEASE™ word-processor or the GRAPHEASE™ graphics facility.
- Display or print the report output, or take it to your spreadsheet, word processing, or graphics programs.
- Organize the access to your forms and reports by setting up your own menus.
- Large data bases: 64K records/file; 255 fields/record; 255 char/field; any number of indexes/file. Relate any number of files with this multi-user relational DBMS. Speedy access: B-Tree indices; cache memory; delayed writes.

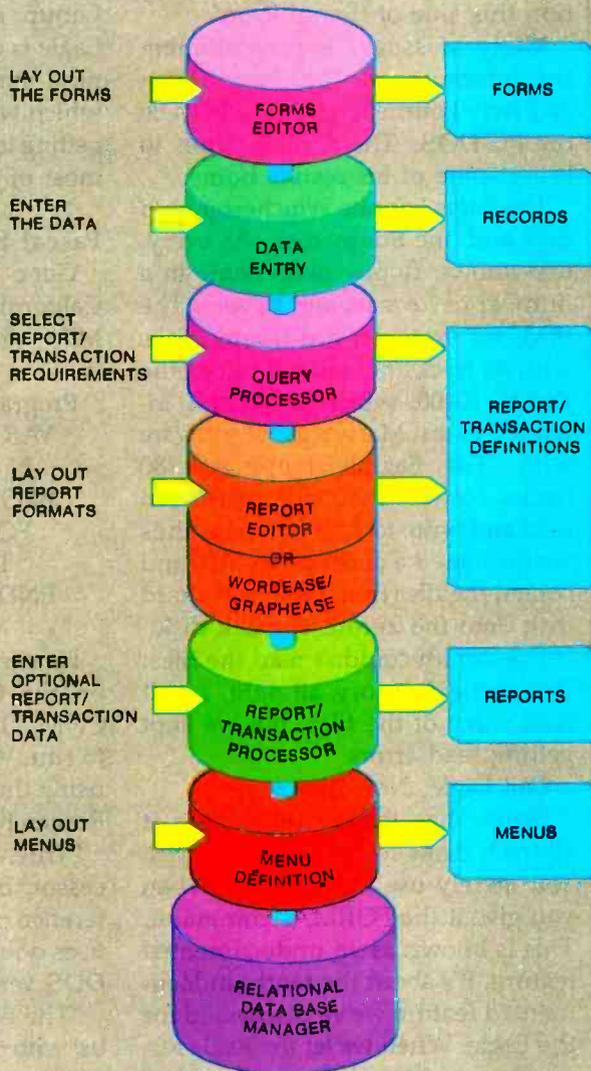

Create your DATAEASE Applications:

Inventory Control
Personnel Management
Job Accounting
Mailing List
Circle 288 on Inquiry card.

Accounting
Order Processing
Market Analysis
Financial Portfolio

Medical Office Systems
Real Estate
Agriculture
Distribution Management

Social Sciences
Bibliography
Library Management
School Records




Software Solutions, Inc.

305 Bic Drive • Milford, CT 06460
(203) 877-9268 • (800) 243-5123 • Telex 703972

Contact your dealer or call directly.

SEE
US AT
SOFTCON
#A761

PUZZLED ABOUT EMULATORS?

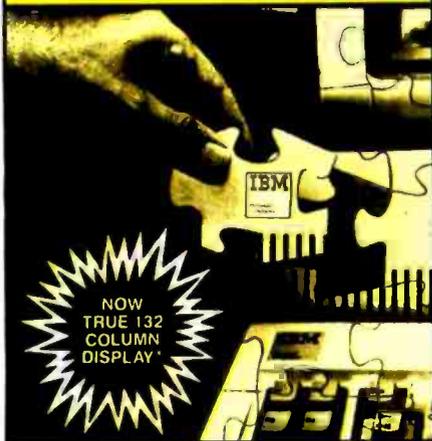

SMARTERM™
is the piece you need!



Thousands of users find our software emulators offer more: multiple setups, "smart" softkeys and command files, online help screens, full printer support, powerful ASCII and and binary file transfer including an "error-free" mode. Combined with a complete manual, reference card, keytop chart, and unlimited telephone support, these features make SMARTERM unmatched!

Call NOW for more information.

Available through your local software dealer or directly from:



2740 Ski Lane
Madison, WI 53713 (608) 273-6000

Software for Professionals . . .
by Professionals

*On your monochrome monitor using the new SuperVision™ board! Ask about our special board prices.

SMARTERM is a trademark of Persoft, Inc.
VT is a trademark of Digital Equipment Corporation
Dasher is a trademark of Data General Corporation
SuperVision is a trademark of California Computer Systems, Inc.

IBM PC's 8088, which only gets 8 bits a shot. When we all go to concurrent operating systems—as we will—each of the four tasks and an 8086 system will run faster than the same job by itself on the PC's 8088.

The Eagle has on-board sockets for 512K bytes of memory and capability for multiple users. It also has eight expansion slots, same as the IBM PC XT. There's an optional built-in 10-megabyte hard disk.

It also has the lousiest documentation this side of the junkyard.

Marty Massoglia is programming the Inferno game (by Larry Niven and Jerry Pournelle) in Pascal MT+86 on PC-DOS. There came time to bring some of his results home.

The Eagle has one Winchester hard disk and one floppy disk. As everyone knows, floppy disks come in a number of formats and flavors. The IBM, for example, has floppy disks with 40 tracks per side. So does the Zenith Z-100, which is what I intended to test Marty's game software with. The Eagle's floppy has 80 tracks. Now 80-track disk drives can read and write to 40-track disks; thus we formatted a disk in the Z-100 and copied the files from the Eagle's hard disk onto the Zenith 40-track disk.

The Zenith couldn't read the files. It read the directory, all right, and it read some of the files, but we kept getting read errors.

Call Eagle. New discovery.

Senle has the ability to format 40-track disks in its 80-track drives. You merely use the /i option when you give it the FORMAT command. This is known as an undocumented feature. It's about the tenth undocumented feature we've discovered for the Eagle. When we let the Eagle format its own 40-track disks, all worked fine, and the Zenith and the PC can read them without difficulty. Sigh.

We're beginning to wonder if there's anything the Eagle won't do, if you can just figure out how to do it. I mean, surely it's obvious that you use the /i option to format 40-track disks? Surely there's no need to document something so obvious?

Flash: I read the above to Eagle's Product Manager. The /i stands for IBM; he discovered it by accident one

day when the engineers were out to lunch and he wanted to format a disk to get programs off an IBM PC. It turns out there are a number of "/" options in the Eagle. None are documented.

I like the Eagle a lot, and we are collecting notes for the revised manual; it's a great machine, but wow! does it have lousy documents. Fortunately, Eagle is working hard to remedy that. Stuart LeVine, senior scientist in the company's Advanced Technology Group recently called to say that Eagle is completely revising its technical manuals. It also has DOS 2.0, which we haven't yet tried but we're getting to now. Its documents explain most of the 1600's hidden features.

Pascal Speed

Gene Allen of Newport Beach, California, offers the following Pascal MT+ program:

```
Program WORK;
VAR
  N : INTEGER;
BEGIN (*WORK*);
  FOR N := 1 TO 100
    DO WRITELN (1.0:3:1);
  END (*WORK*)
```

He says, "When compiled and run on the Compupro machine under CP/M-80 it takes about 3 seconds to run. When compiled for PC-DOS using the new compiler from Digital Research it takes over 45 seconds!

"True, the IBM is a slower processor, but much of the speed difference comes from the fact that DR uses double-precision reals in its PC-DOS version of MT+86.

"The effect of this is that those of us who used MT+ now have programs that run in about 5 minutes under CP/M and about an hour under PC-DOS."

He concludes that Pascal MT+ is portable, but it is not usable.

I sent a copy of his letter to Digital Research and got a reply from Rick Rosenbaum, engineering manager, who says, "The program does indeed run slower when compiled under PC-DOS. However, the speed difference is not due to use of double-precision reals, as Mr. Allen states,

When critics rate you tops, what do you do for an encore?



*"VISUAL 50 is in a class by itself for visual quality; the character set is unusually clear and sharp."**

*"The VISUAL 50 is the most promising new terminal to come out so far, especially in light of its price."***

*"We consider this terminal to be one of today's best products in price/performance, its incorporation of ergonomically designed features and its broad range of functionality."***

Feature Comparison Chart *

Feature	ADDS 60	VISUAL 50	TeleVideo® 925	Zenith 19	Wyse 100
Style	4	4	4	3	5
Overall Quality	2	5	3	4	3
Keyboard	3	5	2	4	2
Rollover/false keying	5	5	3	4	4
Video Quality	1	5	4	4	3
No. of attributes	5	5	5	2	5
Attribute method	2	5	2	4	2
Suitability for micros	2	5	3	5	3
	24	39	26	30	27
List Price	\$895	695	995	895	995

*MICROSYSTEMS—March 1983

**THE ERGONOMICS NEWSLETTER—August 1982

Meet the VISUAL 55

The VISUAL 50, widely acclaimed as the best performing low cost terminal in the industry, is a tough act to follow. But the new VISUAL 55 extends its predecessor's performance even further by adding 12 user-programmable non-volatile function keys, extended editing features and selectable scrolling regions ("split screen").

Both the VISUAL 50 and VISUAL 55 offer features you expect only from the high priced units. For example, the enclosure is ergonomically designed and can be easily swiveled and tilted for maximum operator comfort. A detached keyboard, smooth scroll, large 7 x 9 dot matrix characters and non-glare screen are only a few of the many human engineering features.

Another distinctive feature of the VISUAL 50 and VISUAL 55 is their

emulation capability. Both terminals are code-for-code compatible with the Hazeltine Espirit,[®] ADDS Viewpoint,[®] Lear Siegler ADM3A and DEC VT52.[®] In addition, the VISUAL 55 offers emulations of the Hazeltine 1500/1510 and VISUAL 200/210. Menu-driven set-up modes in non-volatile memory allow easy selection of terminal parameters.

And you're not limited to mere emulation. Unbiased experts rate the combination of features offered by the VISUAL 50/55 family significantly more attractive than competitive terminals.

Both VISUAL terminals are UL and CSA listed and exceed FCC Class A requirements and U.S. Government standards for X-ray emissions.

Call or write for full details.

VISUAL

See for yourself

Visual Technology Incorporated
540 Main Street, Tewksbury, MA 01876
Telephone (617) 851-5000. Telex 951-539

Circle 376 on Inquiry card.

but is due to real I/O [input/output]. In fact, if the FOR statement is replaced by

```
R: = 1.0;
FOR N:=1 TO 100 DO
  R:=R+1.0;
  WRITELN(R:3:1);
```

the program runs in less than 3 seconds. Since few people need to do repeated I/O like the example Mr. Allen gave, we believe the PC-DOS implementation of Pascal MT+ is a powerful product that allows the writing of portable programs."

Alex, who's very interested in Pascal, says they're both right—but Pascal MT+86 is notoriously slow in real I/O, much slower than it ought to be. Even with our Eagle, which is much faster than an IBM PC, we see the poor machine slow down and strain when an MT+ program causes it to write lots of numbers to the screen.

DR's Rosenbaum says, "We are committed to Pascal MT+ and will continue development work to pro-

duce faster and more powerful releases of the product."

I sure hope so. We're writing our big Inferno game in Pascal MT+ largely for the portability between PC-DOS and both 8- and 16-bit CP/M systems; despite MT+'s problems, it remains our favorite for big programs. We intend to convert the program to Modula when Modula stabilizes a bit; of course at the moment there's no Modula for CP/M 2.2 systems.

Turbo Pascal

There's a new Pascal out that we haven't had much time with, but what we have seen, we like.

Turbo Pascal, by Borland International, comes close to what I think the computer industry is headed for: well documented, standard, plenty of good features, and a reasonable price.

Well, almost reasonable.

That is: Borland advertises Turbo Pascal for \$49.95, and indeed will send you the compiler and all the documents for it; but in the fine print


of their license agreement it turns out you don't really own the compiler, and you cannot either sell or even give away programs compiled with it unless you buy an additional license from Borland.

My first reaction on reading this was to ignore the product. What need have we of a compiler that you're not only supposed to confine to a single machine, but whose output programs can be run only on the original machine? Both Microsoft and Digital Research tried that nonsense. Digital gave it up completely, and Microsoft mostly did. A fine product Turbo Pascal might be, but using it would be a solitary vice.

I called Borland's president, Phillippe Kahn. His story is that Turbo Pascal is the cat's whiskers, best thing to come down the pike in years, much better than Pascal MT+, which costs \$600. Borland is a small company that needs money and wants to sell at a low cost, but shouldn't the company get something for its efforts? Anyway, you can use Turbo Pascal for yourself for only \$49.95, but

JUKI 6100

LETTER QUALITY PRINTER

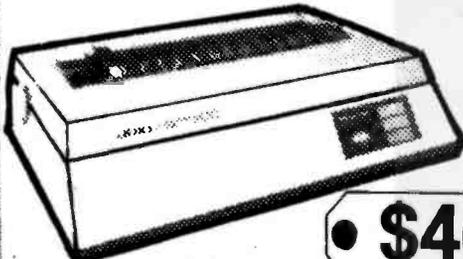

• \$469.

- 18 cps
- Word processing and graphic functions
- Proportional spacing control
- Uses IBM Selectric ribbons
- Compatible with Kaypro, IBM, Apple, Osborne, and others



Free shipping in U.S.



COMPUTERS and more

2420 University Ave., To Order
San Diego, Ca. 92104 (619) 291-1442

Our new Optimizing = C86™ C Compiler controls Charlie...


Like a Puppet on a String!

Take control of Charlie with our new Optimizing = C86™ C Compiler...now available for the IBM PC-DOS and the MS-DOS operating systems.

- Faster/tighter code
- Standard object module format
- Compile time switch for big machine addressing
- Compile time switch to produce in-line 8087 code
- Increased performance for our I/O library
- MS-DOS version 2.00 I/O library
- Expanded manual with numerous examples
- Librarian for maintenance of MS-DOS libraries
- Optional assembly source output

The C86 Compiler Diskette and Manual are still only \$395. See your local dealer or call Computer Innovations for information or to order.

Prices subject to change without notice.



Computer Innovations
980 Shrewsbury Avenue
Suite J-504
Tinton Falls, N.J. 07724
(201) 542-5920

**"They Say It All...
We Do It All!"**

Visa and MasterCard accepted

C86 is a trademark of Computer Innovations, Inc. CPM-86 and MPM-86 are trademarks of Digital Research. MS-DOS is a trademark of Microsoft. PC-DOS is a trademark of International Business Machines.



Instant one-button color printing.



Press here.

It's just that easy! Any time you want to print what's on your Apple's screen just hit the copy button on your Transtar 315 color printer with our PICS card installed, and it's done! No special programming, no lengthy code sequences, no need to exit your program! Just press the button and it prints!


By adding the optional PICS card to your \$599 Transtar 315 color printer, you've opened up a whole new world of easy color printing. For the first time ever, our PICS parallel interface card enables you to screendump virtually any program -- graphics, charts, games -- even copy-protected software! Specially designed only for the Apple II, II+, IIe, and Franklin computers, the Transtar 315 PICS card does the work of a parallel card and a lot more and costs only \$119.95.

At the push of a button, Transtar's innovative new 4-color diagonal ribbon will print up to 7 colors and more than 30 shades in a single pass.

The 315 is precision-built to exacting standards by Seikosha, the most experienced company of the famous Seiko group--recognized worldwide for quality and dependability. In fact, one of the nicest things about Transtar's 6-month warranty on parts and labor is that you'll probably never use it!

Innovative, inexpensive, dependable, easy: the Transtar 315. Color printing has never looked so good!

Only \$599.

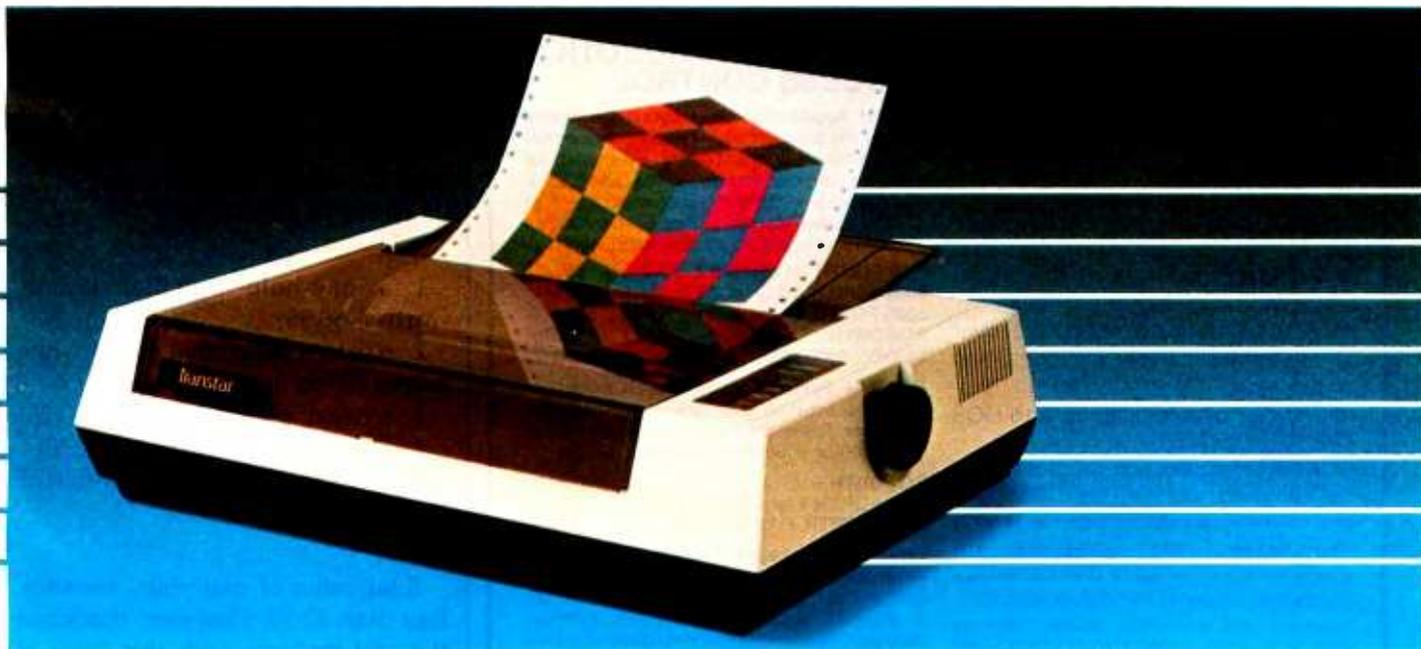

*PICS cards are currently available for Apples and Franklins.
PICS cards for other computers will be available in the future.

Transtar
A Vivitar. Computer Product

P.O. Box C-96975, Bellevue, WA 98009

Circle 361 on inquiry card.

BYTE February 1984 121

commercial users should pay more. "How much more?" I asked. I still wasn't much enthused.

However, it turns out not to be a lot more. Borland only wants another \$100 for what amounts to an unlimited license. Thus the true price of Turbo Pascal (for those who intend to sell or give away their programs or to run programs compiled with it on any machine other than the one they bought the compiler for) is \$149.95.

My first impression of Turbo is that it's probably worth \$149.95. It looks to do everything MT+ with the Speed Programming Package does, and maybe even do it faster and better.

It comes with a built-in editor, much like the MT+ Speed Package or UCSD Pascal. There are lots of utilities. It generates native code, like Pascal MT+, not p-code like JRT Pascal and UCSD Pascal; but unlike Pascal MT+, there are trace debugger capabilities that let you find the source code that produced a run-time error.

The document is a printed book and is quite complete, much more

than adequate provided that you're not trying to learn Pascal from it. The book is certainly no tutorial intro to the language—although Mr. Kahn promises a tutorial Real Soon Now. It hardly matters; at that price you don't expect a tutorial. Get Alex Pournelle's Pascal Intro and a couple of good books, and you'll still be around \$100 for a good learning package (unless you intend to sell or give away your programs).

Meanwhile, I find myself impaled on a real dilemma.

First: I want to encourage outfits like Borland. I think software is priced far too high. Heck, I'd consider a good Pascal compiler for \$150 to be a step in the right direction. Why, then, am I upset if Borland offers the exact same compiler for \$49.95 on condition that you don't sell or give away programs developed with it?

Because it's a tax on honesty. Suppose I buy Turbo Pascal for \$49.95, like it a lot, and write a good utility program with it. My friends like my program and want copies.

I now have two choices: be a liar, or pay \$100. Maybe I like Turbo Pascal so much that I'll pay the \$100 out of gratitude; I understand there are customers who have. On the other hand, a lot of people are going to say to hell with it, and how is Borland going to enforce its "agreement"? I doubt Borland can, and suspect it won't try.

Anyway: my original intent was to see how hard it would be for Marty Massoglia to translate our Inferno game from MT+ to Turbo Pascal, but I was scared off by the licensing agreement. Now that I know a "no strings" agreement is only another \$100, I'll reconsider. I'd think that a fair test of Turbo.

Meanwhile, Phillipe Kahn of Borland promises that upcoming releases of Turbo will include source code to a bunch of useful programs including a spreadsheet. Borland intends to get into the Pascal market in a big way, and I very much like that attitude. I'd like to see the company succeed; it's about time compiler prices came down to something reasonable.

TOTAL CONTROL:

FORTH: FOR Z-80®, 8086, 68000, and IBM® PC

Complies with the New 83-Standard

GRAPHICS. GAMES. COMMUNICATIONS. ROBOTICS
DATA ACQUISITION. PROCESS CONTROL

● **FORTH** programs are instantly portable across the four most popular microprocessors.

● **FORTH** is interactive and conversational, but 20 times faster than BASIC.

● **FORTH** programs are highly structured, modular, easy to maintain.

● **FORTH** affords direct control over all interrupts, memory locations, and i/o ports.

● **FORTH** allows full access to DOS files and functions.

● **FORTH** application programs can be compiled into turnkey COM files and distributed with no license fee.

● **FORTH** Cross Compilers are available for ROM'ed or disk based applications on most microprocessors.

Trademarks: IBM, International Business Machines Corp.; CP/M, Digital Research Inc.; PC/Forth+ and PC/GEN, Laboratory Microsystems, Inc.

FORTH Application Development Systems include interpreter/compiler with virtual memory management and multi-tasking, assembler, full screen editor, decompiler, utilities, and 130 + page manual. Standard random access files used for screen storage, extensions provided for access to all operating system functions.

Z-80 FORTH for CP/M® 2.2 or MP/M II, \$50.00;
8080 FORTH for CP/M 2.2 or MP/M II, \$50.00;
8086 FORTH for CP/M-86 or MS-DOS, \$100.00;
PC/FORTH for PC-DOS, CPM-86, or CCPM, \$100.00; **68000 FORTH** for CP/M-68K, \$250.00.

FORTH + Systems are 32 bit implementations that allow creation of programs as large as 1 megabyte. The entire memory address space of the 68000 or 8086/88 is supported directly

PC FORTH + \$250.00
8086 FORTH + for CP/M-86 or MS-DOS \$250.00
68000 FORTH + for CP/M-68K \$400.00

Extension Packages available include: software floating point, cross compilers, INTEL 8087 support, AMD 9511 support, advanced color graphics, custom character sets, symbolic debugger, telecommunications, cross reference utility, B-tree file manager. Write for brochure.

There's Value for You...

I have acquired Evolving Technology Company's "Disk Doubler," which is advertised as "a real money saver." For "only \$19.95" this gadget can "reduce the cost of disk storage by 50 percent by allowing the use of the back sides of floppy disks for storing programs and data."

What you get for \$19.95 is:

1. a one-hole puncher (Woolworth's, \$0.95)
2. a grease pencil that makes white marks (\$0.95 at most)
3. a heavy plastic template (\$0.25)
4. a sheet of instructions (\$0.10)
5. a "happy face" slip of cardboard (\$0.005)

Total value of materials, certainly less than \$2.50. However, that's not the real problem with this "money saver." The real cost will come if you use it.

So far as I know, all floppy disks have magnetic media on both sides



Laboratory Microsystems Incorporated

4147 Beethoven Street, Los Angeles, CA 90066

Phone credit card orders to (213) 306-7412




FIRST CLASS SOFTWARE

THAT TAKES YOU SOMEWHERE AND GIVES YOU SOMETHING SPECIAL

AGENT 2.0

AGENT 2.0 A crisis, real or imagined? A spy, ours or theirs? A file, fact or fiction? You must decide.



Portfolio Manager

BLU CHIP PORTFOLIO MANAGER Your broker on a disk. Tracks your portfolio. A data base for investors--with spreadsheet capabilities.

THOTH

Action List Data Base Manager

THOTH Once advisor to the gods of Ancient Egypt. Now yours. The action list data base manager.

C TOOLS

C TOOLS A collection of our most useful C routines. Add flavor to your C programming and save time too.

易動 EDO

EDO Think straight but think fast. The game of many strategies where no strategy is sacred.

ST. HIPPO- LYTE'S WALL

ST. HIPPOLYTE'S WALL The challenge of the wall. Colorful. Ever-changing. Complex. Will you survive?

XOR CORPORATION

See us at Softcon Booth #A1200

5421 OPPORTUNITY COURT

MINNETONKA, MN 55343

(612) 938-0005

Circle 394 on inquiry card.

of the disk. Many disk manufacturers test both sides of every disk. If both sides pass quality-control inspection, the disk is sold as "double-sided," and the code holes are punched in the jacket accordingly. If one side fails the tests, the disk is marketed as single-sided. If both sides fail, the disk is either scrapped, or marketed to a discount disk outfit, which puts it through less stringent tests.

Consequently, there's no guarantee at all that the "other" side of your disk is usable—or worse, that it won't fail catastrophically. By Murphy's laws, that disk will fail when it contains the only copy of something extremely valuable.

Ezekial, my late friend who happened to be a Z80 computer, had only one failure in his first couple of years. We eventually traced that failure to cheap disks: one had actually let media rub off on the disk-drive head. That crashed the drive, but not when the cheapo disk was in it. Oh, no. It crashed when I was saving some original text. Even Tony's bulletproof software couldn't

save that particular chapter. Moreover, it kept crashing, and it took some severe scrubbing with alcohol to get the gubbage off and make the drive reliable again.

Since that time, I've been pretty careful about what kind of disks go into my machines. By staying with high-quality disks like Dysan, I protect the disk heads from wear. Most important, though, I protect my data.

All in all, using the back sides of single-sided disks seems to me a good way to invite trouble. It might work, and save a few tens of dollars, but mark my words, there'll come a time when you regret it.

Crashing Shirley

One of the hits of the CP/M East show last month (October, 1983) was Bill Godbout's (of Compupro) multi-user machine. It has some kind of official name, but I first heard of it under the code name "Shirley," and that's what I remember it by.

Shirley is a business machine. It runs CP/M 8/16; that is, there are both 8-bit and 16-bit processors aboard,

and you don't have to tell the system whether you want to run CP/M 2.2 or CP/M-86; Shirley's smart enough to figure it out once you invoke the program.

I'll have more about Shirley after I get mine; it's more than just possible that we'll set her up as the master writing machine here, and no, I haven't given up my notions about distributed processing and "one user, one CPU." Shirley has a separate microprocessor ("brain") chip for every user as well as a master brain to do traffic management and give all four users access to the hard disk; but back to my story.

Godbout had Shirley set up for CP/M East. It was my first chance to play with it. Godbout didn't have Write, my favorite text editor, running yet, but he did have Wordstar, so that's what I called up to play with. There was only one trouble: Wordstar does a lot of disk accesses (to get all those pesky messages and translate all those multiple-stroke commands), and every time there was a disk access, Shirley crashed.

High Quality!

NDC SERIES
100/200

5 1/4" DISK CONTROLLER

KEY FEATURES

- Full sector buffering
- Logical sector addressing
- Multiple sector, cylinder operation
- 11 bit burst ECC
- Self-diagnostic capability
- Automatic sector alternation for the defective sectors
- Automatic Error Retry
- Industry Standard SASI I/F

NCL
National Computer Ltd.

AKEBONO BLDG. 2-6-12 IWAMOTO-CHO
CHIYODA-KU, TOKYO, JAPAN
PHONE: (03) 863-6705 TLX: J27542
FAX: (03) 864-4581
LJASON OFFICE IN CALIFORNIA
PHONE: (408) 734-1006 FAX: (408) 744-0705

In Less Than 3 Minutes

Your IBM Model 50, 60, 65, 75, or 85
Electronic Typewriter
can be an RS232C PRINTER or TERMINAL



CALIFORNIA MICRO COMPUTER Models 5060 and 5061 can be installed easily and require NO modifications to the typewriter.

For additional information contact:

CALIFORNIA MICRO COMPUTER
17791 Jamestown Lane Huntington Beach, CA
92647 (714) 848-3947

More vivid graphics from your personal computer with Sakata CRT Monitors.

Your personal computer deserves a SAKATA CRT MONITOR.

Truly IBM compatible with resolution of 640 dots x 240 lines and distinguishes 16 colors. Exclusive tilt/swivel stand (Model STS-1) provides better viewing from variety of angles. Modern streamlined design, backed by SAKATA's more than four generations of demanding the utmost in quality. ... "We Promise Performance".

Also available: Model SC-100 13" Composite COLOR CRT MONITOR. Model SC-300 13" RGB super high resolution COLOR CRT MONITOR. Model SG-1000 12" monochrome high resolution CRT MONITOR (green). Model SA-1000

monochrome high resolution 12" CRT MONITOR (amber).

SAKATA CRT MONITORS are available wherever personal computers are sold or write for technical and illustrated literature and prices.


SAKATA U.S.A. CORPORATION
651 Bonnie Lane, Elk Grove Village, IL 60007
(312) 593-3211 800-323-6647 (outside Illinois)

Sakata

"Serving industry worldwide . . . since 1896"

Circle 325 on inquiry card.

*Illustrated: Model SC-200 13" RGB High Resolution CRT
COLOR DISPLAY MONITOR with STS-1 Stand (option)
Compatible with IBM and other fine personal computers*

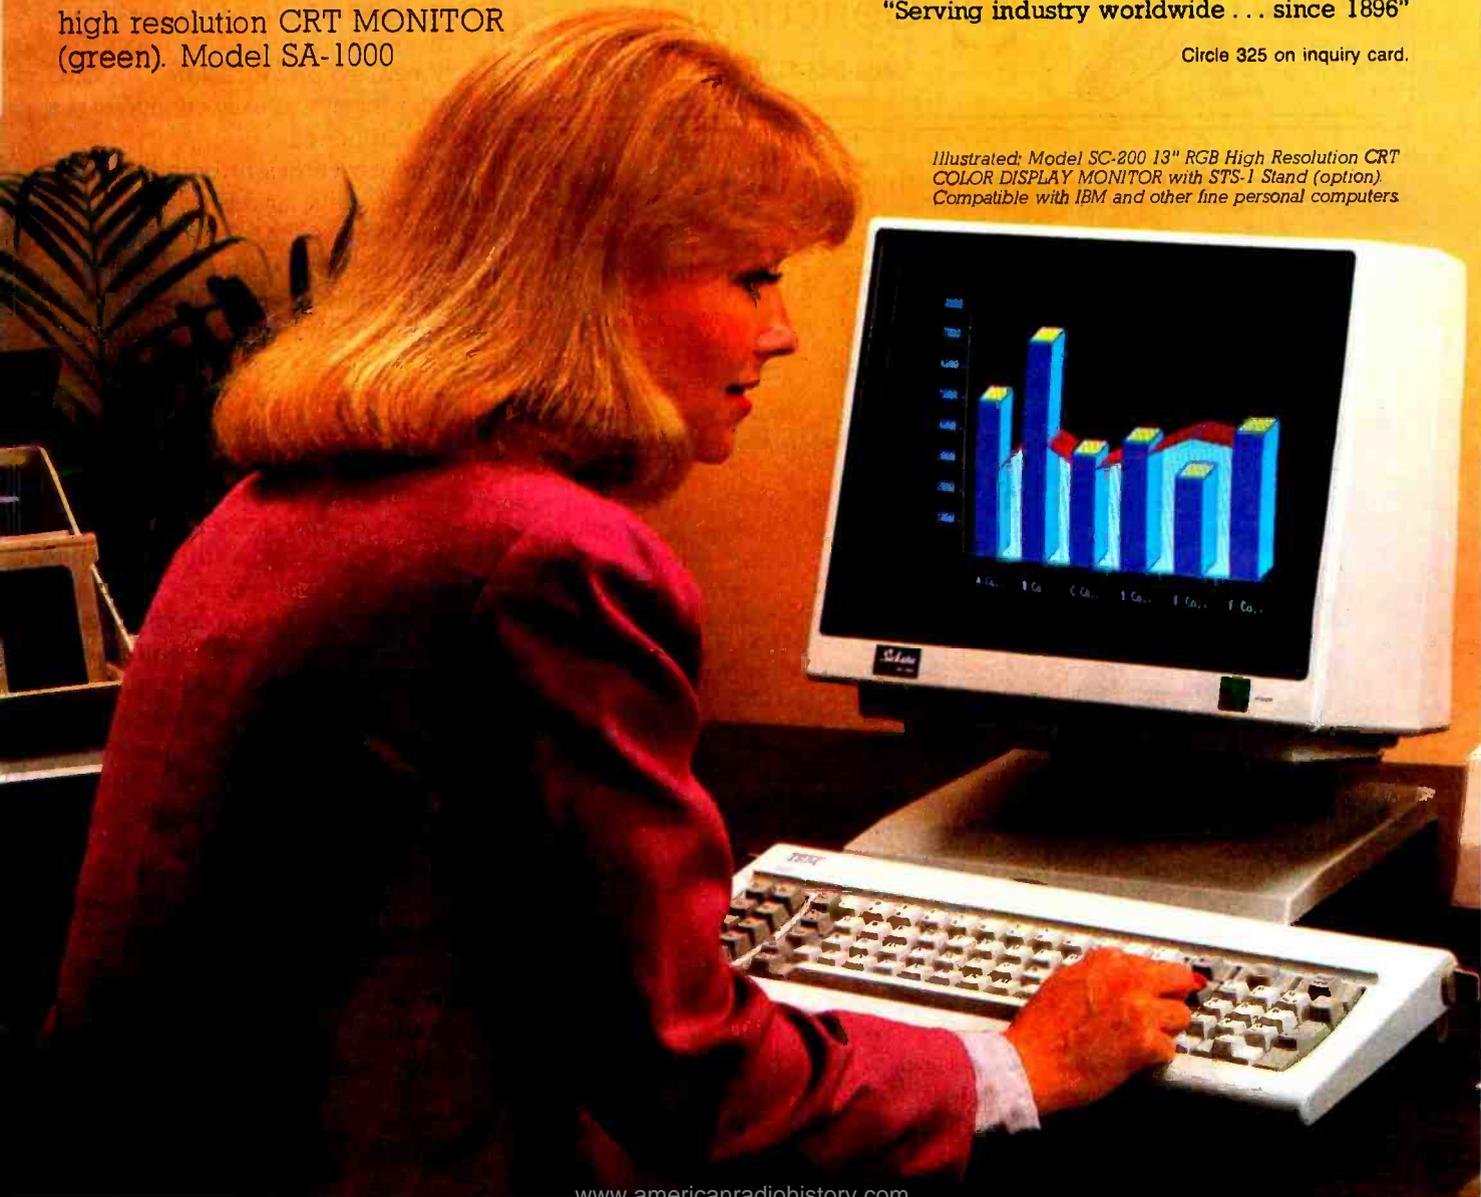

Held Back...

...by yesterday's decisions?

Concurrent's cBASIC Compiler transports your applications to the newer and more powerful 16-bit computers. And the cost is only \$495.

Concurrent also specializes in WICAT 16/32-bit computers and related equipment, a variety of software and consulting services.

Concurrent[™] Corporation
 1870 Madison Road Cincinnati, Ohio 45206
 1-800-543-1128 • TELEX 701492
HIGH PERFORMANCE MICRO COMPUTERS FOR SCIENCE AND INDUSTRY

Compupro tends to have loyal employees; I never will forget how the staff stayed with the booth in the 106+ degree temperature of the outside tents of last year's NCC. The overflow tent area quickly became known as The Inferno; a lot of exhibits shut down because the machines couldn't take it. I got considerable comfort from it, though, because a duplicate of my Compupro system continued to work even though I measured the input temperature at 105 degrees. The staff was wilting before the machines were.

Anyway, when I made Shirley crash for about the third time, one of Compupro's young women came running over in a state of high dudgeon, and I abandoned my fun; but it was annoying. As it happened, I was scheduled to have dinner with Dr. Godbout and his crew that night, and we got to discussing what had happened, and somewhere just after the soup it came to Len Ott, Godbout's software-development manager.

"We mixed up Wordstars," he said.

After that it was easy enough to see what happened.

Wordstar comes in both 8-bit and 16-bit versions, and Shirley can run either. Now CP/M 2.2 (8-bit) command files end with the extension .COM, while CP/M-86 (16-bit) command files end with the extension .CMD, so that's no problem. However, Wordstar has overlays, lots of them, that are called in every time you use one of the multiple-stroke commands—and the overlays have exactly the same names and the extension .OVR whether they're for the 8-bit or the 16-bit version.

Somehow in the mixup of bringing the exhibits (with new furniture not tried before), both .COM and .CMD versions of Wordstar had got onto the hard disk, with the wrong one first, so CP/M 8/16 loaded in the 8-bit command file—which promptly called the 16-bit overlays.

Needless to say, they had that particular problem fixed before I arrived at the show the next morning, and, in fact, someone was watching for me to drag me over and show me they had it working. They'd simply eliminated all the 8-bit Wordstar parts

HEROISM IN THE MODERN AGE

THE ROLE-PLAYING GAME OF TODAY

© Copyright 1983 Pacific Infotech Corp.



A sophisticated simulation of modern life and human psychology.

Includes: **BASIC MODULE** — create and guide characters through their lives...

PROJECT CONTACT (Scenario #1) — save the U.S.A. from a mad scientist and terrorist plot... you have only 60 hours to complete your mission...

HEROISM IN THE MODERN AGE is expandable to other modules and exciting scenarios.

At your computer store.

SYSTEM REQUIREMENTS:
 IBM PC* with one double-sided or two single-sided disk drives, an 80-column monitor, and 64K RAM (96K for DOS 2.0).
 Color graphics/adaptor optional.
 *IBM PC is a trademark of International Business Machines Corp.



10850 Wilshire Blvd.,
 Suite 800
 Los Angeles, CA 90024
 U.S.A.

WORK SMARTER - NOT HARDER

WITH THE SMART-CARD™ MANAGEMENT SYSTEM™*

FROM EXEC-U-PLAN™



DELUXE

Our most popular model

- Manages 288 projects: 2 panels—72 SMART-CARDS per side. Expands to 1440 w/purchase of extra panels
- 750 asst'd SMART-CARDS
- Color-coded signals
- Name or initials on cover
- Pen, tablet and business card storage
- Deluxe lock Plus the SMART-CARD Management System Manual

Leather grained vinyl **\$44.50**
 Genuine leather **\$84.50**
 Plus \$4 shipping and handling



THE TRAVELER

Our streamlined model

- Manages 144 projects
 - 500 asst'd SMART-CARDS
 - Color-coded signals
 - Name or initials on cover
 - Pen holder
- Plus the SMART-CARD Management System Manual

Leather grained vinyl **\$27.50**
 Genuine leather **\$52.50**
 Plus \$4 shipping and handling



SUPER DELUXE

Our premier model

- Manages 576 projects: 4 panels—72 SMART-CARDS per side. Expands to 1440 w/purchase of extra panels
 - 4 tabbed dual pocket dividers
 - 1,000 asst'd SMART-CARDS
 - Multi-function calculator
 - Digital time piece and alarm
 - Calendar-phone-address book
 - Color-coded signals
 - Name or initials on cover
 - Pen, tablet and business card storage
 - Deluxe lock
- Plus the SMART-CARD Management System Manual

Leather grained vinyl **\$105.00**
 Genuine leather **\$155.00**
 Plus \$4 shipping and handling



All Models Available in:

LEATHER GRAINED VINYL

Chestnut Brown (dark), Willow Brown (medium), Black, Burgundy and Natural Tan Suede.

GENUINE LEATHER

Black, British Tan and Burgundy.

SATISFACTION GUARANTEED

If for any reason you are not completely satisfied with your EXEC-U-PLAN SMART-CARD System, simply return it within 30 days of purchase for a full and prompt refund.

GET MORE DONE IN LESS TIME

Control 20-50—even hundreds of projects at a time with the smartest, easiest, most flexible method ever developed for planning and monitoring activities, schedules, appointments, performance, details and deadlines. The SMART-CARD Management System helps busy executives accomplish more in less time—by freeing the mind's memory banks and thought processes to focus where it counts! No matter how well organized you are, The SMART-CARD Management System will give you a better return on your time investment. **We guarantee it!**

CONTROL HUNDREDS OF PROJECTS WITH COMPUTER-LIKE EFFICIENCY

The SMART-CARD Management System is designed to function in many ways like a personal data processing center, but, with much greater flexibility and ease. Simply record all important information directly onto color-coded SMART-CARDS. Then insert them in the system's exclusive see-through panels—for visual control of hundreds of entries at-a-glance. Merge cards into the system after meetings. Move cards as projects are completed or priorities change. Retrieve information instantly. The SMART-CARD Management System's unique features and six special purpose cards help you plan and manage more effectively than ever before.

QUALITY CRAFTSMANSHIP

Individually crafted of the finest genuine leathers or rich leather grained vinyls, each SMART-CARD System comes personalized with your name or initials on the cover. Take the handsomely styled, highly portable EXEC-U-PLAN System with you to meetings, on business trips, or for a more productive daily commute.

WORKS FOR EVERYONE

Available in three styles to satisfy a wide range of needs and preferences, The EXEC-U-PLAN SMART-CARD Management System is ideal for all executives and professionals. With the system you're always so well organized, the time you save won't just be your own—it will increase the productivity of everyone around you. So, to Work Smarter, Not Harder, put the remarkable new EXEC-U-PLAN SMART-CARD Management System to work for you, and those around you, today!

***PATENT PENDING**

SPECIAL BONUS

Now—for a limited time only—receive a handsome, matching Pocket Organizer **FREE** with any model shown at left. This compact tuck-away version of the SMART-CARD Management System puts key data in your pocket—and lets you easily make new entries on-the-go. Retail value \$15.00.



CREDIT CARD ORDERS PHONE TOLL FREE

1-800-USA-0700

OR WRITE: **EXEC-U-PLAN™ DEPT. 184**

31-17 QUEENS BLVD., LONG ISLAND CITY, N.Y. 11101
 Circle 412 on inquiry card.

Add \$750 per model for shipments to Canada, Alaska, Hawaii and Puerto Rico, \$12 to Mexico and \$18 to all other countries.
 Copyright 1983, Executive Management Systems, Inc. U.S. and International patents pending. EXEC-U-PLAN™ SMART-CARD™ SMART-CARD Management System™ and the products named herein are trademarks of Executive Management Systems, Inc.

from the system, which took care of the immediate difficulty.

The long-term solution is to patch 16-bit Wordstar so that it wants overlays with a .16V extension (or some such). Micropro doesn't tell you how to do that, although I gather that some systems consultants have the secret. Len Ott is working on the problem for Compupro; meanwhile, fair warning to anyone using CP/M 8/16. Don't mix Wordstar overlays.

Much Improved...

Another thing I collected at CP/M East was the new manuals for Wordstar 3.3.

I recall the first time I ever saw Wordstar. It was at a show in Los Angeles. MacLean, my late mad friend, and I had machines with memory-mapped video because Electric Pencil wouldn't run with a terminal; indeed, the only full-screen editor that would work with terminals was Wordmaster, and it didn't have word-wrap and other features that I wanted for creative writing.

Micropro, the company that brought out Wordmaster, introduced Wordstar. It was selling it from a small, against-the-wall booth, and the demonstrator/salesman told MacLean, "The documents were written by the programmer who wrote the program."

Wordstar will never be my favorite editor, but the company has steadily improved it, and it's certainly more than adequate.

Dan thumbed through the big notebook and said, sadly, "I can very well believe that."

We stayed with Electric Pencil, partly because Wordstar would work *only* with terminals; it certainly couldn't take advantage of our fast-scrolling memory-mapped video displays. Even if we'd been tempted, though,

the first Wordstar documents would have turned us off.

However, most of the micro community wasn't willing (or perhaps able) to put in memory-mapped video systems, and Wordstar was for several years the best text editor available for systems using terminals. The result was that Wordstar very nearly became the micro world's standard text editor. It wasn't necessarily the favorite editor, but it was a pretty good second best. Everyone knew it, and it was available on most systems. It was smart to learn it, despite the poor documents.

Over the years Micropro improved Wordstar and improved the documents, and I'm pleased to report that the new documents for Wordstar 3.3 are not bad. The tutorial is still too terse and far too "busy" for my taste, but it will serve, and the reference manual is quite complete. Wordstar will never be my favorite editor (they'll never make changes that drastic!), but over the years the company has steadily improved it, and it's certainly more than adequate.

Interestingly enough, the keyboard pictured in the new Wordstar tutorial manual is very much like mine, except that it's missing most of the special function keys. Has Wordstar discovered just how good Archive keyboards are?

Love That MPI

I've become involved in publishing. That is, my friend and long-time associate Jim Baen has talked me into a line of "Jerry Pournelle Presents" books. One of the first of these will be a revised collection of these columns. Others will include books by Tony Bove and Cheryl Rhodes on how to use CP/M and word processors and such, an authoritative guide to the IBM PC, and a tutorial on Modula-2.

I'm editor of record, so I contract for these books, and that's greatly increased the paperwork here at Chaos Manor. Worse, Jim Baen has his standard contracts on his IBM PC, and until a few days ago I didn't have a PC.

I did have Zorro the Zenith Z-100, which in many ways is a better

excel:

ARIS[®]. Finally, the reason to use a computer. And in one elegant software system.

EXCEL

EXCEL Systems Corporation • 655 Redwood Highway
Suite 311 • Mill Valley • CA 94941

Ask your Dealer to demonstrate the entire EXCEL SYSTEMS line for you.

"I built this 16-bit computer and saved money. Learned a lot, too."

Save now by building the Heathkit H-100 yourself. Save later because your computer investment won't become obsolete for many years to come.

Save by building it yourself. You can save hundreds of dollars over assembled prices when you choose the new H-100 16-Bit/8-Bit Computer Kit – money you can use to buy the peripherals and software of your choice.

H-100 SERIES COMPUTER SPECIFICATIONS:

USER MEMORY:
128K-768K bytes*

MICROPROCESSORS:
16-bit: 8088
8-bit: 8085

DISK STORAGE:
Built-in standard
5.25" disk drive,
320K bytes/disk

KEYBOARD:
Typewriter-style,
95 keys, 13
function keys,
18-key numeric pad

GRAPHICS:
Always in graphics mode.
640h/225v resolution;
up to eight colors
are available**

COMMUNICATIONS:
Two RS-232C Serial
Interface Ports and
one parallel port

*128K bytes standard.
**Optional.

DIAGNOSTICS:
Memory self-test
on power-up

AVAILABLE SOFTWARE:
Z-DOS (MS-DOS)
CP/M-85 +
Z-BASIC Language
Microsoft BASIC
Multiplan
SuperCalc
WordStar
MailMerge
Data Base
Manager
Most
standard
8-bit CP/M
Software

The H-100 is easy to build – the step-by-step Heathkit manual shows you how. And every step of the way, you have our pledge – "We won't let you fail." Help is as close as your phone, or the nearest Heathkit Electronic Center.†

And what better way to learn state-of-the-art computing techniques than to build the world's only 16-bit/8-bit computer kit? To run today's higher-speed, higher-performance 16-bit software, you need an H-100. It makes a big difference by processing more data faster.

Dual microprocessors for power and compatibility. The H-100 handles both high-performance 16-bit software and most current Heath/Zenith 8-bit software.


Want room to grow? The H-100's standard 128K byte Random Access Memory complement can be expanded to 768K bytes – compared to a 64K standard for many desktop computers.

And the industry-standard S-100 card slots support memory expansion and additional peripheral devices, increasing future upgradability of the H-100.

High-capacity disk storage, too. The H-100's 5.25" floppy disk drive can store 320K bytes on a single disk. The computer also supports an optional second 5.25" and external 8" floppy disk drives. And an optional internal Winchester disk drive will be available soon.

For more information, circle the reader service number below. Better yet, visit your Heathkit Electronic Center for a demonstration!

The H-100 gives me the most for my computer dollar!

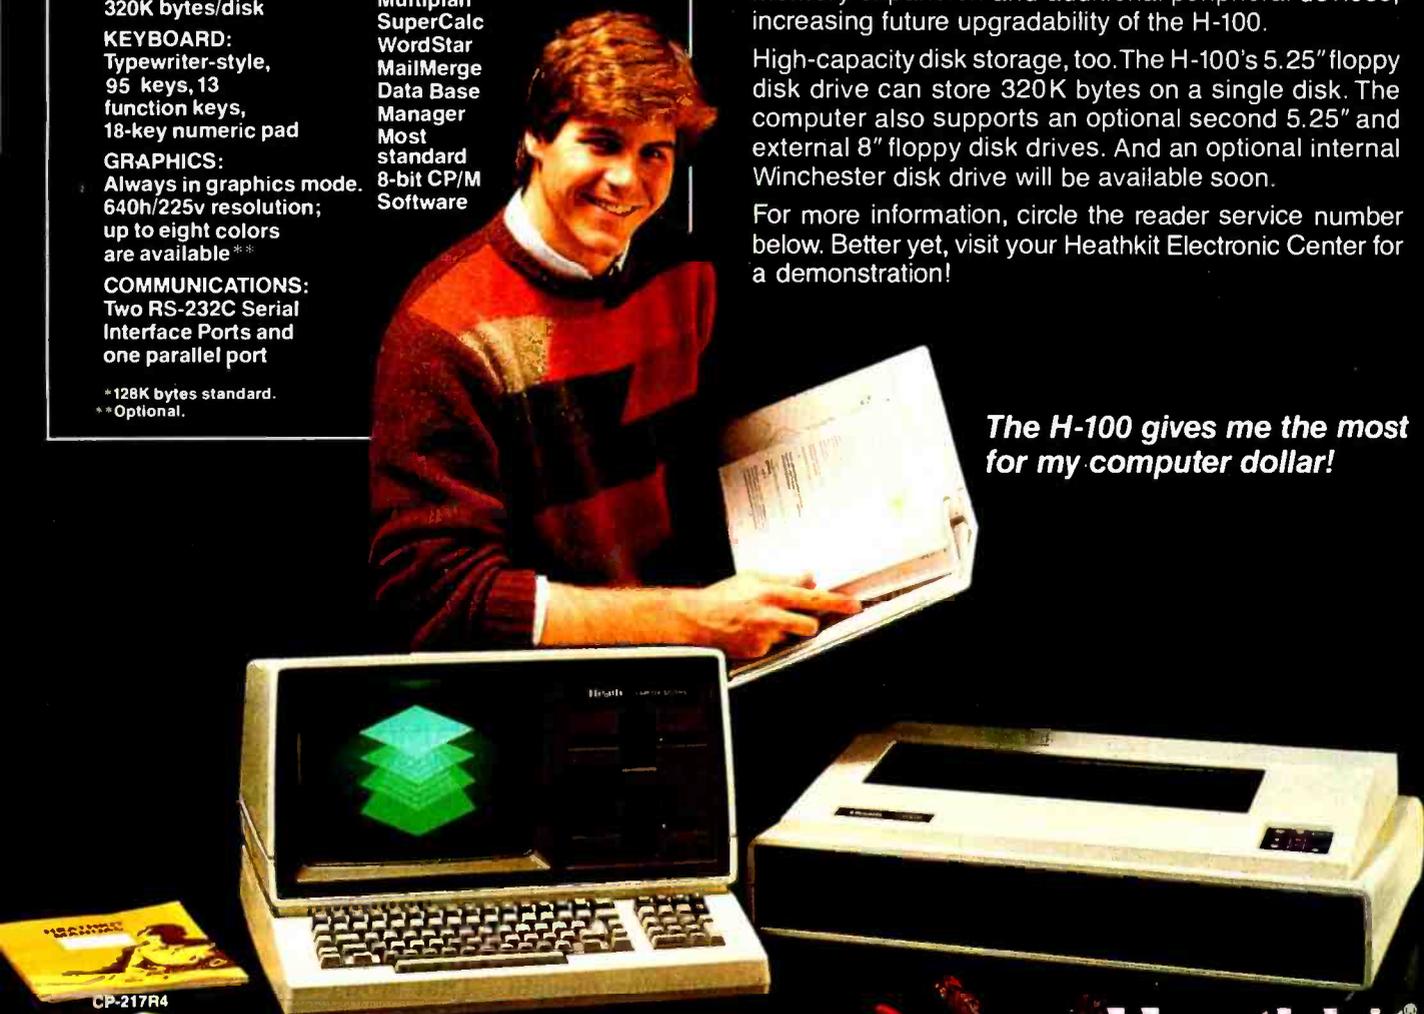

Heathkit®
Heath
Company

Heathkit Electronic Centers are units of Veritechnology Electronics Corporation.
Heath Company and Veritechnology Electronics Corporation are subsidiaries of Zenith Radio Corporation.
CP/M is a registered trademark of Digital Research Corporation.

Circle 168 on inquiry card.

ERG/68000 MINI-SYSTEMS

- Full IEEE 696/S100 Compatibility

HARDWARE OPTIONS

- 8MHz, 10 MHz, or 12 MHz
68000/68010 CPU
- 68451 Memory Management
- Hardware Floating Point
- Multiple Port Intelligent I/O
- 64K/128K Static RAM (70 nsec)
- 256K/512K/1MB Dynamic RAM (150 nsec)
- Graphics-Digital Graphics
CAT-16000
- DMA Disk Interface
- SMD Disk Interface
- Tape Streamer Backup
- 5 1/4" or 8" Floppy Disk Drives
- 5MB-474MB Hard Disk Drives
- 7/10/20 Slot Back Plane
- 20 or 30A Power Supply
- Desk Top or Rack Mount Encl.

SOFTWARE OPTIONS

- 68KFORTH¹ Systems Language
- CP/M-68K²O/S with C, 68K-BASIC¹,
68KFORTH¹, FORTRAN 77, Z80
Emulator, Whitesmiths' C, PASCAL
- IDRIS³ O/S with C, PASCAL,
FORTRAN 77, 68K-BASIC¹, CIS
COBOL⁴, INFORMIX⁵ Relational
DBMS
- UNIX⁴ SYS III O/S with C, PASCAL,
FORTRAN 77, BASIC, RM COBOL⁷,
ADA⁸, INFORMIX⁵, Relational DBMS
- VED 68K Screen Editor
- Motorola's MACSBUG and FFP
Package

Trademark ¹ERG, ²Digital Research,
³Whitesmiths, ⁴Micro Focus, ⁵RDS,
Inc., ⁶Bell Labs, ⁷Ryan McFarland,
⁸U.S. DoD

30 Day Delivery - OEM Discounts



since 1974

Empirical Research Group, Inc.
P.O. Box 1176
Milton, WA 98354
206-631-4855

machine, and the MPI 150G dot-matrix printer, which is faster than the letter-quality Diablo and NEC printers, and plenty good enough quality for contracts and business documents.

We set up Zorro out in the auxiliary office where the whole staff as well as the kids can get at him, and demand has picked up a lot—so much so that people were chafing to get the printing done so they could get back to work.

MPI came to the rescue. That's one great little printer. The MPI ("The Printer People") troops sent an update board for the 150G. It was simple to install, and it loads the printer with 68K bytes of memory. Now when we want to print a contract, we do just as we always did, but when Zorro has sent the entire file over to the MPI 150G, we can start editing something else while the printer continues its work.

The time saved is quite significant. It's even more significant when we're printing Write files; it seems that Wordstar takes quite a long time to go through the text files and do all the necessary formatting. The MPI printer is so fast that it can nearly keep up with Wordstar! However, for Write, program listings, and all the myriad details that one uses a printer for, having that memory is little short of wonderful.

I know there are various boxes of memory that sit between the computer and the printer, and I've always been tempted to get one, but I never have. I suppose one reason is that early on MacLean set me up with a "spooler," which is something a bit different; the spooler, or at least the one I had, is a software timesharing system that let the computer print during pauses when nothing else was happening. It almost drove me mad.

The printer was in the other room, but I could hear it. Whenever I'd pause for thought, the printer would start; as soon as I hit a key, it would stop. All pretense of creative thought went out the window, and I had that darned spooler erased from all my disks so I'd never be tempted to use it again.

That somehow convinced me I didn't want printing going on when I was working. Then, later, I got a second machine and hooked it to the printer, and that became the primary printout system, and I found I could work while the printer was going in the other room, so long as it worked steadily and didn't depend on what I was doing at the time. It's only been recently that I find I wish I had access to the second machine while it's printing; and our experience with the Z-100 and the MPI's magic memory has been so pleasant that I guess I'll start looking for a box to connect between the Compupro Dual Processor and the NEC 7710 Spinwriter.

Meanwhile, if you want a *good* dot-matrix printer, let me recommend the MPI. We also have its little brother, the MPI 99, which is destined to be attached to the IBM PC as soon as we get either a parallel-output board for the PC or the serial-interface adapter cable for the MPI 99.

The Ultimate Language?

Buz Overbeck of Garland, Texas, has evidently been following my language debate articles and has decided to solve the problem once and for all. He sent me the specifications for the new language DeSade, which he thinks should come out of the closet.


According to Overbeck, DeSade "is perfectly suited for brute-force applications, slow and dirty programming, the crunching of numbers, and hacking in general." Some of the previously defined functions are STRIP(X\$), which removes everything; FLOG(X), which returns the floating-point logarithm; SLASH(X), which returns the integer portion of X; MAIM(X), which returns nothing; and SIN(X), which restores X to its original illegal value. Alas, I can't really do justice to DeSade and its library function Libertine—at least not in a family-type magazine like BYTE. Perhaps that's just as well.

That Won't Work...

No one has yet deciphered my secret message encrypted in Charlie Merrit's public-key encryption system. I know for a fact that some

NOW 256K

A PC for PEANUTS

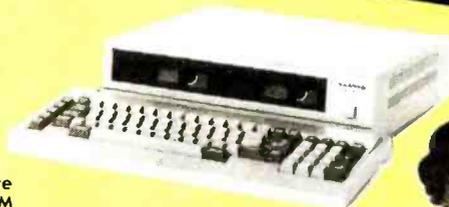

Why settle for a limited home system when Scottsdale Systems will sell you a complete business system for less? Our PC Plus features an 8088 CPU, one 160K drive, 256K RAM with Ramdisk and Spooler software, MS-DOS, Wordstar, Calcstar, Color Graphics Basic, a printer port, and your choice of an amber or green 12" monitor for \$1099.

The PC Deluxe has 2 160K drives plus Mailmerge, Spellstar and Infostar.

Both systems run many programs written for the IBM-PC® and the computer boards are warranted for a full year by over 70 nationwide Sanyo Service Centers. Don't settle for less, give us a call.

PC PLUS™ \$1099
 PC DELUXE™ Call

Hard disks, networking systems - Call


TELEVIDEO



Single user systems now include Word processing, spreadsheet and graphics software (along with CP/M or CP/M-86). Local installation of multi-user systems available via TRW.

TPC	Call
803	\$1849
1603	\$2289
802H	\$4319
806/20 mb.	\$4859
816/40 mb.	\$9275

ALTOS



From the lowest-priced dual-floppy multi-user systems to true 16-bit 10Mhz. multi user systems. Local service available via TRW. We will configure, test and install your systems for an additional charge (call for prices).

5-80-2	\$1998
5-80-10	\$3629
5-86-10	\$5795
5-86-40	\$7995
8000-10	\$4679
8000-14	\$8118

ZENITH



Low prices on the systems that are 5-100, 16 bit/8 bit, MS-DOS and CP/M compatible. Plus, they're backed by Zenith service virtually everywhere. The Z-100's feature two built-in 5 1/4 drives, 128K RAM, graphics and 3 ports. Free software and specials on additional software.

ZF-110-22	\$2699
ZF-120-22	\$2799
ZV-110-32	\$4249

COLUMBIA



Each Columbia now comes with MS-DOS, CP/M-86, Basic (with IBM-PC® compatible color graphics), Perfect Writer™, Perfect Speller™, Perfect Calc™, Perfect Filer™, Fast Graphs, Home Acc't Plus, Space Commanders, Diagnostics, and The Columbia Tutor. The VP is 38 lbs. portable with a built-in 9" monitor. The 1601 is the desktop unit. Both computers come with dual 320K drives, and are backed by Bell and Howell.

VP	\$2349
1600-1	\$2589
1600-4 (10mb)	\$3545

TERMINALS



Adds Viewpoint 3A+ Emulates the ADM-3A, detached keyboard, keypad, 12" green display, nationwide Adds service.

Viewpoint 60	\$589
Wyse 50	\$508
Wyse 100	\$694
Televideo 914	Call
Televideo 924	\$689
Televideo 970	\$1044
Altos II	\$724
Zenith Z-29	\$656
Zenith ZT-1	\$469
Qume 102	\$544

HOUSTON INSTRUMENTS

DMP-29	\$1795
DMP-40	\$745
DMP-41	\$2340

Sanyo 8-bit Systems new lower prices.



Scottsdale Systems Ltd.

617 N. Scottsdale Road, Suite B, Scottsdale, Arizona 85257

VISA (602) 941-5856 MasterCard

Call 8-5 Mon.-Fri.



We participate in arbitration for business and customers through the Better Business Bureau of Maricopa County.

SERVICE/ORDERING


INTEGRATION: Prices listed are for new equipment in factory sealed boxes with manufacturer's warranty. We will pretest your equipment. Integrate your system, configure your software, provide special cables, etc., for an additional charge. Call for prices.

ORDERING: MAIL ORDER ONLY. Prices listed are for cash. No C.O.D.'s. We sell on a Net 30 basis to Fortune 1000 companies and Universities with good credit. P.O.'s add 2% charge cards add 3%. Az. residents add 6%. Prices subject to change, product subject to availability. Personal checks take 3 weeks to clear. 0-20% restocking fee for returned merchandise. Shipping extra - products are F.O.B. point of shipment. CP/M and MP/M are registered trademarks of Digital Research. Wordstar is a registered trademark of MicroPro International. IBM and IBM PC are registered trademarks of International Business Machines Corporation. TeleVideo® is a registered trademark of TeleVideo Systems, Inc.™ SOFTWARE: Sold only w/systems, not warranted for suitability.

PRINTERS



Gemini 10X	\$115 off
Gemini 15, 15X	Call
Delta 10's	Call
Tally 160L/trac	\$584
Tally 180L/trac	\$799
Tally Spirit	\$298
Indox	Call
ANS Prisms	Call



LETTER QUALITY

Silver Reed 500	\$409
Silver Reed 550	\$619
Sanyo PR5500	Less
Silver Reed 770	Call
NEC 7710	\$1965
NEC 2000's	Call

OKIDATA



The new Microline 92's and 93's feature 160 C.P.S. draft mode, 40 C.P.S. correspondence mode. Standard parallel, serial card add \$91.

Microline 92	\$175 off
Microline 93	\$290 off
Microline 82	\$134 off
Pacemark 2350P	Call

DTC-380Z

Replaces the Datsywriter 2000. Uses the same pinwheel, ribbons, and tractor feed. Will run serial, parallel, or IEEE 488, 48K buffer standard, uses Diablo codes.

\$1044



pretty bright people using fairly large machines took a stab at it; so perhaps it's reasonable to conclude that Merrit's program works as advertised.

For those who came in late, public-key encryption systems have two keys. One is published, and anyone can use it to encode a message. However, once the message is encrypted, it can't be decoded except with the other, *secret* key. This means that you can give your friends the means to send you secret messages that only you can read.

About a year ago, I encoded my Vita (whose plain text is known) and a "secret" message I made up and published both messages and the encryption key, with the stipulation that I'd have a reward for the first person to send me the plain text of the message. I made it available in my files at MIT MC and advertised my offer not only in BYTE but on other large electronic networks. (MIT MC is one of the larger machines at the Massachusetts Institute of Technology. That's where my electronic mailbox is located.)

No one has it yet. There have been a couple of noble tries; one chap tried to disassemble Merrit's program in hopes of figuring out how Charlie did it. That didn't work, because the encryption algorithm is no secret: it involves factoring very large numbers.

Public-key encryption systems have two keys: one is published and anyone can use it, the other is secret.

Another try is from Mr. Buttery in Australia, who used psychology: he figured out that I'd simply encrypted the original offer of a reward. Alas, that's not the answer. I've actually forgotten the plain text of my message (I do have it written down). It breaks into a grammatical but meaningless English sentence; there's no point in trying psychoanalysis.

I'm beginning to believe Charlie Merrit has actually produced a near-

ly unbreakable code that we can use on our micro systems. That has some interesting implications.

More Mail...

Alas, another 21 pounds of mail (as weighed by UPS) arrived today; that's a week's supply. It's physically impossible for me to answer it all; I do read every bit of it (so far), and much of it is very informative; it's as if I had my own intelligence service out there. Thanks.

One of my most informative correspondents is Paul Chisholm of New Jersey. He says, "I'm writing this with Spellbinder, a.k.a. Word/125. Boy, is this thing modal! I'm used to input mode and command mode, but this 'edit' vs. command mode stuff is no fun at all."

Coincidentally, there is a furious debate going in the "Editor People" mailing list on one of the nets I frequent. It concerns "modal" versus "modeless" editors.

All the editors I use have "modes." Write, for example, has "insert" and "strikeover" modes; you toggle be-

Volkswagens Weren't Meant To Carry Cows

For years people have extended Pascal so they could pack in more and more large programs. But that's like extending a Volkswagen to carry cows. It might get the job done, but wouldn't something else work better?

Nicklaus Wirth, the creator of Pascal, has a better solution. Modula-2. Not another extension, a new language. Modula-2 gives you all the simple elegance that made Pascal the most popular language of the last decade. Yet with even more power and flexibility. And it's easy. If you know Pascal, within hours you can be writing programs in Modula-2.

Only Logitech's Modula-2/86 system (an exact and complete implementation of Wirth's Modula-2) translates directly into high-speed native code for PC-DOS™, MS-DOS™ and CP/M-86™.

No other system speeds your Modula programs along faster than this native code compiler. And our high-level, symbolic debugger ensures your programs arrive in flawless running condition. Multi-level overlays, 8087 support, ROMable code, and a full library of standard modules make Modula-2/86 the perfect system for every professional application.

Move up to Modula-2/86. The professional software development system. After all, you wouldn't carry cows in a Volkswagen.

PC-DOS is a TM of IBM. MS-DOS is a TM of Microsoft. CP/M-86 is a TM of Digital Research.



LOGITECH

165 University Avenue, Palo Alto, CA 94301
415-326-3885

0284

Your troubles are over!

THERE'S A NEW STAR IN WORD PROCESSING

ANYONE FAMILIAR WITH WordStar® CAN USE NewWord™/MergePrint IMMEDIATELY, AND ENJOY SUPERIOR PERFORMANCE AND EASIER INTERACTION—AT ABOUT ONE-THIRD THE COST OF WordStar®/MailMerge®

NewWord makes it easy for you to turn to uncomplicated, efficient word processing. Now you can get letter perfect, professional-looking documents without a great deal of sacrifice.

The proof of NewWord's superior performance is in the printout. With dot matrix printers, NewWord is exceptional, supporting every advanced capability including microjustification, variable line height/character width, and alternate pitches on the same line.

NewWord's full range of features are what you'd expect to find only on the most expensive word processors. NewWord also gives you such advanced features as unerase deleted text, find a specific page in a document, and multiple-line headers and footers. Its versatility includes automatically changing ruler lines, on-screen display of boldfacing and underlining, and automatic indentation for programming.

Yet, for all its sophistication, NewWord is simple to use. There are no complicated codes to memorize. On-screen menus of functions let you work effortlessly.

And if you're familiar with WordStar, you'll be able to write faster and more effectively immediately. NewWord is entirely compatible with WordStar—key stroke, command and file compatible. Even third party programs, video training and books.

NewWord comes with a complete user manual, including: an *Installation* guide to personalize NewWord, a *Do-It-Yourself* tutorial, an *Encyclopedia* of facts explained with numerous examples, and a handy *Pocket Reference* of commands.

We provide direct telephone support to NewWord users and dealers. A third party toll-free support service is also available as an option.

Perhaps the best thing about NewWord is that at **\$249.00**, NewWord costs less than programs featuring far fewer capabilities. And with *merge print* included, NewWord is an outstanding value.

Let a New Star work for you.

Call us today, toll-free

800-832-2244


(In California, call 800-732-2311)



ROCKY MOUNTAIN
SOFTWARE SYSTEMS

1280-C NEWELL AVE., SUITE 1001; WALNUT CREEK, CA 94596

WordStar and MailMerge are registered trademarks of MicroPro International, Inc.
NewWord and NewStar are trademarks of NewStar Software, Inc.

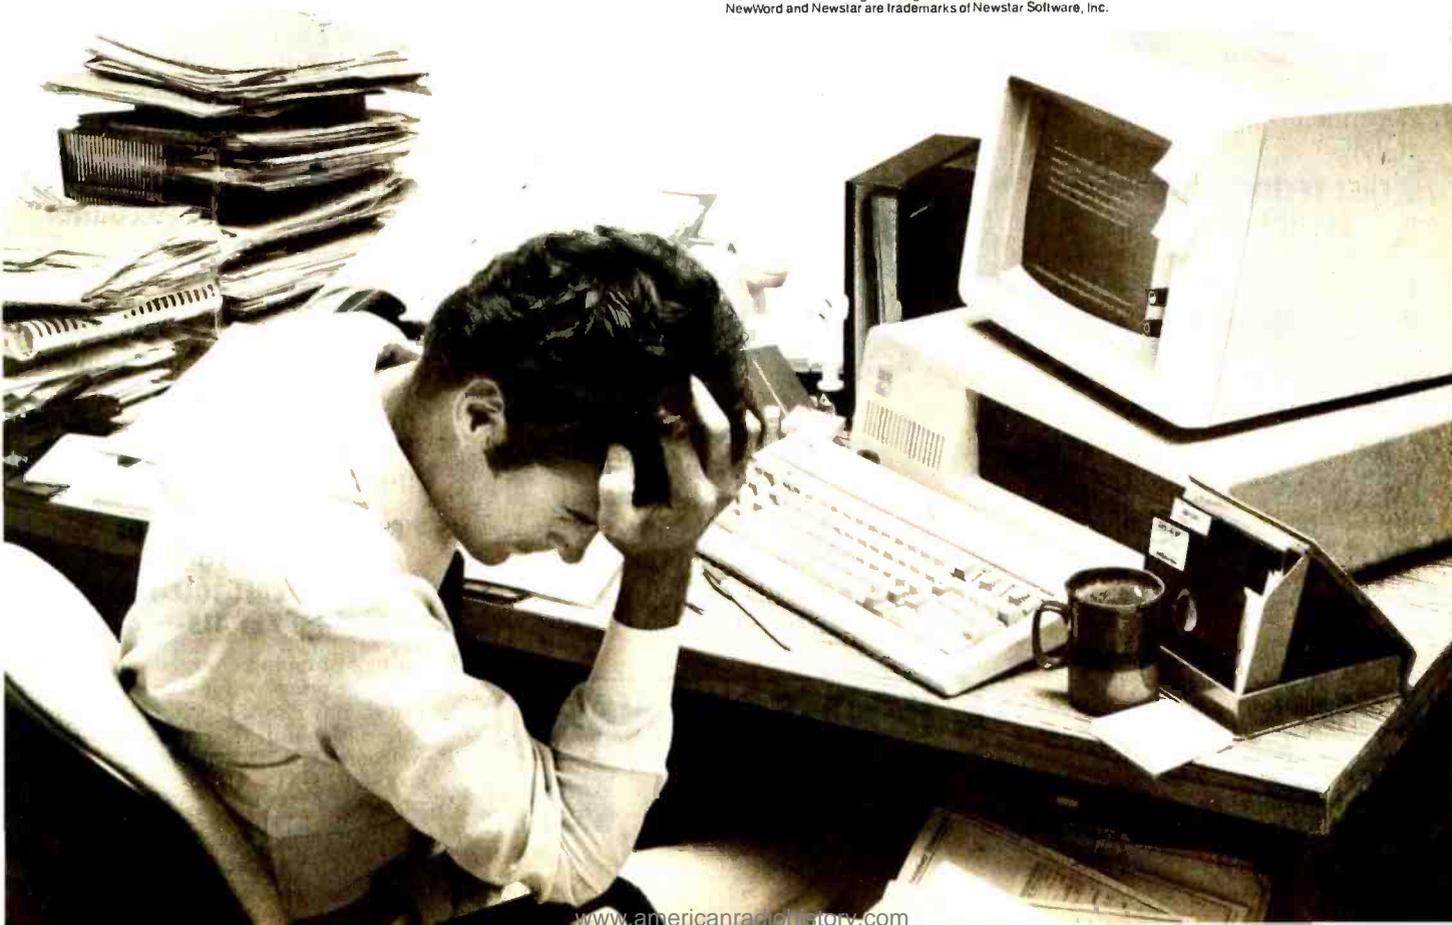

GREAT PRICES! GREAT SERVICE!

Looking for a great deal on business software?

800-SOFTWARE is hard to beat. You see, we became one of America's largest software marketers by offering great prices—and a lot more.

Here are some of the reasons to pick up the phone and pick up a bargain:

LOW DISCOUNT PRICES.

Our prices are fabulous! Generally 40-50% off suggested list price. How do we do it? By buying and selling in enormous volume. (All our programs are the very latest versions. And when "updates" appear, we'll get them for you, fast!)

FAST DELIVERY.

The key to our quick delivery is our giant inventory. We have what you want. Now. And we'll rush it to you like our business depends on it. (Because it does.)

FREE TECHNICAL SUPPORT 90 HOURS A WEEK!

That's right. We offer full technical support at no charge whatsoever, seven days a week.

That means if you have a question on Sunday, at night, or during any of the 90 hours we're open each week, you can get answers. Fast. (And remember, our technical product experts are not ordertakers. Their only job is helping you get the most out of the products we sell.)


- Quantity discounts available through our National Accounts Program.
- Purchase orders accepted. Please call in advance.
- Prompt U.P.S. or Federal Express shipping.
- Overnight delivery available.

CHECK OUT ALL OUR INCREDIBLE BUSINESS SOFTWARE PRICES:

WordStar®	\$269
WordStar® Pro. Pack.	\$389
SuperCalc® 2	\$169
SuperCalc® 3	\$279
Lotus 1-2-3™	CALL
dBase II™	\$399
Quickcode™	\$199
Crosstalk™	\$119
EasyWriter II System™	\$199
I.U.S. Accounting™	\$299/mod
Norton Utilities™	\$59
Perfect Link™	\$119
Multiplan™	\$189
4-Point Graphics™	\$129
Hayes SmartModems™	CALL
Memorex™ or Maxell™ Diskettes	CALL

WE ALSO CARRY SOFTWARE FROM:

Ashton-Tate, Aspen, ATI, CDEX, Digital Research, Fox & Geller, IMSI, I.U.S., Life-tree, MicroPro, Microsoft, Peachtree, Perfect, Software Publishers, Sorcim, VisiCorp and much, much more!

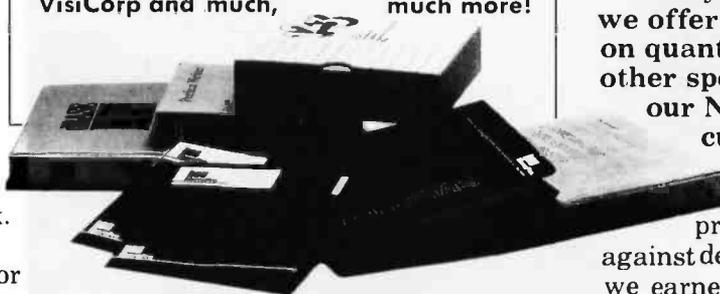

CUSTOMERS TELL OUR STORY BEST.

"I very much appreciate your helpfulness and speed in filling my order. Rarely today do I have the opportunity to deal with a firm which shows such a high

degree of professional ability."
Joe Neil, Lihue, HA

"Thank you very much for the very prompt service you gave me. I would be delighted to do business with you anytime in the future that you have something I need."

William Drescher,
Lansing, MI

RELIABILITY AND REPUTATION.

When you buy from us, you're in good company. You see, some of our best customers are America's biggest corporations. Like IBM, Chevron, Hewlett-Packard, G.E., Price Waterhouse and Honeywell.

They order from us because they know we're not running our business from a phone booth (we have a million dollar inventory!). And because we offer extra discounts on quantity orders and other special services for our National Accounts customers.

Also, we fully guarantee every product we sell against defects. That's how we earned our membership in the respected Direct Mail Marketing Association.



800 SOFTWARE IS READY TO SERVE YOU.

**TO ORDER CALL TOLL-FREE
800-227-4587 or 415-644-3611**

- Call for shipping charges, other low software prices or for a free catalog.
- Prices may change.
- International dealers and orders welcome: TELEX #751743 800-SOFTWARE UD.

Write: 800-SOFTWARE

940 Dwight Way, Berkeley, CA 94710

Circle 5 on inquiry card.

800-SOFTWARE



tween them with a single keystroke. I happen to like the strikeover mode as the normal one; text editors based on MIT's Emacs tend to use the opposite philosophy. The important thing, though, is to get quickly from one to the other, and to have a way to tell which one you're in. (In most text editors there's a status line that tells you; in Write the cursor changes shape.)

Write also has a command mode, a print mode, and a find/replace mode. In every case there's a dramatic on-screen change; you're in no doubt about which "mode" you're in. On the other hand, you don't have to leave the "text" mode for most text operations, which are accomplished with single keystrokes.

Thus, although Write has "modes," it tends toward the "modeless" end of the spectrum. By contrast, consider the simple editor built into most BASICs. You pretty well have to go to command mode to accomplish anything with it. Ed, the text editor that comes free with CP/M, is another "mode" editor, as is the UCSD Pascal source editor; in those you can't even move the cursor without going into command mode.

What irritates Chisholm about Spellbinder is that he can't kill lines without changing modes. With Write that's a one keystroke command that can be made when you're in text mode. Obviously I prefer Write's method; on the other hand, I do pay for it. Many editors based on Emacs keep a big file of every bit of text you've killed and have the ability to "yank" back (unkill) that text at will. Multimode editors tend to have that feature; nonmoded editors tend not to. I don't happen to miss "unkill" or "oops" myself, but then Write won't let me kill anything larger than a line without asking me whether I'm serious.

I wouldn't reject an "unkill" or "oops" feature in an editor, but I don't think I'd pay much for it, either.

Anyway, Chisholm says, "Chalk up a 'nay' vote for Spellbinder." On the other hand, Marty Massoglia has been doing our Inferno game in Pascal using Eaglewriter, which is Spellbinder under another name,

and he's not unhappy with it. But he's writing programs, not text; he also has the patience of an IBM FORTRAN programmer. . .

More on Editors


Doug Hazen Jr. lives in Gainesville, Florida, where my mother went to college many years ago. He started off asking one or two questions and ended with a nine-page letter of queries, all sensible; but I'd have to write at least one book to answer all of them.

One point he makes is that I may

have been unfair to The Final Word. Why, he asks, can't I simply customize its command structure to my liking? After all, he says, "You *didn't* criticize Wordstar's commands, and it doesn't even pretend to be mnemonic or logical."

Taking the latter point first, I've written so often about Wordstar's multiple-stroke commands that I guess I assumed everyone knows my views on the subject. For the record: I don't care for most of Wordstar's command structure. The part I do

Winchester power for your PC

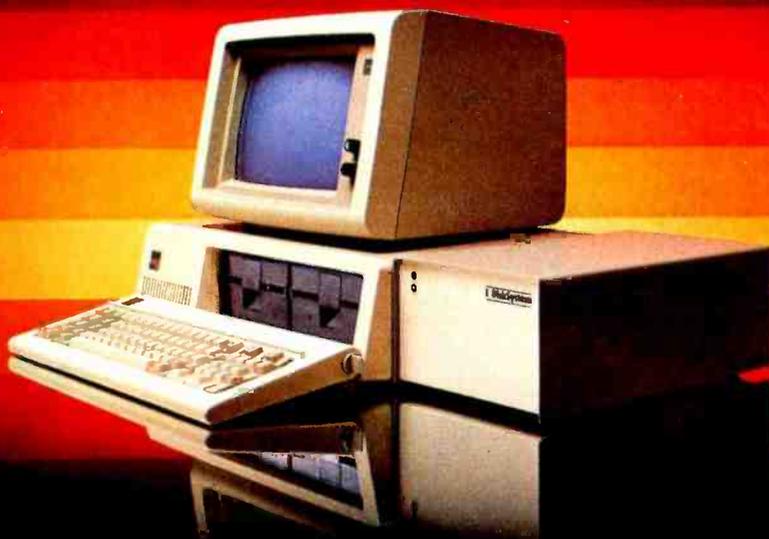

The proven Winchester subsystem drives for your IBM or compatible PC. 10, 15 or 25 megabytes of big system storage in a DiskSystem[®] you simply plug into your system and it's ready to use. At prices that make the speed and storage of a Winchester practical. Only \$1495 for a 10 megabyte DiskSystem, \$1795 for 15 megabytes, or \$2245 for 25 megabytes. DiskSystems can be bootable from the Winchester. See your dealer today for DiskSystem power for your PC.


I² INTERFACE INC

I² Interface Inc
7630 Alabama Avenue
Canoga Park, CA 91304
(213) 341-7914 Telex: 662949

Dealer Inquiries Invited
DiskSystems is a copyright of Interface
Inc. IBM is a registered trademark of
IBM Corporation. Prices are suggested
retail and are subject to change
without notice

Circle 452 for Dealer inquiries. Circle 453 for End-User inquiries.

February 1984 © BYTE Publications Inc. 135

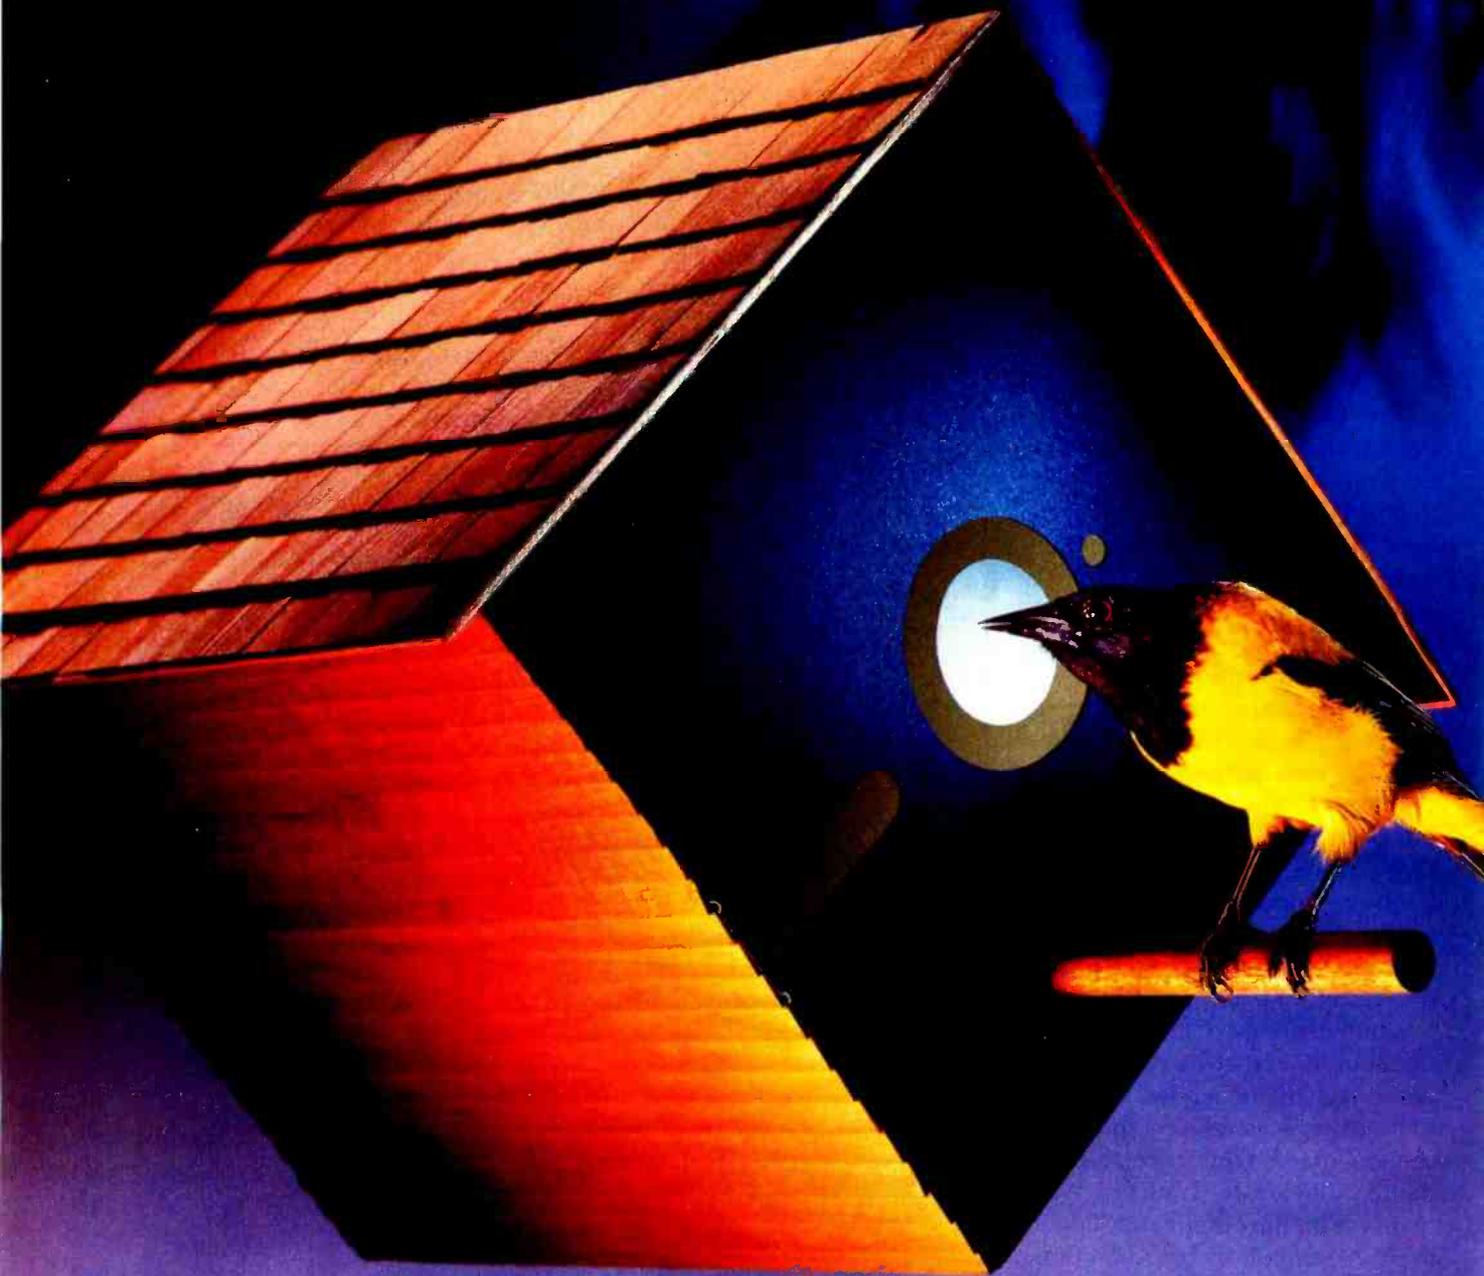

**THERE ARE STILL
PLENTY OF GOOD USES
FOR YOUR
OBSOLETE DISKETTES.**

AS LONG AS IT'S NOT FOR STORING DATA.

INTRODUCING THE DISKETTE THAT MAKES ALL OTHERS OBSOLETE.


Janus. A revolution in diskette engineering. A new standard. Storing your critical data on any other diskette is a risk you no longer have to take.

Janus. Twice as Strong.

We construct our diskettes with stiffer jacket materials. 25% thicker than the other leading brands. And that makes them nearly *twice* as strong.* Pick one up. You can actually feel the difference.



A Janus 10 mils jacket weighted with 500 mg deflects only .349 inches.

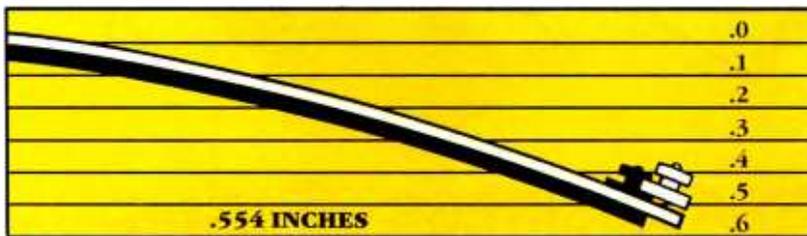

The competition's 8 mils jacket weighted identically deflects .554 inches.

In a test of strength, Janus (top) bends less than the competition (above) when weighted the same. A full 37% less. That makes Janus nearly twice as strong.

Janus. The Innovation You've Been Waiting For.

We took a long, hard look at the problems with diskettes and set our sights on solving them. Diskettes had to be a lot stronger. Over 90% of all computer disk sub-system errors are caused by one culprit — physical damage to the diskette. And no one should ever have to be afraid of losing their irreplaceable data.

We set out to re-invent the diskette. And we succeeded.

The Semi-Floppy Disk.

Our thicker jacket material makes our diskette stiffer and less flexible. The "semi-floppy" disk.

Yet, we've carefully controlled the edge folds to create a stronger jacket *without* creating a thicker diskette. The fit in your disk drive is the same.

It's a breakthrough that means your diskette won't crease as easily. And won't crimp, fold or warp as easily, either. Even at temperatures exceeding 100° F. A Janus diskette is less likely to jam in your disk drive.

inspection standards are the highest. Because our diskette standards are the highest.

Anything less than a Janus diskette is a risk you can't afford to take.

Over 5,000 retailers are willing to back us up. For the one nearest you, call toll-free (800) 338-0100.

Of course, there are still plenty of uses for your obsolete diskettes... Except storing data you intend to keep.

We're proud of our diskettes. And every day we earn the respect of more and more people who tolerate nothing but the very best.



Janus. For people who take their work seriously.


Janus. Ultimate Protection.

We make a stronger diskette to *protect* your data. Other diskettes just store it. The diskette you use is worth far more than the money you paid for it. Failure can cost you your entire accounts receivable. Or your inventory. Or your novel. Thousands of dollars' worth of work hours.

100% Inspection Equals User Safety.

We test 100% of both sides of each diskette. 6% become rejects. Yet 95% of these rejects would meet the standards of most other manufacturers. Our

1860 Barber Lane
Milpitas, California 95035
(408) 943-1600
(800) 338-0100




*Our jacket material specifications are 10 mils ±1. The other leading brands' are 8 mils ±1. The Theory of Flexure for materials holds that a material gets stiffer with thickness according to a cube law. Therefore, by using 1.25 times thicker jacket material, we can achieve 1.25 x 1.25 x 1.25 or 1.95 times the stiffness.

© 1984 Janus Dync Company

Introducing the Most Powerful Business Software Ever!

TRS-80™ (Model I, II, III, or 16) • APPLE™ • IBM™ • OSBORNE™ • CP/M™ • XEROX™

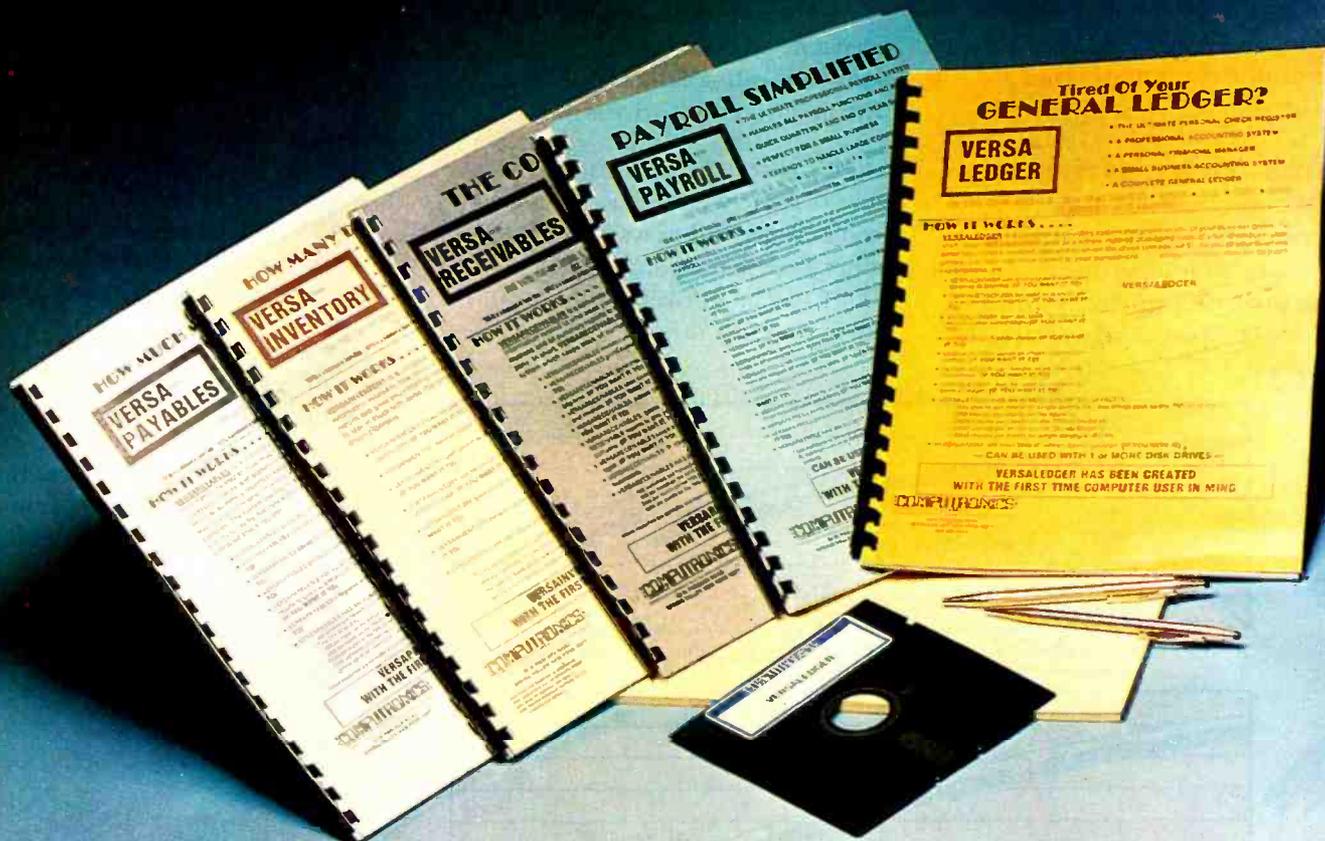

The VERSABUSINESS™ Series

Each VERSABUSINESS module can be purchased and used independently, or can be linked in any combination to form a complete, coordinated business system.

VERSARECEIVABLES™ \$99.95
VERSARECEIVABLES™ is a complete menu-driven accounts receivable, invoicing, and monthly statement-generating system. It keeps track of all information related to who owes you or your company money, and can provide automatic billing for past due accounts. VERSARECEIVABLES™ prints all necessary statements, invoices, and summary reports and can be linked with VERSALEDGER II™ and VERSAINVENTORY™.

VERSAPAYABLES™ \$99.95
VERSAPAYABLES™ is designed to keep track of current and aged payables, keeping you in touch with all information regarding how much money your company owes, and to whom. VERSAPAYABLES™ maintains a complete record on each vendor, prints checks, check registers, vouchers, transaction reports, aged payables reports, vendor reports, and more. With VERSAPAYABLES™, you can even let your computer automatically select which vouchers are to be paid.

VERSAPAYROLL™ \$99.95
VERSAPAYROLL™ is a powerful and sophisticated, but easy to use payroll system that keeps track of all government-required payroll information. Complete employee records are maintained, and all necessary payroll calculations are performed automatically, with totals displayed on screen for operator approval. A payroll can be run totally, automatically, or the operator can intervene to prevent a check from being printed, or to alter information on it. If desired, totals may be posted to the VERSALEDGER II™ system.

VERSAINVENTORY™ \$99.95
VERSAINVENTORY™ is a complete inventory control system that gives you instant access to data on any item. VERSAINVENTORY™ keeps track of all information related to what items are in stock, out of stock, on backorder, etc., stores sales and pricing data, alerts you when an item falls below a preset reorder point, and allows you to enter and print invoices directly or to link with the VERSARECEIVABLES™ system. VERSAINVENTORY™ prints all needed inventory listings, reports of items below reorder point, inventory value reports, period and year-to-date sales reports, price lists, inventory checklists, etc.

VERSALEDGER II™ \$149.95
VERSALEDGER II™ is a complete accounting system that grows as your business grows. VERSALEDGER II™ can be used as a simple personal checkbook register, expanded to a small business bookkeeping system or developed into a large corporate general ledger system **without any additional software.**

- VERSALEDGER II™ gives you almost unlimited storage capacity (300 to 10,000 entries per month, depending on the system),
- stores all check and general ledger information forever,
- prints tractor-feed checks,
- handles multiple checkbooks and general ledgers,
- prints 17 customized accounting reports including check registers, balance sheets, income statements, transaction reports, account listings, etc.

VERSALEDGER II™ comes with a professionally-written 160 page manual designed for first-time users. The VERSALEDGER II™ manual will help you become quickly familiar with VERSALEDGER II™, using complete sample data files supplied on diskette and more than 50 pages of sample printouts.

SATISFACTION GUARANTEED!

Every VERSABUSINESS™ module is guaranteed to outperform all other competitive systems, and at a fraction of their cost. If you are not satisfied with any VERSABUSINESS™ module, you may return it within 30 days for a refund. Manuals for any VERSABUSINESS™ module may be purchased for \$25 each, credited toward a later purchase of that module.

To Order: **Write or call Toll-free (800) 431-2818**
(N.Y.S. residents call 914-425-1535)

- * add \$3 for shipping in UPS areas
- * add \$5 to CANADA or MEXICO
- * add \$4 for C.O.D. or non-UPS areas
- * add proper postage elsewhere

DEALER INQUIRIES WELCOME

All prices and specifications subject to change / Delivery subject to availability.

COMPUTRONICS

50 N. PASCACK ROAD, SPRING VALLEY, N.Y. 10977

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corp. • APPLE is a trademark of Apple Corp. • IBM is a trademark of IBM Corp. • OSBORNE is a trademark of Osborne Corp. • CP/M is a trademark of Digital Research • XEROX is a trademark of Xerox Corp.

like is the cursor controls, which are grouped in a logical manner. I find it much easier to remember that ^E, ^S, ^D, and ^X move the cursor up, right, left, down, than to remember the Emacs "philosophy" of 3~F for forward a letter and Escape-F for forward a word, etc.

Obviously, there's no universal agreement on this. The Final Word is based firmly on MIT's Emacs editor, which was written by my friend Richard M. Stallman; and a lot of people are not merely fond of Emacs, they're fanatic supporters. I use Emacs when I'm connected to my account at MIT, and I manage well enough. It's true that I prefer Write, on the grounds of transparency, but recall that I am a creative writer, and my requirements are much different from those of a programmer, or even of a technical writer.

Second question: "One of The Final Word's most advertised and (seemingly) important features is the ability to recover from power loss, etc., without losing text or even your place in the text. Can Write do this?"

No.

I don't think I want it to, either. The Final Word accomplishes this miracle with a "swap file"; every now and then it writes off what you've done to disk without your asking it to. It's probably pure prejudice on my part, but I find that distracting. I don't want my editor doing things I didn't tell it to.

On the other hand, I've been well trained to "save early and often," which I do. I have fast disks, and I save my text whenever I finish a unit. Still, I concede the point to The Final Word.

Hazen also asks what I think of "what you see is what you get" editors.

I couldn't care less about that feature. Write has a "print to screen" command that lets me see on screen precisely what I'd see on paper, and that's plenty enough for my purposes. On the other hand, the output of my shop is pretty much confined to (1) letters and (2) standard manuscripts that are formatted as 26 double-spaced lines per page, each 60 characters wide, with page num-

OPEN UP AN ACCOUNTING DEPARTMENT FOR \$395.00

Why staff up? With the Desktop Accountant™, all the accounting help your office needs can be at your fingertips!

No matter what type of business you're in, Desktop Accountant will let you manage the financial end of it more professionally than ever before.

A Complete System with Support.

Desktop Accountant includes accounts receivable, accounts payable, payroll and general ledger programs, along with comprehensive user manuals and training aids, including an audio cassette tape. And our telephone "hotline" means personalized support.

Produces 42 Reports. "Keeping the books" has never been so easy! Desktop Accountant prepares every bookkeeping/accounting report your growing business requires: from invoicing to statements to aged A/R listings; from cash distribution to A/P checks to vendor activity reports; from complete payroll checks and stubs to W-2 forms; from the chart of accounts to balance sheet and income statement, as well as many other vital to efficient management.

Desktop Accountant is available for nearly every portable, personal and desktop computer. The system requires either CP/M® or MS-DOS™ (PC-DOS), Microsoft BASIC™, 64K RAM, two disk drives or hard disk, and a 132-column printer (or an 8½" x 11" printer with compressed print mode).

You won't find better quality software at such a low price. Just \$395.00 for most CP/M® formats (\$495.00 for IBM® and some CP/M formats) complete. Call for available formats.



Order Desktop Accountant today!

To order Desktop Accountant or for comprehensive literature, call toll-free:

1-800-832-2244

(In California call 1-800-732-2311)

or send orders to:

1280-C Newell Avenue, Suite 1201
Walnut Creek, CA 94596



* California residents add 6 1/2% Sales Tax • Payment by VISA/MasterCard/COD/MO/Cashier's Check • All Brand Names are manufacturers' registered Trade Marks • No sales to Dealers • Foreign orders please call or write before ordering • 1983 Rocky Mountain Software Systems.



New dimensions in Bible study.



THE WORD
processor
the complete KJV Bible on
disks \$199.95 *

TOPICS
an index to over 200 Scripture
subjects \$49.95 *

* plus \$3 postage/handling

For information contact:

Bible Research Systems
P.O. Box 1389
Round Rock, TX 78680
(512) 835-7981

Requires APPLE II +, IBM PC and compatibles, TRS80, CP/M 2.2 (Z-80), KAYPRO, OSBORNE, COMMODORE 64.

"Software for personal Bible study."

bers and a very short header. I don't need fancy formatting.

What I do like is automatic on-screen formatting. That is: Wordstar and most of the "what you see is what you get" editors insert various "invisible" formatting commands into the text stream. If later you change anything, such as the length of a word, you must consciously reformat the paragraph, otherwise it won't come out right.

For example, if you use a good spelling checker like The Word Plus, it will tell you that in making corrections it has changed the length of words and suggest that you REFORMAT your text.

Write, on the other hand, works from explicit text-formatting commands. They're quite visible because they start with a dot; for example, you set the left margin to 10 by doing .lm10 and set the header margin (space between header and top of text) by doing .hm3 or whatever. Having done that, Write does the rest. When I edit already written text, Write automatically reformats it on

screen. When I run The Word Plus, I can immediately print my text without reformatting, regardless of whether words changed length. And so forth.

I prefer it this way. If I did a lot of newsletter publishing or intricate text layout, I'd probably have a different view. I do know that Write is good enough to produce important documents; the report of The Citizen's Advisory Council on National Space Policy was printed here at Chaos Manor using Write, and it got a letter of commendation from the President, so it must have looked good enough.

Actually, I expect much editor preference depends on what you're used to; as long as you have a decent text editor, these machines are so much better than what we had before we got them that we can loudly count our blessings.

Still, I am making notes about what I want in my "ideal" editor and, who knows, maybe I'll use parts of it as an example when I start writing about how to program in Modula-2.

Upgrade? That Compupro

I'm writing this on a Compupro Z80. I want that clearly understood; maybe I can forestall some of the angry letters.

Bill Godbout's Compupro company has sold one whack of a lot of Z80 microprocessor boards. It still sells them—but he's trying to retire them. What Dr. Godbout really and truly wants you to get is a dual processor, 8085/8088 central processing unit, and while you're at it, get CP/M 8/16 that runs both 8-bit CP/M-80 (2.2x) software and 16-bit CP/M-86 programs.

To encourage this, he's making two offers:

(1) If you have Compupro CP/M-86, return the original master (you can keep a copy) to a Compupro Systems Center and the company will sell you a working CP/M 8/16 complete with BIOS for \$100.

(2) If you have a Compupro Z80 microprocessor, talk to your Compupro Systems Center, or even direct to Compupro; you can arrange to trade it in and get a Dual Processor 8085/8088 replacement board at half price.

Now I know that some people won't consider this an upgrade, because the Z80 does have some pretty efficient instructions not present in the 8085. Phillippe Kahn of Borland says the reason the company's Turbo Pascal is so efficient for CP/M-80 is that it works only with Z80 systems and makes maximum use of the Z80 instruction set.

On the other hand, the micro world is moving toward 16 bits. There's more 8-bit than 16-bit software right now, and the Z80 will run more of it than the 8085, so perhaps this isn't the time to make the change. Perhaps. I have both systems, and there's very little I can't run on the Dual Processor—which also has Jim Hudson's 8087 piggyback board, thus enabling me to do even more wonders.

Anyway, while Dr. Godbout and I were discussing his trade-in offer, he said he was contemplating calling Nieman-Marcus to get into its Christmas catalog. He could offer a \$100,000 microcomputer.

results:

ProType[®]. Develop professional typing skills. Quick. Private. Effective. Now.

EXCEL

EXCEL Systems Corporation · 655 Redwood Highway
Suite 311 · Mill Valley · CA 94941

Ask your Dealer to demonstrate the entire EXCEL SYSTEMS line for you.

Take one each Shirley machine. Each of the four users could have his own CPU and memory. They could also have their own RAM-disk if you'd like. You can make the RAM-disk as large as 4 megabytes and the individual memory area up to 16 megabytes. This requires the new 256K-byte memory chips, which aren't cheap.

With two floppy disks, a hard disk, 16 megabytes of main memory, 1 megabyte of RAM-disk, five processors, and terminals, you could put together a Super-Shirley to sell for \$100,000, and he was going to try to get that in the Nieman-Marcus catalog.

Of course, Shirley doesn't normally sell for anything like that; with four terminals it's still well under \$20,000 for a four-user system.

I don't know whether Godbout got his ad in that catalog, but he does have a point: it's going to be awhile before those 256K-byte chips make any practical difference to the ordinary microcomputer user.

Meanwhile, Godbout is developing a 1-megabyte S-100 *static* memory board that will take up only one slot. You can probably order one now; if you decide you want one, it will be about \$6000, no small sum. Of course, that price will fall over the next year or so; memory prices always come down.

As to why anyone would *want* such an expensive board, it will work at fantastic speeds, far higher than where the cheaper dynamic memory boards can work reliably. I already have a Compupro 8-MHz 8086/8087 microprocessor board—and the company is trying to increase that one's speed. Moreover, with a board like that you're tooling up for the real thing, when the 16032 boards come out.

My conversation with Godbout got me to thinking. People are always asking me, "What should I buy?" Short of giving a specific machine for an answer, what should I say? But I have thought of something.

Buy yourself a state-of-the-art development system—but don't get *this year's* model. Get something that between one and one and a half years

ago was the latest state of the art. That will be advanced enough for almost any nondevelopmental purpose. People will be writing software for it. The bugs will be shaken out and its servicing quirks will be known.

Example: I'm writing this on a Compupro Z80, which was state-of-the-art three years ago, and I'm about to check spelling and print it on a Compupro 8085/8088 Dual Processor, which was state-of-the-art not more than two years ago. Both are reliable, quite sophisticated, and easy to use.

Incidentally, I told Bill Godbout about a new company that's forming to challenge his supremacy in the development systems market.

He said, "Love competition. I'd like to have somebody to steal something from for a change."

Fixing up Adeline

The Otrona company has changed hands, and no one in it seems ever to have heard of me. The company has severed its connection with Fred Whitney, who used to be the local

manufacturer's rep, and the West Coast sales people I knew are all gone.

Thus I hear rumors of new boards and software for the Otrona, but I've not seen any.

Meanwhile, Adeline, our Otrona, developed speech problems: that is, she worked fine, but the communications port stopped sending, making it well-nigh impossible to transfer files out of Adeline and into our main system. (There's a story that goes with that, about why my 5-inch disk systems for the big Compupro Dual Processor aren't up and running, but it's for another time.)

We also had a problem with the handle; not fatal, but annoying.

No one at Otrona returned my calls, so it took a while to find a local dealer; but eventually we came up with Omni Unlimited, of Pasadena. Alex took Adeline over. Within an hour, John Erdwell of Omni had Adeline fixed and running. Moreover, it didn't cost a cent; it seems Otrona had some problems with early machines and instructed

SUCCESS:

MNU.[®] Create menus, use instructions, tutorials, demos – with winning results. Instant success.

EXCEL

EXCEL Systems Corporation · 655 Redwood Highway
Suite 311 · Mill Valley · CA 94941

Ask your Dealer to demonstrate the entire EXCEL SYSTEMS line for you.

authorized repair centers to treat the machines as if under warranty. I don't know if the company is still doing that as you read this, but as of November it is.

We still use the Otrona as the travel machine. There's a good version of Write for Adeline, and she fits in an aircraft overhead rack quite nicely. I last took her to Austin, Texas, and got quite a lot of work done in evening hours. There are said to be better portables, but so far I've not tried one.

Late edition: Otrona has successfully reorganized. Ron Lingeman, the original designer of the machine, has become the vice-president of R&D and is happy as a clam with his return to the laboratories. The new president is Jim Linder, who enjoys sales and marketing. I met both at COMDEX. Communications have been reestablished and we are getting a PC-compatible update for Adeline Real Soon Now.

They also have a very nice large amber screen add-on. With the big screen, PC-compatibility in addition to the original Z80, and lots of bundled software, the Otrona remains my favorite portable.

Game of the Month

We've got a ton of computer games around here. My method of determining which one is most popular is to watch which ones the kids are playing when I go back to their end of the house. It's not quite a random sampling, but it's reasonable.

This month the favorite seems to be Avalon Hill's Tactical Armor Command. I'm glad of that, because I have a soft spot in my heart for AH; I've been playing its board games for at least 25 years, beginning with Tactics II.

The following review is by Alex Pournelle, with assistance from Richard (13) and Phillip (15):

Tactical Armor Command (Apple version tested; no joystick used).

"Dad used to design board war games. I got interested in them because of him, but I have had little spare time and few opponents for a long time. Because of this, I hoped to see some good board-type games for

computers, especially from a company whose games I have admired, Avalon Hill.

"They have done it. Tactical Armor Command, or TAC for short, is definitely an Avalon Hill game right from its rules through its playability. It even has the old Avalon Hill rule gaps—for instance, the game says "fire suppressed," though the rule book doesn't mention what that is. No matter; Avalon Hill gamers would be suspicious of anything perfect in its first release.

"There is one perfect thing: the marriage of computer and board game. The last two board games I used to play were Tobruk (AH) and Air War (SPI). Both dealt with individual units, tanks in Tobruk and jet fighters in Air War. Both were *incredibly* hard to learn and play. Air War had 100 pages of rules, tables, examples, and notes; it took a friend of mine two weeks just to learn to fly straight and level! The computer can take care of this detail much better than you or I; TAC does this for a very Tobruk-like game.

"You choose American, German, Russian, or British armor and troops in World War II. Your opponent, who can be the computer or another sapient being, chooses one of the others. You select how many "armor points" (which buy tanks, artillery, or troops and APCs) each side gets and then purchase your instruments of destruction. Then you each take turns moving on the board, attempting to find each other's units, hiding in forests, laying smoke, and firing either directly or indirectly. Though the moves are entered one after the other, all moves are processed simultaneously, making the game more realistic. Combat resolution, if any, is shown after all moves are entered. All views of the playing field are shown in top view, just like any other tank board game. The hexagon paper, though, is gone: units can be anywhere.

"Good points: the game is fun and refreshingly different. If your coordination isn't up to 4000 aliens a minute, try a little strategy. You can give more units to a lesser player or play the computer if you're alone.

The computer, by the way, is a pretty good player—the game calls him "Major Al Logarithm." There is no time limit during planning stages, so plan on. Moving units *is* time-dependent and you *can* make mistakes, but this is so much more like reality that I am only impressed. I could wish for optional joystick unit movement if I were in a wishing mood.

"Disadvantages: like any other Avalon Hill game, there are some endearing foibles as well as just dumb mistakes. There are not enough examples in the instructions, especially of indirect fire, messages given during combat, how to engage the enemy, what infantry is good for (and how to use it), what artillery can do for you, and what to do with every tank against every other. Avalon Hill provides good examples for its \$12 to \$20 box games; it certainly ought to for a more expensive computer game. You get to pick the units for both sides if you play the computer; I would like to see it do its own choosing. You have to write down what units you're tracking and where they are; the computer could do a lot more note-taking for you. If you try to point a gun in a direction it won't go, the computer just asks you again; there ought to be help on this. Most of these are minor nits, though: the game is very playable and takes only two or three test plays to pick up. I would like to see Avalon Hill add more scenarios and variable terrain so Tactical Armor Command doesn't become a bookshelf queen."

(Note by JEP: the biggest disappointment to me was that although the Germans can have towed artillery, the most famous antitank weapon of the war, the Flak 88, isn't in the game! Rommel changed armored tactics forever by bringing the 88's forward to fight as integral units with his tank armies; it would be interesting to see how that tactic fares in this game. I wish they'd add the 88s. . . .)

Coming Attractions

I'm never very good at predicting what I'll be doing, but next month is COMDEX. Meanwhile, I've been

Items Reviewed

Dedicate/32 Merrit Software POB 1504 Fayetteville, AR 72702 (501) 442-0914	\$175	Otrona Attaché Otrona Corporation 4755 Walnut St. Boulder, CO 80301 (303) 940-3445	\$2995
Disk Doubler Evolving Technology Corporation 3725 Talbot St., Suite F San Diego, CA 92106 (619) 224-3788	\$19.95	Pascal MT + 80 MT + 86 Digital Research, Inc. POB 579 Pacific Grove, CA 93950 (800) 227-1617	\$350 \$600
Eagle 1600 Series Eagle Multiuser PC Spirit Portable Eagle Computer Corporation 983 University Ave., Building C Los Gatos, CA 95030 (408) 395-5005	\$4495-8995 \$1995-4495 \$4795	Shirley (Multipro MP-10) (hard drive 40-megabyte) Compupro Upgrades Compupro 3339 Arden Rd. Hayward, CA 94545 (415) 786-0909	\$8490 —
Final Word Mark of the Unicorn 222 Third St. Cambridge, MA 02142 (617) 576-2760	\$300	Spellbinder (alias Word/125) Lexisoft 706 5th St. Davis, CA 95616 (916) 758-3630	\$495
IBM PCs and Other Computers Computerland of Woodland Hills 28012 Ventura Blvd. Woodland Hills, CA 91367 (818) 716-7714		Tactical Armor Command Avalon Hill Game Corporation 4517 Harford Rd. Baltimore, MD 21214 (301) 254-5300	\$40
Logimouse Logitech Inc. 165 University Ave., #105 Palo Alto, CA 94301 (415) 326-3885	\$203	Turbo Pascal Borland International 4807 Scotts Valley Dr. Scotts Valley, CA 95066 (800) 227-2400	\$49.95
Magic Keyboard Write Dedicate/32 Workman and Associates 112 Marion Ave. Pasadena, CA 91106 (818) 796-4401	\$32.50 \$239 \$175	Wordstar Micropro International 33 San Pablo Ave. San Rafael, CA 94903 (415) 499-1200	\$495
MPI 99 MPI 150G Micro Peripherals Inc. 4426 South Century Dr. Salt Lake City, UT 84107 (801) 263-3081	\$599 \$995-1345	Zenith Z-100 Computer Zenith Data Systems 1000 Milwaukee Ave. Glenview, IL 60025 (312) 391-8865	\$2899

promised the new Eagle Spirit portable (which I'll take to COMDEX) and a number of expansion boards for our IBM PC, including, I hope, Ciarcia's Quicksilver.

Also on deck is Sweet Pea's plotter, Mouse Systems' Mouse compared to Logitech's, Lotus 1-2-3, concurrent CP/M with Logitech, DR Logo, and

Lord knows what else.

There are also 21 pounds of mail to deal with, and the unreviewed software pile continues to grow. I love it. ■

Jerry Pournelle is a former aerospace engineer and current science-fiction writer who loves to play with computers.

Jerry Pournelle welcomes readers' comments and opinions. Send a self-addressed, stamped envelope to Jerry Pournelle, c/o BYTE Publications, POB 372, Hancock, NH 03449. Please put your address on the letter as well as on the envelope. Due to the high volume of letters, Jerry cannot guarantee a personal reply.

The Texas Instruments makes the best software

Best-Seller List.



These best-sellers are among the most popular business software programs for microcomputers as reported in *Inc.* magazine, September, 1983.

Professional Computer perform even better.


See the difference the TI Professional Computer can make with these best-sellers and hundreds more software packages.

Literally hundreds of third-party software packages are available for the TI Professional Computer. So with the TI Professional Computer, whether you need word processing, accounting, spreadsheets, data base management or advanced integrated programs, the best — and best-selling — software can help you meet virtually every business and professional need. But before you consider software alone, you should weigh one other very important point: the better the hardware, the more you get out of your software.

It's no wonder critics have called it "the optimum personal computer."

*Popular Computing
October, 1983*

The TI Professional Computer's outstanding monitor resolution and 8-color graphics make best-selling programs like Lotus 1-2-3™ sharper, easier to work with. And the fact that you can put three times the graphic information on your screen — in both color and monochrome — means you'll be able to take even greater advantage of the best graphics programs. For best-selling word processing packages like WordStar™, TI's comfortable, typewriter-style keyboard is a natural. Anyone

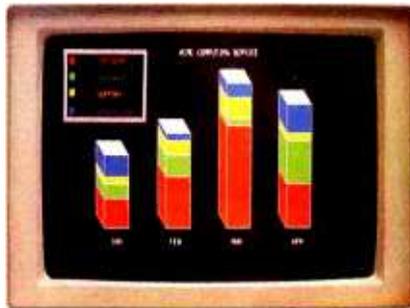

Our sharp, 8-color graphics give your displays even more visual impact.

familiar with a standard typewriter keyboard can start to work immediately, without re-learning key positions.

Texas Instruments has developed forward-looking programs to bring you innovative, easy-to-use technology.

One such package is NaturalLink™, TI's exclusive natural language interface program. NaturalLink lets you access information from subscription data base inquiry services, such as the Dow Jones News/Retrieval®



service, in plain English. So you don't have to memorize special codes to get the outside information your business depends on.

TI's revolutionary development of speech recognition is another way TI helps you get the most from your software.

Leading third-party software suppliers are developing new programs to take advantage of TI's speech technology. In early 1984, with Speech Command™, you'll be able to say things like, "Inventory analysis, please," and have a spreadsheet displayed instantly on your monitor. Voice-operation will make the TI Professional Computer easier to use than ever before.


If you're ready for the best — and best-selling — programs, you're ready for the Texas Instruments Professional Computer. Now at participating ComputerLand stores and independent dealers. For the location nearest you, and answers to questions about your computing needs, call 1-800-527-3500.



**TEXAS
INSTRUMENTS**
Creating useful products
and services for you.

1-2-3 is a trademark of Lotus Development Corp.
Dow Jones News/Retrieval is a registered trademark
of Dow Jones & Company, Inc.
WordStar is a trademark of MicroPro International Corp.
NaturalLink and Speech Command are trademarks of
Texas Instruments Incorporated.
Copyright © 1983 Texas Instruments

From the Rainbow to the VAX ... from the PC Jr. to the 370.

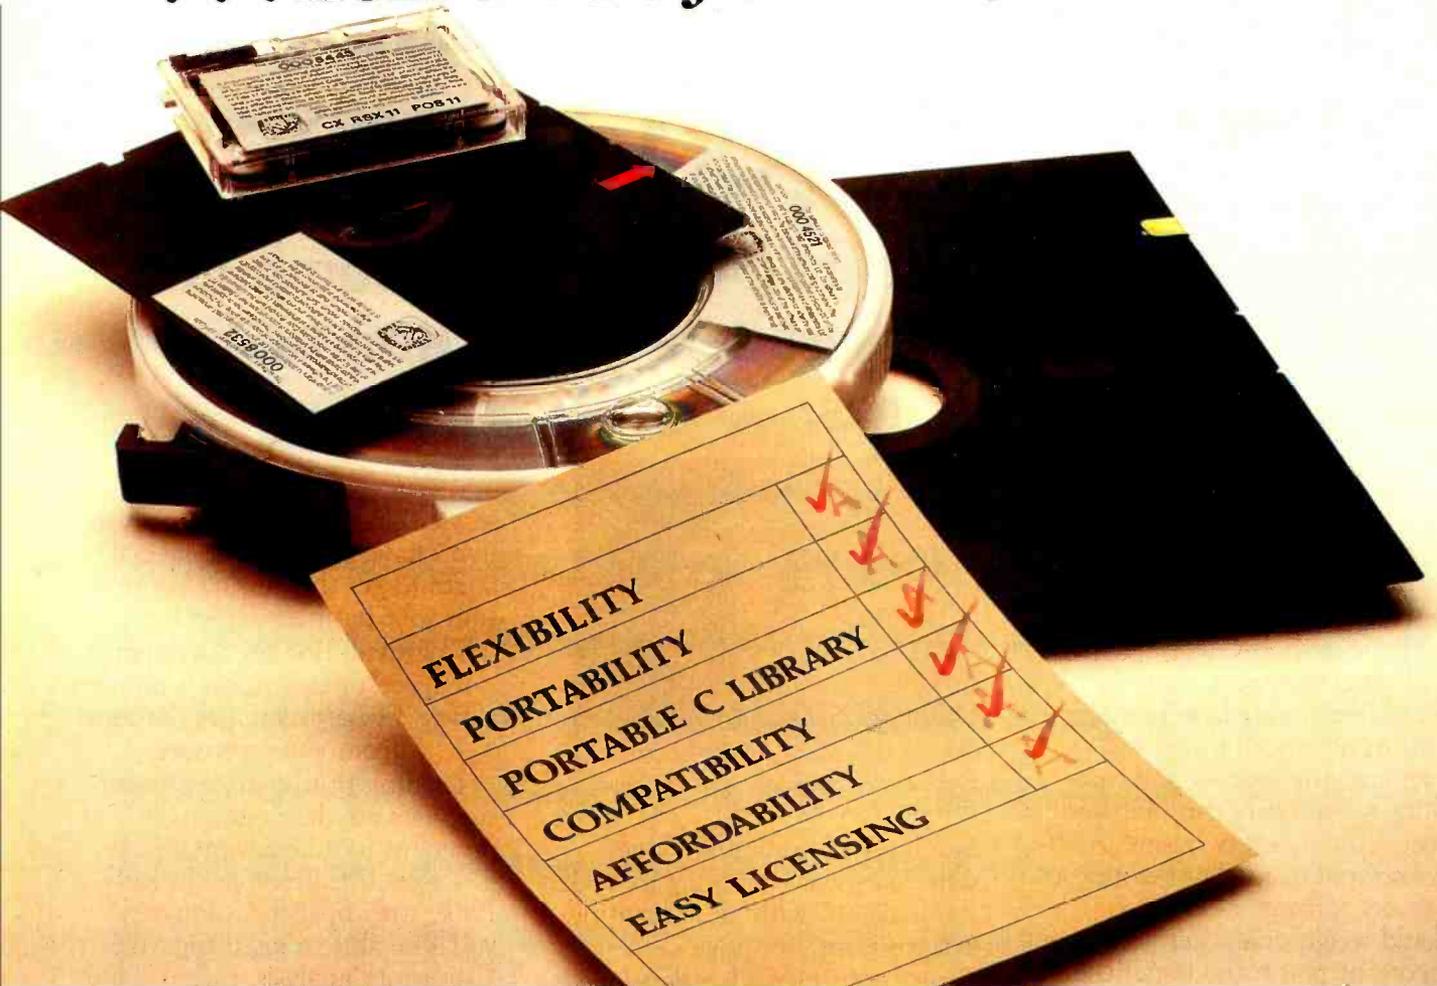

Whitesmiths' C and Pascal Compilers continue to set the industry standards

- **FLEXIBILITY** — the same compiler
 - **PORTABILITY** — dozens of systems
 - **PORTABLE C LIBRARY** — UNIX compatible
 - **COMPATIBILITY** — new UNIX-style library
 - **AFFORDABILITY** — high portability
 - **EASY LICENSING** — the Authorization Seal
 - **RELIABILITY** — thousands of installations
 - **COMPLETENESS** — the full language
- DISTRIBUTOR AND DEALER INQUIRIES INVITED**

Host:	Cross To:			
	CP/M-80	CP/M-68K	MS/PC-DOS CP/M-86	P/OS
UNIX				
IDRIS/R11	✓	✓	✓	
RSX-11	✓	✓	✓	✓
RT-11	✓	✓	✓	
VMS-VAX	✓	✓	✓	✓
UNIX-4.1 BSD	✓	✓	✓	
UNIPLUS	✓		✓	
IDRIS/S68K	✓		✓	
MS/PC-DOS				
CP/M-86	✓	✓		
IBM 370			✓	
Host Only:	CP/M-80*	CP/M-68K	P/OS-11	VERSAdos
	*2.1 Cross Compilers available			

BUILD A STRONG FOUNDATION WITH THE COMPILERS OF THE 80's



Whitesmiths, Ltd.

97 Lowell Road
Concord, MA 01742 (617) 369-8499
TLX 951708 SOFTWARE CNCM

Circle 386 on inquiry card

UNIX is a trademark of Bell Laboratories; Rainbow, PDP-11, P/OS, RSX-11, RT-11, VAX and VMS are trademarks of Digital Equipment Corp., CP/M is a trademark of Digital Research Co., MC68000 and VERSAdos are trademarks of Motorola, Inc., UNIPLUS is a trademark of Unisoft, Inc., IBM PC, PC Jr. PC-DOS and IBM 370 are trademarks of International Business Machines Corp., MS-DOS is a trademark of Microsoft Corp., Idris is a trademark of Whitesmiths, Ltd.

Distributors: Australia, Fawnray Pty. Ltd., Hurstville, (612) 570-6100; Japan, Advanced Data Controls Corp., Chiyoda-ku, Tokyo (03) 263-0383; United Kingdom, Real Time Systems, Douglas, Isle of Man 0624833403; Sweden, Unisoft A.B., Goteborg, 031-13-56-32.

A Business Computer, A Business Program, and More on Voice Recognition

Recent developments raise some questions about perceived industry trends

by Ezra Shapiro

North Star Dimension

The announcement this fall, shortly before COMDEX, of the multiuser IBM-compatible North Star Dimension in many ways validates what industry observers have been preaching as the formula for survival in a world increasingly dominated by the IBM Personal Computer (PC) and its imitators. The North Star Dimension is not to be confused with the Dimension 68000 from Micro Craft Corporation, a single-user system that claims compatibility with just about anything via coprocessor boards. The new machine is a best-level PC work-alike (in other words, it comes as close to being fully compatible as anything to date) that was designed to appeal to a *very* specific segment of the microcomputer marketplace.

The Dimension is a carefully planned business system consisting of a central processing unit, a 13-slot PC-compatible bus, and up to 12 satellite workstations.

The central processing unit is based around the Intel 80186 microprocessor and 256K bytes of RAM (random-access read/write memory) expandable to 512K bytes. In its basic configuration, storage is provided by one 360K-byte floppy-disk drive that can

read all IBM 5¼-inch formats and a 15-megabyte hard disk, although the system will support the floppy-disk drive, two 30-megabyte hard-disk drives, and a 45-megabyte tape backup unit. Output is through a Centronics parallel port, an RS-232C serial port, and a second serial port programmable for a variety of protocols, including asynchronous and bi-synchronous communication with mainframes.

Each workstation terminal is attached to a card that holds an 8088-2 running at 7 MHz and 128K bytes of RAM. Expansion boards of either 128K or 384K bytes of RAM are optional. Workstation cards or, theoretically, any other PC XT expansion cards, slip into the PC bus with no hard-wiring. Terminals feature one serial port for a local printer (or a mouse), a detachable keyboard, and a 12-inch green-phosphor tilt-screen monitor with 640- by 200-pixel IBM-compatible graphics and a 640- by 400-pixel high-resolution graphics mode. North Star currently has no plans to implement color, deeming it unnecessary in the business environment at which the Dimension is aimed.

In short, each workstation is essentially an independent computer with

no permanent storage. The main board serves only as a memory manager, handling requests for programs or data from workstations on a first-in, first-out basis. The 80186 is programmed to use its RAM as a memory cache system, avoiding disk access whenever possible. This design is inherently both faster and safer than linking a group of PC XTs in a local area network because the main board, the workstation boards, and all permanent storage media are located within the same box, and data transfer occurs as quickly as it would in any single-user computer of similar size, with little chance of signal degradation.

At the time this column was written, North Star was still working out preproduction details but was planning to ship beta-test systems in December of 1983 and move to full production early in the first quarter of 1984. Management seemed confident that there would be a large enough supply of 80186s available to meet their schedule.

However, while the Dimension is certainly impressive in its own right, it is perhaps even more significant as an indication of the current state of industry thinking. North Star has been around since 1976 (when it was

known as Kentucky Fried Computers) and is certainly no Johnny-come-lately in the microcomputer rat race. The company was a pioneer in S-100 system design and has been noted for the stubbornness with which it has clung to hard-sectored 5¼-inch floppy-disk drives since it began using them years ago. Although North Star has been marketing 16-bit coprocessor upgrades for its Advantage and Horizon computers for well over a year now, it has done so with little of the media fanfare normally associated with major product introductions.

Thus, it's worth taking notice when Dr. Charles Grant, one of the founders of the company, states flatly that the IBM PC has become a "standard" and that the company intends to "ride the wave" of IBM popularity to a financially secure future. When asked why it had taken them so long to embrace this new standard wholeheartedly, Grant commented that North Star had wanted "to do it right."

North Star's sales goals for the Dimension seem modest enough; the company is shooting for 2 to 3 percent of the IBM-compatible market and the same share of the overall multiuser market. Unlike earlier North Star products, which were moderate- to high-priced machines, the Dimension is certainly priced to compete. The suggested list for the basic configuration (256K-byte RAM, floppy-disk drive, 15-megabyte hard disk, and two workstations with 128K bytes of RAM) is only \$7000. Upgrading the hard disk to 30 megabytes costs an additional \$1000, and extra workstations go for \$1500 each. Add-on RAM boards range from \$300 for 128K bytes to \$700 for 384K bytes. The company's advertising materials highlight graphs that compare system costs to networked PC XTs (North Star claims a 50 percent savings per user in a five-user system), and representatives of the firm tick off the less obvious advantages: multiuser software licenses as opposed to multiple purchases of the same products; no need for either networking hardware or software; and so on. North Star is developing

an aggressive marketing campaign to sell the Dimension to Fortune 1000 companies. Gone are the days when a computer manufacturer could support itself with a product for scientists and hackers. With the Dimension, North Star is attempting to occupy a niche in the market that, so far, has been vacant.

One is forced to wonder which came first, the computer or the strategy. It's becoming painfully obvious that the key to survival as a major manufacturer is acceptance by the business community. The IBM PC has unquestionably opened the door to that market wider than any personal computer before it, but in so doing has made compatibility a primary factor in microcomputer design, for better or for worse. Recent announcements by North Star, Televideo, and a host of smaller firms

Most thick manuals are an insult to user intelligence.

seem to indicate that the 8088/MS-DOS/IBM-compatible bandwagon is becoming something much more like a speeding freight train.

The Integrated Microman

The requirements of the corporate world have become a driving force in software design as well, and a great deal of effort has been devoted to devising software schemes that will help to shoehorn the computer into the executive office. The ideal seems to be a program that eliminates most—if not all—of the need for paper, writing implements, and filing cabinets and is (of course) laughably easy to learn. Whether such a program is practical or even useful (there has yet to be a reasonable analysis of the amount of creative thinking that goes on during the act of shuffling papers, for example) is the great moot question, but the new products continue to multiply. In the attempt to produce a computer environment analogous to an executive desktop and thereby shorten the amount of time it takes for a novice user to develop a "feel" for computer

operations, more and more programs are appearing that make use of multiple windows, alternative pointing devices such as mice, graphic metaphors, and endless layers of menus.

But is all this really necessary? Much of what goes on in most offices is not particularly well organized or logical. Computers and computer programs are by their nature dependent on structures and priorities. If we assume for a moment that it will be necessary for a new user to accept a certain level of organization in order to make use of a computer, why not make computer operations a bit easier to grasp, instead of trying to replace them with an artificial desktop?

That's roughly the philosophy behind an integrated software package, code-named "Microman," from Noumenon Corporation, which will be introduced this spring at Softcon. It's difficult to describe—largely because the most accurate phrases have already been commandeered by copywriters flogging all sorts of programs, from the truly integrated packages all the way down to those that share similar commands but no common data structures.

Microman uses no icons, no mouse (although a pointing device could be added as a substitute for the cursor keys), no windows, and very few screens that could be considered menus. But it is, in fact, an extremely tightly-knit *environment* with word-processing, calculator, spreadsheet, database, business graphics, and time-management capabilities. It's one program, not a linked collection of programs that can swap data files. Microman is designed to act as its own operating system, although it allows for the transfer of files to and from the operating system supplied with the computer.

A large part of the program's power comes from its strongly hierarchical file structure. The first thing you see is a directory, which can either be the titles of subdirectories or the names of working files. You choose a file (or move down the tree to another directory) with the up and down cursor keys. If you wish to create a new file,

SIMPLE.

Instant networking, independent of computer and peripheral brands.


Creating a micro and mini computer network has been costly and confusing. Communications hierarchy has prevented many types and various kinds of equipment from sharing information. Until now.

Introducing StationMate. One unit that joins mini computers, micro computers, terminals, and printers. It's transparent. So different brands and types of computers and peripherals can easily interface. StationMate allows you to construct a comprehensive communications network. *Inexpensively.*

Users can select the information they need from the unit they want. StationMate can

StationMate provides local area networking with XLAN™, the simple communications con-



only \$1,450.00. StationMate makes communications simple. *Incredibly.*

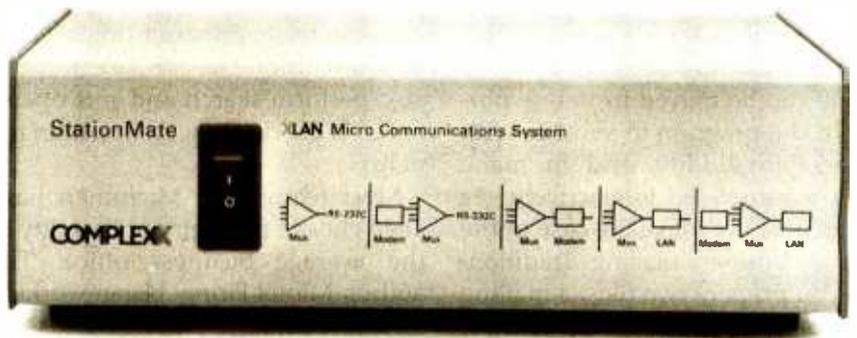

cept from Complexx. All you need is StationMate and an inexpensive shielded-pair cable. Besides local area net-

StationMate. The link you've been missing. See your local dealer or contact Complexx for the name

Teleprocessing

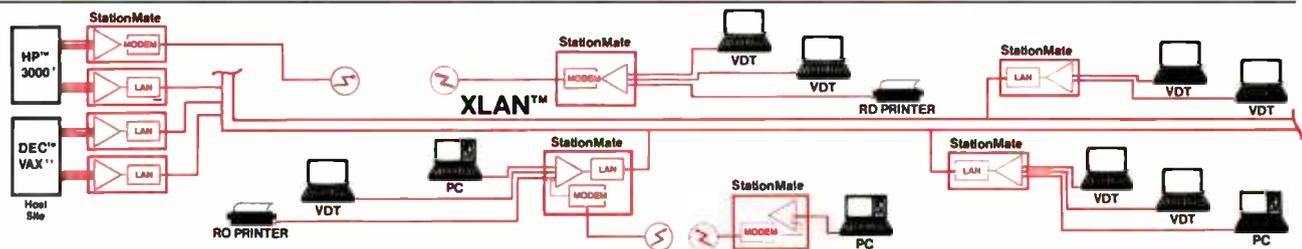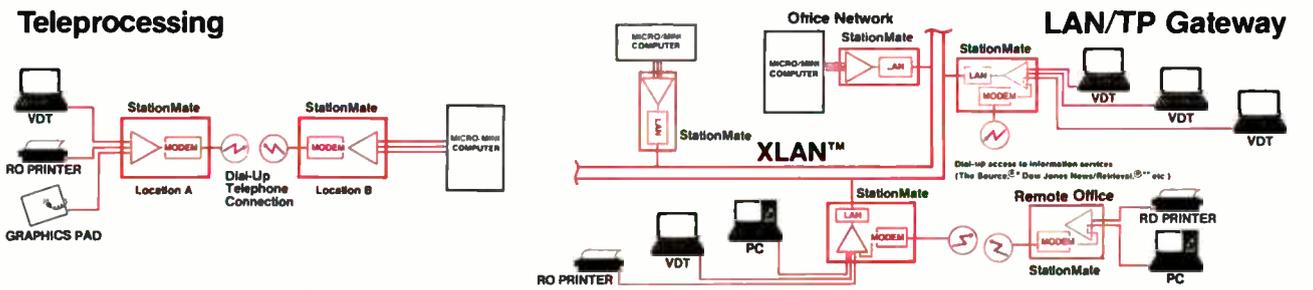

address any port in the network either by its assigned digital code or by its common identifying name. So everyone has access to all the local or remote computers, mass storage files, and peripheral devices connected in the network. *Immediately.*

working, StationMate permits access to remote workstations via an internal dial-up modem. And it serves as a gateway for teleprocessing access to all LAN resources. You couldn't get all of this in one unit. Until now. And the suggested retail price is

of the dealer or distributor nearest you. *Complexx Systems, Inc., 4930 Research Drive, Huntsville, AL 35805. 205/830-4310.*



*The Source is a registered trademark of The Source Telecomputing Company, a subsidiary of the Reader's Digest Association. **Dow Jones News/Retrieval is a registered trademark of Dow Jones & Company, Inc. †HP 3000 is a registered trademark of Hewlett Packard. ††DEC VAX is a registered trademark of Digital Equipment Corporation.

you merely move the cursor to the beginning of a line and begin typing.

Because Microman is self-contained, there is no need to use CP/M or MS-DOS file-naming conventions. Microman allows you to name files with descriptive phrases of up to 67 characters, and blanks and punctuation marks are perfectly acceptable. The loose equivalent of a filetype specifies not only the nature of the information contained in the file but the part of the program used to manipulate it. For example, a file named "Potential Clients" with the filetype "record" would be a mailing list, and Microman would bring up the list facility. A filetype of "table" would invoke the spreadsheet.

Data can be moved from one portion of the program to another with remarkable fluidity, and in many cases manipulated interactively. As an example, let's take the case of the multiple business mailing. Traditionally, you prepare two files, a mailing list (database) and a form-letter matrix with variable names of some sort to indicate where the database

items should fall. These files are independent and are brought together at output when the program inserts list items into the appropriate holes and adjusts the copy accordingly.

With Microman, the letter and the list are prepared as separate files. You can tag the two files (with one keystroke each) at the directory level and proceed to output the merged form letters as previously discussed. However, if you wish, you can tag the files, enter the matrix file, view the list items one at a time in position in the letter, make changes to the items (updating the list file concurrently), and selectively print out single letters (again with one keystroke). You can also perform search and sort operations on the database from within the matrix.

Most features of Microman have been chosen for their applicability to the average business office. The author, Martel Firing, began working on it as a personal project because he couldn't find a commercial offering that suited his needs. Noumenon

does not claim that Microman has the best or most powerful features. The aim was a program that could perform most of the tasks an executive or secretary would require to conduct day-to-day affairs.

The word processor is a two-part operation, a text editor and a print-time formatter, but it is entirely adequate for the generation of memos, correspondence, and clean business reports. A calculator strip (yes, a "window," if you must) can be brought up for quick numerical computations and as quickly banished from the screen.

The spreadsheet is powerful and efficient and is designed to let you enter formulas for cells, rows, columns, or areas in simple English-based syntax. Procedures for recomputation or individual formulas can be named, so that instead of typing "Multiply gross sales \times 5 % = Advertising allowance" you can enter "DO: Ad budget." Multiple procedures can be nested. Notes and free-form messages can be entered at any time without having to associate text

BY THE TIME

YOU DISCOVER

A WORN OUT

DISK, IT'S PROBABLY

TOO LATE.

with standard spreadsheet units (e.g., cells).

Database entries can be made through either user-created input or output forms (which are all the same to the program), and file organization can be changed at will with no chance of damage to the data. Microman also offers the executive a time-oriented database system for the chronological entry and sorting of data—daily expenses, for example. All Microman databases are fully interactive with their report forms, as in the mailing list example just given. Databases are not in themselves computational (numerical data can be shifted to a spreadsheet table smoothly enough), but again, Noumenon sees Microman as a multipurpose office aid, not as a complex data-retrieval system.

Great care has been taken to make the program as simple to run as Noumenon feels is appropriate; function keys perform equivalent tasks in all application areas, and on-screen Help messages are available at all times. Both Firing and Noumenon

president Mike Mead regard the thick manuals that accompany most computer products as an insult to the intelligence of the user and a luxury for which most executives simply do not have the time. Microman documentation is a succinctly worded booklet of under 30 pages, and significant passages are either reproduced directly or enhanced as explanation screens.

Both Noumenon officials note that the computer market has entered a new phase. In their eyes, the technically sophisticated hobbyist of five years ago and the adept enthusiast of last year will make up at most 20 percent of the eventual market; the remaining 80 percent will be composed of naive business users with neither the inclination nor the interest to use computers as much more than tools and shortcuts. Microman is targeted at that group. Mead and Firing see Microman as a program that can remain on line in all but the most specific office situations, and they plan additional program modules (in areas like communications) to further

broaden its usefulness.

A brief product description such as this does not do Microman justice; explanations are often more confusing than the actual operations. But Microman accomplishes what it claims; it's "easy to use," "ready to run," and "user friendly" without being either cumbersome or overly simplistic. Microman is obviously a neatly tailored program for the intelligent, but busy, adult.

Which brings us back to the question of the "bells and whistles" the industry is hurriedly developing. If Microman can achieve its goals using only a moderate amount of video highlighting, a few well-placed rules, clearly defined function keys, and a few simple, largely self-explanatory screens, why are we getting caught up in the notion that in order to make the user interface of a program simpler and less hostile we must make the program itself even more complex? Perhaps the problem lies less in the nature of software than in the nature of software design. It's worth considering.

Presenting the No-Risk Disk.SM

No matter how many times you play it, the TDK No-Risk Disk won't drop a letter. A word. Not even a bit. We guarantee it.

And not for 1 year. Or 5 years. But with a lifetime replacement warranty for as long as you own the disk.

That's a promise we don't make lightly. Because it has almost 50 years' research and development of TDK recording products behind it.

So the next time you want to store important information, put it on TDK. You've got nothing to lose.



TDK offers a complete line of the most popular disks in 5 1/4- and 8-inch formats.

TDK. THE NO-RISK DISK.SM

Visa/MasterCard—NO CHARGE

NATIONAL ORDER DESK

1-800-231-0616

ORDER STATUS AND INFORMATION

1-713-692-7100

FREE SHIPPING!!



EAGLE SOFTWARE

6121 Stuebner Avenue
Houston, Texas 77091
(713) 692-7100



MODEMS

Hayes
Micromodem I/e w/sft. . . \$225
Smartmodem 1200B
w/sft. \$425
Smartmodem 1200 \$490
Smartmodem 300 \$209
Novation
J-Cat \$115
Appelcat II \$260
2/2 Auto Cat \$575
O-Cat Modem \$165
Anchor Automation
Mark I \$83

DISK DRIVES

Micro-Sci
A2 143K wo/Cont \$229
A2/40/70 Cont. Card . . . \$79
A40 164K wo/Cont \$265
A70 286K wo/Cont \$365
Rana
Elite I \$269
Elite II \$459
Elite III \$595
Elite Controller \$95

APPLE PRODUCTS

Keytronic
KB-200 Apple II \$225
Krait
Joystick \$46
Microsoft
16K Ramcard \$69
Softcard (CP/M) \$235
Orange Micro
Grappler \$119
Buffered Grappler . . . \$189
Bufferboard \$135
Orange Interface \$75
TG
Game Paddles \$28
Joystick \$43
Track Ball \$47
Select-a-Port \$43

Videx
Ultraterm \$265
Vidioterm \$229
Vidioterm/SS/INV \$245
Enhancer II \$99
Function Strip \$59
PSID Card \$176
Applewriter II Pre-boot . . \$15
V-Calc 80 Pre-boot \$38
V-Calc 80 W/Mem. Exp. . . \$69

IBM PRODUCTS

Microsoft
Flight Simulator \$33
Mouse \$139
TG
Joystick \$45
Track Ball \$45

MONITORS

Amdek
Color I \$289
Color II \$439
300G Green \$139
300A Amber \$155

APPLE SOFTWARE

Microsoft
Multiplan \$175
Videx
Ultra Applewriter Pre-boot . \$23
Visicorp
Visifile \$169
Visicalc \$169
Siera On-Line
Screenwriter II \$89
Screenwriter Prof. \$129

IBM SOFTWARE

Ashton-Tate
Friday \$195
Financial Planner \$459
Microsoft
Multiplan \$175
The Word \$265
Fox & Geller
dGraph \$189
Dulcode \$189
Micropro
Wordstar Prof \$459
Peachtree
Peachtext 5000 \$239

CABLES

IBM RS-232 M-F \$35

DISKETTES

Verbatim
SS/DD 5 1/4" (10) \$28
DS/DD 5 1/4" (10) \$38
Elephant (5 1/4")
SS/SD Soft Sec. (10) . . . \$18
SS/DD Soft Sec. (10) . . . \$22
DS/DD Soft Sec. (10) . . . \$28
Maxel (5 1/4")
SS/DD Soft Sec. (10) . . . \$27
DS/DD Soft Sec. (10) . . . \$39

USI★TAXAN★PRINCETON
CALL!!!
Princeton Graphics
PG-HX 12 w/cable \$489
PGS MAX-12 Amber \$189

PRINTERS

Star
Gemini 10X, 10",
120CPS \$CALL

TERMS:

Please send money order or cashiers check. Free shipping, except monitors and printers. We will match any price providing it is not below our cost. All brands are registered trademarks. Products subject to availability.

We carry a complete line of software for Apple and IBM. CALL TODAY!

▲ We'll Match Any Advertised Price in this Magazine ▲

Voice-Recognition Status Report

A recent conference in Santa Barbara provided both mildly encouraging and mildly discouraging news on the state of the art in voice recognition. The problem of translating human speech into acceptable input for data processing is one of the stickiest the computer industry is facing, as discussed in "Speech Recognition: An Idea Whose Time Is Coming," by George M. White, January 1984 BYTE, page 213. The conference, called "Towards Robustness in Speech Recognition," brought together most of the country's top researchers in the field. No revolutionary breakthroughs were announced, but it was obvious that progress is being made, and a majority of the participants were enthusiastic about the future. As with all such gatherings, discussions in corridors and between sessions, the exchanging of ideas and contacts, were probably the most productive moments of the three-day affair.

However, brief intimations of gloom managed to creep into the proceedings every now and then. Wayne Lea, conference chairman, managed to cast the first stone in his opening address. "Speech recognizers," he charged, "are *not* robust." And indeed the cheerfulness of the mood of the conference could be phrased as "They've written off voice recognition as a dead issue, but, see, this event proves we're alive and well after all."

Speech recognizers of one form or another have been under development for over twenty years. They're of particular importance to the military (for obvious reasons—freeing an extra pair of hands in an emergency can be critically important), so research and development have been rather intensive. But the vast amount of information to be processed by even a simple speech recognizer has put a limit on expectations. However, as the ability of computers to crunch larger volumes of data at higher speeds increases, there is every reason to believe that speech-recognition technology will benefit.

Refinements of technique were reported at all levels. Advances in acoustics, microphone design, and


Business as Usual?

Business as usual these days means a computer that's up and "humming." But if your computer were stolen or damaged, you wouldn't have business as usual.

YOU'D HAVE TROUBLE!

You can get fast replacement for your entire system and be back in business in a hurry by protecting your computer with SAFEWARE Personal Computer Insurance. It's the only coverage designed specifically for personal computers used for business — in your office, shop or home.


SAFEWARE protects ALL hardware, ALL purchased software and ALL media against theft, damage or any other kind of loss, regardless of use, after a low \$50 deductible.

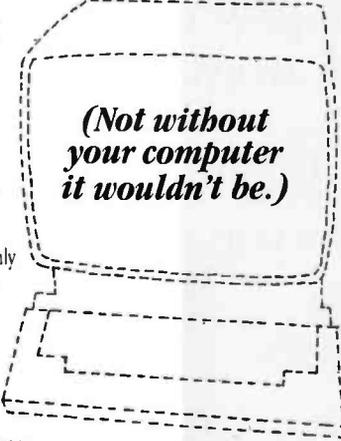

Fast, courteous claims handling prevents your losing valuable business computing time.

Find the premium price for the coverage you need listed in the table below, available for as low as \$35 per year. Fill in the coupon today. Your coverage will begin as soon as your coupon application is received. Or for even faster coverage, call our toll free number:

1-800-848-3469
(In Ohio call 1-614/262-0559)
Phones open 8 a.m. to 8 p.m.,
Monday through Saturday



Mail to: SAFEWARE, P.O. Box 02211, Columbus, OH 43202.

Before I'm out of business,

please issue my SAFEWARE Insurance Coverage.

Name _____
Street _____
City _____ State _____ Zip _____
System value \$ _____ Check Enclosed VISA MasterCard
Card # _____ Exp. Date _____

BYT

Total Hardware, Media & Software System Value	Annual Premium
Up to \$ 2,000	\$ 35
\$ 2,001-\$ 5,000	\$ 60
\$ 5,001-\$ 8,000	\$ 75
\$ 8,001-\$11,000	\$ 90
\$11,001-\$14,000	\$105

Call toll-free for rates on higher coverage. Coverage differs in Texas. It is an underwriting requirement that you insure your system for its full value.

Whatever program you're interested in, it will always have a happy ending with Verbatim, the world's best-selling name in flexible disks.

In fact, one out of every four disks sold is made by Verbatim. And for good reasons. They're certified 100% error-free. And each is backed by a warranty for your peace of mind: Verex,[™] for 1 year; Datalife,^{*} for 5 years; Optima Series,^{*} for 17 years.

For your nearest Verbatim dealer, call toll-free 800-538-1793. In California or outside the U.S., call collect (408) 737-7771.

Because with Verbatim all the data you record always comes back verbatim.



Verbatim[®]
Nothing's better than a Verbatim response.

Enjoy programs without interruptions.





for 6809
8080, Z80
8088, 8086


Real-Time Multitasking Executive

- ROMable (< 3K)
- No royalties
- Source code included
- Language interfaces
- Low interrupt overhead
- Inter-task messages

Options:

- C, Pascal, PL/M, Fortran i/f
- Extended memory (> 64K)
- Configuration Builder Utility
- Resource (semaphore) Manager
- Buffer Manager
- Integer Math Library
- Real-Time C Library

AMX (for 8080) \$800 U.S.
manual only **\$ 75 U.S.**

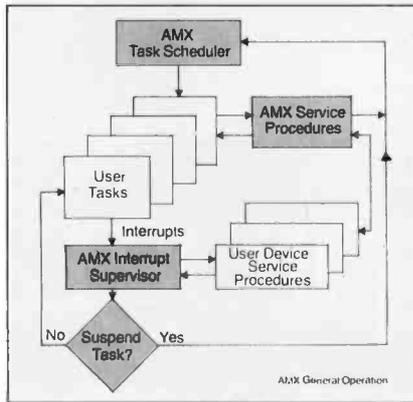

AMX, Real-Time C are TM of KADAK Products Ltd.
Z80 is TM of Zilog Corp.

KADAK Products Ltd.



206-1847 W. Broadway Avenue
Vancouver, B.C., Canada V6J 1Y5
Telephone: (604) 734-2796
Telex: 04-55670

digital encoding have made the initial identification of speech easier; spectral analysis of input is achieving smaller and smaller error rates in matching input against stored speech patterns, or templates; and the application of probability theory for detecting meaningful words among the random noise of human speech (there are over 11,000 discrete syllables in the English language to be sorted through) is also improving recognizer performance.

But the steps forward have been incremental; even the best recognizers available today ("trained" by one speaker repeating a small set of input phrases over and over) are less accurate than keyboard data entry, although the gap is dwindling. The ultimate goal, a speaker-independent recognizer, capable of understanding a large vocabulary of nonstop human speech, is a long way off. Dick Eason, president of Voice Control Systems, one of the sponsors of the conference, makes the point by asking, "What do you do about 'Jeet?' [the contraction of 'Did you eat?']?"

In his keynote speech, Dennis Klatt of MIT, observing what he sees as diminishing returns from all the research, wondered aloud if it might be time for the industry to begin exploring new directions. Unfortunately, none of the other speakers addressed the question that was foremost in the minds of many in the audience: what about the correlation between speech recognition and artificial intelligence? It may be that in order to perfect a truly robust recognizer, we may have to recapitulate the whole process by which a baby learns to make, and use, the collection of sounds we call language.

The outlook? Commercial speech recognizers, initially speaker-dependent and with limited vocabularies, will become better, cheaper, and more commonplace for simple voice control and data entry. Over the long haul, developments may not happen as quickly as we would like to envision. ■

Ezra Shapiro is a technical editor at BYTE's West Coast bureau. He can be reached at McGraw-Hill, 425 Battery St., San Francisco, CA 94111.



Order your personalized computer paper... NOW!

Printed with your name, business, club, anything. Paper is white, 20# bond. Choice of 5 ink colors. Fits all printers using 9 1/2 x 11 continuous paper (8 1/2 x 11 when detached). Limited offer of low prices, and special offer.

Satisfaction Guaranteed— full refund if not satisfied by returning unused paper.

We pay shipping and handling for orders over \$45.00
Orders for different personalized names may be combined for free shipping to one address.

Special Offer
Order now and we'll send free samples of other computer paper specialties with your order.

Name _____
Street _____
City _____ State _____ Zip _____

Personalize as follows: Leave space between words.
(For more than one order use separate sheet for 30 character personalization)

Check ink color: Red Blue Gray Brown Canary

500 sheets at \$19.95 \$ _____	Enclose check or money order. No COD's. Texas residents add 5 1/2% sales tax. VISA and MasterCard accepted. Send number, signature, and expiration date. Allow three weeks for delivery. Mail order to: Personalized Computer Paper/Dept. B P.O. Box 20539/San Antonio, Texas 78220/ 512-227-0585
1000 sheets at \$34.95 \$ _____	
2000 sheets at \$49.95 \$ _____	
Shipping, handling \$ <u>4.00</u> (if under \$45.00)	
Total order \$ _____	

THE FILE CONNECTION

8" DISKETTE SYSTEM FOR THE IBM PC



Our "FILE CONNECTION" programs provide 8" diskette file exchange between the IBM PC and most Micro-Mini-Main Frame computer systems.

Our "WORD CONNECTION" programs provide 8" diskette text document exchange between the IBM PC and many word processing systems.

Contact us for information about the hundreds of 5¼" and 8" diskette formats and systems which we currently support.

FLAGSTAFF ENGINEERING / 2820 West Darleen / Flagstaff, AZ 86001
Telephone 602-774-5188 / Telex 705609 FLAG-ENG-UD


-LA POINTE™

Formerly
Computer Exchange™

**DEALERS
WE BUY
EXCESS
INVENTORIES**

LOW PRICES TO PROFESSIONALS WHO KNOW WHAT THEY WANT AND KNOW HOW TO USE IT!

THE IBM-PC SUPPLY CENTER



IBM is a trademark of IBM Corporation.

256K IBM-PC

System Includes
Two 320K Disk Drives by CDC
90 Day Warranty By Us
Call For Details And
Configurations

	LIST PRICE	OUR PRICE
MEMORY CHIP KITS Add-on to your motherboard. 100% tested. With 90 day warranty.		
* 64K Kit, 200NS, 9 chips, 4164	\$ 50	\$ 45
16K Kit, 200NS, 9 chips, 4116 (for PC-1 motherboard)	\$ 50	\$ 16

AMDEK 4-IN-1 Multiple Board, Color Graphics, Mono, 128K	\$ 599	\$ 519
--	--------	--------

AST ComboPlus, 64K S.P.C.	\$ 395	\$ 279
ComboPlus, 256K S.P.C.	\$ 695	\$ 475
MegaPlus II, 64K, 2-S.P.C.	\$ 495	\$ 345
MegaPlus II, 256K, 2-S.P.C.	\$ 795	\$ 495
256K MegaPlus II Expander	\$ 395	\$ 295
SixPakPlus, 64K, S.P.C.	\$ 395	\$ 295
SixPakPlus, 256K, S.P.C.	\$ 695	\$ 495
SixPakPlus, 384K, S.P.C.	\$ 895	\$ 595
10 Plus II, 2S-P.C.G.	\$ 315	\$ 195
PCnet™, LAN Kit	\$1490	\$1290

CCS SuperVision, monochrome board	\$ 850	\$ 680
Z-Plus 64, Iasi 280B, 64K, para port	\$ 875	\$ 695

* ComX 256K RAM Card with Fastrak™ RAM disk emulator and spooler software.	\$ 695	\$ 256
---	--------	--------

CURTIS PC Pedestal™ for Display	\$ 80	\$ 65
3 to 9 foot keyboard cable	\$ 50	\$ 35
Vertical CPU "System Stand"	\$ 25	\$ 19
Monochrome Ext. Cable Par	\$ 40	\$ 30

HERCULES Monochrome Board	\$ 499	\$ 349
----------------------------------	--------	--------

Key Tronic KB5150, Std. keyboard	\$ 269	\$ 199
---	--------	--------

Koala Koala Pad™	\$ 150	\$ 109
Programmer's Guide	\$ 15	\$ 12

MAYNARD Multifunction (6) Card, MFC	\$ 89	\$ 79
Modules for above card	Call	Call
SandStar, no RAM card	\$ 199	\$ 169
SandStar, 256K Card	\$ 499	\$ 395

MICROSOFT RAMCard 256K	\$ 550	\$ 385
SystemCard 256K	\$ 395	\$ 275
SystemCard 64K	\$ 625	\$ 435
Mouse	\$ 195	\$ 145

MOUSE SYSTEMS , PC Mouse w/ software	\$ 295	\$ 195
---	--------	--------

ORCHID PCnet™, Starter Kit, LAN	\$1490	\$1190
PCnet™ Circuit Board Kit	\$ 695	\$ 545
Monochrome Graphics Card	\$ 499	Call

PLANTONICS ColorPlus, 16 color bird, w/ Para Port	\$ 475	\$ 375
--	--------	--------

QUADRAM		
----------------	--	--

Quadlink		
NEWEST VERSION	\$ 680	\$ 485
Quadboard, no RAM, expandable to 256K	\$ 295	\$ 215
Quadboard 64K, expandable to 256K	\$ 395	\$ 279
Quadboard 256K, 6 function	\$ 595	\$ 395
Quadboard II, no RAM, expand to 256K	\$ 395	\$ 295
Quadboard II, 256K, 6 function	\$ 595	\$ 395
Quad 512 +, 64K plus serial port	\$ 325	\$ 265
Quad 512 +, 256K plus serial port	\$ 550	\$ 420
Quad 512 +, 512K plus serial port	\$ 895	\$ 625
Quadcolor I, board, 16 colors	\$ 295	\$ 225
Quadcolor II, board, use with Quadcolor I	\$ 275	\$ 209
Quadchrome, 12" RGB Monitor	\$ 795	\$ 499
Quadscreen, 17" 968 x 512 Monitor	\$1995	\$1595
MicroZaker, w/ Copy, P.P., 64K, #MP64 w/ P.S.	\$ 189	\$ 129
MicroZaker, w/ Copy, P.P., 128K, #MP128 w/ P.S.	\$ 319	\$ 219
MicroZaker, Snap-on, 8K, P.P., Epson, #ME8, w/ P.S.	\$ 455	\$ 295
MicroZaker, Snap-on, 64K, P.P., Epson, #ME64, w/ P.S.	\$ 719	\$ 475
All MicroZakers are expandable, (w/ copy to 512K) (Snap-on to 64K)	\$ 319	\$ 235

Tecmar 1st MATE, 64K	\$ 389	\$ 295
1st MATE, 256K	\$ 589	\$ 439
Graphics Master	Call	Call

TG PRODUCTS Joystick	\$ 65	\$ 49
WICO, IBM-PC Mouse	\$ 100	\$ 69



Prices and availability subject to change. Call.

\$45

64K CHIP KIT

9 Each, 4164, 200 ns. MEMORY EXPANSION
90 Day Warranty by us


\$256

\$239 Two or more.

256K RAM BOARD

Fully Compatible 2 Year Limited Warranty by ComX.
With Fastrak RAM Disk Emulator and Spooler Software.
Works on DOS 1.1 or 2.0.

DRIVES AND ACCESSORIES



CONTROL DATA OR Tandon
320K/360K DS DD DISK DRIVES

With Detailed Installation Instructions
60 Day Warranty by Factory Authorized Distributor
Same as now installed by IBM **\$229** \$239 For One.

\$199
HALF HEIGHT
MAYNARD

	LIST PRICE	OUR PRICE
Floppy Drive Control Bnd. for up to 4 drives	\$ 195	\$ 165
same with Parallel Port	\$ 275	\$ 205

RANA 2.5 Meg 5" Drive System (Lan)	\$1550	\$1195
25 Meg Hard Disk System	Call	Call

QUADRAM 6 Meg, Removable	\$2295	\$1795
6 Meg, Fixed	\$1995	\$1595
12 Meg, Fixed	\$2250	\$1750
20 Meg, Fixed	\$2650	\$2050
27 Meg, Fixed	\$2695	\$2295
72 Meg, Fixed	\$6500	\$4950

VISTA IBM PC XT 6MB Backup for Hard Disk, V1200	\$1549	\$1049
--	--------	--------

SOFTWARE FOR IBM-PC or XT

BUSINESS

	LIST PRICE	OUR PRICE
ALPHA Database Manager II	\$ 295	\$ 195
ASHTON-TATE		
dBase II, requires PC-DOS & 128K	\$ 700	\$ 385
dBase II User's Guide (Book)	\$ 30	\$ 20
Everyman's DB Primer (Book)	\$ 15	\$ 12
The Financial Planner	\$ 700	\$ 395
Friday	\$ 295	\$ 199
APPLIED SOFT. TECH. Versalorm	\$ 389	\$ 265
ASK MICRO GL, AR, AP, BV or PR, each	\$ 495	\$ 295
BPL, GL, AR, AP or PR	\$ 595	\$ 395
* CONTINENTAL Home Accountant	\$ 150	\$ 89
FCC (Filing, Cataloging, Mailing)	\$ 125	\$ 89
Property Management	\$ 495	\$ 329
DATAMOST Write-On (Word Processor)	\$ 130	\$ 89
DOW JONES Market Analyzer	\$ 350	\$ 279
Market Manager	\$ 300	\$ 239
Market Microscope	\$ 700	\$ 525
EAGLES Writer, Money Decisions	\$ 150	\$ 129
* EINSTEIN , NEW!	\$ 300	\$ 199
Memory Trainer	\$ 80	\$ 55
Speller	\$ 150	\$ 95
Mailer	\$ 80	\$ 55
Letter Scenes	\$ 300	\$ 195
FOX & GELLER Quackcode (MSDOS)	\$ 295	\$ 179
gGraph (MSDOS)	\$ 295	\$ 179
dUti for IBM PC DOS	\$ 99	\$ 59
HAYDEN IBM Pie Writer	\$ 200	\$ 135
Pie Speller	\$ 100	\$ 69
HOWARD SOFT , Real Estate Analyzer II	\$ 250	\$ 189
Tax Preparer, 1984	\$ 295	\$ 220
IUS EasyWriter II (W/P)	\$ 350	\$ 259
EasySpeller II	\$ 225	\$ 149
Business System (GL - AR - AP)	\$ 400	\$ 299
GL, AR, AP, PR, OE or INV, each	\$ 595	\$ 395
* INFOST , Data Design (easy to use DBMS)	\$ 225	\$ 169
LIFEFREE, Volkswagon	\$ 285	\$ 195
* LOTUS , 1-2-3	\$ 495	\$ 329
MICROCRRAFT Verdict or Billkeeper, each	\$ 995	\$ 669
MICRO LAB , Tax Manager	\$ 250	\$ 169
MICROPRO , WordStar™	\$ 495	\$ 239
Mail Merge	\$ 250	\$ 129
SpellStar	\$ 250	\$ 129
* WordStar Professional, 4 Pak	\$ 695	\$ 429
StarIndex™	\$ 195	\$ 109
InfoStar	\$ 495	\$ 259
Report Star	\$ 350	\$ 199
StarStar	\$ 195	\$ 115

BUSINESS

	LIST PRICE	OUR PRICE
* MICROSOFT Multiplan	\$ 275	\$ 175
Word	\$ 375	\$ 275
Word with Mouse	\$ 475	\$ 339
Financial Statement	\$ 100	\$ 69
Budget	\$ 150	\$ 109
MONOGRAM Dollars & Sense	\$ 165	\$ 110
NORTH AMERICAN BUS , The Answer	\$ 250	\$ 169
* OSBORNE/COMX , (Book & Business, Statistics & Math Programs on DS/DD Disks)		
Some Common Basic Prog. (70 each)	\$ 100	\$ 69
Practical Basic Programs (40 each)	\$ 100	\$ 69
PBL CORPORATION , Personal Investor 1.1	\$ 145	\$ 99
PEACHTREE , Peach Pak (GL, AR & AP)	\$ 395	\$ 239
Peach Text 5000	\$ 395	\$ 239
PEARLSOFT , Personal Pearl (DBMS & MS)	\$ 295	\$ 195
* PERFECT , Perfect Writer	\$ 389	\$ 149
Perfect Speller™ or Perfect Calc™, each	\$ 295	\$ 99
Writer & Speller, 2-Pak	\$ 695	\$ 199
Perfect File™	\$ 595	\$ 199
SOFTWARE ARTS , TK! Solver	\$ 299	\$ 219
SOFTWARE PUBLISHING , PFS File	\$ 140	\$ 94
PFS Report	\$ 125	\$ 84
PFS Write	NEW!	\$ 140
PFS Graph	NEW!	\$ 140
SORCIM , SuperCalc II	\$ 295	\$ 195
SuperCalc III	\$ 395	\$ 265
SSI/SATELLITE , WordPerfect	\$ 495	\$ 375
Personal WordPerfect	\$ 195	\$ 149
STC/SOFTC , The Creator	\$ 300	\$ 195
NEW! NEW! Advanced D.B. Master	\$ 585	\$ 395
SYNAPSE , File Manager	\$ 100	\$ 67
SYNERGISTIC , Data Reporter	\$ 250	\$ 169
T/MAKER , T/Maker III	\$ 275	\$ 169
VISICORP , VisiCalc 4	\$ 250	\$ 179
VisiFile or VisiSchedule	\$ 300	\$ 219
Desktop Plan I	\$ 300	\$ 219
VisiWord with VisiSpell (128K)	\$ 375	\$ 269

UTILITY & SYSTEM

1983 CL SOFTWARE AWARD:
"Copy II PC by Central Point Software is still the best software buy of 1983 and 1984. It will copy more copy protected software than any other backup system. Unlike other copiers it makes an exact duplicate of your original and it does 100% verification of copy. Documentation is excellent."
*** CENTRAL POINT**, Copy II PC Backup \$ 40 \$ 35
*** COMX**, Fastrak™, RAM Disk emulator and printer spooler program. Works on any PC DOS version or RAM Card Menu Driven. \$ 100 \$ 59

UTILITY & SYSTEM

	LIST PRICE	OUR PRICE
DIGITAL RESEARCH		
Concurrent CP/M-86™	\$ 350	\$ 225
CBASIC 86™	\$ 200	\$ 135
CP/M 86™	\$ 60	\$ 40
Pascal/MT+ (CP/M-86)	\$ 400	\$ 269
Pascal/MT- (MSDOS)	\$ 600	\$ 399
PL (MSDOS)	\$ 750	\$ 499
Access Manager (MSDOS)	\$ 400	\$ 179
Display Manager (MSDOS)	\$ 500	\$ 339
Speed Prog. Pkg. (CP/M-86)	\$ 200	\$ 135
CISCOBOL-86	\$ 850	\$ 525
DR LOGO-86	\$ 100	\$ 69
CBASIC Compiler (86 or MSDOS, each)	\$ 600	\$ 365
HAYES , Smartcom II (Data Comm.)	\$ 119	\$ 89
MICROCOM , Microterminal (Data Comm.)	\$ 100	\$ 65
MICROSTYF , Crosstalk XVI (Data Comm.)	\$ 195	\$ 129
MICROSOFT , muMath muSmp	\$ 300	\$ 225
Business BASIC Compiler	\$ 600	\$ 450
Pascal Compiler	\$ 350	\$ 255
C Compiler	\$ 350	\$ 225
BASIC Compiler	\$ 395	\$ 285
Fortran Compiler	\$ 350	\$ 255
COBOL Compiler	\$ 750	\$ 559
BASIC Interpreter	\$ 350	\$ 295
NORTON , Norton Utilities 2.0 1.4 programs	\$ 80	\$ 65
ROSESOFT , Prokey	\$ 75	\$ 49

HOME & EDUCATIONAL

EPYX Auto. Sim., Temple of Apshe	\$ 40	\$ 29
Oil Barons	\$ 100	\$ 75
BLUE CHIP , Millionaire or Tycoon, each	\$ 40	\$ 27
* ARMONK , Executive Suite	\$ 60	\$ 39
BPI SYSTEMS , Personal Accounting	\$ 195	\$ 139
* BRODERBUND , Apple Panic (Color)	\$ 30	\$ 19
COMPREHENSIVE , PC Tutor (DOS 1.1)	\$ 60	\$ 40
CONTINENTAL , Home Accountant +	\$ 150	\$ 89
DATAMOST , Pig Pen or Space Strike, ea	\$ 30	\$ 22
DAVIDSON , The Speed Reader II	\$ 75	\$ 49
INFOCOM , Onadine or SUSPENDED, ea.	\$ 50	\$ 33
Zork I for Zork II or Zork III, ea.	\$ 40	\$ 27
* INFOST , Word Trn or Quizzes, each NEW!	\$ 35	\$ 29
MICRO LAB , Mines 2049	\$ 40	\$ 29
MICROSOFT , Flight Simulator	\$ 50	\$ 33
MONOGRAM , Dollars & Sense	\$ 165	\$ 110
PBL CORP. , Personal Investor	\$ 145	\$ 99
SPINNAKER , Snopcor Troops (1 or 2)	\$ 45	\$ 35
Slory Machine or Face Maker	\$ 35	\$ 24
STRATEGIC , the Warp Factor	\$ 40	\$ 30
SUBLOGIC , Might Mission Pinball	\$ 40	\$ 27



★ Means a BEST buy.
AD #987

© 1983 by Conroy-LaPointe, Inc. All rights reserved.

NATIONAL TOLL FREE ORDER DESK (800) 547-1289
Order Desk Hours: 6AM to 6PM PST
Oregon TOLL FREE (800) 451-5151
Portland: 245-4200
Hot Line For Information On Your Order [503] 245-1030

Circle 86 for IBM Peripherals, Circle 87 for Apple, and Circle 88 for all others.

Benchmarks and Performance Evaluation

The art of benchmarking computer languages, programs, and systems by timing them with a standard test is a popular, but inexact, science. You find only what you are looking for—speed—and nothing more. Running a benchmark program will measure the speed of the system you are testing, but how do you measure how easy an application is to learn and use, how consistent its commands are, and how well-integrated the new integrated software packages are? This month's theme articles attempt to answer some of these questions by looking at the limitations of benchmarks and considering what can replace them.

The new levels of sophistication in software and hardware are difficult to evaluate. The simple benchmarks of the past, such as the Sieve of Eratosthenes popularized in *BYTE*, the Whetstone benchmark for FORTRAN, and millions of instructions per second (MIPS) ratings, no longer offer relevant information about the new generation of computers.

Speed and reliability alone are not the determining factors in the decision to purchase a particular computer or application. How quickly it can be learned and put to use effectively are vital factors in the new era of mass-market consumer computers, although these factors can be difficult to test. The quality of a system must be considered as well. Evaluating computer systems as a whole is a new alternative to the traditional practice of measuring a system's speed.

Jerry Houston of Gifford Computer Systems offers a humorous and informative look at the uses and abuses of benchmarks from a user's perspective and explains why the winners of benchmark tests are not necessarily the systems of choice. Jack Carroll and Mary Beth Rosson of IBM take another look at speed versus usability, arguing for quality in computer interfaces and suggesting tests for system quality.


Performance evaluation is becoming a popular term (especially in the mini-computer/mainframe world) for analyzing or simulating the performance of hardware and/or software. Brian Boyle of Gnostic Concepts presents the variables necessary for an equation to evaluate software performance.

Sergio Mello-Grand offers an exhaustive set of printer benchmarks to help you find out how fast your printer really is. Avram Tetewsky of Draper Laboratories discusses some of the tests to validate that software works correctly and reveals the results of some extensive benchmarks for FORTRAN compilers. Peter Marvit of Yates Ventures and Mohandas Nair of Intel come clean in the confessions of the misuses of benchmarks.

Finally, Andrea Lewis guides you through the standard features and options available on the 1984 model word processors, while Arthur Naiman provides a 100-point checklist for evaluating word-processing programs from his book, *Word Processing Buyer's Guide*.
—Bruce Roberts

-
- 160** Don't Bench Me In by Jerry Houston
-
- 168** Beyond MIPS: Performance Is Not Quality by John M. Carroll and Mary Beth Rosson
-
- 175** Software Performance Evaluation by Brian Boyle
-
- 193** The Art of Benchmarking Printers by Sergio Mello-Grand
-
- 218** Benchmarking FORTRAN Compilers by Avram Tetewsky
-
- 227** Benchmark Confessions by Peter Marvit and Mohandas Nair
-
- 235** The Word-Processing Maze by Andrea Lewis
-
- 243** Evaluating Word-Processing Programs by Arthur Naiman

Illustration by Robert Tinney

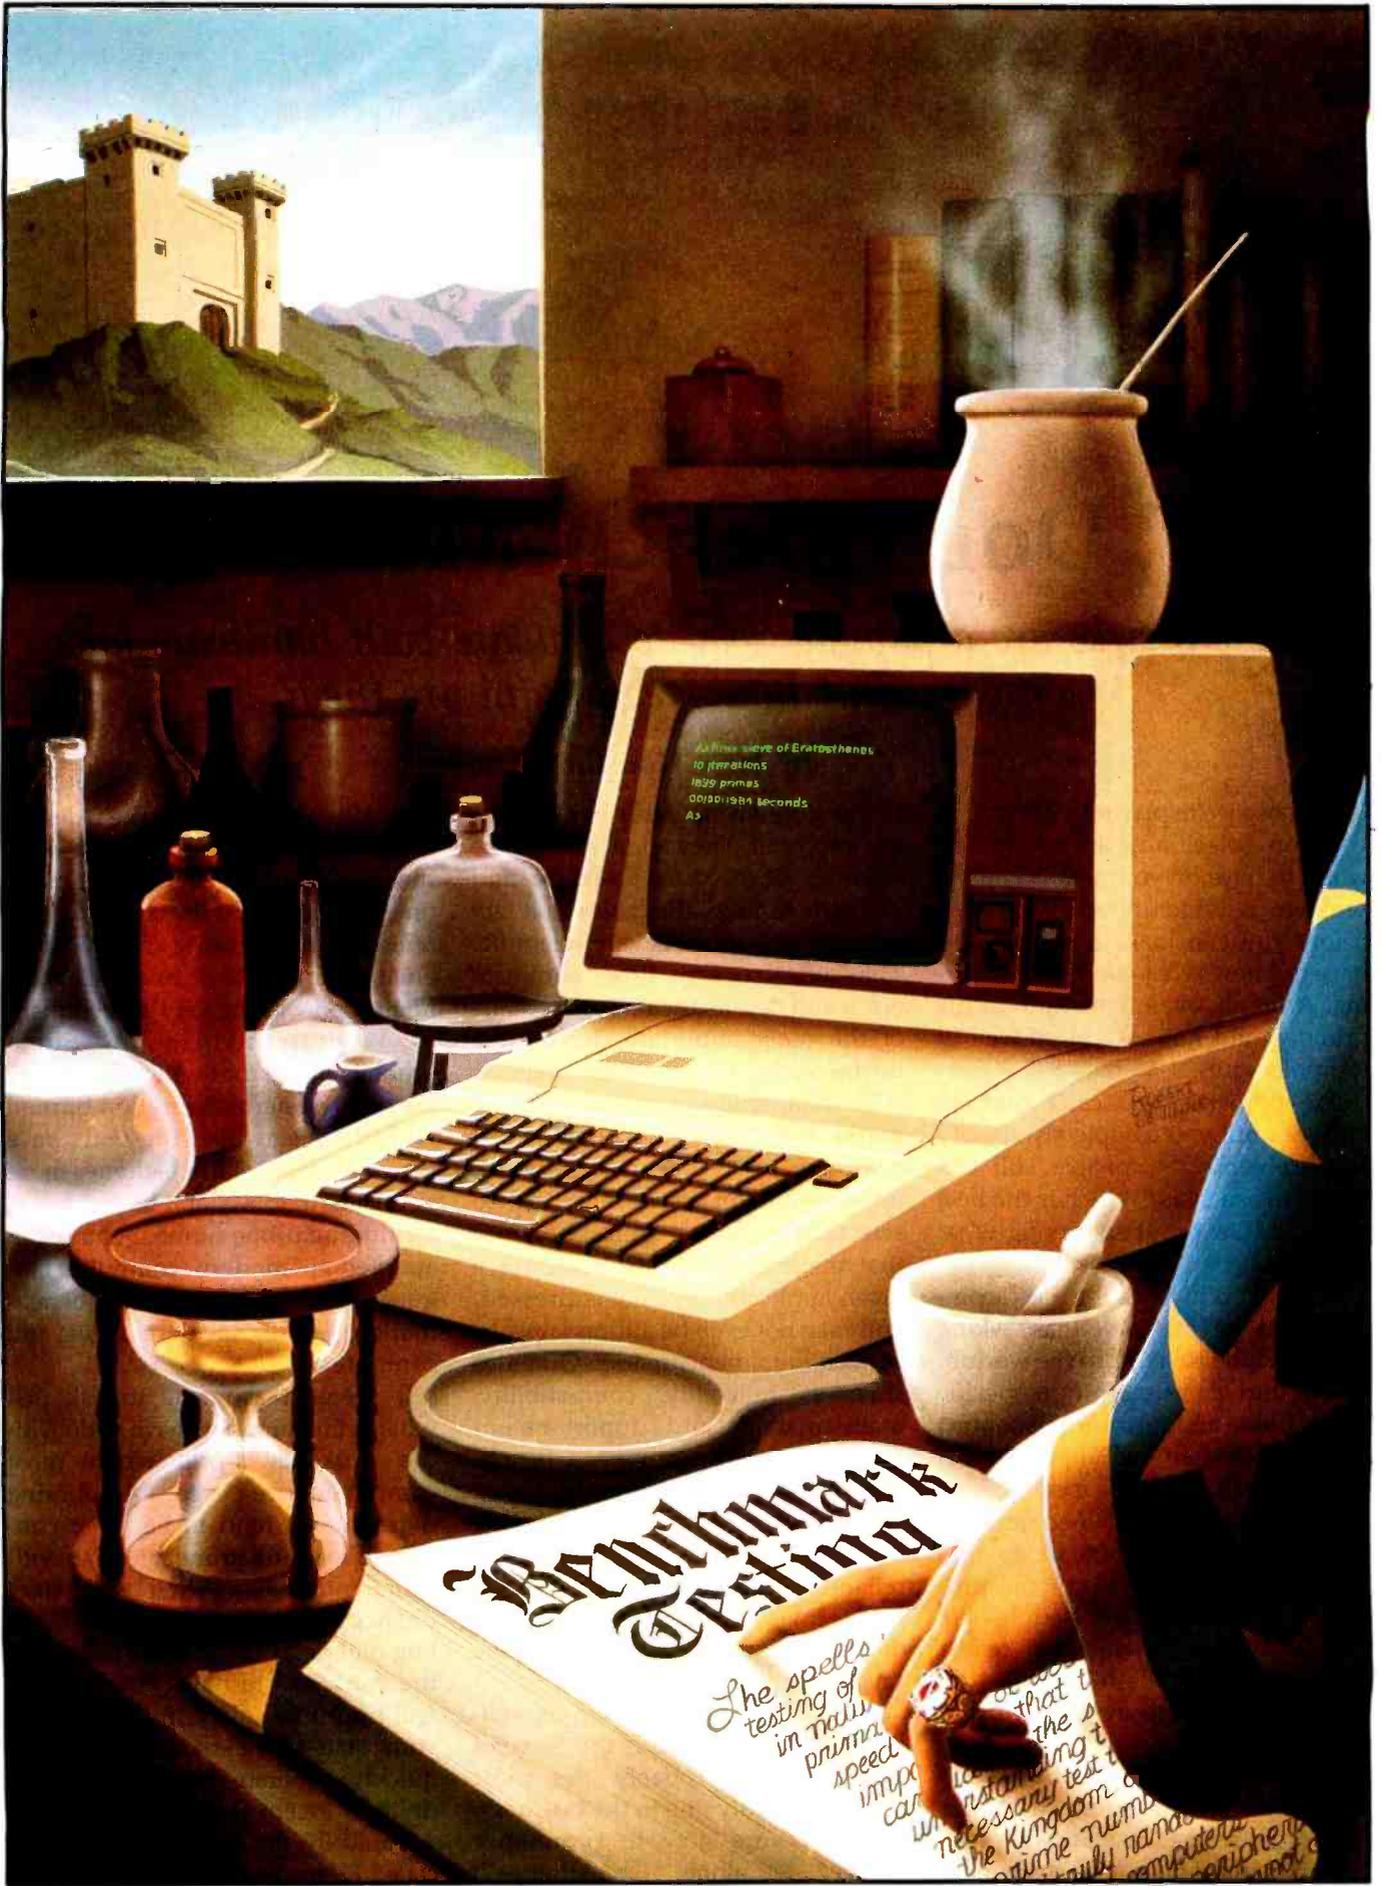

Don't Bench Me In

Benchmarks are a popular way to compare both hardware and software. But how meaningful are they?

by Jerry Houston

Suppose we're playing a game, and you can select any athlete in the world to have on your team. The big problem is which one to pick. But before you can make a choice, you have to know what game we're playing. After all, even Babe Ruth in his prime would not have fared well in the pole vault.

The point is, you can't find an answer until you completely specify the problem. Yet, people still ask questions such as "Which is the best compiler?" without specifying what they mean by "best."

Asking "Which is the best compiler?" is as misguided as asking "Which is the best tool in the world?" A tool derives value from a specific application, and outside the context of the application, the comparison of one tool with another is meaningless.

Unfortunately, many people compare programs without taking into account the application of the programs. Instead, these people use benchmarks—programs that test a computer's speed—to judge the worth of the software or hardware under question.

The great lure of benchmarks is that, in a world of too much choice, they promise fast, easy answers supported by hard facts. Clearly, bench-

marks contain no sales hype. They are impartial. They appear to reduce volumes of product literature and manuals to tidy little tables that talk in numbers, which is very scientific. They offer to save time, eliminate error, and take all the risk out of some of the most important decisions a business can make. Or do they?

It's dangerous to rely on benchmarks for help in deciding which computer, which language, or which implementation of a language to select. Many of the critical qualities that make a product suitable for a given application are not addressed, and may not even be addressable, by conventional benchmarks. Qualities such as reliability, compatibility, maintainability, and support are impossible to measure with a benchmark, but they spell the difference between a useful tool and a booby trap. What is the standard unit of reliability, of compatibility, of support? How do you look at a table and determine if a product will be a time saver or a time vampire?

One of the most popular general-purpose benchmarks is the Sieve of Eratosthenes, probably the most user-unfriendly title in the business. (I'm not sure how to pronounce "Sieve," let alone "Eratosthenes.")

Eratosthenes, head of the Alexandrian library around 200 B.C., was the most wide-ranging scholar of his time. He calculated the circumference of Earth without using an 8087 mathematical coprocessor, and the library he headed was the very embodiment of Western civilization. Some scholars argue that when the library burned, Western civilization burned with it. Meanwhile, the gods have made the fame of Eratosthenes more enduring than Mylar. His technique for finding prime numbers has been adapted to modern computer languages and is now a classic benchmark used to rate languages and computers.

It seems reasonable to ask just what prime numbers have to do with the workaday world where most computers are used. Accounting departments tend to be more concerned with the prime rate than with prime numbers. When your chief financial officer learns that a software bug will delay the income statement the bank had to have yesterday, he will find little solace in the fact that your state-of-the-art computer can quickly generate integers with no divisors except themselves and 1.

Ironically, the specialists of his day called Eratosthenes "Beta," or second

rate, for his alleged superficiality. In the computer trade, "Beta" has come to mean "not thoroughly tested," as in "a Beta copy of a new C compiler." It would be appropriate if "not thoroughly tested" were stamped on hardware and software that has been subjected to the benchmark named after our Greek who lived 2200 years ago.

A Case Study

The dubious utility of general-purpose benchmarks was brought home to our company after we conducted an extensive series of benchmarks on seven C-language compilers compatible with CP/M-86 (see "Comparing C Compilers for CP/M-86," August 1983 BYTE, page 82). After it took us almost as much time to measure performance as it would have taken us to write our own C compiler, we were struck by some curious phenomena. The apparent loser in our time and efficiency benchmarks, Computer Innovations' C86, was the compiler that our staff programmers regularly used both before and six months after we conducted the tests.

I am not a programmer; I'm a civilian. My job is to whine. So when I complained to our programmers that they should think about hopping on the world the next time it came around, they all explained that they had each tried the other compilers and found lots of good and bad points. But they felt that for the tasks they were handling, Computer Innovations' compiler was best. The reason they cited most frequently was something that became evident while we were conducting the benchmarks but that was not reflected in the tabular results. Computer Innovations' C86 was the only compiler we tested that ran every benchmark we tried and gave the expected results, and we were lifting routines from articles, books, Unix libraries, and anywhere else we could find them.

Our staff had chosen to use a compiler whose main benefits were compatibility and reliability. It ran routines taken from a variety of other implementations of C. And it ran them

the first time. These features, not evident from the benchmark results, were revealed only by long experience with the compiler itself.

My faith in general-purpose benchmarks was undermined further when I learned that the Mark DeSmet compiler, which appeared to have done quite well in the benchmarks, was considered by our staff to be a lightweight C compiler. A simple case of being misled by a benchmark? Not quite. It turned out that our staff had nevertheless been taking advantage of a powerful feature of the DeSmet compiler (an advantage which, of course, was not brought out by the benchmarks) and had turned a lightweight C compiler into a novel and extremely productive programming tool. I call it the anti-compiler.

Data such as "number of times per week documentation is thrown against wall" might be useful in evaluating a product.

Because our programmers primarily do system-level work, as opposed to applications programming, speed is very important. Speed to us means assembly language. The DeSmet C compiler, it turns out, lets you mix assembly code with C code. This means that, in the middle of a C program, you can insert #ASM and start writing in assembly language. This feature has streamlined the way we write assembly code.

Before we had the DeSmet compiler, we attacked a major assembly project head-on. We planned a structure, wrote the program, and resigned ourselves to debugging a maze of assembly code. The DeSmet compiler enables us to write a program initially in C. This process is fast. The program runs relatively slowly, but we can make sure that it does everything we want. Once the C version of the program works, we convert one C subroutine into in-line assembly code, compile the new

hybrid C-and-assembly version, debug it if necessary, and proceed to convert the next C subroutine into in-line assembly language. Eventually, the entire program is converted to assembly language, piece by piece, producing code that is well structured, well tested, and usually well ahead of schedule. The benchmarks give no indication of this capability of the DeSmet compiler.

We give a C compiler high points for compatibility with other versions of C, for reliability, and for ease of assembly-language interface. But we are relatively indifferent to its speed. In fact, the more a project calls for speed, the less we are concerned with the speed of the compiler because we know that the critical routines will have to be written in assembly language.

None of the qualities that we consider most important for our applications were addressed in any of our published benchmarks, and I'm not sure how to devise a benchmark that could quantify them. Perhaps data such as "number of times per week documentation is thrown against wall" or "number of support calls returned per thousand" might be useful in evaluating a product. In any case, the point here is not that we ignored our own benchmarks and found the C compilers that are really "the best." We use the compilers that are most suited for our particular jobs. For people who want programs that they will write from scratch, that will execute quickly, that will require minimal assembly code, and that will take up minimal RAM (random-access read/write memory) space, the compilers we have been using may quite possibly be "the worst."

The Ascendancy of Waste

Benchmarks are best at measuring efficiency and speed. Efficiency, however, is threatening to become a dead issue. Efficiency means the amount of memory required to run a program. As technology sprints along, processors are being produced that can address huge expanses of memory. Soon, little children will have to teach their parents what "gigabyte" means. Meanwhile, the price of semi-

conductor as well as mass-storage memory continues to drop. Both trends drastically reduce the pressure to produce and use efficient programs.

One of the most remarkable indications of computer technology's advances over the past few years is the dwindling importance attached to program size. Not so long ago, programmers would spend months paring away a few kilobytes from a piece of code; but now, the programmer's time is valued much more highly than those kilobytes. Apple's Lisa is a monument to the enormous amount of RAM now routinely sacrificed to make programs more "user friendly." With this new attitude toward efficiency, a strong point of benchmarking has been made trivial.

Speed Thrills

With all the vast changes wrought by the stampede of technology, one relationship has remained untouched: time is money. This is true whether it is a programmer's time or a user's time. Therefore, the faster a program runs, the more time and money can be saved. However, there are limits to the extent that increased speed can improve a program. For instance, it does no good to have a word processor wait twice as fast for you to type your next character. For many applications, though, faster is better.

Speed is where benchmarks come into their own. Measuring overall speed, however, can be a little tricky. A compiler may be fast when it runs tasks out of main memory but slow when it does file handling. Even in the unlikely event that all other factors—compatibility, reliability, documentation, support—are equal, you still have to know which operations you are timing and which ones must be fast when you use speed benchmarks.

Job-Specific Benchmarks

Probably the best use of a benchmark is to measure the time it takes a given hardware-software combination to run a program that will actually be run in real life and represents the dominant use of the proposed

system. If, for example, an engineering firm has an application that involves repeatedly inverting a big matrix, then the ideal benchmark would be a matrix inversion with representative sample data. This is, of course, a far cry from finding out how fast the same system can generate prime numbers.

The ideal benchmark is not a generalized exercise that can be published in a magazine and distributed to millions; it's a carefully planned demonstration in which the specific application intended for the product is simulated as closely as possible. Where I work, it is not unusual to receive test programs that we are to run and report on. The Department of the Army is particularly fond of this shopping technique. It goes to the initial trouble of developing a benchmark that fits its application, and the rest is up to systems houses. In effect, the Army is benchmarking us.

Upon receiving a custom benchmark task, a systems house really begins to earn its living. The benchmark is run on equipment that offers different levels of speed, cost, and versatility. If the job can be done on a fast but expensive disk emulator, we offer that option. Because most of our systems are based on the Compupro with a 16-bit, 8-MHz 8088 as well as an 8-bit 8085, we can sacrifice 8-bit compatibility in order to increase speed 40 percent by using a 10-MHz, 16-bit-only 8086 central processor. Another alternative is running the benchmark on an expensive hard disk that has a fast voice-coil-head actuator rather than a less expensive one with a slower stepper motor. We present all these trade-offs to the customer along with realistic timing data. The customer still has to make a choice, and in many cases it is an extremely difficult one; however, he doesn't have to choose blindly, guided only by a meaningless off-the-shelf benchmark.

But, you might say, setting up such a simulation is hardly a benchmark at all. It's a demonstration. The whole beauty of benchmarks is that you don't have to spend all that time designing tests and entering repre-

sentative data. Benchmarks are supposed to be fast and decisive. They shouldn't be a lot of work—they should give you something for nothing. Right?

Wrong! That idea went the way of the free lunch. In most cases, you get out of a benchmark just what you put into it. The time spent designing a job-specific benchmark that suits your needs is insignificant compared to the time you will spend using the tool you eventually select.

Do generalized benchmarks have a place? Of course they do. Benchmarking is the great pastime of the computer world, the great sporting event for software hackers and hardware nerds. Benchmarks are the Olympics. You watch, you marvel, you enjoy. You root for your favorites and revile the opposition. You argue that the results were unfair and that the rules should be changed. You forget the results and lose bar bets to obnoxious friends with better memories. But you don't base major business decisions solely on benchmarks.

How to Make a Selection


If you can't rely on generalized benchmarks, and you don't have the time or skill to design a job-specific benchmark, then how do you select a computer or a program? Unfortunately, it's not easy. You have to realize that a major software or hardware purchase is like a marriage. It is a long-term commitment for better or for worse. Marry in haste, regret at leisure.

There are three important ways to research a product, and you should use all three:

1. Read the trade magazines for reviews. You can usually judge the validity of a product review the same way you judge a movie review. If it is in-depth and genuinely enthusiastic, you probably have a good product. If it is superficial, full of cliches, and apologetic (the reviewer says the documentation looked good but there was not enough time to open it), then ignore the review, not the product. Don't confuse the product with the review.

DBMS?

DBMS, n., A buzzword for Data Base Management System. A structure in which to collect information on a given subject in one or more files. A software program enabling you to store, manipulate and retrieve your information contained in those files.

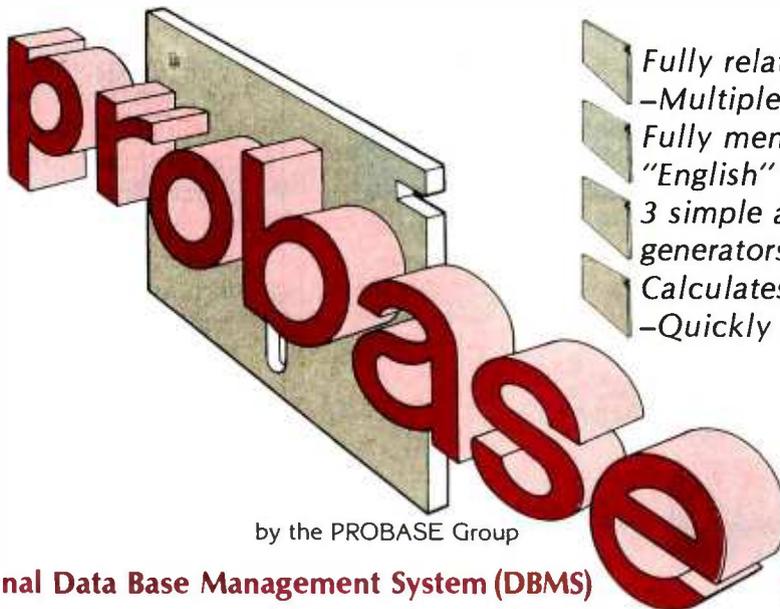

- Fully relational data base management
- Multiple file and disk access.
- Fully menu driven - Presented in "English"
- 3 simple and automatic program generators - A complete package.
- Calculates and compares figures
- Quickly generates valuable reports.

by the PROBABLE Group

Probabase® Fully Relational Data Base Management System (DBMS)

Probabase's Quick Gen "tells" your computer how to enter, find, sort, calculate, analyze and present information. Easily add, change, delete, or browse through your data. Probabase's ability to combine and collect data on a given subject from many separate files allows you immediate access to all of your information - Bookkeeping, Cost Accounting, Inventory, Personnel, Portfolio Analysis, Sales, etc. Menu Gen joins files together in an easy-to-use selection list. Report Gen compiles virtually any comparative reports you need, including projections and forecasts. And prints them in any format you choose.

Probabase® Requires No Training

Press a 'function' key for help. Concise documentation with samples on-screen assists you with your current task. And returns where you left off. Complete documentation includes a handy 2-part tutorial manual.

Easy Enough For Non-Technical Users

Probabase's three program generators (Quick, Menu, Report) create data base management applications according to your direction -automatically. Enter your requests using simple selections and fill-in-the-blank menus. Inquire, generate a report, create or up-date your data bases, design entry screens... Programming and code entry are completely eliminated, so you don't need to be a programmer, or even have computer experience, to produce professional automated business reports.

Powerful Enough For Programmers

Access 3 different files at once and work with as many as you need within a single program. Combine your files in "one-to-many" or "many-to-one" relationships. When you program in Probabase, all of your tools are immediately available: Macro Instruction Language, Subroutine Calls, Programmable Function Keys and more. Program, test and debug without an outside editor, assembler or compiler. Make changes and corrections instantly.

Free disk space... Probabase efficiently compresses screens and program tables onto your disks. And Probabase need not be present on disk when you run your applications. Enjoy more disk storage capacity and faster throughput by eliminating extra program code.

Try Probabase Free For 30 Days
Visit your local dealer or call
800-258-7070 for your copy of
Probabase. If not satisfied, simply
return it within 30 days for a
prompt, courteous refund,
whatever the reason.
See for yourself how
useful Probabase can be
for you.

Available in PC-DOS, MS-DOS and
CP/M86 (all using 128k) and CP/M (64k).
Enjoy the newest, most effective
data base management systems.

Circle 104 on inquiry card.

Probabase®
Another Solution® from
Data Technology Industries™
701 A Whitney Street San Leandro, CA
94577


800-258-7071

(415) 638-1206

Write or Call Today and Find Out How You Can Put Probabase To Work For You.

Treat your personal computer to famous Diablo letter-quality printing.

Diablo 620 API (Up to 26 cps) Diablo 630 API (Up to 40 cps)

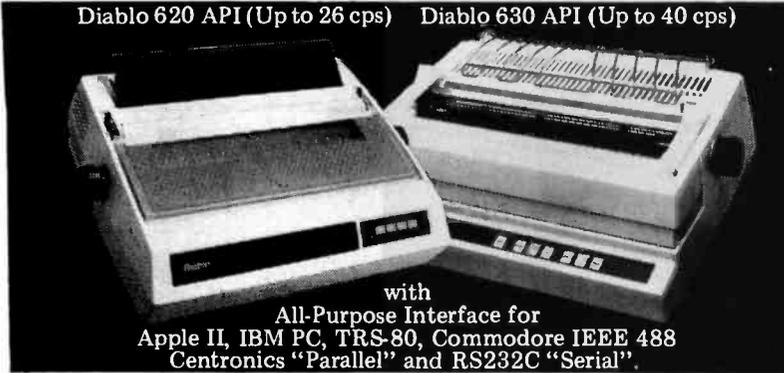

with
All-Purpose Interface for
Apple II, IBM PC, TRS-80, Commodore IEEE 488
Centronics "Parallel" and RS232C "Serial".

MTI has the Diablo 620 & 630 API ready for you.

The best letter-quality printers on the market. At MTI's best prices. Whether you buy, rent or lease our equipment, you'll find MTI is the one source for all the terminals, peripherals, systems, applications expertise and service you'll ever need. At good prices. Call us today.

New York: 516/621-6200, 212/767-0677, 518/449-5959
Outside N.Y.S.: 800/645-6530
New Jersey: 201/227-5552
Ohio: 216/464-6688

"QED" Discounts
VISA & MasterCard



Diablo Authorized
Distributor

Applications Specialists & Distributors, New York, New Jersey and Ohio.
DEC, Intel, Texas Instruments, Altos, Lear Siegler, Dataproducts, Diablo,
Esprit, Intecolor, Racal-Vadic, MICOM, Digital Engineering, U.S. Design,
Cipher, Protocol Computers, MicroPro, Microsoft, Polygon and Select.

2. Talk to friends or colleagues or fellow members of computer clubs, and talk a lot. Most people are reluctant to admit that they wasted money on a product; it's stupid to waste money, and people usually want you to think that they're smart. The same rules apply as when you ask about someone's vacation. The first response is always, "We had the greatest time ever. Absolutely fabulous." Only if you start trading travel stories do you find that the paradise in question is a malarial swamp, the hotel is a convention center for cockroaches, and the airport boasts the world's largest network of sinkholes. Again, keep them talking. Value the advice of a user who was not involved in the decision to buy (and so whose pride is not at stake) more than the advice of someone who actually selected the product.

3. Find a reputable dealer. Good dealers are well aware that a major purchase is a marriage between dealer and client. In a good sale, the client returns and buys more goods and refers friends who in turn buy and buy again. This sort of sale enhances both the self-esteem and the bank account of the dealer and generally makes business fun. Good dealers love it if they sell you the right product, and they will often do some homework for you to make sure you make the right choice. They will certainly do more than look up some benchmark results. To a good dealer, selling you the wrong product is like driving off a cliff: there are a lot of exciting possibilities, but they're all bad.

These three rules are reliable ways of selecting software and hardware, much more reliable than the general benchmarks you see published so often. Stay true to these rules, and you'll be able to look beyond the numbers and break away from the bench. ■

Jerry Houston is vice-president of marketing at Gifford Computer Systems (POB 1917, San Leandro, CA 94577).



In every battle, we came up the victors. Not only in price, but in service and support as well.

Call to order: **1-800-257-5217**
(in NJ 609-424-4700)

We carry:

Intertec Data Systems
Corvus Concept
Corvus Hard Disk
C. Itoh Printers



TriStar Data Systems
2 Keystone Avenue
Cherry Hill, NJ 08003
609-424-4700
215-629-1289

WE SERVICE WHAT WE SELL

INTRODUCING
THE ONLY S100 BUS 16 BIT
SINGLE BOARD COMPUTER!

LOMAS DATA PRODUCTS PRESENTS:

THUNDER 186


THUNDER 186 provides the earth shaking performance you have come to expect from LOMAS DATA PRODUCTS, now in a full 16 bit single board computer. THUNDER 186 utilizes a highly integrated 80186 microprocessor from Intel to bring all the features required of an S100 bus computer system together on a single height IEEE-696 board.

The Thunder 186 features:

- 8 Mhz 80186 micro-processor (10 Mhz 8086 performance).
- Floppy disk controller, controls both 5¼" and 8" disk drives simultaneously.
- Two RS232 serial ports with full handshaking.
- One parallel printer port.
- Either 128K bytes or 256K bytes of no waitstate dynamic RAM with parity.
- Full IEEE-696 (S100) bus compliance.

THUNDER 186 is the only single board 16 bit computer that requires no additional boards to complete a functional system. THUNDER 186 is fully supported by our full line of operating systems: MS-DOS**, CP/M-86*, MP/M-86*, and CONCURRENT CP/M-86*, which are all available immediately. Thunder 186 includes CONCURRENT CP/M-86 in the low introductory price.

128K Byte version \$1250.00
256K Byte version \$1595.00

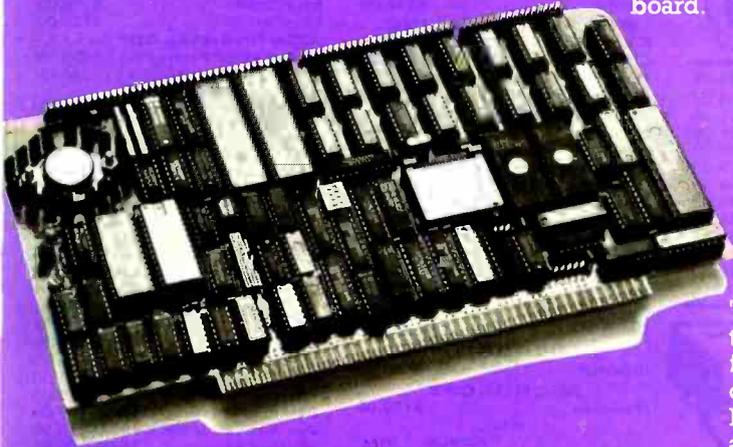


LIGHTNING 286

When we introduced our Lightning One*** in January of 1982 it was the fastest CPU board on the S100 BUS available. Now our Lightning 286 replaces the Lightning One as the fastest board on the S100 BUS. We have incorporated the Intel 80286 microprocessor on a CPU board that again brings new levels of performance to micro-computers. The 80286 is capable of supporting up to 16 megabytes of physical memory and up to 1 Gigabyte of virtual address space when utilized in virtual address mode. In real address mode, the 80286 is compatible with the vast library of 8086/88 programs already written. We have the three major operating systems available immediately on our Lightning 286, no need to wait for third party support to take advantage of this exciting new processor.

The LIGHTNING 286 features:

- Up to 64 Kbytes of onboard EPROM
- 9 Vectored interrupts expandable to 65 levels
- Full compliance with IEEE 696
- Multi-layer board for low-noise reliable operation

In addition to these features, a high speed memory bus expansion port has been included

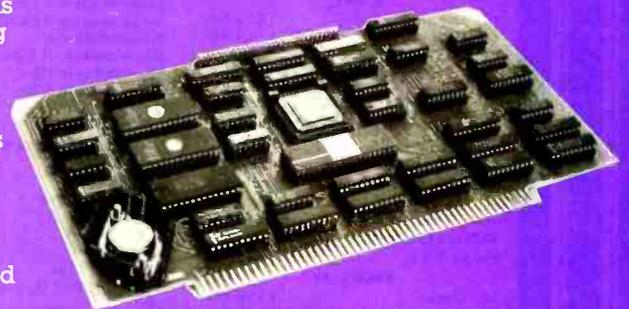

that will allow extension of the memory with a high speed dynamic memory board. The use of the companion memory board will allow use of an 8 Mhz 80286 without memory wait states. The board will contain 1 Mbyte of memory, and will allow cost efficient expansion of 80286 memory space.

Price \$1395.00

If your application requires 16-bit computing power and versatility, call Lomas Data Products today.

Dealer inquiries invited.



LOMAS DATA PRODUCTS, INC. □ 66 Hopkinton Road, Westboro, MA 01581 □ Tel: (617) 366-6434

COMPUTER MAIL ORDER

TERMINALS


914	\$569.00
924	\$689.00
925	\$739.00
950	\$929.00
970	\$1399.00

COMPUTERS

Teleport Portable	CALL
800A	\$1099.00
802	\$2699.00
803	\$1949.00
802H	\$4695.00
806/20	\$4999.00
816/40	\$9199.00
1602	\$3399.00
1603	CALL



TeleVideo



Spirit XL Portable	\$3999.00
IIE-1	\$1569.00
IIE-2	\$1899.00
IIE-3	\$2399.00
IIE-4	\$3299.00
PC-E	\$1579.00
PC-1	\$2399.00
PC-2	\$2799.00
PC-XL	\$3599.00
1620	\$3599.00
1630	\$5499.00
1640	\$6499.00
Cyma Software	CALL

SANYO

MBC-550 PC	CALL
MBC-555 PC	CALL
MBC 1100	\$1499.00
FDD 3200-320K Drive	\$389.00
MBC 1150	\$1899.00
MBC 1200	\$1849.00
FDD 6400-640K Drive	\$469.00
MBC 1250	\$2099.00
PR 5500 Printer	\$599.00



MONITORS

AMDEK	
300 Green	\$149.00
300 Amber	\$159.00
310 Amber	\$169.00
Color 1	\$279.00
Color 1 Plus	\$299.00
Color 2	\$399.00
Color 2 Plus	\$419.00
Color 3	\$349.00
Color 4	\$699.00
BMC	
12" Green	\$79.99
12" Green HI-RES	\$119.99
9191-13" Color	\$249.99
GORILLA	
12" Green	\$88.99
12" Amber	\$95.99
NEC	
JB 1260 Green	\$109.99
JB 1201 Green	\$149.99
JB 1205 Amber	\$159.99
JC 1215 Color	\$299.99
JC 1216 RGB	\$429.99
PRINCETON GRAPHICS	
HX-12 RGB	\$519.00
TAXAN	
12" Green	\$119.00
12" Amber	\$129.00
Taxan 1 RGB	\$279.00
USI	
Pi 1, 9" Green	\$99.99
Pi 2, 12" Green	\$119.99
Pi 3, 12" Amber	\$149.99
Pi 4, 9" Amber	\$139.99
1400 Color	\$269.99
ZENITH	
ZVM 122 Amber	\$109.99
ZVM 123 Green	\$89.99
ZVM 135 Color/RGB	\$469.99

MODEMS

ANCHOR	
Mark I (RS-232)	\$79.00
Mark II (Atari)	\$79.00
Mark III (TI-99)	\$109.00
Mark IV (CBM/PET)	\$125.00
Mark V (Osborne)	\$95.00
Mark VI (IBM-PC)	\$169.00
Mark VII (Auto Ans/Auto Dial)	\$119.00
Mark XII (1200 Baud)	\$299.00
TRS-80 Color Computer	\$99.00
9 Volt Power Supply	\$9.00
HAYES	
Smartmodem 300	\$219.00
Smartmodem 1200	\$509.00
Smartmodem 1200B	\$459.00
Micromodem II	\$265.00
Micromodem II Plus	\$299.00
Micromodem IIE	\$269.00
Micromodem 100	\$299.00
Smart Com II	\$89.00
Chronograph	\$199.00
NOVATION	
J-Cat	\$99.99
SmartCat 103	\$179.00
SmartCat 103/212	\$399.00
AutoCat	\$219.00
212 AutoCat	\$549.00
Apple Cat II	\$249.00
212 Apple Cat	\$569.00
Apple Cat 212 Upgrade	\$309.00
Cat	\$139.99
D-Cat	\$149.00
PC-Cat	\$339.00
ZENITH	
ZT-1	\$309.00
ZT-10	\$339.00
ZT-11	\$369.00
APPLE INTERFACE	
CARDS & BUFFERS	
Choose from PKASO, Orange Micro, MPC, MicroMax, Tymac, Quadram & Practical Peripherals. CALL	

NEC PRINTERS

NEC 2050	\$999.00
NEC 3550	\$1699.00

PERCOM/TANCOON DRIVES

5 1/4" 320K Floppy	\$229.00
5 Meg Hard w/Controller	\$1399.00
10 Meg Hard w/Controller	\$1699.00
15 Meg Hard w/Controller	\$2095.00
20 Meg Hard w/Controller	\$2399.00

AMDEK

310A Amber Monitor	\$169.00
DX1 100 Plotter	\$599.00
Color II	\$399.00

AST RESEARCH, INC.

Six Pak Plus	\$279.00
Combo Plus II	\$279.00
Mega Plus	\$309.00
I/O Plus II	\$139.00

QUADRAM

Quadlink	\$519.00
Quadboard	as low as \$289.00
Quad 512 Plus	as low as \$249.00
Quadcolor	as low as \$219.00
Chronograph	\$89.00
Parallel Interface Board	\$89.00
64K RAM Chips Kit	\$59.00

MICRO PRO

WordStar/Mail Merge	\$349.00
InfoStar	\$299.00
SpellStar	\$159.00
CalcStar	\$99.00

MICROSTUF

Crosstalk	\$105.00
-----------	----------

MICROSOFT

Multiplan	\$159.00
-----------	----------

pfs

APPLE		
Write	79.00	89.00
Graph	79.00	89.00
Report	79.00	79.00
File	79.00	89.00
IBM		
Solutions	as low as 16.00	16.00
- Call On Titles		

IBM



ASHTON-TATE

dBASE II	\$389.00
Friday!	\$185.00

IUS

EasyWriter II	\$249.00
EasySpeller	\$119.00
EasyFiller	\$229.00

CONTINENTAL SOFTWARE	
1st Class Mail/Form Letter	\$79.00
The Home Accountant Plus	\$88.00

SYNAPSE

File Manager	\$89.00
--------------	---------

LOTUS

1-2-3	\$319.00
-------	----------

PROFESSIONAL SOFTWARE

PC Plus/The Boss	\$349.00
------------------	----------

VISICORP

IBM APPLE	
VisiCalc	159.00
VisiCalc 4	159.00
VisiCalc-Advanced	269.00
VisiWord/Spell	249.00
Visitrend/Plot	199.00
VisiLink	169.00
VisiFile	199.00
VisiSchedule	199.00
VisiIndex	159.00
VisiPlot	135.00
VisiTerm	75.00
Desktop Plan	199.00
Bus. Forecast Model	75.00
Stretch Calc	75.00
Visi Tutor Calc	59.00
Visi Tutor-Advanced	75.00
Visi Tutor Word	59.00
Vision Calc	249.00
Vision Graph	129.00
Vision Mouse	159.00
Vision Host	319.00

PRINTERS

AXIOM	
AT-100 Atari Interface	\$239.00
CD-100 CBM 64/VIC 20	\$239.00
GP-100 Parallel Interface	\$199.00
BMC	
401 Letter Quality	\$589.00
BX-80 Dot Matrix	\$269.00
CENTRONICS	
122 Parallel	\$399.00
739-1 Parallel	\$299.00
739-3 Serial	\$349.00
C.I.TOH	
Gorilla Banana	\$209.00
Prowriter 8510P	\$379.00
Prowriter 1550P	\$679.00
A10 (18 cps)	\$569.00
F10-40	\$999.00
F10-55	\$1499.00
COMREX	
ComWriter II Letter Quality	\$499.00
DIABLO	
620 Letter Quality	\$949.00
630 Letter Quality	\$1749.00
DAISYWRITER	
2000	\$999.00
Tractor Feed	\$109.00
EPSON	
MX-80FT. MX-100. RX-80. RX-80FT. FX-80. FX-100	CALL
IOS	
Prism 80...For Configurations	CALL
Prism 32...For Configurations	CALL
MANNESMAN TALLY	
160L	\$589.00
180L	\$799.00
Spirit 80	\$309.00
NEC	
2010/2030	\$899.00
8023 Dot Matrix	\$379.00
8025 Dot Matrix	\$669.00
3510 Serial/Letter Quality	\$1449.00
3530 Parallel/Letter Quality	\$1499.00
7710/7730 Serial/Parallel	\$1949.00
OKIOATA	
82.83.84.92.93.2350.2410	CALL
SMITH CORONA	
TP-2	\$439.00
Tractor Feed	\$119.00
SILVER REED	
500 Letter Quality	\$469.00
550 Letter Quality	\$699.00
STAR	
Gemini 10X	\$299.00
Gemini P15	\$399.00
Delta 10	\$559.00
Serial Board	\$75.00
TOSHIBA	
TRANSTAR	

= WEST = = CANADA = = EAST =
 800.648.3311 800.268.4559 800.233.8950



In NV call (702)588-5654, Dept. 0201
 Order Status Number: 588-5654
 P. O. Box 6689, State Line, NV 89449

In Toronto call (416)828-0866, Dept. 0201
 Order Status Number: 828-0866
 2505 Dunwin Drive, Unit 18
 Mississauga, Ontario, Canada L5L1T1

In PA call (717)327-9575, Dept. 0201
 Order Status Number: 327-9575
 Customer Service Number: 327-1450
 477 E. Third St., Williamsport, PA 17701

Nonisk, nodelpositon C. O. D. orders. Pre-paid orders receive free shipping within the UPS Continental United States with no waiting period for certified checks or money orders. Add 3% (minimum \$5.00) shipping and handling on all C. O. D. and credit card orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. We stock manufacturer's and third party software for most all computers on the market. Call today for our new catalog.

COMPUTER MAIL ORDER



APPLE/FRANKLIN DISK DRIVES MICRO-SCI


A2	\$219.00
A40	\$299.00
A70	\$319.00
C2 Controller	\$79.00
C47 Controller	\$89.00

RANA

Elite 1	\$279.00
Elite 2	\$389.00
Elite 3	\$569.00

ACE 1000 Color Computer... CALL
 ACE Family Pack System... CALL
 ACE PRO PLUS System... CALL
 ACE 1200 Office Mgmt. System... CALL
 "NOT IIE EXPENSIVE"

APPLE IIe STARTER PACK
 64K Apple IIe. Disk Drive & Controller.
 80 Column Card. Monitor II & DOS 3.3
 COMPLETE \$1199



HOME COMPUTERS



600XL..... \$199
800XL..... \$299

1200XL CALL
1400XL CALL

commodore



C 64
\$ 199

CBM 4032	\$599.00
CBM 8096	\$869.00
CBM 9000	\$999.00
B128-80	\$769.00
CBM 64K Memory Board	\$269.00
8032 to 9000 Upgrade	\$269.00
2031 LP Disk Drive	\$299.00
8050 Disk Drive	\$849.00
8250 Disk Drive	\$1199.00
4023 Printer	\$379.00
8023 Printer	\$569.00
6400 Printer	\$1399.00
Z-RAM	\$499.00
Silicon Office	\$699.00
The Manager	\$199.00
Soft ROM	\$125.00
VisiCalc	\$159.00

MSD
 SD1 Disk Drive \$349.00

VIC 20 CALL
CBM 8032..... \$599

C1541 Disk Drive	\$249.00
C1530 Datasette	\$69.00
C1520 Color Printer/Plotter	\$169.00
M-801 Dot Matrix/Parallel	\$219.00
C1526 Dot Matrix/Serial	\$279.00
C1702 Color Monitor	\$249.00
C1311 Joystick	\$4.99
C1312 Paddles	\$11.99
C1600 VIC Modem	\$59.00
C1650 Auto Modem	\$89.00
Logo 64	\$49.00
Pilot 64	\$39.00
Simon's Basic	\$19.00
Word Pro 64 Plus	\$59.00
Parallel Printer Interface	\$49.00
Calc Result 64	\$129.00
Codewriter 64	\$75.00
Quick Brown Fox	\$49.00
Word Pro 64 Plus	\$59.00

PROFESSIONAL SOFTWARE

Word Pro 2 Plus	\$159.00
Word Pro 3 Plus	\$189.00
Word Pro 4 Plus/5 Plus...each	\$279.00
InfoPro	\$179.00
Administrator	\$399.00
Power	\$79.00

We stock a full inventory of software for Commodore, such as: Artwork, Broderbund, Commercial Data, Creative Software, Epyx, HES, MicroSpec, Nufekop, Romox, Sirius, Synapse, Thorn EMI, Tronix, UMI, Victory, Spinnaker, Rainbow & Timeworks!

CALL FOR DETAILS!

HANDHELD COMPUTERS



41CX	\$249.99
41CV	\$199.99
41C	\$144.99
HP 10C	\$51.99
HP 11C	\$69.99
HP 12C	\$88.99
HP 15C	\$88.99
HP 16C	\$88.99
HP 75C	\$749.99
HPIL Module	\$98.99
HPIL Cass. or Printer	\$359.99
Card Reader	\$143.99
Extended Function Module	\$63.99
Time Module	\$63.99

PC-1500A... \$165.99
PC-1250A... \$88.99

CE-125 Printer/Cassette	\$128.99
CE-150 Color Printer/Cassette	\$171.99
CE-155 8K RAM	\$93.99
CE 161 16K RAM	\$134.99
CE 500 ROM Library	\$29.99

TIMEX/SINCLAIR

Timex/Sinclair 1000	\$24.99
Timex/Sinclair 2068	CALL
16K Memory	\$25.00
2040 Printer	\$99.99
VuCalc	\$17.99
Mindware Printer	\$99.99

NEC

PC-8201 Personal Computer	\$599.00
PC-8221A Thermal Printer	\$149.00
PC-8281A Data Recorder	\$99.00
PC-8201-068K RAM Chips	\$105.00
PC-8206A 32K RAM Cartridge	\$329.00

1010 Recorder	\$74.00
1020 Color Printer	\$249.00
1025 Dot Matrix Printer	\$449.00
1027 Letter Quality	\$299.00
1030 Direct Connect Modem	CALL
1050 Disk Drive	\$379.00
CX30 Paddle	\$12.00
CX40 Joystick	each \$8.00
CX77 Touch Tablet	\$64.00
CX80 Trak Ball	\$48.00
CX85 Keypad	\$105.00
488 Communicator II	\$229.00
4003 Assorted Education	\$47.00
4011 Star Raiders	\$33.00
4012 Missile Command	\$29.00
4013 Asteroids	\$29.00
5049 VlsiCalc	\$159.00
7097 Logo	\$79.00
7101 Entertainer	\$69.00
7102 Arcade Champ	\$75.00
8026 Dig Dug	\$33.00
8030 E.T. Phone Home	\$33.00
8031 Donkey Kong	\$39.00
8033 Robotron	\$35.00
8034 Pole Position	\$39.00
8036 Atari Writer	\$79.00
8040 Donkey Kong, Jr.	\$39.00
8043 Ms. PacMan	\$39.00
8044 Joust	\$39.00

DISKETTES MAXELL

5 1/4" MD-1	\$29.00
5 1/4" MD-2	\$39.00
8" FD-1 (SS/DD)	\$39.00
8" FD-2 (DS/DD)	\$49.00

VERBATIM

5 1/4" SS/DD	\$26.99
5 1/4" DS/DD	\$36.99

ELEPHANT

5 1/4" SS/SD	\$18.49
5 1/4" SS/DD	\$22.99
5 1/4" DS/DD	\$28.99

HEAD

5 1/4" Disk Head Cleaner	\$14.99
--------------------------	---------

DISK HOLDERS

INNOVATIVE CONCEPTS

Flip-n-File 10	\$3.99
Flip-n-File 50	\$17.99
Flip-n-File(400/800ROM)Holder	\$17.99

LJK ENTERPRISES

Atan Letter Perfect-Disk(40/80)	\$79.99
Atan Letter Perfect-ROM(40 col.)	\$79.99
Atan Letter Perfect-ROM(80 col.)	\$79.99
Atan Data Perfect-ROM(80 col.)	\$79.99
Atari Spell Perfect-DISK	\$59.99
Atari Utility/MailMerge	\$21.00
Apple Letter Perfect	\$99.00
Apple Data Perfect	\$75.00
Apple LJK Utility	\$21.00
Apple Lower Case Generator	\$19.00



AT 88-S1	\$329.00
AT 88-A2	\$259.00
AT 88-S2	\$529.00
AT 88-S1PD	\$429.00
AT 88-DDA	\$119.00
RFD 40-S1	\$449.00
RFD 40-A1	\$269.00
RFD 40-S2	\$699.00
RFD 44-S1	\$539.00
RFD 44-S2	\$869.00

TEXAS INSTRUMENTS

TX 99-S1	\$279.00
----------	----------

RANA

T000	\$319.00
------	----------

TRAK

AT-D2	\$389.00
-------	----------

MEMORY BOARDS

Axlon 32K	\$59.00
Axlon 48K	\$99.00
Axlon 128K	\$299.00
Intec 32K	\$59.00
Intec 48K	\$85.00
Intec 64K	\$99.00
Intec Real Time Clock	\$29.00

ALIEN VOICE BOX

Atari	\$119.00
Apple	\$149.00

KOALA PAD

Atari	\$75.00
Apple	\$85.00
IBM	\$95.00
CBM 64	\$105.00

CONTROLLERS & JOYSTICKS WICO

Joystick	\$21.99
3-way Joystick	\$22.99
Famous Red Ball	\$23.99
Power Grip	\$21.99
BOSS Joystick	\$17.99
ATARI/VIC Trak Ball	\$34.99
Apple Trak Ball	\$54.99
Apple Adapter	\$15.99
Apple Analog	\$37.99

KRAFT

Joystick	\$41.99
Atari Single Fire	\$12.99
Atari Switch Hitter	\$15.99
Apple Paddles	\$34.99
IBM Paddles	\$34.99
IBM Joystick	\$46.99

AMIGA

3100 Single	\$13.99
3101 Pair	\$19.99
Joyboard	\$37.99

TG

Atari Trak Ball	\$47.99
Apple Joystick	\$47.99
Apple Trak Ball	\$47.99

= WEST = = CANADA = = EAST =
800-648-3311 800-268-4559 800-233-8950

In NV call (702)588-5654, Dept 0201
 Order Status Number: 588-5654
 P.O. Box 6689, Stateline, NV 89449

In Toronto call (416)828-0866, Dept 0201
 Order Status Number: 828-0866
 2505 Dunwin Drive, Unit 1B
 Mississauga, Ontario, Canada L5L1T1

In PA call (717)327-9575, Dept 0201
 Order Status Number: 327-9576
 Customer Service Number: 327-1450
 477 E. Third St., Williamsport, PA 17701



CANADIAN ORDERS: All prices are subject to shipping, tax and currency fluctuations. Call for exact pricing in Canada.
 INTERNATIONAL ORDERS: All shipments outside the continental United States must be pre-paid by certified check only. Include 3% (minimum \$5.00) shipping and handling. EDUCATIONAL DISCOUNTS: Additional discounts are available to qualified Educational Institutions.
 APO & FPO: Add 3% (minimum \$5.00) shipping and handling.

Circle 76 on Inquiry card

Beyond MIPS*: Performance Is Not Quality

Two users examine the quantifiable aspects of system quality

by John M. Carroll and Mary Beth Rosson

Performance is the most common term of measurement used in the world of computing. Performance refers to the effective speed of a device, hardware or software. It refers to reliability. It refers to so many things that you could easily come to regard performance as a synonym for quality. But there is a danger in this—quality must not simply be equated with performance. Performance does not take into account usefulness or usability, which are critical determinants of the ultimate quality of a system, particularly a microcomputer system.

In this article, we consider three aspects of quality. First, we discuss the meaning of quality and emphasize the contributions of factors other than system performance as typically measured. Within this broader context, we consider how the quality of a computer interface might be analyzed. We focus on users' needs and on how readily those needs can be accomplished. We argue that high-quality devices are those that support the user's fluent accomplishment of typical tasks. Finally, we describe how an analysis of quality might be incorporated into the design process. Devices can be designed for high performance; we

urge that they be designed for high quality.

What Is Quality?

Usually, when we ask "Does a device work?" or "How well does it work?" we intend the industrial-engineering sense. We presuppose an *ideal* operator. It is easy, though, to imagine examples in which this assumption is overly generous. A bicycle with pedals positioned so far from the seat that a *typical* rider cannot reach them may be a high-performance bike for that ideal operator, but something is seriously wrong with it for the typical operator.

Frequently, computer application systems are like that high-performance bike: neither usable nor useful. Imagine a new word processor with twice the processing power of previous systems and a minuscule probability of hardware defects. With respect to performance, it is rated a quality system; but if you are a novice and want to use the system to type and print a one-page letter, you may not agree with this rating. Very often, there will be no simple procedure to accomplish your goal; despite the "quality" of the parts, the pedals seem to be designed for people with far longer legs. Thus, you may need to sort through icons, negotiating selection and movement,

single and double mouse clicks, copying dummy documents, and so forth. Or you may need to traverse a more rigidly structured, but equally inscrutable, hierarchy of menus or be faced with a vacant screen that awaits commands but gives no hints.

Consider a scene we have observed often in studying users of commercial word processors. The operator is presented with a menu of options immediately prior to seeing the text-input area. Under the menu is the following prompt: Type ID code to select CHOICE; press ENTER. The user need not in fact select any optional CHOICE to move to text input, but invariably the user does. Having done so, the user is once again prompted: Type ID code to select CHOICE; press ENTER. Again, the user selects an option (often reselecting his prior CHOICE). Indeed, this cycle of redundant selection and reselection can continue for many minutes. And unfortunately it accomplishes little or nothing. The default CHOICES are satisfactory in most cases; CHOICE-looping only delays the goal of getting to the typing display (see references 3, 4, 8).

The issue of quality is not limited to inexperienced users. For experienced operators, measures of performance, such as processing speed, may indeed become more im-

* millions of instructions per second

portant determinants of quality; these users may operate in a mode in which variations in system capacity are more apparent (see references 6 and 10 for discussions of the effects of system response time on users' productivity). However, even for routine users, other factors are much more important. Good system performance may make a tedious procedure more acceptable, but it will not eliminate the negative impact on quality. Nor will performance alleviate the problem of long-term skill learning—often, experienced users fail to acquire the most effective methods for accomplishing their goals (see reference 9). In a high-quality system, these problems would be addressed not by improving system performance but by making the more effective methods transparent to the user and by making relevant procedures easy to learn and execute.

Even if the usability of a system is high, its quality might be severely impaired by its usefulness to its intended audience. For example, if a user is shy when it comes to writing about sensitive matters, or if a person cannot type fluently, an electronic mail system would not be useful. By the same token, if someone is principally concerned with filling in forms, then most word-processing systems would not be useful. Finally, if someone works in a highly interactive team environment, a calendar application without provisions for sharing data would be of very limited use.

The term "quality" has meaning only when considered from the perspective of real users performing real activities on a system. The level of performance in the context of an ideal user may contribute to quality considered from this perspective, but much more important is the extent to which the system supports users in the pursuit of their own goals (both what they want to do and how they want to accomplish it). How can quality, in this sense, be measured?

Measuring Quality

In order to measure the quality of a system, we need to know (a) who the intended users will be, (b) what

they will want to use the system for, and (c) how they will want to achieve those goals. Such a description would turn the focus on users and their needs, which is essential to evaluating system quality. The measurement itself is made through psychological experimentation: empirical studies of representative users performing representative tasks.

The representativeness of the users and their tasks is key. The quality of a system designed to be used by secretaries cannot be assessed by having programmers try it out. Programmers aren't secretaries. The background knowledge that can be assumed for one group cannot be assumed for another. A system that is just fine for programmers could be

If one system elicits better performance on typical tasks by typical users, then that is the higher-quality system.

a disaster for secretaries. For example, it is routine for programmers to invoke an application before using its function. This is not at all obvious to nonprogrammers. Secretaries with no computer experience might attempt to type their first word-processor document on the top-level control menu. (We have observed this kind of error with nonprogrammers learning to use a variety of word-processing systems.) Conversely, secretaries routinely specify pitch and style of type fonts; a system designed for such users could address such functions more technically than could a comparable system designed for use by programmers.

Just as background knowledge varies among user groups, so do their typical goals in using the system. Secretaries seldom compose text. Far more typically, they key in and revise text that someone else has composed. This arrangement would be reversed for typical programmers. Accordingly, testing the quality of a word-processing system for secretarial users would place relatively greater emphasis on keying and revi-

sion tasks than on composition tasks. And the reverse would be true for a word-processing system designed for programmers.

Typical Tasks, Typical Users

Indeed, the characterization of typical tasks and user groups can and should be more in-depth than our simple example. The tasks of legal secretaries differ from those of correspondence secretaries in many relevant ways. Typical tasks can be analyzed in greater resolution than composition versus transcription/revision: some secretaries may deal exclusively with one-page memos and letters; others may often transcribe lengthy technical reports. Assessing the quality of a system requires us to identify the intended users and their typical tasks and measure a representative group of such users performing such tasks with the system.

For a system designed for correspondence secretaries who typically type brief memos, a measure of quality would be *the average time required to type an average memo*. Two systems, both designed for this user group (possibly among other groups), could be compared on this basis. If one system elicits better performance on typical tasks by typical users, then that is the higher-quality system.

Of course, systems often provide a variety of functions intended for diverse groups of users. For these systems, different user groups must be demographically represented in any test and asked to perform the particular tasks typical of their group. If the principal group is secretaries and the secondary group is managers, then both must be proportionally represented in the tested sample of users. The secretaries might be asked to transcribe memos and the managers might be asked to prepare performance plans.

Our considerations don't stop there. Users vary not only in their job-related backgrounds but also in their computer-related backgrounds. Systems optimized for correspondence secretaries with no computer experience might be less

than optimal for members of the "same" user group who are experienced with word processors. When we begin to imagine the interactions of experience on different systems, this issue can become quite complicated. Nevertheless, we must pay attention to distinctions in system quality for users of different experience levels. Thus, one measure of quality for a word-processing system intended for secretaries might be the time required for a secretary without computer experience to create and print her first letter; another measure might be the time required for an experienced secretarial user to create a table with a complex format. In a quality system, basic functions are learned easily, which aids the initiation of novices. But just as important, advanced functions should be acquired *naturally* when appropriate, which supports productivity and the development of expertise in the longer term.

Current system designs in many

cases do try to accommodate distinctions between different experience and expertise levels (as well as some of the other distinctions we have discussed). However, in no case has the quality of a design been seriously ascertained. The IBM Displaywriter provides a menu interface to make learning easier and a menu-bypass facility to support fluent and productive skilled use. The Apple Lisa system presents an interface organized by the desktop metaphor for ease of learning and Apple-key commands for the convenience of more experienced users. We would argue that although both systems are addressing the right issues and adopting reasonable approaches to these issues, their success is unknown. The quality of both systems on these grounds (and others) must be determined empirically.

Analyzing Quality

We have argued that system quality is more than mere performance.

We have tried to show how usability and usefulness are the final determinants of system quality and how they can be assessed empirically. But we can do better: we can try to understand the components of usability and usefulness; we can try to understand what quality is.

Our starting point is *how* users want to achieve their goals. We want to expand the framework presented in the preceding section to include consideration of the particular approaches, methods, and subskills that are employed when users try to address a goal (such as typing a buck slip) with an application system. Knowing that 90 percent of correspondence secretaries can key in and print out a one-page memo in less than 15 minutes provides an assessment of quality. But knowing a larger number of more specific facts (e.g., 85 percent make the mistake of miscoordinating coded keypress commands at least once in the course of requesting a print job to be queued) provides a more detailed

HARD COPY MADE EASY.

Picture CRT information
in full color with the new
KODAK INSTAGRAPHIC™
CRT Imaging JUST
Outfit. **\$190**

LIST PRICE*

This new Kodak imaging outfit makes recording CRT graphic displays as easy as taking a photograph! Just hold the Instagraphic camera and cone over a 12- or 13-inch-diagonal CRT screen, and press the button. That's it!

Get a full-color photographic record—an instant print or a conventional print or slide†—without darkening the room. Without ambient light or parallax concerns. Without focusing. Without tying up your terminal, color printer, or plotter. All for an incredibly low \$190!

*Subject to change without notice. Dealer prices may vary.



Circle 122 on inquiry card.

assessment of quality.

Breaking down macro-level tasks, like keying in and printing out a buck slip, into subtasks, like queuing a print job, provides an insight into quality that is deeper than that provided by simple pass/fail tests. Two systems might be indistinguishable with respect to how long comparable groups of users take to perform comparable tasks, but the systems might differ substantially in *where* the users' time went. Queuing a print job might present the user with a variety of specific problems in one system: awkwardly worded prompts, iconcluttered displays, inconvenient defaults, multiple-keystroke commands, etc. In another system, the problems might pertain to the command or menu protocol for selecting the pitch and style of type fonts. From the macro-level standpoint, the quality of the two systems is equal; we have assumed that in both cases an identical proportion of representative users can successfully accomplish a representative task. But

from the more detailed level of *how* the users accomplish particular subgoals, there is a trade-off in quality between components of the macro-level task.

A trade-off is not a choice between equivalents. The relative usefulness of the two systems we have imagined might differ considerably. The system for which type-font selection was difficult might still be more useful than the system for which queuing a print job was difficult. After all, being forced to accept default pitch and style is not as great an obstacle to getting real throughput as is being unable to queue a print job. The default type font may not be exactly right, but it will always be better than no printout at all. The relative difficulty of system subtasks must be collated against the goals people bring to the situation in order to assess the usefulness of the system (see reference 2).

In the short term, it may be satisfactory to know that typical users spend an average of 15 minutes keying in and printing out a buck slip.

After all, if the state of the art is 18 minutes, you might realize a productivity savings of about 15 percent in the system of *higher quality*. But in the longer term, we need to understand better where the 15 minutes (or the 18 minutes) is going and how it affects the usefulness of the system. Indeed, understanding those details is the key to improving the quality of systems.

Designing for Quality

It will probably come as no surprise when we suggest that an understanding of system quality, along the lines indicated earlier, might be incorporated into the design of systems. After all, if we are not satisfied with merely benchmarking macro-level user tasks, why stop with benchmarking subtasks? If we can understand the detail of system quality, then we ought to be able to exploit this understanding by designing better systems. Addressing the finer grain of user subtasks affords us a more analytic measurement of sys-

Outfit includes camera, film, cone, more!

Get everything you need to record charts, graphics, formulas, etc. from your CRT in full color...for reports, documentation, or presentations. Complete outfit includes: Kodak Instagraphic camera with +3 close-up glass lens; two packages of new Kodak Instagraphic color print film with excellent resolving power (the camera and film can normally deliver *more* detail than a 2,000-line CRT can produce); a Kodak Instagraphic CRT cone (the interface between camera and CRT) designed to fit against the frame around the tube or against the cabinet; instruction manual; filter, carrying strap, foam strips, bumpers, spacers, and brackets for adapting your 35 mm single-lens-reflex camera to the cone. The Instagraphic camera and cone are covered by a Full Three-Year Warranty!

Ask for a demonstration. (You'll find your dealer listed in the Yellow Pages under Audiovisual Equipment & Supplies, Photographic Equipment & Supplies, or X-ray Products.) Or request more information. Check the coupon at right or call toll free for a free instant print of CRT data, plus a list of dealers who carry this exciting new product.

†If you want conventional prints and slides, use a 35 mm camera (not supplied in the outfit) equipped with a 35 mm lens capable of focusing at 11½ inches (290 mm), or you may be able to use a +1, +2, or a +3 diopter close-up lens with your present lens.



Motion Picture and Audiovisual Markets Division
Eastman Kodak Company, Rochester, NY 14650



© Eastman Kodak Company, 1984
Circle 123 on inquiry card.

IF YOU NEED CONVINCING, PHONE

1-800-445-6325, EXT. 207.

OR FILL OUT AND MAIL THIS COUPON.

Motion Picture and Audiovisual Markets Division
Eastman Kodak Company, Dept. 412L, Rochester, NY 14650

**YES I WANT TO MAKE
HARD COPY EASY.
SHOW ME YOUR CAPABILITY.**

- Send me an instant print of a CRT display and more information. A5062
- Have a representative contact me. A5061

Name _____

Title _____ Company _____

Address _____

City _____ State _____

Zip _____ Phone _____

February 1984 © BYTE Publications Inc. 171

People & Technology™

ACCESS TOMORROW'S COMPUTER SOLUTIONS TODAY!

We've broken the disk access bottleneck using advanced 3M™-patented technology never before available for the IBM PC. Now, for the first time, this advanced storage technology is made available exclusively to the small-to-mid-sized business user by People & Technology.™

INTRODUCING . . .

ELECTRONIC File Cabinet™ SERIES 100

20 Mb Disk Drive

- IBM™ compatible
- Plug-compatible w/ most PC/DOS and MS/DOS (version 1.1 and 2.0)
- Mainframe data access time & reliability for your PC . . . only 65 ms!
- All installation software, cabling, and comprehensive operations/information manual included
- Look-alike IBM packaging
- Bank financing available
- Only \$2,350 . . . more storage for less money!

For product and ordering information, call our 24 hour toll free order line at
800-443-0100 Ext. 428

People & Technology
Access tomorrow's computer solutions today.

People & Technology

844 Manatawna Ave.,
Phila., PA 19128

People & Technology and Electronic File Cabinet are registered trademarks of People & Technology. IBM is a registered trademark of International Business Machines. 3M is a registered trademark of 3M Corporation. Please contact the company without prior notice.

tem quality that can contribute directly to the designing of higher-quality systems. Although this discussion has focused on the assessment of completed systems, many of the measurements we have discussed could be made on mock-ups of interfaces, on simulations of systems, and on prototypes.

We believe that making such measurements during the early stages of the system-development process is the only way to ensure the design of quality systems (see references 5 and 7). Consider, for example, the implementation of contextual dependency in a menu-driven word-processing system. The notion is that only functions that make sense in a given context are available to the user. The payoff is obvious: it protects the user from the often costly errors associated with inappropriate menu selections (reference 3).

But the implementation of the principle is not so obvious. We could incorporate the dependency either in the *display* of options or in their *selection*. In the first case, the physical appearance of the menu would vary from mode to mode and the user would be faced with possible problems stemming from a failure to recognize the mode and its inherent limitations on functions. In the second case, the physical appearance of the menus is constant, but its response to the user's action varies: sometimes certain functions are "not available," leading to possible user frustration. The choice of a good solution to this design issue cannot be known a priori, nor can it be indicated through macro-level usability benchmarking. The ultimate choice will be very much a function of the details of the application, the menu content, and the instances of contextual dependency most likely to be encountered by a typical user.


The computer industry will very likely continue to focus on the goal of improving system performance. And it clearly should; performance factors like reliability and response time have a variety of obvious, and not so obvious, effects on user satisfaction and productivity. (The exact nature of these effects is still a mat-

ter of controversy; see references 1, 6, 9.) But increasingly there is an awareness that mere performance is not enough, that it is not the same thing as quality. As computers become tools and toys for everyone, their ability to adapt to human needs and propensities becomes the principal determinant of real system quality. We have outlined a simple, yet systematic, empirical approach to the measurement, analysis, and design of system quality. We know of no scrupulous case studies of this approach, but the momentum of the entire industry is overwhelmingly heading in this direction. In the next few years, the study of system quality should be one of the most active areas in computer science research. ■

John M. Carroll has a Ph.D. in psychology from Columbia University. Mary Beth Rosson has a Ph.D. in psychology from the University of Texas at Austin. Both are members of the Research Staff at IBM's Thomas J. Watson Research Center (POB 218, Yorktown Heights, NY 10598).

References

1. Boies, S. J. "User Behavior on an Interactive System." *IBM Systems Journal*, 13, 1974, pages 1-18.
2. Bullen, C. V., and J. L. Bennett. "Office Workstation Use by Administrative Managers and Professionals." *IBM Research Report*, RJ 3809, 1983.
3. Carroll, J. M., and C. Carrithers. "Blocking User Error States in a Training System." Submitted to *ACM Communications*.
4. Carroll, J. M., and R. L. Mack. "Learning to Use a Word Processor: by Doing, by Thinking, and by Knowing." *Human Factors in Computer Systems*, J. Thomas and M. Schneider, eds. Norwood, NJ: Ablex, 1983.
5. Carroll, J. M., and M. B. Rosson. "Usability Specifications as a Tool in Iterative Development." *Advances in Human-Computer Interaction*, H. R. Hartson, Norwood, NJ: Ablex, forthcoming.
6. Doherty, W. J., and R. P. Kelisky. "Managing VM/CMS Systems for User Effectiveness." *IBM Systems Journal*, 18, 1979, pages 143-163.
7. Gould, J. D., and C. H. Lewis. "Designing for Usability—Key Principles and What Designers Think." Manuscript in preparation.
8. Mack, R. L., C. H. Lewis, and J. M. Carroll. "Learning to Use Word Processors: Problems and Prospects." *ACM Transactions on Office Information Systems*, 1, 1983, pages 254-271.
9. Rosson, M. B. "Patterns of Experience in Text Editing." *CHI '83 Conference on Human Factors in Computing Systems, Proceedings*. Boston, December, 1983.
10. Shneiderman, B. "Response Time and Display Rate in Human Performance with Computers." To appear in Shneiderman's *Designing Interactive Computer Systems: A Software Psychology Approach*.

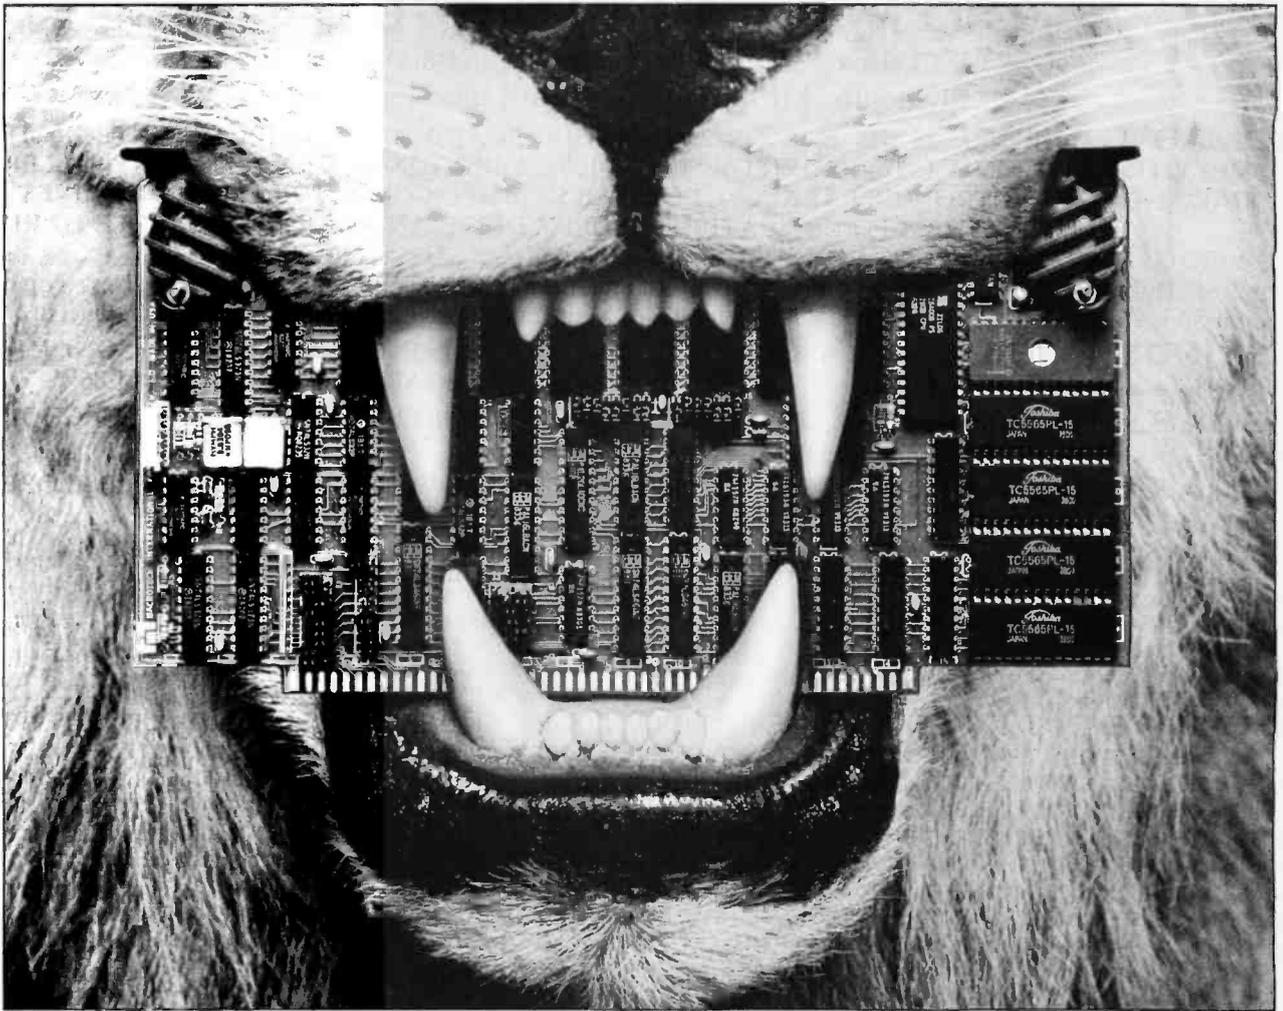

KING OF THE S-100 JUNGLE



You'll reign supreme when your S-100 system is equipped with Macrotech's high performance products. Our full megabyte high speed dynamic RAM and 16 channel intelligent DMA I/O boards provide the edge you need in today's competitive jungle.

Our one slot MAX dynamic RAM is field expandable from 256K to one megabyte. You get far more than just the low price per kilobyte of \$2.39. You get:

- IEEE 696 full parity detection • Virtual disk support in all popular Digital Research operating systems • High Speed Z80, 8085—6 MHz; 8086, 8088, 68,000—8 MHz No Wait States
- On-board refresh • 16-24 bit Memory Mapped Addressing option
- DMA fully supported in strict compliance with IEEE 696

Our ADIT 16-channel serial I/O board is no pussycat either. An on-board 6 MHz Z80B provides intelligence for a large array of commands. Plus important things like:

- Resident virtual disk interface • Memory to memory DMA
- 24-bit DMA addressing • Field expandable from 4 to 16 channels
- Full compliance with IEEE 696

Macrotech makes every slot in your computer really count! To get the rest of our story on the ADIT or the MAX, write or call us. In the S-100 jungle Macrotech products can be your key to success.

MACROTECH INTERNATIONAL CORP.

9551 Irondale Ave., Chatsworth, CA 91311, (213) 700-1501

Dealer/Distributors: Priority One Electronics (800) 423-5922, (213) 709-5111
Soft Machines (217) 351-7199; In England: Fulcrum (Europe) (0621) 828-763

— COMPETITIVE EDGE —

P.O. Box 556
Plymouth, MI 48170

Order Line 800-336-1410
Info Line 313-451-0665

LOMAS THUNDER 186 128K OR 256K SINGLE BOARD 80186 COMPUTER INTEGRATED BY COMPETITIVE EDGE IN A LOW PROFILE 4 SLOT S-100 CABINET INCLUDES DISK CONTROLLER TWO SERIAL AND ONE CENTRONICS PARALLEL PORT, (2) 5" IBMPC COMPATIBLE FLOPPY DRIVES & 128K FOR . . . \$1995 or ONE 5" IBM PC COMPATIBLE FLOPPY DRIVE AND ONE 10 MEGABYTE HARD DISK FOR (BOTH SYSTEMS INCLUDE CONCURRENT CP/M-86™) . . . \$3195

For 256K Thunder 186 instead of 128K add \$240 to above prices. Thunder 186 also available in 15 Slot Desk Top or Rack Mount Single Cabinet Mainframe or Dual Cabinet 20 Slot Mainframe (Drives & Cards in Separate Cabinets).

THUNDER 186 SINGLE BOARD COMPUTER ALONE 128K WITH CONCURRENT CP/M-86™. . . \$1035. **THUNDER 186** SINGLE BOARD 256K WITH CCP/M-86™. . . \$1275.

LOMAS LIGHTING 286 CPU IN 15 SLOT S-100 SYSTEM WITH 128K STATIC RAM, AND CHOICE OF MSDOS OR CP/M-86™, (2) 8" 2.4 MB DRS . . . 3995

LOMAS (2) USER 256K, MP/M-86™ CE INTEGRATED SYSTEM, W/8086, 8089, (2) 8" 2.4 MB FLOPPYS, 15 SLOT MAINFRAME. . . 3895

LOMAS THUNDER 186 128K CCP/M-86	\$1035	LIGHTNING 286	\$1116
LDP 72 DISK CONTROLLER	220	8 PORT SERIAL	316
RAM 67 128K 8-16W/ BAT. BACK UP	800	LDP 256K DRAM	636
LDP88 8088 1K RAM, SERIAL BOARD	279	LIGHTNING 1 8086 10MHZ	520
THUNDER 286 256K, CCP/M-86	1275	RAM 67 STATIC MEMORY 128K	725
HAZITALL SYSTEM SUPPORT BOARD	275	LOMAS COLOR GRAPHICS BOARD	396
LDP 128K DRAM 8-16	396	CP/M 80 EMULATOR	60

COMPETITIVE EDGE INTEGRATED SYSTEMS WITH COMPUPRO® CIRCUIT BOARDS

85/88, DISK 1, INTERFACER 4, RAM 21, SYSTEM SUPPORT 1, ENCLOSURE 2, DUAL DR. CAB. W/8" 2.4 MB CP/M 8-16™	\$3895
6MHz CPU Z, DISK 1, INTERFACER 4, RAM 17, ENCLOSURE 2, DUAL DRIVE CABINET, (2) 8" MITSUBISHI 3ms 2.4 MB FLOPPYS	3195
10MHz 68000 DISK 1, INTERFACER 4, RAM 22, SYS SUPPORT 1, ENCLOSURE 2, DUAL DR CAB. (2) 8" DSDD DRS CP/M68K	4695
MP/M 8-16™, 85/88, INTERFACER 3-8, 512K, SYSTEM SUPPORT 1, ENCLOSURE 2, DUAL DR. CAB. (2) 8" DSDD DRS	6095
10MHz 8086, DISK 1, INTERFACER 3-8, 512K (2 RAM 22), SYS. SUPPORT 1, ENCLOSURE 2, DUAL DR. CAB 2-8" DRS MPM86	6395

For MDRIVE-H add \$995 per 512K. For Q540 40MB QUANTUM HARDDISK & DISK 3 SUB-SYSTEM add \$3000.

BUDGET 15 SLOT COMPETITIVE EDGE INTEGRATED SYSTEMS WITH DUAL 8" DOUBLE SIDED DRIVES AND COMPUPRO BOARDS
85/88, DISK 1, RAM 16, I/O 4, CP/M 2.2 . . . \$2995. 6MHz CPU Z, DISK 1, IO 4, RAM 17, CP/M® 2.2 . . . \$2895. 10 MHz 86 or 68K, RAM 21, I/O 4 CPM® . . . \$3695.

DISK 3 & Q540 QUANTUM 40 MEGABYTE HARD DISK SUB-SYSTEM WITH SYSTEM . . . \$2995. SEPARATELY . . . \$3195.
HARD DISKS ARE BURNED IN.

DISK 1 — \$327. DISK 3 — \$525. DISK 1A — \$459. SPUZ — \$459. 68K CSC — \$561. 68K A&T — \$459. 8086 CSC — \$561. 85/88 SSI — \$297. ENCLOSURE 2 DESK — \$599. ENCLOSURE 2 RACK — \$645. CP/M68K — \$242. 20 SLOT MOTHERBRD — \$195. 12 SLOT — \$129. RAM 17 — \$329. RAM 22 — \$1155. RAM 21 128K 8-16 — \$657. 2-8" DRS & CAB — \$1095. DUAL SLIMLINE DRS & CAB 2.4 MB — \$1050. SPECIAL 1-8" FLOPPY & DISK 3 & Q540 IN RACK MOUNT, CPM 80 & 86 — \$3495. DUAL 8" SLIMLINE 2.4 MB DRIVES 3ms STEP RATE, IN CABINET WITH DISK 3, Q540 HARD DISK CP/M 2.2 AND CP/M 86 RACK OR DESK — \$3995.

TELETEK SYSTEMS AND COMPONENTS INTEGRATED BY COMPETITIVE EDGE

FOUR SLOT S-100 SYSTEM WITH SYSTEMMASTER, 2-8" DRS, CP/M 2.2	\$1995
SAME IN 15 SLOT CABINET WITH Z80A, 64K TWO SERIAL	2495
10 MEGABYTE HARD DISK SUB-SYSTEM FOR ABOVE	\$1495
INCLUDES TELETEK HDC HARD DISK CONTROLLER. FOR 20 MEGABYTE	1995
TWO USER TURBODOS SYSTEM, SYSTEMMASTER, 2-Z80A SLAVES, (2) 8" FLOPPYS 2.4 MB, 15 SLOT	\$4095
6 USERS, 10 MB HAR DISK	7995
TELETEK SYSTEMMASTER — \$585. SBC-1 64K — \$575. SBC-11 — \$995. HDCTC HARD DISK CONTROLLER — \$525. CP/M 135 TURBODOS — \$750.	

TERMINALS, PRINTERS ETC.

QUME 102 GREEN	\$539	F10 55 CPS	1395	PRISM 80 COLOR	1295	TELEVIDEO 924	695
IDS MICROPRISM	475	QUME 108 GR	695	1550 SERIAL	725	PRISM 132 COLOR	1495
C.ITOH F10 40	1095	IBM CABLE	45	TELEVIDEO 914	575	SHEETFEEDER F10	495
QUME 102 AMBER	549	C.ITOH 1550	675	PRISM 132	1095	U.S. ROBOTICS S-100	
IDS PRISM 80	950	QUME 108 AMBER	710	8510 SP PAR.	625	300/1200 BAUD MODEM	315

8" DOUBLE SIDED DOUBLE DENSITY DISKETTES WITH LIFETIME WARRANTY — QTY 10	\$27	5" DSDD DISKETTES FOR IBM PC™ QTY 10	\$24
8" SINGLE SIDED DOUBLE DENSITY DISKETTES WITH LIFETIME WARRANTY — QTY 10	\$26	5" SSDD DISKETTES FOR APPLE™ QTY 10	\$19

Most Software for CP/M®, CP/M-86™, MSDOS™, PCDOS™, & MP/M-86™
DIGITAL RESEARCH PASCAL MT + 86 — \$375. CB86 CBASIC COMPILER — \$375. CB80 CBASIC COMPILER — \$325. DRI "C" FOR 86 — \$225. dBASE II — \$425.
THE BEST WORD PROCESSOR AVAILABLE LEXISOFT'S SPELLBINDER — \$275. It has many features not found in any other word processor. COMPUTER INNOVATIONS "C" — \$295. SORCIM SUPERCALC II — \$199. MICROSOFT FORTRAN 86 — \$250. MS "C" COMPILER — \$350. MULTITOOl WORD — \$275.

All prices subject to change. minimum \$3. Shipping, manufacturer's warranty's apply CP/M, CP/M-86, MP/M-86, CCP/M-86 are either registered trademarks or trademarks of Digital Research Inc., Compupro is a Godbout Company. IBM is a trademark of International Business Machines, Apple is a trademark of Apple Computer Inc., Supercalc II is a trademark of Sorcim Inc., Spellbinder is a trademark of Lexisoft Inc., Thunder 186, Lightning 1 and Lightning 286 are trademarks of Loma Data Products Inc.

Software Performance Evaluation

Some helpful guidelines borrowed from a successful hardware model

by **Brian Boyle**

On the grand scale that measures difficulty, relevance, and necessary skills, the job of software performance evaluation falls somewhere between the role of test pilot and drama critic. While obviously subjective, the criteria for evaluation must be rigorously and narrowly defined: it is not the reviewer's task to rank the intrinsic social or intellectual values of, for example, Lotus 1-2-3 versus Pac-Man, but rather, to report to prospective consumers the quality of the rendition of the subject matter.

In this article, I'll try to document some of the criteria used for software performance evaluation. Though not an easy task, there are some straightforward approaches. Also included is a text box that discusses a surprisingly accurate means of evaluating a processing system's performance. The knowledge gained in successfully constructing a hardware performance measuring tool can be used to guide reviewers in evaluating software.

The evaluation of software application packages is only one of the categories of analysis performed at Gnostic Concepts Inc. We regularly examine computer hardware, operating systems, and support, training, and distribution schemes, as well as market data and projections. At either end of this spectrum are areas of interest readily amenable to quantitative analysis. At the microcomputer end, a system based on an Intel 8088 processor running at 4.77 MHz (megahertz) can perform a spe-

cific number of 32-bit ADD instructions in a given time. A 5¼-inch Winchester disk with known rotational speed, head-movement time, and transfer rate can access a known number of fixed-length records in a certain time. At the market end, statistical analyses can accurately determine and predict the number of dentist's offices in the United States today and during the next decade.

It would thus be tempting to assume that a software application package lying somewhere along this path from microcomputer to market can be treated objectively and numerically using the same tools. In a nation of numbers, the ultimate goal of any evaluation is usually to obtain a number, set of numbers, or semi-quantitative indicators.

Quantifying Hardware

Despite the obstacles, there is a possible software performance-evaluation methodology for arriving not at a single (scalar) value but a characteristic set (vector) of values, based principally on experience in hardware evaluation. The accompanying text box depicts the relatively "simple" methodology for arriving at a single Figure of Merit (FOM) for a given hardware configuration. Clearly, a single value is an oversimplification that overlooks many specific advantages and disadvantages of the system within a particular environment: a system ideally suited for video games is different from a sys-

tem optimized for scientific array computation or business database processing. Realistically, however, a CAD (computer-aided design) system for integrated circuits, for instance, has many of the requirements of each, so a single scalar value has some foundation in reality.

Obviously, quantification of something as complex and personal as personal computer application software is far more difficult than hardware evaluation, but you have to start somewhere. Lacking any other scale, potential users still want to know "what's hot and what's not," even when the limitations of such an oversimplification are spelled out.

Software Evaluation

Of course, there are aspects of software performance evaluation that lend themselves to the same kinds of quantitative techniques that are used in the hardware-evaluation approach discussed in the text box. Like test-piloting, quantitative limitations are tested, wherever feasible, both up to and beyond their stated limits: *up to* validates the claim; *beyond* evaluates how user friendly, or user hostile, the system is when pushed over the edge. Response times under given loading conditions can be measured quite accurately: using a personal computer's RS-232C port allows it to simulate both a terminal and a tireless, methodical user/evaluator on another system. Not only can much of the process be automated, but

thousands of measurements accurate to the millisecond are possible.

Still, there remains the problem of assigning interpretation to these quantitative values. What is an acceptable response time? To whom? When? The problem wanders out of the realm of measurement and into the twilight zone of experimental or industrial psychology, management science, or opinion sampling—all on the borderline of applied guesswork. Yet, despite the obvious difficulties and differences, the hardware performance-evaluation model provides useful insights into an approach, or set of approaches, to software performance evaluation. At the very least, there is a suggestion of a divide-and-conquer approach in which the separate factors and terms of the software are evaluated and weighed individually before recombination.

Perhaps the most useful concept transportable from the hardware model is the suggestion of the units of measurement. The units in the hardware FOM are the square root of the product of the word width (in bits) and the (practical) memory address length (also in bits). All of this is divided by nanoseconds and multiplied by a dimensionless value purportedly relating the “value” of bits-out relative to bits-in.

Intellectual Leverage

The last factor, the “value,” or “information multiplier,” characterizing the intellectual advantage of the machine, is closely analogous to the mechanical advantage factor of simple machines like levers and pulleys, in which you trade increased motion for increased force. A good computer system (hardware plus software) is expected to give us what Xerox scientist Lynn Conway called “intellectual leverage.” If the bits/second were liters/second or electrons/second, then information flow, or throughput, would be fluid flow or current in amperes. When multiplied by the knowledge-enhancing “force” (pressure or voltage), the resultant value is work/second or power (equivalent to watts).

Any software performance measurements should be consistent with

this line of reasoning. Raw performance measurement applies it directly. A typical data-processing program can be rated by the product of:

1. the *number* of records processed in a given time
2. the *size* of the records in bits (more often bytes)
3. the *complexity* of the structures manipulated, usually the order or binary logarithm of the number of branches in the graph of the data structure represented as a binary tree
4. the *transformation factor* or ratio of the information-theoretic complexity of the records output compared to those input

The concept of the *order* of an algorithm is frequently used in theoretical analyses that compare different sort, search, merge, and transform techniques. A sequential search, for example, is said to be of order(n) because its run time increases linearly with n , the number of items in the list. A binary search, in which the search domain is narrowed by one-half at each step, is said to be of order($\log(n)$) because its run time increases by only one step for each power of two, or doubling, of the number of items.

Of course, the complexity (and run time) of each step is typically greater for the binary search, so the sequential search may actually be faster for short lists, but for a sufficiently large n we know that the order will dominate algorithmic performance. Similar theoretical performance estimates can be made for frequently used features within an operating system: context-switching (between processes), interrupt-handling overhead, and subroutine or procedure calls are examples that account for a majority of the instructions executed in typical general-purpose computer systems.

Theoretical, Experimental, and Observational Evaluation

When it comes down to it, the modes of software evaluation are the same as those of physics. Simple behavior of small numbers of well-understood features can be theoretic-


cally modeled and predicted, such as the reflection of light, the collision of billiard balls, and the surprisingly indicative hardware FOM. Then there are the properties that can be measured experimentally, like the speed of sound, light, or programs under specified conditions. Finally, there are those aspects like astronomy, cosmology, human psychology, and other observational sciences, in which you are unable, or not allowed, to take apart the mechanism to experiment, and your theories are never really verifiable. This last aspect is the most difficult and most challenging.

Another lesson to be learned from physics is the uncertainty principle that says (among other things) that to some degree the act of measuring a phenomenon affects the outcome and changes the result. You can see this in the case of a program-performance monitor running on the same machine, and competing for the same resources, as the program it is attempting to evaluate. Such internal instrumentation of a program, in which checkpoint code is inserted into the program source and compiled with it, can be very revealing, but you must remember to correct for the effects of the monitor itself, both in timing and, even more subtly, in operation.

An actual relevant side effect of the uncertainty principle is the unspoken realization that the whole is greater than, or sometimes less than, the sum of its parts. At the trivial end of the spectrum, a dynamite set of programs—word processor, spreadsheet, graphics, database, etc.—is a dud if the components each use mutually incompatible formats. A little farther up the scale, if they communicate only through disk files or, worse yet, files *and* conversion programs, they may add up, but they certainly don't multiply or enhance one another. A major feature of the Unix operating system from Bell Laboratories is not so much its multiuser as its multiprocessing capabilities; it uses the pipe mechanism to pass data among concurrently running programs without passing through a vastly slower disk file. Finally, there is semantic incom-

Text continued on page 180

THE 22-SECOND DEMONSTRATION OF DESKTOP PERFORMANCE

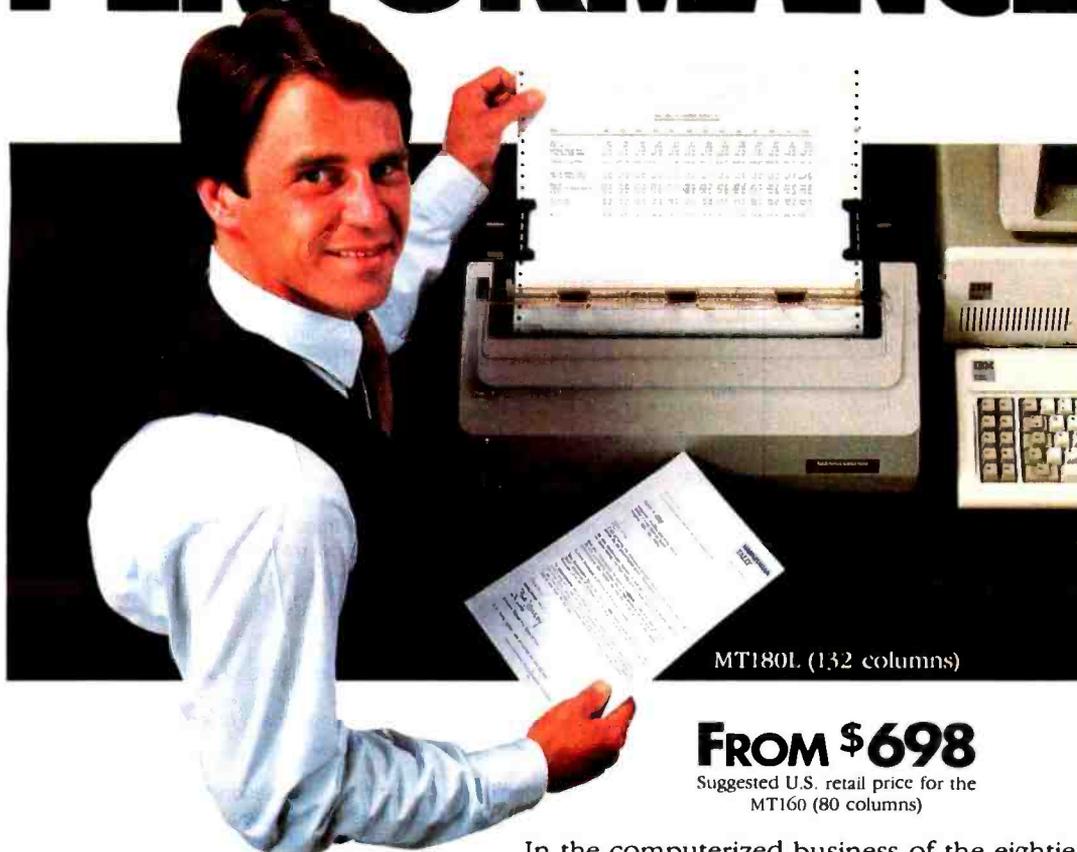

FROM \$698

Suggested U.S. retail price for the
MT160 (80 columns)

In the computerized business of the eighties, more decisions will hinge on getting the right information in the right hands at the right moment. How well you do that will ultimately depend on the performance and durability of your printer.

**SMARTER,
FASTER,
STRONGER.**

In the Tally MT160/180 series, a powerful 16-bit microprocessor masterminds document flow. That means saving valuable seconds when seeking the shortest possible print path. And printing at top speed all day long. Some machines claim 160 cps but can't hold that speed because they're not engineered or built like a Tally.

You can quickly run down the extensive menu of print styles and word processing enhancements, making selections at a touch. On *L* models, switch from draft mode to letter quality just as easily and get results the *Creative Computing* magazine calls "superb."

All 160/180 models have adjustable tractors and friction feed paper handling. And both parallel and serial interface ports are built in. So you're ready to print right out of the box.

The spreadsheet you see above was produced in a scant 22 seconds. In an age when every moment counts, that's desktop performance at its best.

For more information and the name of your nearest dealer, call toll free: 800-447-4700.*

**MANNESMANN
TALLY**

* In Illinois: 800-322-4400 In Canada: 416-661-9783

Quantifying Processing System Performance—the MilliVAX

The Figure of Merit

The somewhat formidable Figure of Merit (FOM) formula in table 1 is based on some common-sense concepts that measure "work per time," just like the story problems of grade-school days: Tom can chop a cord of wood in three hours, Jerry in four hours, and Bill in two hours. How long ... ?

To determine how much wood the wood-choppers could chop if they chopped together, our math book said to take the reciprocal of the sum of their rates in cords/hour, for a combined time of 12/13 hour per cord. We were also taught to assume independence and ignore the practical facts that Tom and Jerry can't stand to work together and that "Wild Bill" is fast but too dangerous to work with.

The hardware FOM is simply a quantitative measure of how much data (in bits) can be fetched and stored in a given period of time (in nanoseconds) multiplied by the amount of value-added work that can be performed on that chunk of data to transform it into useful information. The FOM is a surprisingly accurate approach for predicting processing-system performance.

For evaluation purposes, the processing system does not include fetch and write cycles from mechanically dependent memory devices such as floppy disks, hard disks, and tape. Nor does it consider input (e.g., keyboard) or output (e.g., printer) interaction times. On-board memory access, including any cache memory, is included.

You could arrive at the denominator (time) using raw MIPS (millions of instructions per second) figures, but such numbers offer a precise yet inaccurate measure of system performance, as misleading as Wild Bill's performance as a wood processor.

A more complex but accurate denominator for the FOM formula takes into account the several levels of memory in most computer systems. The typical processor clock rate and memory cycle time can be misleading if used blindly: the memory may not always be as fast as the processor or synchronized (in step) with it, resulting in wait states. Conversely, on many micro-coded processors, memory fetches are much faster than typical instruction execution time.

Using a technique developed in the days when processors were much faster than memory, many sophisticated systems employ a fast auxiliary cache memory between the processor and main memory. The effec-

FOM*	=	$K \times n_p^{2/3} \times (1 + n_c)^{1/2} \times W_{eff} \times W_{inst} \times W_{addr} / T_{avg}$
Where:		
K	=	a constant to force the "value" of a VAX-11/780 to 1000.0 milliVAX
n_p	=	the number of main (general-purpose) processors in the system
n_c	=	the number of special-purpose coprocessors in the system (if any)
W_{eff}	=	the effective processor word-width (in bits)
	=	$(W_{int} \times W_{ext})^{1/2}$
Where:		
W_{int}	=	the internal word-width, usually the register-length
W_{ext}	=	the external word-width, usually the data-path or bus-width
W_{addr}	=	the effective processor typical maximum memory address-width (in bits)
	=	$\log_2 (M_{addr})$
Where:		
M_{addr}	=	the effective useful maximum main memory address
	=	$(M_{min} \times M_{max})^{1/2}$
Where:		
M_{min}	=	the useful minimum main memory configuration
M_{max}	=	the useful maximum main memory configuration
W_{inst}	=	the effective processor instruction field-width (in bits)
	=	$\log_2 (n_{inst})$
Where:		
n_{inst}	=	the effective number of distinct operable instructions
	=	$n_{mri} \times n_{mod} - n_{nul} + n_{nmr}$
Where:		
n_{mri}	=	the number of separate memory reference operation codes
n_{mod}	=	the number of separate memory address modes
n_{nul}	=	the number of meaningless combinations of op-codes and a-modes
n_{nmr}	=	the number of separate nonMRI (memory reference instructions)
T_{avg}	=	the average operation cycle time normally executed by the processor
	=	$T_{ira} \times R_{reg} + (T_{ira} + T_{amr}) \times (1 - R_{reg})$
	=	$T_{ira} \times R_{reg} + T_{ira} + T_{amr} - T_{ira} \times R_{reg} - T_{amr} \times R_{reg}$
	=	$T_{ira} + T_{amr} - T_{amr} \times R_{reg}$
Where:		
T_{ira}	=	the inter-register ADD time (in nanoseconds)
R_{reg}	=	the register access ratio (what fraction of references are to registers)
	=	$1 - \text{Probability that an instruction references memory (not registers)}$
	=	$1 + 2 \times P(\text{reference is to main memory}) - 2 \times P(\text{reference is to register})$
	=	$1 + 2 \times (1/\log_2 (M_{addr})) - 2 \times (1/\log_2 (n_{reg}))$
	=	$1 + 2/W_{addr} - 2/\log_2 (n_{reg})$
Where:		
n_{reg}	=	the number of general-purpose registers of width W_{int}
And:		
T_{amr}	=	the average cycle time to reference main or cache memory
	=	$T_{cam} \times R_{cam} + T_{mem} \times (1 - R_{cam})$
Where:		
T_{mem}	=	the main memory cycle time (in nanoseconds)
T_{cam}	=	the cache memory cycle time (in nanoseconds)
R_{cam}	=	the cache "hit-ratio" (what fraction of memory references are to cache)
	=	$1 - \text{cache "miss-ratio" (probability a reference to Main not in cache)}$
	=	$1 + 2 \times P(\text{reference is to Main Memory}) - 2 \times P(\text{same address in cache})$
	=	$1 + 2 \times (1/\log_2 (M_{addr})) - 2 \times (1/\log_2 (M_{cam}))$
	=	$1 + 2/W_{addr} - 2/\log_2 (M_{cam})$
Where:		
M_{cam}	=	the cache memory size in Kbytes

* © 1983 Gnostic Concepts Inc., A McGraw-Hill Company

Table 1: The processing-system figure of merit (FOM).

tiveness of the cache in minimizing accesses of a slower main memory depends on the "hit rate"—the average fraction of memory references to data or instructions that are in the cache. The cache's overall utility is a product of its speed and probable hit rate; the latter depends on the cache size and characteristics of the program(s) being run.

Smaller systems generally lack cache

memory but have internal registers with even faster access times that the FOM characterizes by the interregister add time. In assembly-language code and good compilers, these registers are used as a sort of "minicache" for intermediate results, offsets, bases, pointers, counters, and other frequently used values, so that the number of such registers and their flexibility

determine their hit rate.

For simplicity's sake, our FOM does not include the opposite end of the speed spectrum, mass storage—usually disk. Disk storage is normally the rate-limiting factor in most small computer systems. This lowest level of memory is classified as level 5, after registers, cache, main, and optional level 4 memory (typically bubble memory), CCD (charge-coupled device), or disk-cache devices.

The greatly improved throughput of the hard disk owes less to its greater size than to its much faster random-access speed. This is not to be confused with the transfer rate, the speed of loading data once the proper track and sector are reached, which is usually quite fast. Random-access time is the search-plus-seek time necessary to reach the data in the first place, usually measured in tens or hundreds of milliseconds. Admittedly, the chunk of data transferred is usually large, so the vast initial overhead is spread across the hundreds or thousands of bytes accessed. Nonetheless, speed and volume of disk reading and writing utterly dominate most business applications.

Work Per Time Still Works Best

As you might expect from a work-per-time measure, the denominator of the FOM expression expresses a typical mean data access time, the average of the access times for the various memory levels weighted by their projected, relative frequencies of use. The numerator expresses "work" and is a function of word size (width of data manipulated per access) and memory size (how much data you can stuff in memory without special addressing tricks or faulting to the next level of memory). This raw volume of data is multiplied by the power of the instruction set, a value indicating how few instruction cycles are necessary to accomplish a single high-level operation.

None of these factors can reasonably be read directly from a product's specification sheet. Word length, for example, could be taken either as the internal register length or the external data path width, which may be different. As an empirically validated compromise, the FOM uses their geometric mean (the square root of their product). This yields the expected 8 and 16 for the symmetric 8085 (8 by 8) and 8086 (16 by 16), respectively, but yields a "word length" of 11.3 for the 8088 because of its asymmetrical 8-bit external, 16-bit internal architecture.

The geometric mean is similarly used as

a normalizing and scaling function to compute a reasonable memory-size parameter from the minimum and maximum memory configuration for a system. Taking the binary logarithm of this number converts its units back to bits, namely the word width required to address such a memory configuration. Experimentally, this turns out to be a much better measure than the theoretical maximum address range, which may go as high as 2^{24} or even 2^{32} .

The final factor in the formula, the power of a system, may seem the most technically obscure, subjective, or simply arbitrary. All other things being equal, the processing capability of a system obviously increases with the size of its instruction set, but certainly not in direct proportion.

As important to many compiler designers as an instruction set's size is its orthogonality, the fraction of potential instructions that are actually meaningful and useful. Like words in the English language, the frequency of instruction use follows (approximately) a logarithmic distribution: the most common eight instructions (or words) occur as frequently in common usage as the remainder of the most common 64.

This is the rationale for applying the log₂

function to the total number of meaningful combinations of instructions, address modes, etc. The binary logarithm of the full set of combinations captures the log-normal frequency of instruction use and the advantages of symmetrical architectures such as the National Semiconductor 16000. Table 2 is an example showing the values used in the FOM computation for two typical processing systems.

MilliVAX versus the Real World

Does the hardware FOM actually correspond to anything we can relate to in the real world? In scanning any recent trade journal it is virtually impossible not to catch at least a dozen bar charts comparing brand-X supermicrocomputer to the DEC VAX-11/780, particularly in a Unix environment. If Helen of Troy possessed "the face that launched a thousand ships," then, to me, a reasonable unit of feminine beauty would be the milliHelen—the precise amount of beauty required to launch one ship. Similarly, the FOM constant, K, can be adjusted so that the ubiquitous VAX-11/780 has a figure of merit of precisely 1000 to create the semiwhimsical unit called the milliVAX, in which all

Text box continued on page 180

Parameter	Description	Units	DEC VAX	IBM
			11/780	PC XT
FOM :	Figure of Merit	mVAX	1000.0	79.2
n_p :	Number main processors		1	1
n_c :	Number of coprocessors		1	1
W_{eff} :	Word width, effective	bits	32	11.3
W_{int} :	Word width, internal	bits	32	16
W_{ext} :	Word width, external	bits	32	8
W_{addr} :	Width, useful address	bits	21	17.7
M_{addr} :	Memory, useful configuration	Kbyte	2048	202.3
M_{min} :	Memory, useful minimum	Kbyte	512	64
M_{max} :	Memory, useful maximum	Kbyte	8192	640
W_{inst} :	"Width" instruction set	bits	8.8	7.7
n_{inst} :	Number useful operations		445	210
n_{mri} :	Number mem-ref operation		96	64
n_{mod} :	Number addressing modes		16	12
n_{nul} :	Number null combinations		1218	630
n_{nmr} :	Number non MRI instructions		127	72
T_{avg} :	Time, average operation	nsec	585	1928
T_{ira} :	Time, inter-register ADD	nsec	515*	1677
R_{reg} :	Register "hit-ratio"	(%)	57	40
n_{reg} :	Number full-word GP-registers		14	7
T_{amr} :	Time, average memory-ref	nsec	165	420
T_{mem} :	Time, memory cycle	nsec	400	420
T_{cam} :	Time, cache access	nsec	150	00
R_{cam} :	Cache "hit ratio"	(%)	94	00
M_{cam} :	Cache memory size	Kbyte	8	00

*A combination of integer and long ADD.

Table 2: A sample Figure of Merit computational value for the VAX 11/780 and the IBM PC XT.

TAKE THE CATALOG

CHALLENGE

- For Savings
- For Selection
- For Service

Other companies waste time and overhead producing expensive catalogs. Computers and More doesn't. Putting the latest products and best prices in our customers' hands, not catalogs, is our goal. We challenge any catalog company to match our pricing, selection and service. Take the catalog challenge and save! • New Product or Price.

COMPUTERS

Desk Top	Portable
IBM P/C 2-320K 2195	Columbia VP 2349
IBM XT ON SALE!	Corona 1-320K 1989
Columbia 1600-1 2289	Panasonic Sr Partner 1995
Columbia 1600-4 3494	Kaypro II CALL
Corona 2-320K 2389	Kaypro 4 1689
Eagle 1620 3995	Teletole 1289
Eagle PC XL 3395	Televideo TPC-2 1759
NEC All Models	Eagle Spirit XL 3495
Epson QX-10 ON SALE!	The Computer by Sharp NEW!
Dec Rainbow 100 CALL	NEC 8201A 639
Leading Edge P/C 2199	Compaq 1 drive CALL
Televideo 803 or 1605 H CALL	Apple Compatable CALL
Franklin QMS CALL	Epson HX-20 CALL
Apple Computers CALL	Zorba 9 in 1776

PRINTERS

Letter Quality	Dot Matrix
NEC 3550 (IBM) 1695	C. Itoh 8510 339
Cannon Ink Jet 634	C. Itoh 1550 645
Juki 6100 489	Epson FX-80 CALL
Silver-Reed 550 599	Epson RX-80 CALL
Silver-Reed 770 CALL	OKI 82A 319
Translar 130 699	OKI 83A 589
Translar 140 1089	OKI 80 319
NEC 2010 859	OKI 92A 449
NEC 2015 859	OKI 93 339
NEC 2050 (IBM) CALL	Rieman 80 Col 749
F-10 Starwriter 1099	Gemini Delta 10 549
F-10 Printmaster 1349	Gemini Radix 10 or 15 CALL
Pointtype by Star CALL	Gemini 10X 259
HR-1 589	Toshiba P-1350 SALE
HR-15 ON SALE!	NEC 8025 699
Diablo 630 CALL	IDS Prism 132 1165
Daisywriter 48K 1089	Mann-Tally 160L 619
DTC 380-2 1049	Mann-Tally 180L 849
Brother HR-25 769	Translar 315 CALL

ACCESSORIES

IBM	Apple
Supervision by CCS 679	Rana 8088 CPU CALL
Paradise Multi display 419	DualInterface (Par & Ser) 159
Graphics Card by Hercules 367	80 Col/64K for Ile 116
STB Video Board 349	PKASO Card 127
Baby Blue by Microlog 459	Par. Interface 59
AST Sx Pak 289	Koala Touch Tablet 84
AST PC Net 1279	Wildcat Computer SALE!
Smartmdm 1200 B/W/soli 429	Premium SII Cd II 349
Password Modem 339	Sup R Mod 49
Tandon TM 100-2 219	Disk Drive 199
CDC Disk Drive DS/DD 227	Drive Controller 59
Disk Controller by Maynard 157	Disk Emulator 294K 519
Half High 320K 199	Ulraterm 289
Quaddisk 6 meg. Fixed 1589	MicroModem II 269
Keytronic New 5150 198	Smart Modem 1200 529
Kraft Joystick 34	D-Cat 149
USI Color/Graphics 1/2 & Para 359	Kraft Joystick 29
Corvus/Pegasus/Corona 469	Davong 5 Meg 1359
Quadram Quadlink 469	Microbuffer II 209
Quadram New Quad Brd 64K 299	80 Col cd 99
Tecmar 1st Mate 259	BUF Grappier+ CALL
Tecmar Graphics Master 559	Wizard 16K 53
Orchid Technologies CALL	Keytronic KB200 217

MONITORS

Color	Monochrome
Princeton HX-12 \$469	Taxan Amber 129
Princeton SR-12 649	Taxan Green 129
New Max-12 199	Zenith 122 A 125
NEC JG-1203 (IBM) 519	Zenith 123 G 97
Taxan RGB-3 449	Amdek 310 A 169
Quadram Quadchrome 497	Amdek 300 459
Zenith - New CALL	New Max-12 199

SOFTWARE

IBM	Apple
R Base CALL	Tax Preparer 147
Millionaire 39	Home Accountant 49
Wizardry 39	Great Plans CALL
Wordstar 239	Peachtree CALL
Easywriter II 259	PFS Solutions CALL
Volkswriter 119	PFS File 84
Visicalc (256K) 179	PFS Report 84
Multiplan 189	PFS Graph 84
Lotus 1-2-3 319	dBase II 397
PFS Graph 89	Visifile 169
PFS File 89	Versafarm 264
PFS Report 83	T. I. M. CALL
PRS Solutions CALL	List Handler 59
dBase II 384	Wordstar 249
CDEX - Any Program 49	Bank Street Writer 47
Tax Preparer 169	Screenwriter II CALL
OZ by F & G CALL	Magic Window 97
Infostar 259	Magic Call 99
Personal Pearl 199	Zork I 27
Home Acct Plus 112	Zaxxon 27
Peachtree CALL	Chopfliter 26
Property Management 329	Progger 24
Digital Research SALE!	Wizardry 39
DESO NEW!	Jumpman 29
Select 299	

Printer Accessories

Soooper Spooler 283	Microbuffer (in line 32 K P) 219
Micro Spooler (P to P 16K) 189	Microbuffer (in line 32 K S) 219
Micro Spooler (P to P 64K) 229	64 K for MB 139
Soundtrap 89	Optimizer by ACT CALL

Terminals

Wyse 300 1019	Mann-Tally Pxy 3 689
Wyse 200 1019	Sweet-P 528
Adds - All Models CALL	Six-Shooter CALL
T.V. 910+ 569	Amdex X-Y 569
T.V. 925 C 749	Amdex 6 Pen Auto 995
T.V. 950 C 969	Quadjet by Quadram CALL
Dume 102 A 549	C. Itoh CX (Par) 549
Dume 102 G 549	C. Itoh CS (Ser) 549
Dume 108 A 679	Strobe 8 Pen 799
Zenith CALL	Houston Ins MI-Pad 759

Plotters

Text box continued from page 179:
small systems can be measured.

FOM Agrees with Actual Performance

Not surprisingly, the computed FOMs for various microprocessor-based systems agree with the marketing hype only as to relative performance, yet even the most advanced supermicrocomputers reach only a few hundred milliVAX. A bit more surprisingly, the FOM value seems to predict rather accurately the number of users that can be supported concurrently with reasonable responsiveness. Each user seems to require about 20 milliVAX as an absolute minimum, 30 or 40 for comfort, 60 for high performance, and hundreds for certain computationally intensive programs.

On this scale, a VAX-11/780 would support 50 to 64 users minimally, 32 comfortably, and 16 to 20 with high performance. At the low end of the scale a Z80-based personal microcomputer rated at 30 milliVAX is acceptable for one undemanding user; for comparison, a DEC PDP-8 (the first commercially successful minicomputer, with 4096 12-bit words of memory) has a value of 30 milliVAX and supports one to three users. The IBM PC provides 80 milliVAX (actually sufficient for 2 to 3 users, but not configured as such for marketing reasons). The Altos 586 enhances this to 130 milliVAX and five users by employing the full 16-bit 8086 processor and twice the PC's typical memory. Finally, most of the M68000-based, cache-enhanced supermicrocomputers vying with VAXs hit the charts at 200+ milliVAX, for a realistic 12 to 16 users. The point is that the FOM is actually a reasonable indicator of system capabilities.

Text continued from page 176:

patibility, in which the commands/keystrokes in one program mean different, even conflicting, things in another.

How do you quantify the benefits of compatibility? Again, physics has a model: the RMS (root-mean-square). A hundred violins sound only 10 times as loud as one, because they are not "in step" and (like incompatible programs) combine destructively nearly as often as constructively. Rather than adding end to end, they add "at right angles," since any two vectors are randomly oriented with respect to each other.


COMPUTERS



1 Year Warranty Available
TO ORDER Phone orders invited using Visa, MasterCard, or bank wire transfers. Visa, MC, service charge of 2%. Mail orders may send charge card number (include expiration date), cashiers check, money order, or personal check (allow 10 business days for personal or company checks to clear). Please add 3% (\$5.00 minimum) for UPS shipping, handling, and insurance. All equipment is in factory cartons with manufacturer warranty. Opened products not returnable. Restocking fee for returned merchandise. Equipment subject to price change and availability. Retail prices differ from mail order prices. Calif. residents add 6% State Tax. Company and school P.O.'s accepted on approval. IBM & Apple are registered trademarks. International inquiries welcomed. Telex 697120, Datamax Attn. Dept. 322

and More
The Catalog Challengers!
3620 - 30th Street
SAN DIEGO, CA 92104
TO ORDER
(619) 291-1442

THE MOST IMPORTANT DATA SAVING DEVICE YOU'LL BUY.

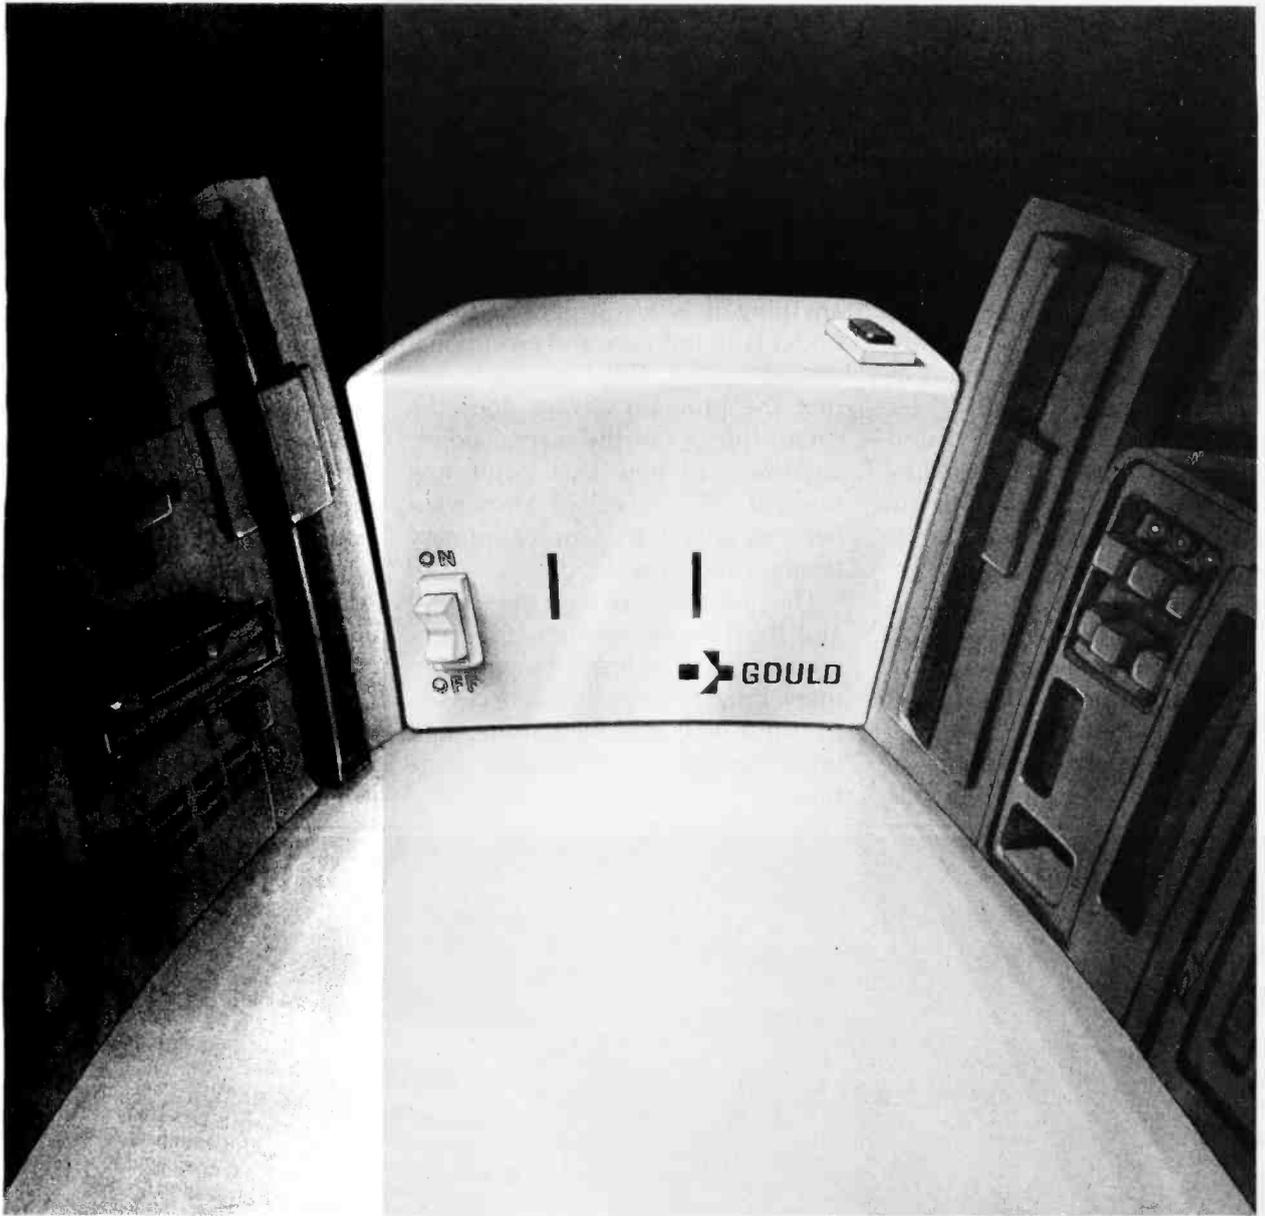

It's not a disk drive or a cassette recorder, and it can't store a single kilobyte. But it could save an entire disk full of data, or a week of work.

Because this is the Personal Conditioner™ from Gould—an inexpensive version of the Gould Line Conditioners big computer systems use.

By now you probably know that a noisy AC line can make your computer lose data, drop entire files, even shut down completely.

But did you know that typical line protection devices just filter out the highest surges

and worst glitches? That means potentially harmful noise often passes right through. And none of them do anything at all about undervoltages, so a brownout can put you out of operation.

So if you're serious about saving data, you need a Gould Personal Conditioner™. It's much more than a surge suppressor or noise filter. It actually creates the smooth power your computer needs. Even if your AC power drops as low as 96 volts, the Gould Personal Conditioner™ will keep supplying 120 volts of clean power.

You can add a Personal Conditioner™ to your system for less than \$200. Sure, you can save a few dollars by getting something less effective. But which would you rather save—a little money, or your data?

For the name of your local computer dealer carrying the Personal Conditioner™ call Toll Free 800-854-2658. In California, (619) 291-4211. Gould Inc., Power Conversion Division.

 **GOULD**
Electronics

The length of the diagonal so formed is given by the Pythagorean theorem as the square root of the sum of the squares, or RMS. The combined value of cooperating programs is directly additive, or even multiplicative, when they actually support each other. Totally random combinations of mutually incompatible programs can be summed using the RMS value.

Software Evaluation Criteria

Once the errors and effects of measurement are taken into account and methods for rationally combining individual component values are determined, the basic components of evaluation must be specified. The following three Cs should be tested by any software performance-evaluation scheme:

1. Correctness of the operation: does the program (or system) do all that it is intended or is claimed to do with no side effects?
2. Completeness of user support: are the documentation, on-line aids,

tutorials, training, and other aspects sufficient for operation?

3. Consistency of the package: is there a uniform conceptual model and consistency of actions and commands that minimize ambiguity?

For correctness, first check all the specifications you reasonably can to determine whether the program does all the things it claims to. Second, check that the program doesn't do anything it is *not* supposed to do under both ordinary and exceptional circumstances. Third, check to see that the program always does the same things at the same point, regardless of how that point was reached. This so-called Markovian behavior often is the bane of ordinary testing procedures.

The problem with both the second and third requirements is that programs tend to be tested by programmers. Programmers do not necessarily think like unskilled users, and even they gain expertise after some time.

Short of an endless supply of new users or an eraser for certain sections of the brain, the only way to simulate the bizarre states users may get themselves into is by methodically testing the progression from state to state, typically using a personal computer-based user simulator, running a program called a finite state machine (FSM.) Such a program, or checklist for human use, assigns a state number to each conceptual state the program occupies, as determined by its previous inputs or conditions. It then determines experimentally the (possibly) new state reached for each possible input. A well-behaved system has only as many states as are conceptually distinct—when a word processor is in a command mode, for example, it should not matter whether the last command was an ADD or DELETE, unless the difference is necessary (e.g., for an UNDO command).

Completeness of the user support is a frequently overlooked aspect of the system-evaluation process. (Shame on those systems analysts

Your PC can now "speak" C when using...

BASTOC™

A BASIC-To-C Translator

JMI's BASTOC is a versatile software tool which converts BASIC source programs to C source programs. BASTOC also translates multiple dialects of BASIC.

Registered Trademarks: IBM—International Business Machines Corp., Microsoft, MS, XENIX—Microsoft Corp., Applesoft—Apple Computer, Inc., TRS-80—Tandy Radio Shack Corp., CBASIC—Digital Research, Inc.
 Distributors: Australia, Fawcay Pty. Ltd., P.O.B. 224, Hurstville, NSW 2220 (612) 570-8100; Japan, Advanced Data Controls Corp., Chiyoda-ku, Tokyo (03) 263-0383; United Kingdom, Real Time Systems, Newcastle upon Tyne, 0632 43131

JMI SOFTWARE CONSULTANTS, INC.
 1422 EASTON ROAD • ROSLYN, PA 19001 • 215-657-5660

BASTOC FEATURES

- Supports Microsoft Disk BASIC.
- Full run-time support library is provided.
- Provides conventional BASIC compiler when used in conjunction with a C compiler.
- Produces formatted and structured C code, easily maintained and modified.
- The output of BASTOC may be used directly as input to a standard C compiler.
- Several dialects of BASIC may be translated to C on the same system.
- BASTOC will soon translate CBASIC and Applesoft BASIC.

AVAILABLE NOW

JMI's BASTOC is available now for the IBM PC and PC-compatible computers using PC-DOS or MS-DOS, and the Radio Shack TRS-80, Model 16, running XENIX. BASTOC will be available for other systems soon!

ORDER NOW

The BASTOC single unit binary price is \$350, and includes documentation, media, and shipping. To order, or to get more information, write or call JMI Software Consultants, Inc., 215-657-5660. Check, Money Orders, VISA and MC are acceptable. Circle 400 on inquiry card.

Compute and print client tax returns in minutes

on your microcomputer with **MICRO-TAX[®]**

That's right, in just minutes you can have a client's completed tax return in your hand. Think about it... you increase client volume, you increase your profits. Plus, you save the cost of your computer service bureau—and you have complete client security.

FEDERAL AND STATE PACKAGES TO MEET EVERY NEED. MICRO-TAX[®] offers four Federal tax packages and 25 state packages (fully integrated with the Level II Program), so you can select the programs that best meet your needs:

Level I—Federal Individual Package: for individuals preparing their own taxes.

Level II—Federal Professional Individual Package: for accountants, registered agents, tax attorneys, and other tax professionals.

Level III—Federal Partnership/Corporate Package: for those who prepare Federal Partnership, Corporate, and Subchapter S returns.

Level IV—Overseas Tax Package: addresses the unique tax situations of United States Expatriates.

Levels II, III, and IV have a depreciation module and automatically compute underpayment penalties and minimum tax. In addition, Levels II and III automatically compute self-employment taxes, and Level II computes income averaging.

FLEXIBLE DATA ENTRY. With MICRO-TAX[®] you can organize data entry in a sequence similar to that of manual tax preparation, or you can choose another sequence. The menu driven system makes data entry simple.

MULTIPLE PRINTING OPTIONS. You can input client tax information at the time of interview and produce forms immediately, or enter data during the day and batch print returns at night. MICRO-TAX[®] prints your returns on IRS forms, IRS approved substitute forms, or with transparent overlays.

TAXNET[®]—TELETEXT SUPPORT NETWORK. MICRO-TAX[®] customers can now have access to an electronic mailbox and instantaneous memoboard through the TAXNET[®]

teletext support network. With TAXNET[®] you can send information, ask questions, get answers and updates—directly through your computer and a modem.

TAX ORGANIZER. Now MICRO-TAX[®] offers a Tax Organizer. You get both the software and the forms, so each year, you can send your clients an organizer with the prior year's client data printed on it.

HARDWARE COMPATIBILITY. MICRO-TAX[®] is compatible with your IBM PC/XT, DEC Rainbow, Radio Shack, or any other personal computer with CP/M-80, PC DOS, or MS DOS—from Apple* to Zenith*.

So, take the tedium out of tax preparation—save time and money—Call Micro-Tax[®] for complete details, or call your local dealer.


FULL FEDERAL MICRO-TAX [®] PERSONAL COMPUTER SYSTEMS	1983 FEDERAL FORMS AND SCHEDULES INCLUDED																									PRINTS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
	1040	1040A	1040ES	1118	1118E	1118F	1118G	1118H	1118I	1118J	1118K	1118L	1118M	1118N	1118O	1118P	1118Q	1118R	1118S	1118T	1118U	1118V	1118W	1118X	1118Y		1118Z	1118AA	1118BB	1118CC	1118DD	1118EE	1118FF	1118GG	1118HH	1118II	1118JJ	1118KK	1118LL	1118MM	1118NN	1118OO	1118PP	1118QQ	1118RR	1118SS	1118TT	1118UU	1118VV	1118WW	1118XX	1118YY	1118ZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY	1118ZZZ	1118AAA	1118BBB	1118CCC	1118DDD	1118EEE	1118FFF	1118GGG	1118HHH	1118III	1118JJJ	1118KKK	1118LLL	1118MMM	1118NNN	1118OOO	1118PPP	1118QQQ	1118RRR	1118SSS	1118TTT	1118UUU	1118VVV	1118WWW	1118XXX	1118YYY

**SAVE AT ELEK-TEK
ON PRINTERS**

**HUGE SAVINGS ON
ALL EPSON PRINTERS**


**CALL FOR SUPER
LOW PRICES ON**

RX 80 FT FX 80 FX 100



**EPSON RX-80
275.00**

8750 Ribbon Cartridges for Epson
80 Column Printers4.00



**EPSON MX-100
\$500.00**

**(15 in. wide carriage)
includes Tractor & Friction**

8755 Ribbon Cartridges for Epson
132 Column Printers7.00

Cables for Epson

PA10A 10 ft. 36/36 pin standard parallel	25.00
IB-P10 10 ft. 36/25 pin parallel for IBM	25.00
PAGT 6 ft. 36/16 pin parallel for TI-99/4A	25.00
RS10A 10 ft. 25 pin standard RS-232(full loaded)	21.00
RS1Y RS-232 Y cable for TI-99/4A	35.00

Interfaces

Microtech MCC 2064	65.00
GRAPHSTAR	70.00
GRAPPLER PLUS	120.00
GRAPPLER PLUS (32K) BUFFER	165.00
8148 Ser. (For RX or FX Models)	90.00
8161 IEEE-488 interface	60.00

**DUST COVERS
AVAILABLE FOR
ALL MODELS**

**LETTER QUALITY PRINTERS
\$500—\$1,550
TTX — COMREX — DIABLO**

**CALL TOLL FREE 800-621-1269
EXCEPT Illinois, Alaska, Hawaii**

Corp. Accts. invited. Min Ord. \$15.00 Mastercard or Visa by mail or phone. Mail Cashier's Check, Money Ord., Pers. Check (2 wks to cln.) Add \$4.00 1st item (AK, HI, P.R., Canada add \$10.00 first item) \$1.00 ea. add'l shpg. & handl. Shipments to IL address add 6% tax. Prices subj. to change. **WRITE for free catalog.** Return policy for defective on arrival replacements only: 90 day mfr. wty. **ALL ELEK-TEK MERCHANDISE IS BRAND NEW, FIRST QUALITY AND COMPLETE.**



ELEK-TEK, inc.
6557 N. Lincoln Ave., Chicago IL 60645
(800) 621-1269 (312) 677-7660

who fail to recognize that the user is part of the system.) Support may be categorized as external or internal and passive or active.

Manuals and other documentation are external/passive and should realistically be divided into three levels for three audiences:

- Level 1 (why) is a managerial overview describing the purpose of the program/system, its capabilities, and its limitations.
- Level 2 (how) is an operational guide to the use of the program/system, step by step, function by function.
- Level 3 (what) is the technical reference manual for the programmer or experienced user, detailing the intricacies of each function, the functions' idiosyncrasies and implementations, as needed.

Such manuals and accompanying materials (such as key caps, templates, reference cards, etc.) should meet reasonable standards: Is the text clear, complete, and readable in normal English? Are there clear and useful graphics of proper size and color? Is there a table of contents, an index, and a glossary of terms?

Training (live, video, or audio) is external/active and may occur at multiple levels, depending on user experience and sophistication:

- Level 1 (novice) explains the routine capabilities and the handling of the normally encountered exceptions in the normal fashion (usually "manual" rather than "automatic" mode)—those in which operator errors are harmless or easily recoverable.
- Level 2 (occasional) explains the time-saving and powerful shortcuts that bypass much of the novice-level error checking.
- Level 3 (expert) explains everything else about the system.

Menus and static Help screens are considered internal/passive because they provide support for the user from inside the system but are not generally context-sensitive—they are Markovian in that they read the same

regardless of where the user is in the program's operation or how the (usually confusing) state was arrived at.

On-line context-sensitive Help messages take into account where the cursor is (what field of what screen of what program) and possibly how the user got there. Ideally, when an input is disallowed by the system, these Help messages reference the offending portion of the input and explain what is wrong with it. Better still, there is user control over the explanatory verbosity versus cryptic terseness of the system, depending on the user's current level of experience (novice, occasional, or expert).

Such internal/active on-line user aids (Help messages, menus, and tutorials) should comply with certain behavioral expectations for easy use; for instance, is the Help or menu transition-graph a hierarchical tree? Do the Help and menu structures have escape mechanisms? Are the context-sensitive Help messages and menus accurate?

Consistency, the third C in the software-evaluation checklist, is the best predictor of how well the user will get along with the program/system. While, as Emerson said, "a foolish consistency is the hobgoblin of small minds," a uniform conceptual model smooths the user's interaction with the system. Unpredictable behavior, whether in a human, a program, or a St. Bernard, is an impediment to understanding.

A good program relates to people who sometimes do make mistakes they would like to recover from and who do not always refer to things in the same way. An "undo" facility, where practical, is far better than merely asking five times whether the user is absolutely, positively, sure that all those files should be deleted. After a while, such redundancies merely irritate, and the overload of too many warnings actually reduces the attention paid to them.

Aliasing, allowing the same command or option to be expressed in different ways, is a human touch with real value to the novice and occasional user. If one form is faster or

The truth about information management:

The Knowledge Manager beats dBASE over 250 ways.

"... the leading seller is no longer the best."


You get more from the Knowledge Manager. Relational data management, ad hoc queries (like IBM's SQL/DS), spreadsheet, math and statistics, printed forms management, screen I/O management, a full-scale programming language. All for less than the list price of dBASE. Plus you can now get a text processor, a forms painter, color graphics and a run-time version.

Records	dBASE II	KnowledgeMan
1,000	6.15	5.38
2,000	14.93	11.13
5,000	64.16	33.73
10,000	205.50	69.53

*K-MAN V1.05, dBASE II V2.3D, IBM XT, 256K RAM, heavily populated directory.

John - "K-man" not only looks superior to dBASE, I've checked it against other & it seems to be a generation or two ahead!
J.P.

All completely integrated: So you can do just about anything you wish. Like financial modeling, order entry, job costing or decision support.

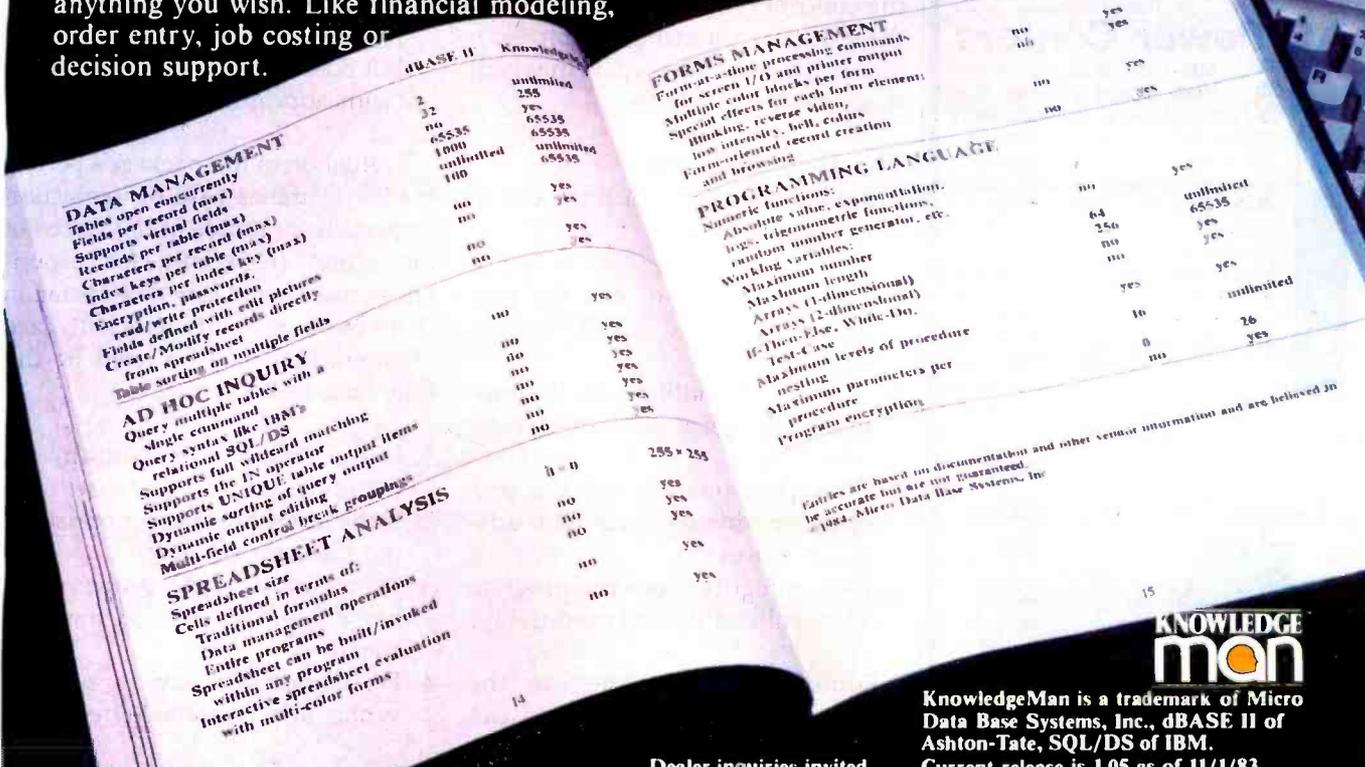

KnowledgeMan is a trademark of Micro Data Base Systems, Inc., dBASE II of Ashton-Tate, SQL/DS of IBM. Current release is 1.05 as of 11/1/83.

Dealer inquiries invited.

- Please send me:
- Free feature-by-feature comparison
 - Forms painter information
 - Graphics information
 - Text processor information
 - Run-time package information
 - Please accept my order for KnowledgeMan Package \$500.00
 - Shipping and Handling* 10.00 (Indiana residents must add 5% sales tax—\$25.00)

- Machine: _____
 Operating Systems:
 PC DOS MSDOS CP/M-86
 Disk Format:
 8" IBM-3740 SS/SD

- 5 1/4" IBM PC SS
- 5 1/4" Victor/Sirius
- 5 1/4" DEC Rainbow (Dig. RX50)
- *Add \$20.00 if outside U.S., Canada or Mexico
- Check or money order enclosed (must be drawn from U.S. bank in U.S. currency)
- MasterCard No. _____
- VISA No. _____
- American Express No. _____
- Expiration Date _____
- Bank No. (if M.C.) _____
- Signature _____

VISA and MasterCard orders may be placed by phone (317) 463-2581.

Name _____
 Title _____
 Company _____
 Phone (____) _____
 Address _____
 City _____
 State _____ Zip _____
 Send To:

 **MDBS/Consumer Products**
 P.O. Box 248
 Lafayette, IN 47902
 Phone: (317) 463-2581

Or Contact Your Local Dealer.
 PRICES SUBJECT TO CHANGE WITHOUT NOTICE

Multi-function RS-232 Transfer Switches

MFJ-1240
\$79.95

Choice of
8 models



Multi-function RS-232 transfer switches let you switch your computer among printers, modems, terminals, any RS-232 peripherals; monitor data/line failure, protect data lines from surges, and use as null modem for less cost than a switch alone.

Switches 10 lines (2, 3, 4, 5, 6, 8, 11, 15, 17, 20). LED data/line indicators monitor lines 2, 3, 4, 5, 6, 8, 20. Metal oxide varistors protect data lines 2, 3 from voltage spikes and surges. Push button reverses transmit-receive lines (2, 3). PC board eliminates wiring, crosstalk, line interference. Connects any one input to any one output.

Model	Price	In	Out	Model	Price	In	Out
MFJ-1240	\$79.95	1	2	MFJ-1244	\$139.95	3	3
MFJ-1241	\$99.95	2	2	MFJ-1245	\$169.95	3	5
MFJ-1242	\$119.95	2	3	MFJ-1246	\$199.95	5	5
MFJ-1243	\$119.95	1	4	MFJ-1247	\$99.95	1	2

Switches 20 lines

AC Power Centers

MFJ-1108
\$99.95

MFJ-1108, \$99.95. Add convenience, prevent data loss, head bounce, equipment damage. Relay latches power off during power transients. Multi-filters isolate equipment, eliminate interaction, noise, hash. MOVs suppress spikes, surges. 3 isolated, switched socketpairs. One unswitched for clock, etc. Lighted power, reset switch. Pop-out fuse. 3 wire, 6 ft. cord. 15A, 125V, 1875 watts. Aluminum case. Black. 18x23/4x2 in. MFJ-1107, \$79.95. Like 1108 less relay. 8 sockets, 2 unswitched. MFJ-1109, \$129.95. Like 1107 but intelligent. Switch on device plugged into control socket and everything else turns on. Others available.



Acoustic/Direct Coupled Modem



Use with any phone anywhere
MFJ-1233
\$129.95

MFJ-1233 Acoustic/Direct Coupled 300 baud modem. Versatile. Use with virtually any phone, anywhere. Use battery or 110 VAC. Direct connect mode: Plug between handset and base. Use with single or multi-line phones. Acoustic coupled mode: Use with phones without modular plugs. Quality muffs give good acoustic coupling, isolates external noise for reliable data transfer. Originate/answer. Self test. Carrier detect, ON LEDs. RS-232, TTL compatible. Reliable single chip modem. Crystal controlled. Aluminum cabinet. 9x1 1/2x4 in. Other models available.

Order from MFJ and try it. If not delighted, return within 30 days for refund (less shipping).

One year unconditional guarantee.

Order yours today. Call toll free 800-647-1800. Charge VISA, MC. Or mail check, money order. Add \$4.00 each for shipping and handling.

CALL TOLL FREE ... 800-647-1800

Call 601-323-5869 in MS, outside continental USA.

**MFJ ENTERPRISES
INCORPORATED**

921 Louisville Road, Starkville, MS 39759

more efficient than others, it doesn't hurt to have the system remind the user once in a while of the shortcut; in fact, it's an ideal and painless way to learn because it hands the user a tool at the precise moment needed.

Context dependence or independence refers to commands meaning conceptually identical actions in different program contexts. This can be as simple as having Control-D always meaning delete in word-processing, database-management, and spreadsheet programs. It could mean that Control-D deletes different things depending on where the user is in the program—referring to a directory, file, page, paragraph, sentence, word, or character. The point is that the concept remains consistent with the specifier (command, option, etc.), independent of the context in which it occurs.

The Human Factor

Evaluation criteria for programs to serve people include:

1. Routine operation: can the program accept and handle normal cases?
2. Exception handling: can the program recognize and treat rarer cases?
3. Basic performance: can the program provide its users with adequate power?
4. Basic integrity: does the program work coherently and predictably?

Routine operation, the way the program works in normal cases, can be rated according to a checklist of pertinent questions:

1. Does the program have appropriate default conditions?
2. Are commands/keys/menus consistent and reasonably mnemonic?
3. Is system optimization for rule-versus exception-handling appropriate for the actual normal/abnormal mix?
4. Can the system adapt to user needs and preferences and does it support "scripting" or execution of stored commands?

Exception handling, the program's

treatment of various levels of less frequent cases, should be geared to the overall efficiency of the system but balanced for user comfort. If exceptions that occur 1 percent of the time were to require 10 times the normal processing in order to save 10 percent processing on the other 99 percent, the trade-off would be wise, because 10 times .01 plus .9 times .99 is less than one. The following useful questions can be asked to rate exception handling:

1. Can the user undo errors?
2. Can the user switch between normal and exception modes of processing—for example, between "command" and "data" modes?
3. Does the program allow a user to perform all "seemingly unwise," but possibly necessary, operations (with appropriate warnings)?

Evaluation of the package's performance examines ease of interaction (especially for novice users), speed of interaction (especially for experienced users), and speed of operation (both measured and predicted). Ease of interaction may be rated by the following major points:

1. Is the system command-driven, menu-driven, or otherwise?
2. Is the level of detail appropriate or too great for comfort?
3. Do menus have the proper number of options (five to nine entries)?
4. Do commands have a uniform syntax and reasonable options?

Speed of interaction is sometimes at odds with ease of interaction, so it is valuable to have multiple modes or levels for the various levels of user sophistication and experience. Speed is a phantom quality and should fall behind ease of use in overall ranking; a system that cannot be used without a manual has a speed approaching zero. Therefore, these questions are pertinent: Are lengthy commands and sequences readily avoidable? If Shift and Control characters are used, are they used reasonably? Can prompts, menus, and Help messages be suppressed or avoided?

NEVADA SOFTWARE

FOR CP/M. TOP QUALITY, BOTTOM PRICE.

Nevada makes it easy and economical to get the software you want and need. Need a better BASIC? We've got it. Is BASIC not solving your business or engineering problems? Nevada COBOL or FORTRAN will. The media praises Nevada, and it's priced right: just \$39.95—about 1/10 what comparable quality costs. For about half the price of one competitive package, you can own the *entire* Nevada Software library! So don't wait; order one or two or all of our bargains—today.

NEVADA BASIC™
Diskette & 220-page manual
For business, education, engineering, science

Finally, a better BASIC. This straightforward language lets beginners write useful programs without limiting them to simple programs. New Nevada BASIC's interpreter has Prof. Starkweather's great built-in full-screen text editor. You can define single- and multi-line functions. Plus there are full-matrix operations, Random Access and Sequential files, program execution with a simple command, BCD Math—no round-off errors. With Nevada BASIC, micros can run like minis costing thousands more.

NEVADA COBOL™
Diskette & 165-page manual
For business

Whether you do business computing or learn computing for business, COBOL is the language; more business application software is in COBOL than in all other languages combined. Based on ANSI-74 standards, Nevada COBOL offers many

advanced features: Random Access and Sequential files, debugging capability, COPY statement, character string, 16 bit binary and decimal data types. Colleges use the fine documentation as class room texts. It's field-proven by 10,000+ worldwide business, government and education users. Join them.

COBOL Application Package—Book I.
Superior user documentation that saves even experienced programmers many hours.

NEVADA FORTRAN™
Diskette & 214-page manual
For science & engineering

"If you want to learn or teach someone FORTRAN, this is the package to buy." ACCESS, March/April 1983. For

learning and teaching, for scientists and engineers, Nevada is the perfect FORTRAN. Based on ANSI-66 standards (FORTRAN IV), its advanced features include IF...THEN...ELSE constructs, COPY statement, CHAINing with COMMON, TRACE style debugging, and 150 verbal error messages. And you can intermix in-line FORTRAN and Assembly Language statements for special micro needs. Requires 48K RAM. If you're shopping for FORTRAN, look no further.

NEVADA PILOT™
Diskette & 131-page manual
For dialogue

Perfect for training, testing, virtually all programmed instruction, and word puzzles. It's the ideal companion language for BASIC, COBOL, and FORTRAN application packages, because it so quickly solves training and documentation problems. Nevada PILOT meets all PILOT-73 standards and has many new features including a built-in full-screen text editor. Prof. Starkweather's

documentation is exceptional; the manual comes with 10 free programs. See *MICROCOMPUTING* review, January 1983, and you'll be convinced.

NEVADA EDIT™
Diskette & 59-page manual
For text editing

"A well-thought-out product with excellent documentation and an astoundingly low price." *MICROCOMPUTING*, May 1983.

Now, high-quality text editing for micros. A character-oriented full-screen display editor, Nevada EDIT is great for program editing as it's specifically designed to create COBOL, BASIC, and FORTRAN programs. Simple to configure, you customize tab stops, default file type, keyboard layout, and CRT by menu selection. Nevada EDIT may pay off better than any software purchase you've made.



EACH ONLY \$39.95
COBOL Application Package—Book I: \$9.95

Money back guarantee: you must be completely satisfied, or return the package(s)—in good condition with the sealed diskette(s) unopened—within 30 days, and we'll gladly refund your money.

CP/M is a registered trademark of Digital Research, Inc. TRS-80 is a registered trademark of Tandy Corp. Apple II is a trademark of Apple Computer, Inc. Osborne is a registered trademark of Osborne Computer Corp. Xerox 820 is a trademark of Xerox Corp. Kaypro is a trademark of Non-linear Sys. Health/Zenith is a trademark of Heath Corp. IBM is a trademark of International Business Machines, Corp. Nevada BASIC, Nevada COBOL, Nevada FORTRAN, Nevada PILOT, Nevada EDIT, and Etis Computing are trademarks of Etis Computing, Inc. © 1983 Etis Computing, Inc.



Send to
ELLIS COMPUTING, INC.
3917 Noriega Street
San Francisco, CA 94122 Phone 415/753-0186

Please send me: **Software Packages**
 BASIC COBOL FORTRAN PILOT EDIT

Disk Format

- 8" SSSD (Standard CP/M IBM 3740)
- 5 1/4" Diskette for:
 - Access
 - Apple CP/M
 - DEC VT 180
 - Epson QX-10
 - Heath Hard Sector (Z-89)
 - Heath Soft Sector (Z-90)
 - IBM-PC (Baby blue or big blue card)
 - Kaypro Double Density
 - Micropolis Mod II (Vector Graphic)
 - NEC PC 8001
 - Northstar Double Density
 - Northstar Single Density
 - Osborne (Single Density Disk)
 - Sanyo
 - Superbrain DD, DOS 3.X (512 byte sec)
 - Televideo
 - TRS-80 Model I (Relocated to 4200 hex)
 - Xerox 820 (Single Density)

Send my order for _____ packages @ \$39.95 each Total _____

COBOL Application package @ \$9.95 each Total _____

California residents add 6 1/2% Sales Tax. Sales Tax _____

Outside North America, add \$6 per package for shipping. Shipping _____

(Postage paid within North America.) Checks must be in U.S. dollars and drawn on a U.S. bank.

Check enclosed Mastercard VISA TOTAL _____

Card # _____ Exp. Date _____

Signature _____

Ship to: Name _____

Street _____

City/State/Zip _____

The CP/M operating system, an 8080, 8085, or Z-80 microprocessor, and 32K RAM are required. Note: Double Density drives can read Single Density diskettes.

Speed of operation has already been discussed from the system's point of view, but what happens "when the ball is in the user's court"? The very fact that the system typically waits while the user thinks, and then rushes to catch up, is a problem with many interactive programs that cannot be solved except at the operating-system level. Ideally, in menu and similar lengthy disk-fetch and screen-painting sequences, if a 2-second wait after 10 seconds of deciding is unacceptable to the user, all (five to nine) menus possible at the next lower level can be prefetched in preparation for the user's choice. Thus, response can be improved when the operating system allows "interrupt"-type operation.

The following questions help point up speed traps in a program:

1. Is inter-key response time acceptable in all circumstances?
2. Is the command/menu-selection processor response acceptable?
3. Is the disk-fetch and process-swap response time acceptable?

Integrity of the package involves not only function but self-protection. With this in mind, use the following checklist:

1. Does the system incorporate reasonable self-protection mechanisms for stored data and for the program itself?
2. Does data integrity require perfect hardware operation? Is the program tolerant of faults in the processor, disk, telecommunication devices, and operating system?
3. Is "good" data reasonably protected against corruption by unreasonable data?
4. Can questionable data be entered but marked as "not passing edits" or other tests?

Conclusions

One final and valuable lesson from the physical sciences is a recognition of the legitimacy of an experiment that reaches no conclusion, that proves no cherished theory, that uncovers no fundamental truth. It may be unfortunate that no single univer-

sal software evaluation formula, no more complex version of the hardware FOM, can be found. Then again, perhaps that is not such a desirable goal after all.

In the end, software performance evaluation comes back to human judgment—to the test pilot, the drama critic, the gourmet, or any individual. The complexity and variety of software packages, the individual tastes and preferences, and the varying modes and environments all come into play to work against easy answers to the software-evaluation problem. As in life itself, software and its users benefit from the rich diversity, the complex specialization, the adaptability, birth, growth, and death of programs according to the same rules that have led to the existence of the programs' creators. ■

Brian Boyle is managing analyst for the Software Information Service of Gnostic Concepts Inc. (951 Mariner's Island Blvd., Suite 300, San Mateo, CA 94404).

IBM PC-8087 SUPPORT FROM MICROWARE

87FORTRAN/RTOS™ is a MicroWare adaptation of the Intel Fortran-86 compiler, a full ANSI-77 subset with 8087 extensions and overlays. It generates in line 8087 code allowing use of all 8087 data types, including 80 bit reals and 64 bit integers. The complete subset I/O is supported including Internal and External Files and List Directed I/O. 87FORTRAN/RTOS uses the Intel large memory model, allowing data/code structures which utilize the full megabyte. The compiler provides direct access to 8088 ports and supports logical operations on 8 and 16 bit operands normally treated in assembly language. It is ideal for large applications which are number intensive or control hardware.

87PASCAL/RTOS™ is Intel's ISO-Standard Pascal with 8087-8088 exceptions. These make it possible to use all the 8087 data types directly, while generating modules in one of the three Intel Memory Models.

87FORTRAN/RTOS and

87PASCAL/RTOS include RTOS and support for one year. each \$1350

RTOS™ — Real Time Multi-Tasking Operating System

RTOS is a MicroWare configured version of iRMX-86, Intel's legendary operating system. It includes the Intel Assembler, ASM-86, which supports the 8086, 8087, 8088 and 80186. All modules produced by the compilers or ASM-86 are combined, loaded and managed with the Utilities LINK-86, LOC-86 and LIB-86. These products make it possible to load modules anywhere in RAM, and resolve external references between runtime modules. Overlays with a single root job are supported by the linker. RTOS/ASM-86/LINK-86/LOC-86/LIB-86. \$600

iRMX-86, LINK-86, ASM-86, LOC-86 and LIB-86 are trademarks of Intel Corp. IBM PC is a trademark of IBM Corp.

PC TECH JOURNAL REVIEW: "The MicroWare package is preferable ... it executes the basic operations more rapidly and MicroWare provides a free update service."

87BASIC™ includes patches to the IBM Basic Compiler and both runtime libraries for USER TRANSPARENT and COMPLETE 8087 support. Provides super fast performance for all numeric operations including trigonometrics, transcendentals, addition, subtraction, multiplication, and division. \$150

87MACRO™ - our complete 8087 software development package. It contains a "Pre-processor" which converts 8087 instructions into 8088 escape codes, source code for a set of 8087 macros, and an object library of 8087 functions which include transcendentals, trigonometrics, hyperbolics, encoding, decoding and conversions. \$150

PLM-86 with RTOS. \$1100

MICROWARE BEST SELLERS!

8087-3 CHIP in stock with 180 day warranty and 8088 exchange \$199

FASTPAK™ +8087 includes one runtime library (87BASIC or 87MACRO), the 8087 chip, the 87/88GUIDE, and installation instructions. \$375

MATRIXPAK™ manages a **MEGABYTE!** Written in assembly language, our runtime package accurately manipulates large matrices at very fast speeds. Includes matrix inversion and the solution of simultaneous linear equations. Callable from MS Fortran 3.13, MS Pascal 3.13, SSS Fortran, and MicroWare 87MACRO, 87BASIC, and RTOS compilers. each \$150

87/88GUIDE - an excellent tutorial on writing 8087 code and interfacing it with compilers. Full of code that runs! \$30

MICROSOFT FORTRAN 3.13

MICROSOFT PASCAL 3.13 These new IEEE compatible compilers support both double precision and the 8087. each \$289

MICROSOFT C COMPILER

includes Lattice C and the MS Librarian. \$399

64K RAM Upgrade.	\$59
SuperSoft Fortran.	340
SSS 8087 Support.	50
SuperSoft Voice Drive.	895
87BASIC+.	75
TRACE86 Utility.	125
Microsoft Business Basic Compiler.	495
Computer Innovations C86.	345
STSC APL★PLUS/PC.	545
64K QUADRAM.	319
Sandstar WS2 Hard Disk System.	1355
Novation 212 SmartCat.	495
HALO Graphics.	call
Energraphics.	call

Micro Ware

P.O. Box 79
Kingston, MA
02364
(617) 746-7341

**You Can
Talk To Us!**

Printers

C. ITOH

Prowriter



120 cps, 4 fonts (includes proportional), 8 sizes, 160 x 144 dpi, friction & tractor feed. A worthy rival of Epson. The BPI is IBM-PC compatible.
 Prowriter \$399.88
 Prowriter BPI (IBMPC) 459.88

Starwriter

40 cps, 136 columns 10 & 12 pitch. The Printmaster is the 55 cps version. The A10 Starwriter (18 cps) has the same specs.
 A10 Starwriter..... \$609.88
 Starwriter 1219.88
 Printmaster 1569.88
 A10/F10 Tractor Feed 289.88
 A10/F10 Sheet Feed 619.88

DIABLO

620 \$999.88
 620 Tractor Feed 189.88
 630 1979.88
 630 Tractor Feed 289.88
 620/630 Sheet Feed 619.88

EPSON

RX/FX Epsoms CALL

IDS/DATAPRODUCTS

P-480 (MicroPrism) \$429.88
 P-Series 132 1239.88
 w/4-color 1669.88

INFORUNNER

Riteman \$349.88

MANNESMANN TALLY

MT-160 L Spirit



The MT-160 L (160 cps) features 8 fonts (including a correspondence font), parallel & RS-232C interfaces, friction/tractor feed. The MT-180 L is a 136 column version. The Spirit (80 cps) features 4 fonts, italics, dot graphics & friction/tractor feed.
 MT-180 L \$649.88
 MT-160 L 849.88
 Spirit 329.88

MEMOTECH

DMX-80

The DMX-80 printer (80 cps) features 10, 12 & 17 cpi, sub/super scripts, underline, friction/tractor feed & dot graphics. It uses most Epson code, so it's easily installed on software. Service nationally by Panasonic.
 DMX-80 \$389.88

NEC

2010/2030 \$879.88
 2050 999.88
 3510 1549.88
 3530 1639.88
 3550 1899.88
 2000/3500 Tractor 239.88
 2000/3500 Sheet Feed 619.88
 7710/7730 2159.88

Roland DG DM-121 Monitors

Superior quality & workmanship characterizes the Roland DG DM-121 series. A composite video output (NTSC) on a 12" diagonal screen, the DM-121 features 80 columns by 25 lines, 18MHz bandwidth, 640 dots by 200 lines video resolution. Green or amber screen.

Roland DG DM-121G (12" green) \$174.88
 Roland DG DM-121A (12" amber) \$179.88



OKIDATA

Microline Series



The 92/93 printers (160 cps) & the 84 (200 cps) are exceptional. Tough, reliable, they produce superior draft quality, correspondence quality & graphics. Features include 10, 12 & 17 cpi, a correspondence font, sub/super scripts, underlining, dot graphics (120 x 144 dpi) & friction/pin feed (adjustable tractor is optional on the 92, standard on the 93).

The PC Plug-n-Play ROMs turn the 92/93/84 into 100% IBM-PC compatible printers. Our very best selling printer line.

The 84 Step 2 (200 cps) is a high-speed matrix printer with 10, 12, 17 cpi, plus correspondence modes in all sizes. Dot graphics are standard (120 x 144 dpi).
 Microline Series \$CALL

QUADRAM

QuadJet \$CALL

SMITH CORONA

Messenger



The Memory Correct III Messenger (12 cps) features 10, 12 & 15 cpi, variable line spacing, backspace, auto-correction and a dual parallel/RS-232C interface. True daisy wheel printing makes it an exceptional typewriter & printer. Ideal for the home or small office.
 Memory Correct III Messenger 609.88

SILVER REED

EXP 550/500



The EXP-550 (18 cps) & the EXP-500 (12 cps) features 10, 12 & 15 cpi, variable line spacing.

backspace, & Diablo 1610/20 code emulation. Optional tractor feed.

EXP-550 (Par.) \$669.88
 EXP-550 (Ser.) 689.88
 550 Tractor 139.88
 EXP500 (Par.) 439.88
 EXP-500 (Ser.) 469.88
 500 Tractor 129.88

STAR MICRONICS

Gemini/Delta Radix Series



Gemini 10X \$299.88
 w/RS-232C 399.88
 Gemini 15X 419.88
 Delta 10 529.88
 Delta 15 669.88
 Radix 10 719.88
 Radix 15 839.98
 PowerType (18 cps Letter Quality) 399.98

TOSHIBA

P 1350 \$1759.88

CABLES

Parallel cables for the Columbia MPC, IBM-PC, Osborne-1, TRS-80 (Model I/II/III/IV & 16), Standard Centronics (Male-to-Male & Male-to-Female) \$39.88
 VIC-20/Commodore 64 69.88
 Apple II/II+/IIfx 89.88
 Parallel Card/Cable 89.88

QUADRAM

Microfazer

A print buffer with pause, copy & reset controls. It comes with a 9V power supply and cable to printer. There are so many buffer sizes (from 8K to 512K), & so many configurations (Parallel/Parallel, Parallel/RS-232C, RS-232C/Parallel & RS-232C/RS-232C) that you should call (800) 343-0726 for prices.

Monitors

NEC



JB 1205M (amber) \$179.88
 JB 1201M (green) 159.88

AMDEK

300A (12" amber) \$164.88
 300G (12" green) 149.88
 310A (amber) CALL

QUADRAM

QuadChrome



690 x 240 resolution, 80 columns x 24 lines, 16 colors & exceptional performance. Cable included.
 QuadChrome(RGB) \$509.88

PRINCETON GRAPHICS

HX-12

Same spec's & performance as the QuadChrome.
 PGS HX-12 (RGB) \$499.88

Modems

US ROBOTICS

Password PC Modem

0-300/1200 baud direct-connect modem with auto-dial/answer, full/half duplex, voice/data. Uses LSI technology. Cables & power supply included (specify type of computer). The PC Modem has all of the above, plus a parallel port, real-time clock & memory to 256K.
 Password \$379.88
 PC Modem \$CALL
 *Courier 479.88
 *Uses Osborne-1 modem port & includes Telepac communications software for the Osborne.

DC HAYES

Smartmodem



0-300 or 0-300/1200 baud direct-connect modems with auto dial/answer, full/half duplex, power supply & modular cable (RS-232C cable optional). 1200B is an in-board modem for the IBM-PC & includes Smartcom II
 The MicroModem IIe is a 300 baud in-board modem for the Apple II series. Includes SmartCom I
 300 \$219.88
 1200 539.88
 1200B (IBM PC) 459.88
 Micromodem IIe \$259.88

Peripherals

For the IBM-PC...

We carry a variety of peripherals for the IBM-PC, including: QuadramQuadboards, Quad 512+, QuadLink, QuadDisk, Quad I/O, QuadJet & single-function boards; AST products; Tandon's TM-100-2 double-sided drives; QCS's 12, 20 & 26 MB Hard Disk Subsystems; a Hard Disk/Tape subsystem; Tecmar's Graphics Master; the Paradise Multi-Display Card; Titan MultiFunction Cards; & the Eagle PC and the Columbia 1600-1 personal computer systems.

Call (603) 881-9855 for information; call (800) 343-0726 for prices & orders.

For the Apple II...

We also carry numerous Apple II/II+/IIfx peripherals, including: TBL Products Cooling Fan; the Pkaso Printer Cards; Microsoft's Z80 Cards, RamCards & Premium Packs; Videx's Video-Term, UltraTerm & Enhancer II; Rana Elite Disk Drives; AMT's MicroDrive; Saturn Systems Accelerator II & Memory Boards; Quadram's eRAM 80 Column Card; & the Novation Apple Cat II. We also carry the Franklin Ace 1000 & Ace 1200 OMS personal computer systems.

Call (603) 881-9855 for information; call (800) 343-0726 for prices & orders.

Information/Orders:
(603) 881-9855
Orders Only:
(800) 343-0726

No Hidden Charges:

- You get FREE shipping on all orders within the 48 states.
- We never charge extra for credit card purchases.
- Credit cards are not charged until order is shipped.
- We accept CODs up to \$1000 (add \$10 handling fee per order) payable with certified check or money order.
- Easy payment terms: We accept all major credit cards, certified checks, money orders, company checks or personal checks (allow 21 days for personal checks).
- We have a \$50 minimum order.
- Company Purchase Orders are accepted on a limited basis & upon approval only. Sorry, no APO or foreign orders accepted.
- All our equipment is shipped with full manufacturer's warranty. We are an authorized dealer for all products we sell to insure full warranty support, & we're authorized for warranty work on a number of printers. We also offer extended warranty plans for many printers.
- We prepared this ad in January, & prices do change, so call to verify them.
- Our Computer Showroom is now open in Amherst, New Hampshire, five miles west of Nashua (one hour from Boston).
- For a catalog, send \$1 with your name, address & the type of computer you own.

HIGH TECHNOLOGY AT AFFORDABLE PRICES

THE BOTTOM LINE

MILFORD, NH 03055 □ TELEPHONE (603) 881-9855

Circle 39 on inquiry card.

www.americanradiohistory.com





CRAFTSMEN OF THE NEW TECHNOLOGY.
BEST PRICES WITH QUALITY SUPPORT* ON SOFTWARE AND HARDWARE.

ORYX SYSTEMS

QUALITY DISCOUNTS

APPLE/ FRANKLIN

ASHTON-TATE	
d-Base II	\$ 389
ASPEN SOFTWARE	
Grammatik	\$ 60
Proofreader	42
BEAGLE BROS.	
Apple Mechanic	\$ 22
DOS Boss	17
Utility City	22
BRODERBUND	
Bank Street Writer	\$ 45
General Ledger w/AP	305
Payroll	275
CDEX	
Visicalc Training	\$ 45
CHARLES MANN	
Class Scheduling	\$ 299
CONTINENTAL SOFTWARE	
Home Accountant	\$ 49
DOW JONES	
Market Analyzer	\$ 245
Market Manager	219
Microscope	529
HOWARD SOFTWARE	
Tax Preparer '84	\$ Call
LINK SYSTEMS	
Datafax	\$ Call
Datalink	79

LOGO CORNER

Krell Logo

MICROPRO	
Wardstar (Special) w/ CP/M Card, 7 col. & 64K)	\$ 350
Infostar (Includes CP/M, 70 col., 64K)	350
Pro Pak (W5/MM/SS/Index)	399
MICROSOFT	
Cobol-80	\$ 499
Fortran-80	145
TASC Compiler	119
A.L.D.S.	79
Multiplan (DOS)	169
OMEGA	
Locksmith	\$ 69

PEACHTREE (CP/M)	
Peachpak 40 G/L + A/R + A/P (Special)	\$ 215
Series 40 G/L, A/R, A/P ea.	195
Peachcalc	279
Telecommunications	279
PENGUIN SOFTWARE	
Complete Graphics	\$ 50
Graphics Magician	39

Complete Graphics/ Apple Tablet	86
SIERRA DESIGN	
Homework	\$ Coll
SOFTTECH	
Basic Compilers	
Runtime	\$ 169
Softteach	94
UCSD P-system Set	469
SOFTWARE PUBLISHING	
PFS: File	\$ 79
PFS: Graph	79
PFS: Report	79
SUPERSOFT	
Basic Tutor	\$ 79
Fortran	299
SYSTEMS PLUS	
Landlord	\$ 375
VISICORP	
Visicalc (II or III)	\$ 165
Visischedule	195

CP/M SOFTWARE

COMPUVIEW	
*V-Edit 8080 Z80, IBM/PC	\$ 130
*V-Edit CP/M 86, MS DOS	160
DIGITAL RESEARCH	
*Pascal MT + W/SPP	\$ 389
MAC-PLUG	149
ZSID (Z80) Debugger	85
CP/M 2.2	125
C Basic 2	95
PL/1-80	375
C Basic Compiler (CB-80)	299
Access or Display Mgr.	299
C Language/compiler	260
Concurrent CP/M 2.0	225
All 8" - 86 Version of Above	\$ Call
INFOCOM	
*Deadline	\$ 49
*Starcross	39
*Suspended	39
*Zork, I, II, III (each)	39
Planet Fall	49
LEXISOFT	
*Spellbinder	\$ 239
MARK OF THE UNICORN	
*Final Word	\$ 199
MICROPRO	
*WordStar	\$ Call
*InfoStar	\$ Call
*Pro-Pack (W5/MM/SS Index)	\$ Call
All others	\$ Call
MICROSOFT	
Basic 80	\$ 239

d-BASE II CORNER

Ashton-Tate	
d-Base II	\$ Call
Bottom Line Strategist	259
FPL	410
Friday	189
Human Soft	
d-Base Plus	\$ 95
Fox & Geller	
Quick Code	\$ 175
D Util	58
Software Banc	
d-Base II User's Guide: w/ d-Base II Purchase	\$ 15
w/o d-Base Purchase	20
Anderson-Bell	
Abstat	\$ 349
Tylog Systems	
d-Base Window	\$ 199

*All above available on PC-DOS

Basic Compiler	249	PICKLES & TROUT	
Fortran 80	330	CP/M for TRS-II	\$ 180
Cobol 80	449	PRO/TEM SOFTWARE	
Macro 80	130	*Footnote	\$ 105
MuMath/MuSimp	189	REVASCO	
MuLisp/MuStar	155	Z80 Disassembler	\$ 85
*Multiplan	169	SORCIM	
		*Supercalc III	\$ Call
		Superwriter (w/Speller & Mailer)	\$ 169



PEACHTREE CORNER

▶ PeachPak 4 (GL, AP, AR)	\$ 215
▶ General Ledger / Accounts Payable / Accounts Receivable / Sales Invoicing / Inventory Control / PeachPay Payroll	Each 389
▶ PeachText	160
▶ PeachText w/ Random House Thesaurus	195
▶ Spelling Proofreader	95
▶ PeachCalc	90
▶ Job Cost System	399
▶ Client Posting & Accounting	399
▶ Graphics Language	259
▶ Business Graphic System	199

MICROSTUF		SELECT	
*Crosstalk	\$ 109	Select Word Processor	\$ 329
NORTHWEST ANALYTICAL		STAR SOFTWARE SYSTEMS	
*Statpak	\$ 365	*Legal Time, Billing	845
OASIS		Property Mgmt.	845
The Word Plus	\$ 103	*Acc't Partner	299
Punctuation and Style	99	SUPERSOFT	
ORGANIC SOFTWARE		*Diagnostic II	\$ 89
*Datebook	\$ 229	Disk Doctor	74
*Milestone	229		

FORMATS AVAILABLE

All prices below are for B" standard. Other formats are available. Some formats subject to "Download" fee and require minimum 2 weeks for delivery. Please inquire.

*Fortran 4	299
Basic-8086	225
C Cross Assembler	400
*ScratchPad	187
T MAKER III	215

IBM/PC

Please see CP/M listing. All products with a * in front are also made for PC/DOS and are priced the same unless otherwise specified.

ALPHA SOFTWARE	
Doza Base Mgr. II	\$ 179
Mailing List	72
Executive Pkg.	105
Type Faces	79
Question	35
Apple-IBM Connection	189
CENTRAL POINT	
Copy II PC	\$ 34
CONDOR III	
w/Training	\$ 445
CONTINENTAL	
Home Accountant	\$ 89
DIGITAL RESEARCH	
Concurrent CP/M 86	\$ 225
CP/M-86	39
Cobol 86	499
Pascal MT + 86 (MS DOS)	375
SPP 86	130
C Basic 86	135
Pascal MT+ (PC/DOS)	385
DR Logo	109
DOW JONES	
Market Analyzer	\$ 245
Market Manager	219
ECO-SOFT	
Microstar	\$ 230
FINANCIER	
Tax Series	99
Financier II	\$ 119
GRAPHIC SOFTWARE	
Super Chartman II	\$ 299
Super Chartman IV	199
Bath (above)	350
LEXISOFT	
SpellBinder	\$ 239
LIFETREE	
Volkswriter	\$ 135
PEACHTREE	
Please see listing under CP/M	
PeachText 5000	\$ 215
SORCIM	
Supercalc III	\$ Call

SUPERSTOT	
C Compiler - 8086	\$ 350
Star Edit	180
Disk Edit	75
Basic Compiler	225
Fartron IV PC/DOS	
or 8086	299
8087 Support	40
Diagnostics II	89
Scratch Pad	187
SYSTEMS PLUS	
Landlord (prop mgmt)	\$ 375
Runtime Basic	
(req'd for above)	45
... and many more!	

APPLE/ FRANKLIN BOARDS

ALS CP/M Card	\$ 299
ALS Smarterm	249
ALS Z-Card II	142
ABT Keyboard	99
Axlon Ramdisk 128K	299
Bit 3 Dual Comm-plus	209
CCS 7710 Asynch Serial	119
Central Point Alaska	119
East Side Wild Card	110
Microsoft 16K Ramcard	69
Microsoft Softcard	219
Microsoft Softcard +	429
Microsoft Premium	
Softcard (III)	335
Microtek Printer I/F	75
Microtek Dumping-16	195
Microtek Dumping-GX	119
Mountain A-D/D-A	279
Mountain Music	
System w/Software	299
PCP 4 MHz Appli-	
Card + 88 Card	599
PCP 88 Card 16 Bit	
+ 64K	475
Prometheus Versacard	159
Prometheus Graphiti	
Card	99
SSM ASIO Serial I/F	
w/cable	129
SSM AIO-2 Serial/	
Parallel	179
Street Echo II Speech	
Synthesizer I/F	129
Tymac Parallel I/F	
w/cable	79
Videx Display	
Enhancer	99
Videx Display	
Enhancer II	109
Videx Func. Strip	59
Videx Videoterm	
VT-600	235
Videx Ultraitem	299
Wesper 16K Ram Card	69

Please:

- ▶ Wisconsin residents add 5% for sales tax.
- ▶ Add \$3.50 for shipping per software and light items. For multiple and other items, call.
- ▶ Foreign — add 15% handling & shipping for prepayment. (Int'l money order.)
- ▶ Prices are subject to change without notice.
- ▶ All items subject to availability.

Store prices are strictly retail.

ORYX SYSTEMS, INC.

CRAFTSMEN OF THE NEW TECHNOLOGY

425 First Street
P.O. Box 1961
Wausau, WI 54401

*For technical information and
in Wisconsin: 715-848-1374

Int'l Telex: 260181
ORYX SYS WAU

IBM/PC BOARDS

AST RESEARCH		
ComboPlus 64K Clock/ Calendar, Serial & Parallel, I/F, Expand- able to 256K	\$ 279	
MegaPlus 64K, Clock/ Calendar, Serial Port, Expandable to 512K w/Megopak	269	
Extra parts available for Megoplus and I/O Plus II includes Game, Parallel & Serial		40
Megopak 256K upgrade for Megoplus	\$ Call	
I/O Plus II Clock/Calen- dar and Serial Port	115	
LNW Products	\$ Call	

MAYNARD ELECTRONICS	
Floppy Drive	
Controller	\$ 155
Floppy Drive Control- ler w/Parallel Port	209
w/Serial Port	219
Sandstar Mem. Card	
— 3 modules cap.	194
Sandstar Multifunction	
Card - 6 modules cap.	93
Sandstar Modules	\$ Call

QUADRAM	
Quadboard 64K, Clock/ Calendar, Serial & Parallel Ports, Software	\$ 279
Microfazer Stack Printer	
Buffer (expandable to 512K)	
▶ Parallel/Parallel 8K	132
▶ Parallel/Parallel 64K	188
▶ Serial/Parallel 8K	170
▶ Serial/Serial 8K	170
Quadlink 64K Memory, Game Port allows Apple Software to to an IBM/PC	\$ Call

TECMAR Products	\$ Call
-----------------	---------

XEDEX/MICROLOG	
Baby Blue	\$ 425

TALL TREE	
512K JRAM	
Memory Board	\$ 699

DISPLAY CARD CORNER

Hercules Graphics Board	\$ 359
Orchid Monochrome Graphic Adapter	360
Plantronics Colorplus	389
USI Display Card (color/monochrome)	\$ Call
Amdek MAI Card	\$ Call
Tecmar Graphic Master	\$ Call

MONITORS

Amdek Video 300A	
Amber	\$ 149
Amdek RGB	425
NEC 12" Hi-Res Green	187
Sonyo 12" Hi-Res	
Green	199
USI Hi-Res 12" Amber	159
NEC JB-1260 Green	119
PGS RGB Color	\$ Call
NEC JC-1216 RGB	475
Panasonic Monitors	\$ Call
Quadram	
Quodochrome	\$ Call
Taxan 12" Amber	149
Taxan 12" Green	136
Taxan 12" Med. RGB	323
Taxan 12" High RGB	512
Taxan RGB	
Cable for PC	17
Sony Profeel	
12/19/25"	\$ Call

TELECOMMUNICATIONS CORNER

*** SPECIAL ***

Hayes Smartmodem 12000 / Hayes Smartcom II	
Software AST I/O Plus II Clock Calendar and Serial Port	\$ 689
Above w/Smartmodem 300	399
Hayes Smartmodem 1200 & Smartcom II Software	575

MODEMS

Novation	
Apple-Cat II	\$ 259
Hayes Micromodem II	259
Anchor Mark I	79
Anchor Mark VII	119
Hayes	
Smartmodem 300	\$ 205
Hayes	
Smartmodem 1200	495
Hayes Chronograph	189
Novation 1212 Auto-Cat	565
US Robotics	
Auto-Dial (full auto answer 300/1200)	459
US Robotics	
Auto-Link (auto answer 300/1200)	410
US Robotics Password	379

DISK DRIVES

Teac Half-Hgt	\$ 259
Superfive Half-Hgt	
(App)	9
Panasonic Half-Hgt	205
Tandon TM-55-2	\$ 255
Tandon TM-100-2	239
Davong DSI-501 Hard	\$ Call
Davong DSI-512 Hard	\$ Call
Davong DSI-519 Hard	\$ Call
Corona 5 MB Hard	1,395
Corona 10 MB Hard	1,795
CDC 1800	270
Corvus	\$ Call
Tall Grass	\$ Call
Vista Solo 143K	\$ 259
Vista Solo & Controller	329

DISKETTES

3M 5" DS, DD, Box	\$ 40
BASF 5" DS, DD, Box	37
Moxell 5" DS, DD, MD2, Box	40
Verbatim 5" DS, DD, Box	35
Ultra Magnetics 5" DS, DD, Bonus Box (12 Diskettes)	35

PLOTTERS

Enter P100 Sweet P Apple/Franklin, IBM/PC	\$ 595
Strobe M100 Plotter w/ I/F Apple/Franklin	499
Strobe M100 Plotter (RS 232)	539
Panasonic Digital Plotter	\$ Call

MISC.

Chalk Board	\$ Call
Koala Technologies	
Graphic Tablet	\$ 95
Symtec Light Pen	
IBM/PC	140
Symtec Light Pen	
Apple/Franklin	200
TG Joystick IBM/PC	49
TG Joystick	
Apple/Franklin	46
Versa VersoWriter Tablet IBM/PC,	
Apple/Franklin	235
Wico Analog Joystick	59
Wico Apple Adapter	18
Wico IBM/PC I/F Card	\$ Call
Keytronic Keyboard	
IBM/PC	209
Keytronic Keyboard	
Apple/Franklin	249
Curtis PC Products	\$ Call
Electronic Protection	
Series	\$ Call

CP/M is a registered
trademark of Digital
Research. IBM and the
IBM logo are registered
trademarks of
International Business
Machines. Apple and the
Apple logo are registered
trademarks of the Apple
Computer Company.
Franklin and the Franklin
logo are trademarks of
the Franklin Computer
Company.

We welcome:

- ▶ COD (Add \$2.00 per shipment. Cash or certified check required.)
- ▶ Visa, MasterCard & American Express. (Add 4%.)
- ▶ Checks. (Allow 1-2 weeks for clearing.)

Working Hours:

Mon. - Thurs. 8:30 - 5:30 • Fri. 8:30 - 6:30
Sat. 10:00 - 2:00 • Central Time

ORDER TOLL FREE OUTSIDE WISCONSIN 1-800-826-1589





ADDS VIEWPOINT from your point of view

**IF YOUR COMPUTER CAN HANDLE
ANOTHER TERMINAL, HERE'S THE
TERMINAL IT SHOULD HANDLE.**



Now that many desk-top micros are multi-user, you can add an inexpensive Viewpoint® terminal to dramatically increase your micro's productivity. For more powerful computers, the ADDS Viewpoint puts power on every desk at substantial savings.

Even though the ADDS Viewpoint is very inexpensive, it is still packed with features. The screen tilts for comfortable viewing. Detachable stepped and sculptured keyboard. Numeric pad, cursor control keys and three discrete function keys. Character highlighting (blinking, underlining, reverse video, *half* or zero intensity). Full 24 lines by 80-character screen with 96 displayable ASCII codes. There are even optional keycaps for foreign languages.

All this, with EIA RS-232-C or CCITT V.24 communications interfaces.

ADDS has a complete line of Viewpoint terminals, offering color, IBM compatibility (monochrome or color) and exceptional intelligence. Ask your ADDS dealer for details.

Quality, features, functions, competitive price...

IT ALL ADDS UP.

ADDS
Applied Digital Data Systems Inc.
A Subsidiary of NCR Corporation

100 Marcus Blvd., Hauppauge, NY 11788 — (516) 231-5400.

Viewpoint is a registered trademark of Applied Digital Data Systems Inc.

The Art of Benchmarking Printers

New tests of speed are needed for dot-matrix and daisywheel units

by Sergio Mello-Grand

Developing good benchmarks for computer systems is not an easy task, but benchmarking computer printers is not much simpler. Even if you limit the evaluation to units with list prices under \$3000, which excludes the more expensive "page" and "line" printers, the task is still complex because of the great variety of different functions available on today's printers.

Benchmarking efforts can be divided into two principal areas because of the different natures of dot-matrix and fully formed character printers. Dot-matrix types are most popular among personal-computer users and provide an economical and flexible output with reasonable quality. Fully formed character printers, which generally include the more costly and slower units, provide excellent letter-quality output and are popular among companies and professionals who require high quality in their business correspondence. The main distinction is, however, the printing technologies employed; two sets of benchmarks are required.

In this article, I'll document the development of two sets of benchmarks, one set applicable to dot-

matrix printers and the other to fully formed character (daisywheel) printers. You'll also find a detailed discussion of the rationale behind each approach and, finally, how several dot-matrix and daisywheel printers performed when subjected to these tests. The actual benchmark listings and test texts are included so you can put your printer through its paces and make some comparisons of your own.

Two sets of benchmarks are required: one for dot-matrix printers and one for daisy wheel printers.

Dot-Matrix Printers

Dot-matrix units employ a printing technique in use for nearly two decades. The printhead has an array of small pins that are independently propelled against an inked ribbon, transferring dots onto the paper behind them. Each pin is activated by an electromagnetic field controlled by the printhead's control electronics. Depending on control codes, one or

more pins of the array can be activated at the same time, producing a single dot or a pattern of dots aligned vertically. By moving the printhead horizontally, it is then possible to print a line of characters formed by a controlled pattern of dots.

The basic technology of creating characters through dot patterns is responsible for both the high flexibility and the limited quality of dot-matrix printers. The flexibility stems from the fact that the same array of pins can be used to print any character without waiting for the mechanical rotation of a specific character to a printing position. The reduction in printing quality comes from the discrete nature of the dot pattern used to approximate the shape of each character.

Flexibility and quality take on different meanings for each dot-matrix printer. Setting aside each printer's mechanical tolerances in the printhead positioning system (the shaft-to-bearing relation is important because of potentially disturbing vibrations during the head motion), the main element that determines printer flexibility and quality is the pin array.

Older or less expensive dot-matrix printers use a seven-pin, one-line array to generate characters from a 5 by 7 dot matrix (each character is a pattern of dots in a cell 5 dots wide and 7 dots high). These units are not very flexible because the combinations of dot patterns available in such a small matrix is very limited. For instance, a 5 by 7 matrix doesn't provide descenders, forcing lowercase letters such as *g*, *j*, *p*, *q*, and *y* into unnatural shapes. Almost all modern dot-matrix printers use a nine-pin in-line array and form characters from a minimum 7 by 9 matrix. This produces true descenders and a closer approximation of traditional characters. Print quality is improved by the denser pattern of dots whose individual boundaries are less visible than those from a 5 by 7 matrix.

The introduction of nine-pin in-line arrays has been a major improvement in dot-matrix printers and has resulted in new capabilities that have greatly expanded their flexibility. For instance, selecting an appropriate pattern, in conjunction with appropriate horizontal stepping, it is now possible to have compressed or emphasized boldface and double-width characters. In the emphasized mode, a printer moves in smaller steps, forming characters out of a horizontally denser matrix (e.g., 18 by 9). In order to achieve even better print quality and compete with the more expensive and slower fully formed character printers, several modern dot-matrix printers also use a double-pass approach or adopt special printheads with nine or eighteen "staggered" pins.

The double-pass approach prints a line in a first pass and, after a tiny vertical shift, reprints the same characters over the same line. This technique provides a near-letter-quality output at the expense of performance. Double-pass printing means at least half-speed printing, an often acceptable compromise when the basic printing speed is 100 cps (characters per second) or more, as in almost every modern dot-matrix printer. Some units also offer a sort of combination of emphasized and double-pass modes that provides a

"correspondence" quality in which characters are formed from an 18 by 18 or larger matrix.

To achieve both correspondence quality and high speed, some dot-matrix printers employ printheads with staggered pins capable of printing overlapping dots. The final effect is similar to that achieved with a double pass but without any performance penalty.

Although 9-pin staggered heads have been adopted by some printer manufacturers, better results often are obtained with 18-pin staggered heads. These include two 9-pin arrays located side by side with a half-dot vertical shift. With these heads, the second array's pins hit exactly in the boundary position of the first array's pins. Besides providing correspondence-quality capabilities at full speed, 18-pin staggered heads offer an even higher flexibility in the patterns used for characters.

This brief discussion on the different printheads shows that a comparison among printers based exclusively on speed has limited meaning. To have a more accurate picture of a particular printer's true capabilities, it is necessary to take into consideration some elements of quality. Because a low-quality seven-pin printer has the same speed as a near-letter-quality 18-pin staggered unit doesn't mean that the two printers are comparable from a user's point of view. The first unit might be used only for rough-draft printouts and the second might be used for business correspondence, two activities with very different values for the user.

In designing these benchmarks, I have tried to account for this inequality by including tests for correspondence printouts. You should put equal care into evaluating the results. Remember that any benchmark, no matter how well designed, is only an approximate quantitative comparison that does not take into account very important subjective elements that can be of much greater importance. Furthermore, even the quantitative results are only an approximation, with several limits imposed by some technological restraints.

For instance, I had to face the problem of printers' buffers. Modern printers have an internal buffer that accepts a certain amount of data from the system at high speed, enabling functions such as bidirectional and double-pass printing.

A 128-character buffer may be enough for these functions, but several printers offer buffers as large as 48K bytes. Such buffers let a printer store an entire document in its memory, leaving the system free to start a new job while the printer outputs the previous document from its own memory. From the system's point of view, the printer has done its work once it has acquired the whole document in its memory. If you write a benchmarking program using the system's clock, the result for a 48K-byte buffered printer might be astonishing (something in the order of thousands of characters per second).

Without underestimating the importance of huge printer buffers, I have decided to base my measurements on "physical" printing times rather than on "logical" printing times. Such a choice might obviously underrate the real operating performance of a highly buffered printer but is a necessary step in a realistic printer benchmark. After all, several operating systems offer spooling capabilities that provide an almost zero logical printing time, but this doesn't mean that users have no interest in physical printing time.

Another major problem I had to face in these benchmarks is the software support for each printer's control codes. Activating an advanced functionality in a modern printer requires the transmission of one or more control codes to tell the printer's controller that a certain operating mode is to be used. Control codes are needed for underlining, for italics, and for each of the printing modes selectable (emphasized, double-pass, enlarged, compressed, etc.).

Unfortunately, no standard has yet emerged in the chaotic area of dot-matrix printer controllers; each manufacturer uses different codes. With IBM's recent support of certain control codes, a tentative de facto

- CPM®
- IBM®
- APPLE®

DIRECT SOFTWARE™

- CPM®
- IBM®
- APPLE®

DISCOUNT DIGEST

TO ORDER CALL (415) 459-1282 • TOLL FREE (800) 533-3012 CA (800) 533-3011 USA

Direct Software™ Discount Prices Save \$\$ and Make Sense to Smart Buyers Who Know What They Want!!

DIRECT SOFTWARE™ MAKES PRIME PRODUCTS SO AFFORDABLE THAT THOSE IN-THE-KNOW WILL FIND IT UNWISE TO RESIST. OUR PRODUCTS ARE BACKED BY SUPPORT AND SERVICE, WITH SAME-DAY SHIPMENT ON MOST ORDERS. COMPARE OUR PRICES AND SAVE:

	List	Sale
ALPHA SOFTWARE		
Apple-IBM Connection	250	169
Data Base Manager	145	119
Data Base Manager II	295	249
Question	45	39
Typeface	125	79

ANDERSON — BELL		
ABSTAT	395	319

ASHTON-TATE		
dBASE II	700	398
Financial Planner	700	459
Friday	295	199

ASPEN SOFTWARE		
Grammatik	75	56
Proof Reader	50	38

A.T.I.		
Training WordStar	75	65
Training dBASE II	75	65
Training Multiplan	75	65

CDEX		
MYB-Lotus 1-2-3	70	60
MYB-Visicalc	70	60

ACCOUNTING M.B.S.I.

	List	Sale
Account Payable	650	459
Account Receivable	650	459
Payroll	650	459
Order Entry -		
Inventory Control	650	459
General Ledger	650	459
Sales Analysis	325	279
RM Cobol		169

I.U.S.

General Ledger	595	359
Account Receivable	595	359
Account Payable	595	359
Order Entry	595	359
Inventory Control	595	359
Payroll	745	359

DIGITAL MARKETING		
Milestone	295	249
Datebook II	295	249
Footnote	129	109
Bibliography	125	109
Notebook	150	119
MICROLINK II	89	79

	List	Sale
DIGITAL RESEARCH		
Concurrent CP/M 86	350	249
CB 80 Compiler	500	369
CBASIC	150	94
SID	75	63

FOX & GELLER		
Quickcode	295	175
dGraph	295	175
dUtil	99	58

GKE		
Condor 3	650	369
CROSSDATA	99	89

HUMANSOFT		
DBPlus	125	89

IUS		
Easy Filer	400	229
Easy Planner	250	179
Easy Writer II	350	199
Easy Speller	125	99
Easy Speller II	225	129

SPECIALS

	List	Sale
DBASE II + Quickcode	995	525
DBASE II + dUtil	799	429
DBASE II + DGraph	999	539
DBASE II + ABSTAT	1095	717
DBASE II + DBASE Window	949	599
DBASE II + WordStar	1195	629

WORDSTAR \$248 | dBase II \$389
MULTIPLAN \$159 | LOTUS \$319

LEXISOFT		
Spellbinder	495	229

LIFETREE		
Volkswriter	195	125

LOTUS		
1-2-3	495	319

METASOFT		
Benchmark Word Processor	499	279
Benchmark Mail List	250	179

MICROPRO		
WordStar	495	248
WordStar / MailMerge	645	347
WordStar / SpellStar	645	347
Professional Pak	845	395
InfoStar	495	258
InfoStar + CP/M Card	695	399
WordStar + CP/M Card	695	399
MailMerge	250	129
SpellStar	250	128
CalcStar	145	88

	List	Sale
MICROSOFT		
Multiplan	250	159
BASIC Interpreter	350	249
BASIC Compiler	395	285
Softcard	345	248
Flight Simulator	50	38
Word/Mouth	475	399

MICROSTUFF		
Crosstalk	195	117

OASIS		
The Word Plus	150	105
Punctuation & Style	150	99

PERFECT SOFTWARE		
Perfect Writer	489	249
Perfect Speller	289	159
Perfect Filer	589	249
Perfect Writer/Speller	695	359

PETER NORTON		
Norton Utilities	80	58

SELECT Information Systems		
Select Word Processor	495	259

SORCIM		
SuperCalc	195	129
SuperCalc II	295	169
SuperSpellguard	195	125
SuperCalc III	395	319

TYLOG		
dBase Window	249	189
dBase Door	149	119

VISICORP		
Visicalc	250	169
Visicalc IV	250	169
Visicalc Advance	400	295

WOLF SYSTEMS		
Move it (IBM)	150	98
Move it (CPM)	125	89

- Purchase orders accepted
- Prompt UPS service
- Dealer and institutional discounts
- Quantity discounts available
- Call for charges and return policy; Prices may change

Call today for our free catalog

TO ORDER CALL
(415) 459-1282

TOLL FREE
(800) 533-3012 CA
(800) 533-3011 USA

850 College Ave., Suite #3
Kentfield, CA 94904

standard appeared to be emerging, but the industry is still plagued by control-code incompatibilities. From a user's standpoint, this means that a certain software package fully supports some printers and offers only basic functions on other printers. A word-processing program, for example, might take advantage of the immediate underlining capabilities of a popular printer (such as the Epson) and might not take advantage of a similar capability in a different printer because its control codes are incompatible. On the first printer, an underlined line then might be printed at full speed; on the second printer, it might require a continuous output of a character and subsequent over-strike with the underline character. If benchmarked in such an environment, the second printer might very well show a comparatively poor performance even though its intrinsic capabilities are equal to the first one's.

In the absence of a clear industry standard, I didn't want to penalize any printer manufacturer choosing a specific set of control codes, so these benchmarks had to be executable with any unit, no matter how exotic its control codes. As a direct consequence of this choice, I had to give up my original idea of using a popular word processor and a popular spreadsheet for some of the tests. Depending on the program chosen, some printers would have been directly supported and others would not, which is an unjust and discriminatory approach to benchmarking. Word-processing and spreadsheet printout simulations therefore have been conducted directly with some simple BASIC programs that set the appropriate control characters and then print a series of lines of text.

Thanks to the nature of dot-matrix printing, there is no difference in printing one certain sequence of characters and then a different sequence of other characters. This fact lets us use strings of regular characters without having to select a sequence in which the frequency of each different character approximates its frequency in typical English. This

is the main issue in benchmarking fully formed character printers. In these benchmarks I have chosen the character *A*, but any other letter will provide similar results.

In designing the following 14 benchmarks, I have tried to utilize the fundamental capabilities of today's dot-matrix printers to evaluate their performance. The advertised printing speeds are generally higher than the measured ones. This depends on the different benchmarking procedures used. Manufacturers measure their units' performances at full speed, without taking into account accelerations and decelerations at the beginning and end of a line. I have viewed performances from the user's perspective, which means that accelerations, decelerations, and even carriage returns and linefeeds have to be considered for a more realistic estimate of a printer's performance.

Bench 1

The first test, which stresses the acceleration/deceleration and linefeed capabilities of a printer, is the output of a single character at the beginning of a line and the repetition of the process on new lines 50 times. Almost all units, even if intelligent and capable of printing in a bidirectional, optimized way, struggle pretty hard in order to minimize the delays connected with the repetitive starts, stops, and linefeeds of this test. This obviously is unfair when measuring performance in terms of the rate of characters per second. Nevertheless, this test shows immediately some sharp behavioral differences among apparently similar printers and can be useful as a first element of comparison.

Bench 2

Extending the Bench 1 test, I print a string of 10 consecutive *As* at the beginning of a line and repeat the process for 50 lines. In some printers, the time required to complete this test is just a little longer than the time for Bench 1. This shows clearly that, for short lines, the overhead induced by accelerations, decelerations, and linefeeds is much more important than the theoretical printing speed.

Bench 3

As a further extension of the previous tests, I print a string of 20 *As* at the beginning of a line and repeat the process for 50 lines. This test, besides providing a logical continuity with the two previous ones, is useful in estimating throughput in applications such as label-printing with a single-label horizontal format. BASIC-language listings with short lines are also approximated by this test. As the printers work at full speed in the middle of the string, the cps rating improves, although it is still far from the "official" rates.

Comparing the times for Bench 2 and Bench 3, it's interesting to note that the additional 500 characters involved in the second test require only a few additional seconds to be printed. Dividing 500 by the result of the subtraction between Bench 3's and Bench 2's times, you can obtain a first estimate of the "full-speed" theoretical performance of a printer. In general, this speed is at least equal to the advertised one, which means that the manufacturers are not "cheating." As I have already said, the companies are simply measuring the printing speed in a theoretical way.

Bench 4

I print a string of 40 *As* and repeat the process the usual 50 times. This text can be used as an approximation for a typical listing. Again, increasing the number of printed characters per line, the measured performance shows a significant improvement, sometimes reaching 70 percent of the advertised speed.

Bench 5

By printing a string of 60 *As* 50 times on consecutive lines, I am able to approximate a general text printout. The measured performance shows a further increase, with some printers hitting 75 to 80 percent of the rated speed.

Bench 6

Going to 80 characters per line, the maximum line length for the most popular dot-matrix printers (operating at the standard 10 pitch), I print

Accounting software so perfect you'll want to change it immediately.

It's perfect because you *can* change it.

Which is one thing you can't do with canned accounting programs. Instead, you're stuck doing bookkeeping their way.

Well, rather than let your accounting software run your business, we suggest you run our business accounting software: Sensible Solution Management.

Straight out of the box, it's ready to get down to business with single-entry general ledger,

accounts payable and receivable, payroll, inventory control and order entry.

Language so you can modify the program to take into account your needs.

You can change it to use your business forms and checks. Work in your company's commission rates. Add space for your product codes. Or do just about anything else your way.

So if you've got accounting software you can't change, change to the Sensible Solution.

And kick the canned forever.

Canned Accounting vs. The Sensible Solution

	The Typical Accounting Package	Sensible Solution Management
Can the program be changed to suit special needs?	No	Yes
Can you use your business's existing forms?	No	Yes
Is source code included in the program's price?	No	Yes
Can you easily transfer your data when you buy a new computer?	No	Yes

But instead of locking you in to our way of accounting, we also supply you with source code and The Sensible Solution

The Sensible Solution™

The Sensible Solution Programming Language for most single and multi-user operating systems is \$695 (single-user) or \$995 (multi-user) with Accounting Modules at \$250 each. For more information, write or call: O'Hanlon Computer Systems, 11058 Main Street, Bellevue, WA 98004. Phone (206) 454-2261. Telex 152974. Dealer and distributor inquiries welcome.

50 lines of As. Several printers perform at 80 to 85 percent of the official speed, which, after all, is not too bad when you consider that it includes all the necessary starts, stops, and line-feeds. Some printers, though, run at a lower performance ratio, often because their paper-advance motor is not very fast or because they do not provide bidirectional printing.

By comparing the times for Bench 6 and Bench 3 it's possible to get a better estimate of the abstract "full speed" of each unit. This is obtained by dividing 3000 (the number of additional characters) by the result of the subtraction between the times of

Bench 6 and Bench 3. As can be seen in table 1, this abstract "full speed" is in most cases even higher than the one claimed by the manufacturers.

Bench 7

After testing the straight printing speed with different length lines, it's interesting to see what happens when a printer operates on formatted text, such as the output of a word-processing program. To emulate this environment, I print 50 times a string composed of 10 blanks followed by 60 As. In this way, I can approximate typical letter text with two 10-character margins on both sides.

Intelligent printers, with logic-seeking and look-ahead capabilities, can analyze a buffer's content and optimize the printing path by skipping the leading blanks. Less intelligent units can't do so and will "print" 10 consecutive spaces at the beginning of each line, using a significant (10 to 15 percent) overhead.

As shown in table 1, some intelligent units print the 70-character strings (with 10 leading spaces) of this Bench 7 in the same amount of time required to print the 60-character strings of Bench 5. This confirms that those units recognize leading spaces and optimize their printing paths accordingly.

Bench 8

Stressing even more the logic-seeking capabilities of modern dot-matrix printers, I have designed a benchmark in which a short string of

A Guide to Tables 1 and 4

The numbers in parentheses beneath the printer model numbers indicate the advertised printing speed in characters per second (cps). The numbers in the shaded columns are the times (minutes:seconds) it took the printers to complete specific tests. The numbers in the adjacent, unshaded columns are the approximate printing speeds in characters per second for each test.

	Epson MX-80 (80)	Epson RX-80 (100)	Epson FX-80 (160)	Diablo 11 (100)	Okidata 82A (120)	Okidata 92 (160)	IDS 480 (110)	Gemini 10X (120)
Bench 1—Print A on 50 consecutive lines	00:18 2.8	00:17 2.9	00:13 3.8	00:08 6.2	00:11 4.5	00:16 3.1	00:12 4.2	00:13 3.8
Bench 2—Print a string of 10 As on 50 lines	00:23 21.8	00:22 22.7	00:16 31.2	00:13 38.4	00:12 41.7	00:12 41.7	00:16 31.2	00:17 29.4
Bench 3—Print a string of 20 As on 50 lines	00:30 33.3	00:27 37.0	00:21 47.6	00:18 55.6	00:16 62.5	00:15 66.7	00:20 50.0	00:22 45.5
Bench 4—Print a string of 40 As on 50 lines	00:43 46.6	00:39 51.3	00:29 69.0	00:29 69.0	00:24 83.3	00:21 95.2	00:30 66.7	00:33 60.6
Bench 5—Print a string of 60 As on 50 lines	00:55 54.5	00:51 58.8	00:37 81.1	00:40 75.0	00:32 93.8	00:28 107.1	00:39 76.9	00:42 71.4
Bench 6—Print a string of 80 As on 50 lines	01:08 58.8	00:62 64.5	00:45 88.9	00:51 78.4	00:40 100.0	00:36 111.1	00:48 83.3	00:52 76.9
Bench 7—Print a string of 10 spaces and 60 As on 50 lines	00:55 63.6	00:51 68.6	00:37 94.6	00:41 85.4	00:32 109.4	00:28 125	00:39 89.7	00:43 81.4

Table 1: The results of running the 14 benchmarks for dot-matrix printers on eight members of the dot-matrix family.

characters (10 As) appears in different positions on five consecutive lines. In the first line, the string is printed in positions 6–15; in the second, in positions 16–25; this continues until the fifth line, in which the string is printed in positions 46–55. In each line, leading and trailing spaces fill the “free” areas from positions 1–60. A loop repeats this sequence 10 times.

A clever unit will print the first string, stopping at position 15, perform a linefeed, and continue printing the second string from positions 16–25. The printer will then perform a new linefeed and start printing the third string from position 26. A similar technique will be used for the fourth and fifth lines. A not-so-intelligent unit, not recognizing the optimized “stair-step” pattern, will instead print some of the blanks. A printer without any logic-seeking

capability will print all leading and trailing blanks, with an execution time similar to that of Bench 5.

Bench 9

Another interesting printing example is the simulation of a typical spreadsheet output with a regular table of numbers evenly spaced in rows and columns. To evaluate the printers’ behavior in such a case, the benchmark prints a string with an alternate sequence of five spaces and five 1s 50 times. This process prints a table of 50 rows and 10 columns, each column being 10 characters wide and composed of a five-digit right-aligned number (11111) preceded by five spaces. Intelligent printers with good look-ahead capabilities will recognize each five-space sequence and will skip at high speed to the nearest digit. Intelligent printers without this capability will optimize

their path more simply, avoiding the first five spaces of each row. Less intelligent units will print each line just as if it were a regular 80-character sequence.

Bench 10

All the benchmarks described in the preceding pages were conceived for the basic operating mode of 10 characters per inch (cpi) with the standard character set. So far, no compressed, double-width, emphasized, or double-pass operating modes have been considered in the benchmarks. Because they are relevant to some users, I have included five additional benchmarks dealing with these advanced capabilities. Although the modes tested are fairly common, some printers don’t support them. For these units, the table of results indicates N/A (not available). In this test, after setting the

Text continued on page 203

Bench 8— Print 10 times 5 strings of 50 spaces and 10 As with different displacement	00:32 93.8	00:32 93.7	00:31 96.8	00:21 142.8	00:26 115.4	00:18 166.7	00:32 93.7	00:36 83.3
Bench 9— Print a string of 8 alternate groups of 5 spaces and 5 1s on 50 lines	01:05 61.5	00:60 66.7	00:43 93.0	00:53 75.5	00:39 102.6	00:35 114.3	00:46 87.0	00:51 78.4
Bench 10— Same as Bench 5 but with emphasized mode, i.e., 18 by 9 matrix	01:36 31.2	01:30 33.3	01:01 49.2	N/A	N/A	N/A	N/A	01:09 43.5
Bench 11— Same as Bench 5 but in double-pass mode, i.e., 9 by 18 matrix	02:33 19.6	02:04 24.2	01:47 28.0	N/A	N/A	01:13 41.1	N/A	01:44 28.8
Bench 12— Same as Bench 5 but in correspondence mode	03:53 12.9	03:28 14.4	02:36 19.2	02:35 19.4	N/A	01:52 26.8	00:52 57.7	02:36 19.2
Bench 13— Same as Bench 5 but in compressed mode	01:04 46.9	01:01 49.2	00:44 68.2	00:41 73.2	00:32 93.8	00:29 103.4	00:39 76.9	00:48 62.5
Bench 14— Same as Bench 4 but in double-width mode	01:07 29.9	01:02 32.3	00:41 48.8	00:50 40.0	00:41 73.2	00:37 54.1	00:49 40.8	00:57 35.1

Listing 1: Dot-matrix printer benchmarks 1 through 9 in BASIC. The text discusses benchmarks 10 through 14, which use benchmarks 4 and 5 in emphasized, double-pass, correspondence-quality, compressed, and double-width modes. Results of these benchmarks on three typical dot-matrix printers are shown in table 1.

```
10 FOR I=1 TO 50
20 LPRINT "A"
30 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT "AAAAAAAAAA"
30 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT "AAAAAAAAAAAAAAAAAAAA"
30 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT "AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA"
30 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT "AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA"
30 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT "AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
AAAAAAAAAAAAAAAAAAAAAAAA"
30 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT "          AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
AAAAAAAAAA"
30 NEXT I
```

```
10 FOR I=1 TO 10
20 LPRINT"          AAAAAAAAAA          "
30 LPRINT"                AAAAAAAAAA          "
40 LPRINT"                    AAAAAAAAAA          "
50 LPRINT"                        AAAAAAAAAA          "
60 LPRINT"                            AAAAAAAAAA          "
70 NEXT I
```

```
10 FOR I=1 TO 50
20 LPRINT"          11111          11111          11111          11111          11111          11111
          11111          11111"
30 NEXT I
```

SEIZE CONTROL.

With FingerPrint,[™] you've got Apple in the palm of your hand.

FingerPrint functions as the "Print Screen Key" your Apple doesn't have. But that's only the beginning. FingerPrint is more than just a parallel printer interface card. A touch of its button puts any program on hold, so you can make hard copies of any graphics or text. And do things Apple never imagined.

FingerPrint consists of the printer interface card connected to a touch-sensitive button that adheres to your keyboard. It also comes with a free printer cable and a disk loaded with programs.

We made FingerPrint smart. You can make it even smarter. The built-in 2K ROM provides functions like Print Screen, Program Pause, Graphic Dump, Jump to Keyboard or Monitor for De-bugging and more. With 2K of user RAM, you can invent new functions such as Keyword Search and Replace or special tasks only you could dream up.

FingerPrint works with any parallel printer made. And it can be programmed to interface with new printers as they come on the market.

Get the most out of your Apple II, Apple II+ or Apple IIe. Order FingerPrint today. Or visit your nearest dealer for a test flight.

Thirdware has a whole family of innovative computer products. Including a multiple-printer parallel interface, slim-line disk drives, diskettes, disk cases and the only protective sleeves that remain in place while the disk is in use. Write for our latest catalog.

ORDER TOLL-FREE.

1-800-528-6050

Ext. 2112

In Arizona: **1-800-352-0458**

In Alaska & Hawaii: **1-800-528-0470**

THIRDWARE
COMPUTER PRODUCTS 



- Please send a free Thirdware catalog and complete information on FingerPrint.
- Please send _____ FingerPrint(s) @ \$149 each. (Add \$3.50 shipping & handling for each one ordered.) FL residents add 5% sales tax.

Enclose check or credit card authorization for full amount

Name _____

Address _____

City _____ State _____ Zip _____

Charge to: MasterCard/Visa (Circle one)

Acct. No. _____ Expires _____

Signature _____

Mail to: Precision Software, Inc.
4747 NW 72nd Avenue Miami, FL 33166

B

Circle 299 on inquiry card.

THE SMART CABLE™ IS THE PERFECT RS-232 MATCHMAKER FOR COMPUTERS AND PERIPHERALS.

The Smart Cable's unique on-board logic "looks" at the RS-232 interface on each end of your connection, then correctly links your printer, modem or any other peripheral to your computer. Completes data lines, handshakes, everything.

NO MORE CUSTOM CABLES.


Now you can avoid the frustration and confusion of customized cables. The Smart Cable instantly creates virtually any RS-232 interface. And if you want to swap equipment, or use other peripherals, the Smart Cable adapts. Automatically. It's one accessory that's never obsolete.

GET MORE OUT OF YOUR EQUIPMENT.

At work or at home, you can re-arrange your system with ease. One Smart Cable lets you connect many different computers and peripherals. For example, you can connect portable computers to any available serial printer. Just plug in, watch for the status lights to indicate your circuit is complete, and start working.

Best of all, the Smart Cable is priced competitively with conventional cables and custom cables.

To be a success these days you've just got to have the right connections. Call us today at 800-227-6703 (in California 800-632-7979, in Canada 800-663-9767) to make yours a whole lot easier.

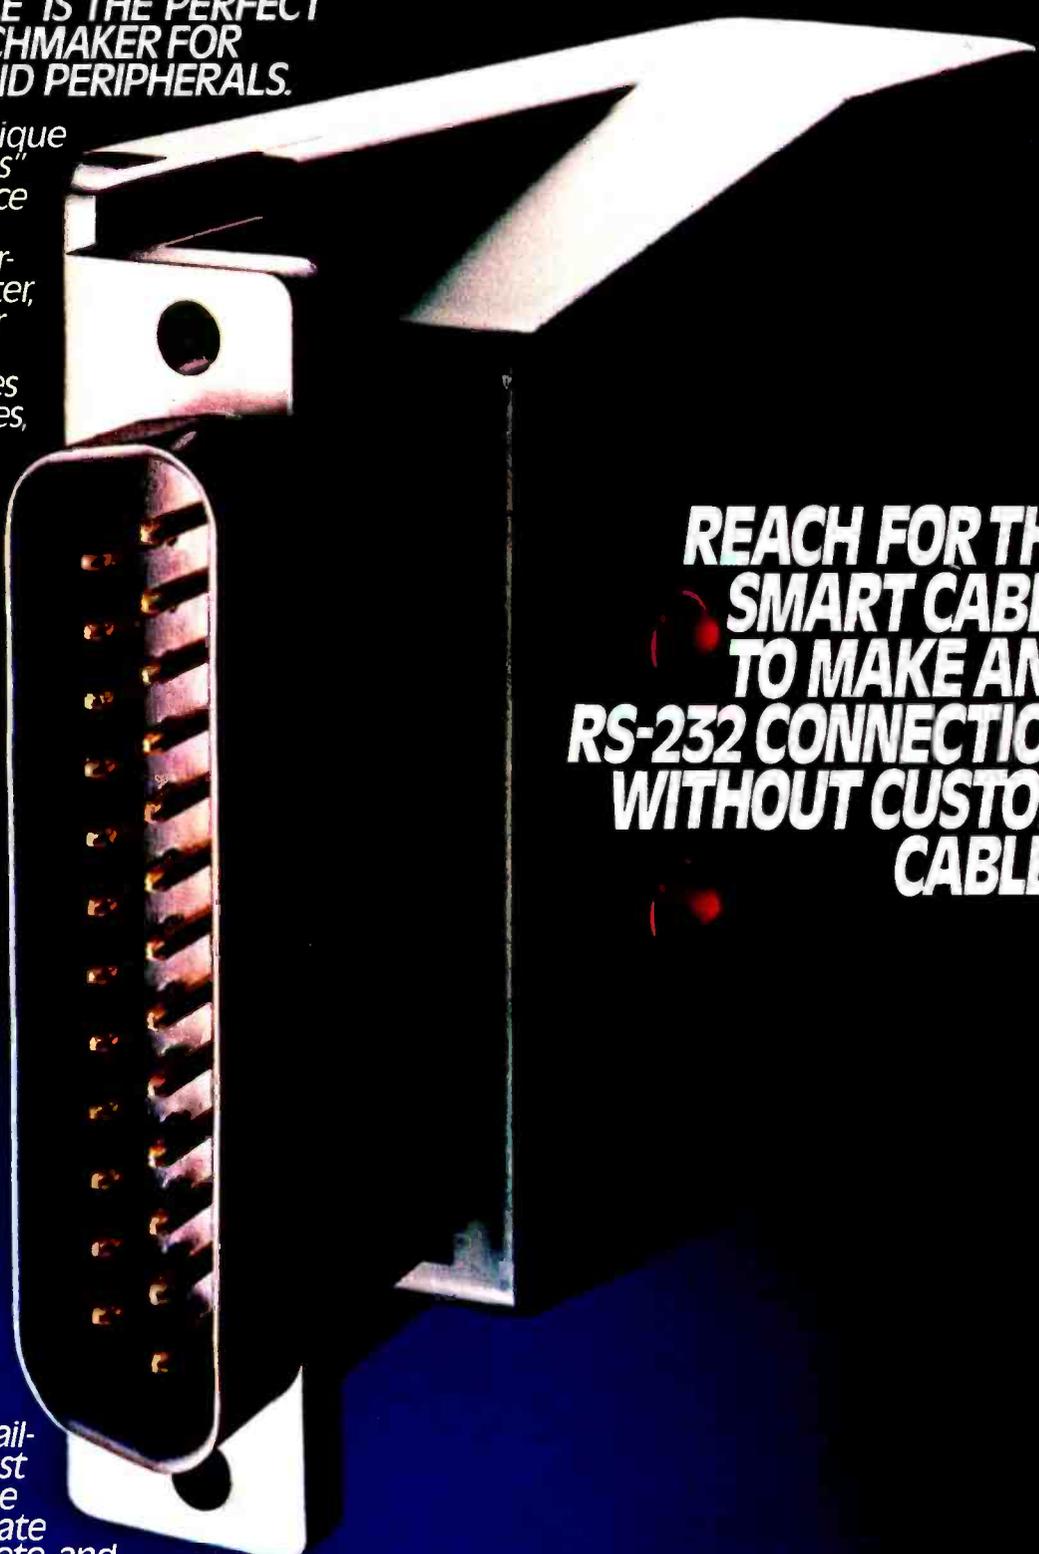

**REACH FOR THE
SMART CABLE™
TO MAKE ANY
RS-232 CONNECTION
WITHOUT CUSTOM
CABLES.**

Smart Cable



IQ TECHNOLOGIES, INC.
11811 N. E. First Street
Bellevue, WA 98005
TELEX 701 472 IQTECH UD

Text continued from page 199:

printer into emphasized mode, I printed a string of 60 As on 50 consecutive lines, as in Bench 5.

In emphasized mode, the print-head moves in smaller steps, forming a character from a horizontally denser matrix. This produces a better-quality printout but at the expense of speed, as is clearly indicated by the results. This benchmark, when compared to the similarly structured benchmarks that follow for fully formed character printers, gives you a good idea of the comparative performance of a dot-matrix printer operating in "quality" mode and a fully formed character printer operating in its native high-quality mode.

Bench 11

A popular approach used by dot-matrix printers in order to obtain a better output quality is to print a line and, after a very small vertical shift, reprint the same characters on top of it. In this way, characters are printed from a denser matrix, which provides a better quality. In order to test the performance penalty caused by this operating mode, after setting it, I once more printed a string of 60 As on 50 consecutive lines. The benchmark's results show clearly that the throughput is, in general, a little less than half the standard one.

Bench 12

Some printers let the user select an operating mode in which emphasized and double-pass modes are combined to obtain an even denser dot matrix and, consequently, a better correspondence quality. After this mode is set, this benchmark prints the usual string of 60 As on 50 consecutive lines. Suffering from a double overhead, the printers that use this sophisticated operating mode often perform slowly but sometimes compensate with outstanding print quality.

Bench 13

Most printers offer a compressed operating mode that fits 132 characters in an 8-inch line. This operating mode sacrifices part of the quality available in the standard printing

mode but shouldn't generate any additional overhead. Bench 13, based on the traditional string of 60 As printed on 50 consecutive lines, confirms that the printing time in compressed mode is often roughly equivalent to the printing time in standard mode.

Bench 14

In order to test the double-width mode, I first activated it with the appropriate control codes and then printed a string of 40 As on 50 consecutive lines, just as I did in Bench 4. As standard double-width characters use a horizontally expanded matrix (double the standard one), 40 characters cover the entire 8-inch width of the standard European paper. The benchmark's results demonstrate that, as expected, the printers' performance is almost half the basic one, estimated by Bench 4.

Other Considerations

Although I have examined and tested several printing possibilities, I

haven't covered the broad spectrum of possible applications and operating modes of a modern printer.

Some modes (such as underlining, italics, slanted, etc.) haven't been considered because, generally, they do not involve a performance degradation of a printer. Their expected performance should be similar to the performance measured for the standard operating mode.

Some modes, obtainable through a combination of basic operating modes (such as double-width compressed) offer performances that can be estimated by joining the benchmarks' results for their basic elements. Other modes, such as high-resolution graphics, have not been considered because only a few of today's printers provide good graphics support as standard. Those that do show a large resolution variability that might have penalized the units with densest dot resolution. Today, quality rather than quantity is the most relevant factor in graphics printing. This is probably also true

Epson QX-10™ ?

Graphics?

Q PLOTTER

GRAPHIC POWER FOR THE EPSON QX-10™

with one key . . .

■ Draw Circles ■ Squares
■ Lines ■ Axis, etc.

also zooming and panning, multiple screens,
animation and much more . . .

Q Plotter also turns your Mbasic into a high powered
graphics basic.

introductory price \$175.00

To order call toll-free 1-800-824-7888 Operator 409
For technical information or dealer nearest you
Call (602) 747-0005 or Telex 709234

Metro Software Inc.
2509 N. Campbell Ave., Suite 214, Dept. J., Tucson, Arizona 85719

QX-10 is a TM of Epson America • Mbasic is a TM of Microsoft

ence the results. To make the test a little more realistic, you might print the characters in a sequence created by a random-number generator with equal probability of occurrence for each character. Claude Shannon, called the father of information science, has termed this approach *zero-order approximation*. In *The Mathematical Theory of Communication*, written with Warren Weaver and first published in 1949, Shannon used the problem of approximating English as an example in his analysis of discrete, noiseless systems.

The problem of optimizing telegraphic transmissions brought Shannon to the more general analysis of statistical properties of English, with results of great relevance to fully formed character printers.

In telegraphy, as well as in printing, the messages to be transmitted or printed consist of sequences of characters. As Shannon notes, "These sequences are not completely random. In general they form sentences and have the statistical structure of, say, English. The letter *e* occurs more frequently than *q* and the sequence *th* more frequently than *xp*, etc." The statistical structure of text has been used to optimize transmission; short symbols replace frequently occurring letters (the letter *e* is a single dot), and longer ones replace infrequently occurring letters (*q*, *x*, and *z* are represented by longer sequences of dots and dashes).

Similar knowledge of the statistical properties of English text has been used with fully formed character printers to optimize the rotational delays of daisywheels and other units with rotating printheads. Because the character *e* is used most frequently in English (after the "space"), it has been placed in a position to result in, on the average, the lowest rotational delay. All other characters have been arranged according to their frequency of use, with a few exceptions related to some physical restraints of the daisywheel. (It is sometimes difficult to fit big characters in adjacent petals without potential mechanical interference.)

With all this in mind, it is apparent that a more realistic test than the

DIAMOND DELIVERS!

dBase II \$ call
 Infostar \$259
 Multiplan \$159
 Multitool Word \$269
 Multitool Word w/Mouse
 Wordstar/Mailmerge/Spellstar/Star Index \$1039
 Wordstar Pro Pak/Lotus 123/dBase II \$579

Multimate \$309
 Volkswriter Dlx \$179
 Supercalc 3 \$239
 Wordstar \$245

	LIST	SALE		LIST	SALE
Alpha Software			Micropro		
APPLE-IBM CONNECTION	\$250	\$139	MAILMERGE	\$250	\$135
DATA BASE MANAGER II	\$295	\$169	SPELLSTAR	\$250	\$339
			WORDSTAR/MAILMERGE	\$645	\$309
Ashton-Tate			PLANSTAR	\$695	\$ 99
dBASE-II	\$700	Scall	CALCSTAR	\$195	\$ 99
FRIDAY	\$295	\$199	STARBURST	\$195	\$ 99
			SUPERSTORT II	\$200	\$ 99
Condor			Microsoft		
CONDOR 3	\$650	\$359	MOUSE	\$195	\$139
			MULTITool FINANCIAL	\$100	\$ 69
Continental			MULTITool BUDGET	\$150	\$109
HOME ACCOUNTANT	\$150	\$ 99	PASCAL COMPILER	\$350	\$249
ULTRAFILE	\$195	\$125	FORTRAN	\$350	\$349
			C COMPILER	\$500	\$396
Digital Research			Peachtree		
PASCAL MT - 86	\$400	\$269	PEACHTEXT 5000	\$396	\$239
CONCURRENT CP/M 86	\$350	\$249	Professional Software		
C BASIC 86	\$200	\$145	WORD PLUS W/BOSS	\$495	\$329
PERSONAL BASIC	\$150	\$ 49			
CP/M 86	\$ 60	\$269	Software Publishing		
ACCESS MGR	\$400	\$349	PFS REPORT	\$125	\$ 85
DISPLAY MGR	\$500	\$ 79	PFS FILE	\$140	\$ 95
DR LOGO	\$ 95	Scall	PFS GRAPH	\$140	\$ 95
PC DOS LANGUAGES			PFS WRITE	\$295	\$169
	\$350	\$265		\$295	\$169
Dow Jones	\$300	\$219	Sorcim		
MARKET ANALYZER			SUPERCALC 2	\$425	\$299
MARKET MANAGER	\$195	\$119	SUPERWRITER		
	\$150	\$119	Supersoft		
Financier			FORTRAN	\$375	\$269
PERSONAL SERIES II	\$295	\$199	Visicorp	\$250	\$169
TAX SERIES	\$295	\$199	VISIWORD	\$300	\$199
	\$295	\$199	VISICALC IV	\$300	\$205
Fox & Keller			VISIFILE	\$300	\$205
QUICKCODE	\$295	\$ 59	VISITREND/PLOT		
GRAFOX	\$ 99	Scall	VISISCHEDULE	\$395	\$269
IGRAPH					Scall
dUTL	\$250	\$169	AST Research		
Howard Software			6 PAK PLUS-64K	\$699	\$499
TAX PREPARER	\$395	\$239	ALL OTHER AST PRODUCTS	\$599	\$439
	\$225	\$129			
Information Unlimited			Hayes		
EWII/ESII/EMII	\$400	\$249	SMARTMODEM 1200	\$680	\$489
EASYSPELLER II	\$175	\$ 99	SMARTMODEM 1200B	\$295	\$219
EASYFILER	\$595	Scall	Quadram		
EASYMAILER			QUADLINK	\$680	\$269
ACCOUNTING SERIES	\$195	\$119	QUADCOLOR	\$395	\$425
	\$225	\$139	64K EXPANDABLE BOARD	\$595	\$269
Litelite			256K	\$395	\$269
VOLKSWRITER	\$500	\$319	QUADBOARD EXP. TO 384K		
VOLKSWRITER INTL					
Micro Data Base					
KNOWLEDGEMAN	\$495	\$339			
Microform					
R-BASE					

At Diamond Software we offer the best selling business application software for your IBM PC, CP/M or Apple Computer at the lowest possible prices. And we maintain a complete technical department to assist you before, during and after your system purchase. Not only that, we offer same day shipment on most items and we accept Visa, Mastercard and also American Express. We'll even pay the shipping charges if you send us a money order, cashiers, company or personal check. Purchase orders are gladly accepted from qualified organizations and we welcome dealer inquiries. Call Diamond today, you'll be glad you did.




TO ORDER CALL TOLL-FREE 1-800-227-0545

Diamond Software Supply 484 Lake Park Ave., Suite 123 - Oakland, CA 94610

For price quotes, information, or in California call 1-415-893-7676. We credit your order for the call. Technical Department (415) 893-7678. International Telex 338139 (attn. 149)


Support, Service and Price.

Shipping/Handling UPS surcharge \$3.00 plus an additional \$3.00 per item for UPS Blue. C.O.D. orders add \$4.00. For personal check allow 2 weeks for delivery.

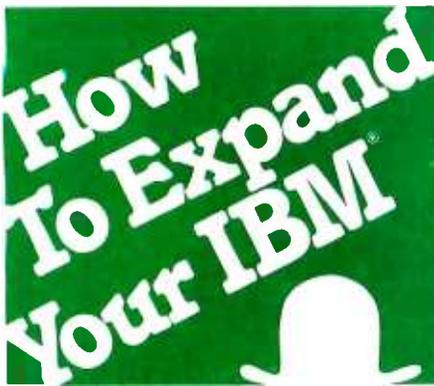

Exclusive six-function card expands workspace, increases speed, and boosts memory up to 576K.

The TITAN™ is the only expansion card that gives your IBM PC or XT both hard disk SASI interface and a parallel printer port. This advanced package also includes a pair of RS-232C serial ports, real-time clock/calendar with battery back-up, plus a choice of memory expansions. And everything slips into a single slot!

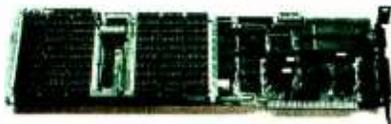

Pick a TITAN with parity-checked dynamic RAM from 64K to 576K. Each comes ready to run, complete with four super software selections. PSEUDO-DISK™ makes the RAM act like an exceptionally fast disk drive. PSEUDO-PRINT™ print spooler lets your computer calculate while the printer is running. WHATIME™ keeps track of date and time so you don't have to enter them at each system restart. HARDISK™ makes a 10MB Winchester addition plug-in easy.

Yes, it's a lot for one slot. And it's available now to add new utility to your IBM system.

Let us help you expand your IBM's productivity. For information on our multi-function boards and other Titan microcomputer products, see your computer dealer or contact: Titan Technologies, Inc., P.O. Box 8050, Ann Arbor, MI 48107; Telephone (313) 662-8542.

Sales and Marketing by The MARKETING RESOURCE GROUP, Costa Mesa, CA.



IBM PC and XT are registered trademarks of International Business Machines Corp
TITAN, PSEUDO-DISK, PSEUDO-PRINT, WHATIME, and HARDISK are trademarks of Titan Technologies, Inc.

zero-order approximation must take into consideration the relative frequency of each character in the English language. In the first-order approximation of English, each character has its own probability of occurrence according to the statistical analysis of average English text. The random-text generator that creates the benchmark sample to be printed takes into account these different probabilities. With this approach, the benchmark becomes more realistic and, if the probabilities are really representative of average English text, the benchmark can approximate the real performance of the fully formed character printer being tested.

Not satisfied with the first-order approximation obtained with independent characters "weighted" with frequencies of appearance in English text, Shannon decided to study a second-order approximation that considers the probabilities of sequences of two letters (digrams). From statistical studies of the language, it is known that the digrams *jb* or *jc* never occur in English and that *th* and *ed* occur very frequently; it is possible to achieve a better statistical approximation, along with a potentially better optimization.

In the second-order approximation of English, the random-text generator considers not only the different frequencies of each character but also the probabilities of a character following the preceding one. The benchmark text will have a digram structure the same as in English and will be an even better approximation of real text. In the case of my benchmark, the second-order approximation reflects the correct character sequences of the English language and eliminates unrealistic sequences such as *jb*, *jc*, and the many others that can be generated by the first-order approximation random-text generator.

Of course, a similar approach to the one followed for the second-order approximation can be adopted for a third-order approximation, based upon the frequency of three-character sequences (trigrams). Fourth-order approximations can be obtained for four-character sequences and so on for fifth-, sixth-, and, gen-

erally, *n*th-order approximations. In practice, highly accurate approximation results are almost impossible to obtain due to the exponential growth of the frequency matrixes. A fourth-order correlation matrix for a 96-character set would include 96^4 (84,934,656) elements, each a floating-point number indicating the frequency of a certain tetragram. Obviously, then, even a large number-crunching supercomputer could have trouble with such a huge matrix. Moreover, for the purpose of this article, the improvement in the benchmark's approximation of reality obtained by going to third- and fourth-order approximation would be only minimal. After all, the main concern here is the rotational delay from one character to the following one while maintaining correct frequencies of character occurrence and correct two-character sequences.

Rather than face the huge complexities of fourth-order approximations, Shannon decided to adopt a different approach, leaving the character level and passing to the word level. Instead of approximating an English text with random sequences of characters, he decided to make an approximation with random sequences of English words. Again, you can follow a zero-order approximation approach by choosing random words from a dictionary as if their frequencies were equal. A better approach, though, is a first-order word approximation, in which words are weighed by the random-text generator according to their frequency of occurrence in average English. An even better approach is a second-order word approximation that takes into account the word frequency and the probability of a word to follow another word.

As an example of this second-order approach, Shannon supplies the following nonsense sentence: The head and in frontal attack on an English writer that the character of this point is therefore another method for the letters that the time of whoever told the problem for an unexpected.

This sentence, which Shannon uses as an example of statistical approximation to ordinary English text,

(1a)

The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected. The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected. The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected.

(1b)

The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected. The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected. The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected. The head and in frontal attack on an english writer that the character of this point is therefore another method for the letters that the time of who ever told the problem for an unexpected.

Figure 1: The Shannon test (573 characters) at a width of 80 characters in 1a and 60 characters in 1b.

has been adopted by almost all manufacturers of fully formed character printers for evaluating the performance of products. Thus, the universally adopted Shannon test for measuring the expected performance of a fully formed character printer is not a test purposefully designed for benchmarking. It is only an adopted test, derived from an example in Shannon's book. When Shannon wrote his book, he had no intention of specifying a printer benchmark for 1980s fully formed character printers.

The main problems with the so-called Shannon average-English test are the incorrect statistical frequencies of characters with respect to average American-English text, and the use of a limited subset of characters. How much this distorts the evaluation of a fully formed character printer's benchmark is hard to say, but it is obvious that the Shannon test is not at all the best possible benchmark for this type of printer.

Before trying to define a better benchmark, however, it's interesting to analyze in more detail the two main limits of the Shannon test. To do so, I considered the version of the test used by Diablo Systems Inc. (see figure 1). By counting the occurrence of each alphabetical character (plus "space") in Shannon's test, I obtained the data shown in table 2, column 3. This frequency data then can be com-

pared with several other frequency data computed by linguistic and behavioral researchers.

Among the many efforts to establish a "definitive" frequency count for words and characters in English, the most comprehensive work is the re-

search done at Brown University and published in 1967 by H. Kucera and W. H. Francis, *Computational Analysis of Present-Day American English*. A huge amount of English text (approximately 1 million words) from a large variety of authors and sources

Character	ASCII Number	Shannon Test	American English Average	First-Order English Test	Fourth-Order Shakespeare Test
space	32	18.421	17.241	16.500	18.205
a	97	6.316	6.300	5.700	7.712
b	98	0.526	1.279	1.600	2.023
c	99	2.105	2.574	1.600	1.517
d	100	2.632	3.274	4.300	3.793
e	101	12.105	10.444	9.300	9.482
f	102	3.158	1.939	2.000	2.528
g	103	0.526	1.618	1.700	1.264
h	104	7.895	4.560	5.000	3.666
i	105	3.684	6.079	6.600	4.425
j	106	0.000	0.132	0.200	0.253
k	107	0.526	0.540	0.700	0.759
l	108	2.632	3.404	3.900	3.413
m	109	1.579	2.108	1.900	4.425
n	110	5.263	5.889	5.500	5.057
o	111	6.842	6.331	7.200	6.700
p	112	1.579	1.682	1.600	1.138
q	113	0.000	0.089	0.100	0.000
r	114	6.842	5.097	4.500	4.172
s	115	2.105	5.380	5.900	6.068
t	116	12.631	7.725	8.600	6.827
u	117	0.526	2.256	1.800	3.287
v	118	0.526	0.827	0.800	0.506
w	119	1.053	1.565	0.900	1.138
x	120	0.526	0.163	0.200	0.126
y	121	0.000	1.424	1.900	1.517
z	122	0.000	0.078	0.000	0.000

Table 2: A comparison of character frequencies for the four daisywheel-printer tests discussed in the text.

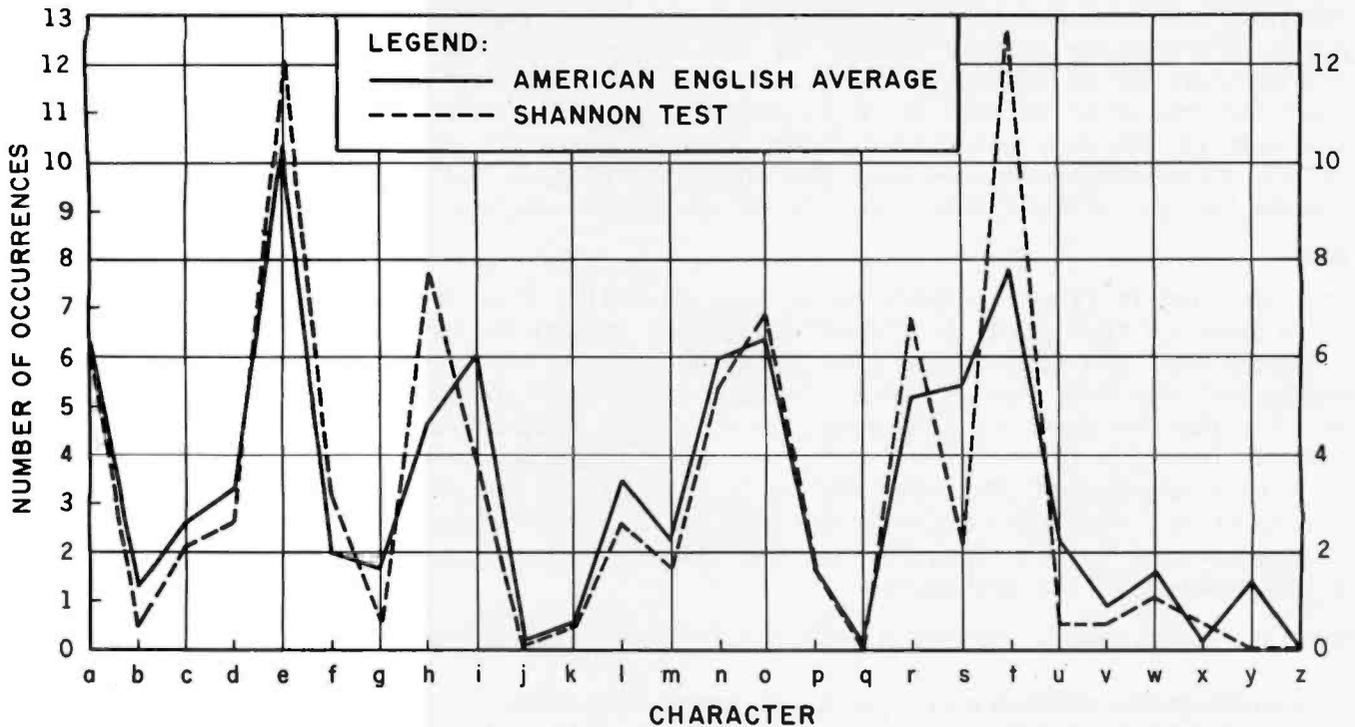


Figure 2: American English average character frequency compared with the Shannon test.

(literature, newspapers, etc.) was analyzed and a frequency count made for each of the approximately 40,000 different words.

In 1976, R. Solo and J. King, from the University of Idaho and the University of Chicago, respectively, published a character-oriented frequency analysis based on the word list of Kucera and Francis. Here's an example of the procedure for counting total frequency of characters. The word *note* has a frequency of 127 per million. The frequency totals for the letters *n*, *o*, *t*, and *e* are incremented by 127. This procedure was used for each word on the Kucera and Francis list.

Unfortunately, the analysis by Solo and King on character, digram, and trigram frequencies, developed to analyze the structure of words, doesn't take into account the "space," a very important element in a printer's benchmark. This unfortunate omission can be corrected in the table for character frequencies by inserting a mathematically determined space frequency and by recalculating all the other frequencies accordingly.

A correct space frequency for the

English language can be computed from the same work by Kucera and Francis that was used by Solo and King for their frequency counts. Dividing the 4,576,585 characters in the sample by its 953,456 words results in an average word length of 4.8 characters, which can also be used as a letter-to-space ratio. Recomputing the Solo and King frequencies and including spaces results in the data shown in column 4 of table 2, which might be considered the best basic frequency count for the purposes of this article. Comparing this data with that calculated from the Shannon test (see figure 2), it's evident that Shannon's sample is not a particularly good approximation of character frequencies in average English text.

Since 1948, when Shannon wrote his book, computers have greatly simplified the statistical analysis and simulation of text, and, taking advantage of such resources, it is certainly possible to define a better benchmark. Following the pattern used by Shannon, it is possible to construct first-, second-, and third-order character approximations based on the work by Solo and King for character, digram, and trigram frequencies and

first-order word approximations based on the work on word frequencies by Kucera and Francis.

At this point, with a simple program based on a random generator that considers the different probabilities of each character, it is possible to create a first-order character approximation of English text to be used as an alternative benchmark to Shannon's test. The approximate 1000-character text shown in figure 3 is the result of such a weighted random-text generation and, although it is certainly not a piece of fine literature, it can be used as a first alternative benchmark. Analyzing its character frequencies, reported in column 5 of table 2 and in figure 4, it is apparent that this first-order character text offers a better approximation of average English character frequencies than Shannon's test text.

As previously discussed, second-, third-, and fourth-order character approximations would provide an even better sample text. Unfortunately, digram and trigram counts (tetragrams are not available) from Solo and King do not include spaces and, in this instance, there is no way to recompute relative frequencies as

THE BEST KEPT SECRET IS OUT.....

JUKI LETTER QUALITY, DAISY WHEEL PRINTERS ARE NOW AVAILABLE NATIONWIDE AT \$699⁰⁰



There's no mystery about it! Juki's Model 6100 bi-directional, daisy wheel printers are full featured and priced right!

Designed to perform word processing and graphic functions including bold face, subscript, superscript and shadow, the Model 6100 prints at 18 cps, has a proportional spacing control and utilizes 100 character drop-in daisy wheels. The Juki printer uses IBM Selectric Ribbons and is compatible to IBM, Apple, Osborne, Kaypro and most other personal computers. But that's no secret!

The news is that the Juki Model 6100 printers are now available through a reliable network of industry professionals strategically located throughout the country to give you the prompt, dependable sales and technical service you need. And Juki distributors are backed by a company who has been specializing in electronics for over 25 years.

So, contact the Juki distributor nearest you for the real undercover story on the best letter quality, daisy wheel printer around.



CONTACT YOUR JUKI DISTRIBUTOR FOR THE DEALER LOCATION MOST CONVENIENT FOR YOU:

ACORN DATA PRODUCTS
7304-L South Alton Way
Englewood, CO 80112
303/779-6644
Serving:
MT, WY, CO, UT, NM

BUTLER ASSOCIATES, INC.
82A Winchester Street
Newton, MA 02161
617/964-5270
Serving:
ME, NH, VT, CT, RI, MA

COMPUTER SERVICES
INTERNATIONAL CORP.
905 Boulevard East
Weehawken, NJ 07087
201/866-2880
Serving: METRO NY, E. PA, NJ

GENTRY ASSOCIATES, INC.
7865 Currency Drive
Orlando, FL 32809
305/859-7450
Serving:
TN, NC, SC, MS, LA, AL, GA, FL

INFORMATION SYSTEMS, INC.
2420 E. Oakton Street, Unit K
Arlington Heights, IL 60005
312/228-5480
Serving:
WI, IL, MN, IA, MO, NE, ND, KS, SO

INTERNATIONAL BUSINESS
SYSTEMS CENTER
7023 Little River Turnpike
Annandale, VA 22003
703/750-3882
Serving: MD, DE, DC, VA

OSSMANN COMPUTER
TECHNOLOGIES, INC.
6666 Old Collamer Road
E. Syracuse, NY 13057
315/437-6666
Serving: UPSTATE NY

SIGMA DISTRIBUTING
2110 116th Ave. N.E.
Bellevue, WA 98005
206/454-6307
Serving:
WA, OR, ID, AK

SOUTHERN MICRO
DISTRIBUTORS
8708 Royal Lane
Irving, TX 75063
214/258-6636
Serving: TX, OK, AR, LA

STAR-TRONIC
DISTRIBUTOR CO.
23976 Freeway Park Drive
Farmington Hills, MI 48024
313/477-7586
Serving: MI, IN, OH, KY, PA, W. PA, WV

TECHNOLOGY MARKETING CORP.
2300 Valley View Lane
Suite 109
Dallas, TX 75234
214/243-7994
Serving: TX, OK, AR, LA

VITEK
930-G Boardwalk Avenue
San Marcos, CA 92069
619/744-8305
Serving:
S. CA

WESTERN MICRO
TECHNOLOGY
10040 Burb Road
Cupertino, CA 95014
408/725-1660
Serving: N. CA, NV, AZ

NATIONAL HEADQUARTERS:
JUKI INDUSTRIES OF AMERICA, INC.
QA DIVISION
299 Market Street
Saddle Brook, NJ 07662
201/368-3666

WEST COAST:
JUKI INDUSTRIES OF AMERICA, INC.
CALIFORNIA DIVISION
20437 South Western Avenue
Torrance, CA 90501
213/320-9001

ntor hh uoiweutilnoph e oif rilpnah h elyduetruoeffoaroocci
h hmaebls oitmkog esthasls wlnosea edl acitf iehnteagrtrdh
yteolhose feens omnootcsesh eu oha eb c o mfaes ennynttey
ifl hhbvy hotahlilltt dtmnd vnsdutisd aegnfiotrcn a spv iy
ei fethtlngiornr nept ntk aenaovmhot enilegeariontessptawo
orf rainrug ome itmbadtt lhadutjhttsdltlanmaoaldiotorpemhti
o s hiaaossseie ri drcey hidttiedsnerytteli osvioks a eh
peap ogbid iw treaeais nuc nlgi ntgt oden h opptnroret n
rlj pylbnbd ifeesnn ka rnlh rteteivyiyint i arolato te e
a morapsrthennr hoai nntte irscnegrndid d ocopse s tbd dho
esua bcii ia talyb seces efe uit ohuorshssosoemlfie msfddco
odtb he sir i tvhihietuihed fx aseer sdec oo nho ulseosotft
awaybs rt odolif eeuiih o ger kma bhyothat rlrkrklersg rasgi
rdtrpis dctt a hnheostsbddalyamtp ntrnr ee hs tnwaed thd l
u oewgedatelytseh ithhindftex dsss luo pet hal itdhofwabl
uq l onraes dt t atlon osasa hmrytndntei gas geciooriiaa
koomg fn eoicatiavyeewedry tms nedabeido

Figure 3: American English first-order random approximation (1000 characters).

I did for single-character counts. Thus, it is not possible to create a second- or third-order character approximation based on their extensive work. Other researchers, working on smaller samples, have fortunately considered spaces in their digram, trigram, and (also) tetragram counts and have been able to create second-, third-, and fourth-order random approximations of English text. Among these researchers is W. R. Bennet Jr., whose work at Yale University resulted in the 1976 publication of *Scientific and Engineering Problem-Solving with the Computer*. In part of this

book, Bennet considers the popular idea that enough monkeys, given enough time, could pound away at typewriters and eventually reproduce the great works of literature.

Instead of messing with a multitude of monkeys working at typewriters, Bennet developed a series of simulation programs to do the same job in a much faster and neater way. An early program simulated a monkey working on a traditional typewriter with equal probability for each character (zero-order approximation). Of course, even with the fastest computer, Bennet probably would still be

waiting for a barely acceptable piece of literature resulting from this program.

A second program introduced a virtual typewriter with a different probability for each character. For this simulation, Bennet used frequencies from Act III of Shakespeare's *Hamlet*, a 35,224-character text. Even with this approach (as you can imagine looking at our own first-order approximation text in figure 3), Bennet had little hope of obtaining a readable piece of literature, let alone competing with Shakespeare. Using more advanced virtual typewriters, capable of producing second-, third-, and fourth-order approximations, Bennet's "monkeys" showed significant improvements, producing almost intelligible fourth-order text (90 percent of the words appear in an English dictionary).

Thanks to Bennet's research, it is possible to use a fourth-order random (monkey) approximation of Shakespeare's *Hamlet*, which, in turn, is a good example (especially in literary terms) of English prose. Such a simulated text, as published by Bennet, is shown in figure 5. Comparing this text's frequencies with those of Solo and King (see figure 6) reveals a closer similarity than in Shannon's text or in my own first-

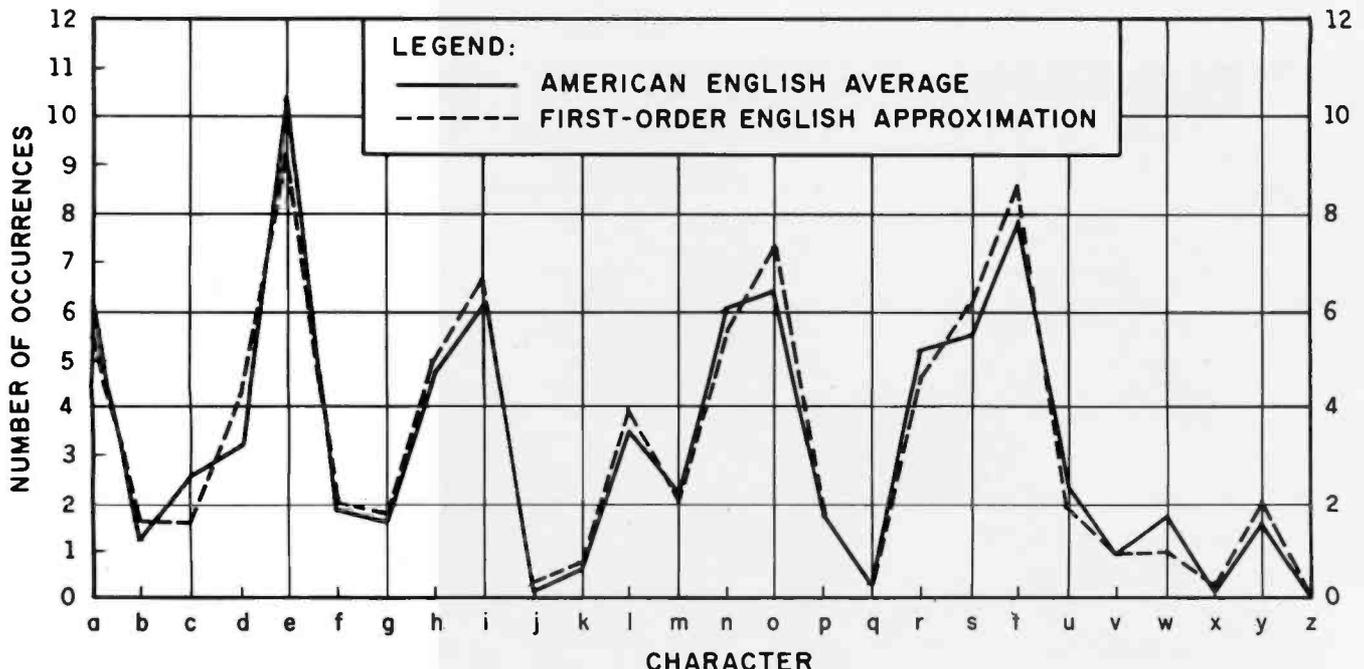


Figure 4: American English average character frequency compared with first-order approximation.

order approximation. Consequently, I adopted this text as an additional benchmark for measuring the performance of fully formed character printers.

So far, I have considered only lowercase English text with a character set limited to the 26 basic characters of the alphabet plus the space. But almost any actual text includes uppercase characters, digits, and punctuation marks. Periods, commas, and apostrophes generally have a higher frequency than characters such as *q*, *j*, and *x*. Moreover, in almost all business letters and manuals, for which fully formed character printers are primarily used, digits have an appreciable frequency of appearance.

Unfortunately, even with several visits to computer science, linguistics, and English departments at Stanford and the University of California at Berkeley, I couldn't find a good analysis of character frequencies that included capital letters, punctuation marks, and digits. A long computerized search through the comprehensive Language and Language Behavior Abstracts DataBank didn't solve the problem either. I also struck out with direct inquiries to companies such as Diablo, which probably has this data but considers it proprietary.

a go this bare and judgement of tedious retch and not lord
 what if the easelves and do and make and base gathem i ay
 beatellous we play means holy fool mour work from inmost
 bed be confould have may judgement was it massure's to
 lady would hat prime that's our thrown and did wife father'st
 livength sleep tith i ambition to thin him and force and law's
 may but smell so and spursely signor gent much chief mixturn
 ecstance of the me to like crafts did too my mome fair your do
 himself it perce as makes so but our heart ourself and be
 armont i does unsee a sent statio hamlet the is tongs musince
 hyperationse and hamlet heave madamnable must as frank on
 hecat now by and stings he's borruptis free our els the speak
 it soul o broad fore you as aught of ment ape a broom modestill
 be but is man effence are

Figure 5: Fourth-order approximation of Shakespeare's Hamlet (796 characters).

Because I wanted to have at least one benchmark text with an extended character set, I decided to calculate my own frequencies through a computerized analysis of an English text. For a change, I decided not to use Shakespeare or other classical literature but opted for a different kind of text: the on-line Unix manuals. This choice means that the sample benchmark I eventually obtained is not an approximation of average English but an approximation of some technical computer literature; frequencies are skewed due to computer-jargon characters. Speaking of Unix, the frequencies of slashes and backslashes are much higher than in an average English text. Nevertheless, because a lot of

fully formed character printers are used to print computer-related manuals, reports, and articles, a benchmark approximating this environment might be appropriate and interesting.

In order to build a representative frequency table for the potential 256 ASCII (American National Standard Code for Information Interchange) characters, I have analyzed (using a PDP-11/70) a sequence of over 1½ million characters from the Unix on-line manuals. The results from this analysis are shown in table 3, which lists the frequencies for the 96 ASCII characters (codes 32 to 127) relevant for fully formed character printers. These frequencies have been recalculated from the raw Unix analysis

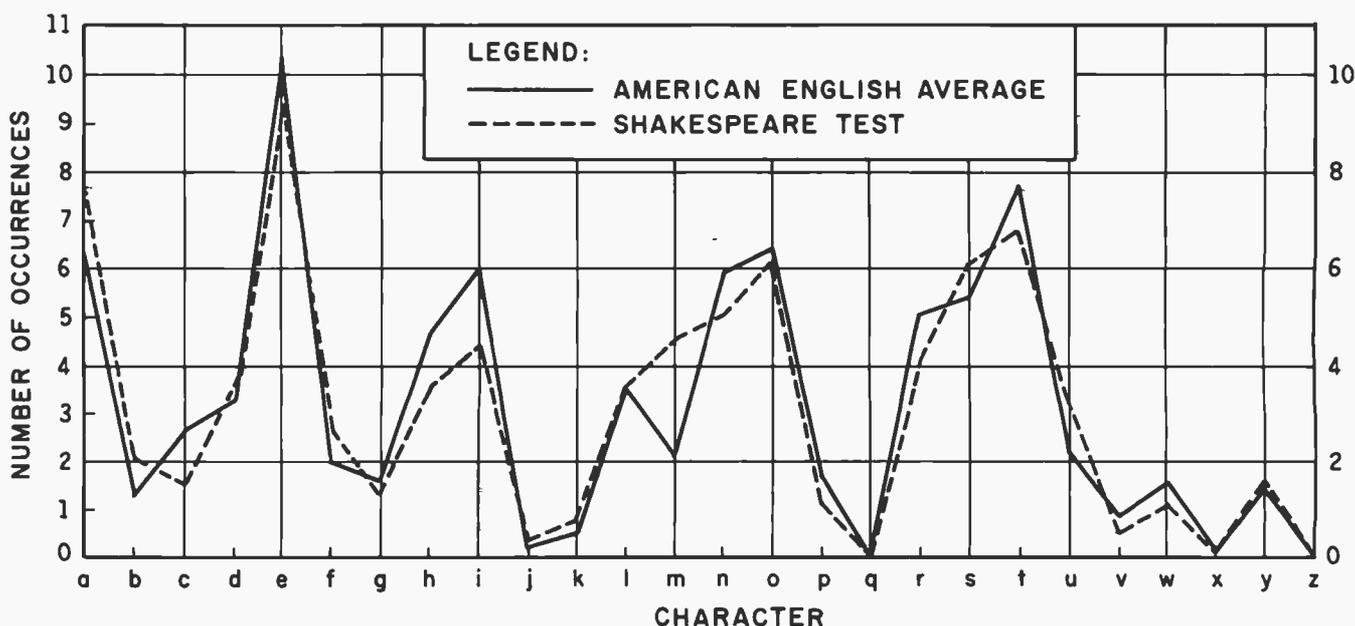



Figure 6: American English average character frequency compared with fourth-order Shakespeare approximation.

Character	ASCII Number	Frequency	Approximation	Character	ASCII Number	Frequency	Approximation
space	32	29.694	28.300	P	80	0.313	0.100
!	33	0.011	0.000	Q	81	0.007	0.000
"	34	0.104	0.100	R	82	0.151	0.200
#	35	0.016	0.000	S	83	0.448	0.300
\$	36	0.019	0.000	T	84	0.397	1.000
%	37	0.032	0.000	U	85	0.156	0.100
&	38	0.007	0.000	V	86	0.022	0.000
'	39	0.243	0.400	W	87	0.041	0.000
(40	0.441	0.800	X	88	0.092	0.000
)	41	0.445	0.100	Y	89	0.055	0.000
.	42	0.065	0.100	Z	90	0.016	0.000
+	43	0.026	0.000	[91	0.073	0.000
,	44	0.554	0.800	\	92	0.017	0.000
-	45	0.463	0.500]	93	0.072	0.000
.	46	0.975	1.300	^	94	0.008	0.000
/	47	0.463	0.600	_	95	2.164	2.200
0	48	0.191	0.200	`	96	0.126	0.100
1	49	0.490	0.400	a	97	4.350	4.500
2	50	0.211	0.300	b	98	0.916	0.900
3	51	0.082	0.000	c	99	2.067	2.200
4	52	0.069	0.100	d	100	2.238	1.800
5	53	0.092	0.100	e	101	7.681	9.400
6	54	0.038	0.000	f	102	1.587	1.000
7	55	0.048	0.000	g	103	1.061	1.500
8	56	0.109	0.100	h	104	2.198	2.000
9	57	0.027	0.000	i	105	4.251	4.100
:	58	0.073	0.000	j	106	0.044	0.000
;	59	0.110	0.100	k	107	0.290	0.200
<	60	0.025	0.000	l	108	2.589	2.800
=	61	0.033	0.000	m	109	1.817	2.000
>	62	0.028	0.000	n	110	4.153	4.600
?	63	0.014	0.100	o	111	3.935	3.200
@	64	0.006	0.000	p	112	1.496	2.200
A	65	0.233	0.300	q	113	0.071	0.000
B	66	0.075	0.000	r	114	4.006	3.700
C	67	0.197	0.100	s	115	4.057	4.300
D	68	0.146	0.100	t	116	5.286	5.700
E	69	0.315	0.000	u	117	1.742	1.100
F	70	0.080	0.100	v	118	0.439	0.300
G	71	0.061	0.200	w	119	0.661	0.800
H	72	0.046	0.100	x	120	0.272	0.600
I	73	0.452	0.500	y	121	0.823	0.900
J	74	0.011	0.000	z	122	0.073	0.100
K	75	0.023	0.000	{	123	0.009	0.000
L	76	0.127	0.000		124	0.024	0.000
M	77	0.199	0.100	}	125	0.009	0.000
N	78	0.284	0.100	~	126	0.009	0.000
O	79	0.229	0.100	DEL	127	0.000	0.000

Table 3: The frequencies and approximations of characters in on-line Unix manuals. Nearly 1½ megabytes were analyzed to compute this extended frequency table that includes numbers, punctuation marks, and other symbols.



PC & XT



IBM PC & XT COMPUTERS
Call for price & availability

SOFTWARE FOR IBM PC

Bottom Line Strategist	\$295
dBase II	\$395
Financial Planner	\$489
Flight Simulator	\$49
Friday	\$99
Home Accountant Plus	\$299
Infostar	\$149
Mailmerge	\$149
Multiplan	\$175
1-2-3	SCALL
Payless Tax 2	\$135
PC Tutor	\$59
Peach Pak (GL, AR, AP)	\$239
Peach Tree 5000	\$237
PFS: File	\$95
PFS: Report	\$85
Property Management	\$359
Real Estate Analyzer	\$189
Report Manager	\$399
Spell Guard	\$119
Spellstar	\$149
SuperCalc I	\$99
SuperCalc II	\$169
Super Writer	\$195
Tax Manager	\$179
TKI Solver	\$219
VersaForm	\$249
VisiCalc	\$169
VisiCalc/Excel	\$239
VisiFile	\$219
VisiDex	\$179
VisiSchedule	\$225
VisiWord	\$295
VisiSpell	\$195
VisiWord & VisiSpell	\$350
Wordstar	\$269
Wordstar & Spellstar	\$399
Wordstar Professional	\$469
Wordstar & Mailmerge	\$369

MONITOR SALE




****RGB COLOR****
BMC BM-AU9191MU, 13" RGB color as shown above, hi resolution 640-dot, 16 colors. Sale \$449




Princeton HX-12, 12" RGB color, high resolution 650-dot, 16 colors, similar cabinet as IBM monitor. \$479



Quadchrome, 12" RGB color, 690-dot high resolution, 16 colors. \$569
Amdel RGB Color II Plus, 640-dot hi resolution, 16 colors. \$469
Zenith ZVM134, 12" RGB color, high resolution. Sale \$399



Dynas GM-12d, 12" green, high resolution 600-dot, 20 MHz. This is our best seller (as shown). \$129



Roland DG MB-122G, 12" green, 18 MHz, hi-resolution 720x350 dots, fully compatible with IBM monochrome display card. \$179



****AMBER SCREEN****
Dynas AM-121, 12" amber, 600-dot hi resolution, 20MHz. \$149
Taxan KA12N, 12" amber, 800-dot hi resolution. \$150
USI PI-2, 12" amber, 1000-dot hi resolution, 20MHz. \$165
Amdel 310A, 12" amber, 900-dot hi resolution, designed to run on IBM monochrome display card. \$179



BROTHER HR-1A
This is the famous daisywheel printer that sets the industry standard for reliability & durability. 16 CPS, bi-directional & proportional spacing. 10, 12, 15 pitch. Uses standard typewriter ribbon. 16 1/2" paper. Parallel Interface. We have purchased a huge quantity of this printer and offering it to you at an unbelievable price. **\$599**



C. ITOH CX-4800 Printer/Plotter
Unique 4-color machine produces hi quality printing at speed up to 8 CPS & plotting speed up to 4.8"/second. 9" paper size, standard parallel or serial interface. Intro special **\$595**



Roland DXY-800 Plotter
8-pan intelligent X-Y Plotter. Hi-speed 180mm/sec. IBM-PC compatible. 11" x 17" paper size. Horizontal or vertical operation. Dual speed switch. Parallel and serial interfaces. \$795



CABLES
Parallel printer cable for IBM PC. \$35
Serial modem/cable for IBM PC. \$35



Smart Modem
300 --- \$209
1200 --- \$485
1200B --- \$429



5 1/4" DISKETTES
10 per box
Soft sectored.
Dyan 204 DSDD. \$49
Maxell MD2-DM, DSDD \$40
Verbatim MD550-01 DSDD \$40



5 1/4" DISK DRIVES
Tandon TM-100.1 Single-sided, double density, 160K formatted. \$159
Tandon TM-100.2 double-sided, double density, 320K formatted. \$225
Tandon TM-100.4 double-sided, quad density. \$335
Control Data, double-sided, double density, 320K formatted. \$235



AST Multi-Function Cards for IBM PC and XT
New Low Prices!
(Each card now comes w/ SuperDrive & SuperSpool!)

SixPakPlus Cards
Six-function card with 64K 384K RAM memory, Parallel port, Serial port, Optional Game port, Clock-Calendar, SuperDrive & SuperSpool Software. Memory installed on card --- none 64K 128K 192K 256K 384K
with parallel & serial port No. 2 --- \$274 \$314 \$364 \$414 \$464
with parallel & serial port No. 2 --- \$309 \$349 \$399 \$449 \$499
MegaPak --- expands a fully populated MegaPlus card (256K) to 512K \$299
Optional Game Port --- add \$50



QUADRAM MegaPlus II Cards
Amount of memory installed on board --- none 64K 128K 192K 256K
with parallel, serial ports, clock/calendar --- \$235 \$275 \$325 \$375 \$425

I/O Plus II Cards
Standard card w/one serial port (S1) and clock/calendar. \$129
Additional Parallel (P), Game (G), or Serial 2 (S2) port --- add \$35 ea.



TELETEX TTX-1014
NEW! 12 CPS daisywheel printer w/ built-in tractor adjustable 2 1/4"-14 1/2" Parallel & serial interfaces. Wordstar compatible. Programmable pitch & line spacing. Compact size. \$499



TELETEX TTX-3000 Smart Terminal
Built-in text edit & graphic capability. Design for upgrading to stand-alone computer, word processing & telecon system. 80x25 line scroll screen, 10 function keys & numeric keypad. \$549
Complete w/1014 printer. \$949



SILVER REED EXP-550
16 CPS daisywheel printer, bi-directional printing, proportional and incremental spacing. Parallel. \$649




FINGER PRINT by Drexelhaus - Add-On module for IBM PC/XT. Gives fingertip control up to 11 printer functions. Reg. \$89. \$49.95



BROTHER HR-25
New! 23 CPS daisywheel printer w/ 2 color printing, 3K buffer, proportional spacing, etc. Parallel. CALL Tractor for HR-25. \$119
Cut Sheet Feeder for HR-25. \$199



EPSON
FX-80, 160 CPS, 80 Col., friction & tractor feed, parallel. CALL FX-100, 160 CPS, 132 Col., friction & tractor feed, parallel. CALL RX-80, MX-80 FIT, MX-100...CALL




DYNAX DX-15
New! Letter quality daisywheel printer with 2-color printing. Logic seeking, bi-directional, proportional spacing, graphic & hold printing, direct printing, super/sub script, auto double strike & underline, 3 K buffer. Parallel. \$319
Serial interface. SCALL
Cut sheet feeder. \$199
Tractor. \$119
Keyboard. \$179
Ribbons (1 dozen) \$49



STAR GEMINI
Gemini-10X, 120 CPS, 80 Col., friction & tractor feed, parallel. SCALL Gemini-15X, above w/15" platen. Call



DAISYWRITER 2000
The intelligent letter-quality printer w/48K built-in buffer memory, 17 CPS, bi-directional, auto margin justification, universal interfaces. \$1,059
Tractor. \$119



SUPER 5 printer
Outstanding dot matrix printer w/ 640 graphic dots/line instead of the usual 480 graphic dots/line found on other printers. 80 CPS, 80 Col., friction & pin feed for 4" to 10" wide paper. Parallel. \$265



COMPLEX CR-1
17 CPS daisywheel printer, bi-directional, Parallel. SCALL



RITEMAN
120 CPS, 9x9 matrix, tractor/friction feed, compact size, only 2 7/8" ht. Fits in briefcase, parallel. \$349



FUJITSU SP-830
A super daisywheel printer w/ultra fast 80 CPS printing speed, plus many outstanding features. \$2,095



NEC SPINWRITER 3550
NEC's new letter-quality printer especially designed for the IBM PC. 203 columns, auto proportional space, justification, bi-directional, 350 words per min. Parallel. \$1,799
Tractor for NEC 3550. \$245
8023A, 100 CPS, 80 col., par. \$385




TOSHIBA P1350
Super dot-matrix printer w/24-pin hi-resolution head. 192 CPS draft, 100 CPS letter-quality (parallel) SCALL



IDS PRISM
IDS Prism 80C, 200 CPS, 80 col., 4-color, graphics, friction/tractor feed, sheet feeder, serial & parallel. \$1,989
IDS Prism 132C, above but 132 col. Parallel. \$1,495




JUKI 6100
18 CPS daisywheel, 13" platen, 2K buffer, 3-pitch, parallel. \$539
Tractor for 6100. \$120



OKIDATA
ML 80, 80 CPS, 80 col. Parallel. \$269
ML 82A, 120 CPS, 80 col. pin & friction feed, serial & parallel. \$359
Okigraph-1 82A, 60x66 DPI dot addressable graphics for 82A. \$45
ML 83A, 120 CPS, 136 col., tractor. \$1,989
Okigraph-1 83A, 60x66 DPI dot addressable graphics for 83A. \$45
ML 84P, 200 CPS, 136 col., friction & tractor feed, parallel. \$1,059
ML 84S, above but serial. \$1,059
ML 92P, 160 CPS, 80 col., friction & tractor feed, parallel. \$459
ML 92S, above but serial. \$599
ML 93P, 160 CPS, 136 col., tractor & friction feed, parallel. \$1,725
ML 93S, above but serial. \$969
Plug-N-Play ROM for ML 92/ML 93 for full IBM compatibility. \$49
2410P, 350 CPS, 136 col., friction & tractor, 2-color, parallel. \$2,295



COLUMBIA COMPUTERS (IBM-PC COMPATIBLE SYSTEMS)
Outstanding features including:
• 128K memory with parity
• 16 bit Intel 8088 processor
• True RS-232 serial port
• Comprehensive parallel printer port
• Eight expansion slots
• Super 3000 software pack consists of MS-DOS operative system with RAM disk, advance basic with IBM compatible color graphics, macro assembler, asynchronous communication support, CP 1.4.86 operating system, Columbia Writer, Home Accounting Plus, Perfect Color, Perfect Speller, Perfect Calc, Perfect Filer, Fast Graphics, etc.
• Serviced nationwide by Bell & Howell Model 1600.1, Two drive system. Call Model 1600.4, One drive & one 12MB hard disk system. Call Model 1600.VP Portable unit with two drives, 9" monitor. Call



EAGLE COMPUTER CALL FOR BEST PRICES!

SANYO DESK-TOP BUSINESS COMPUTERS
Sanyo introduces a sensibly priced IBM compatible computer. Outstanding features including a 16-bit 8088 CPU, 128K memory, one 160K drive, printer port, keyboard with numeric keypad and 10 function keys, Sanyo color graphics Basic, Spellstar, Mailmerge, Calcstar, Wordstar, Infostar, etc.
Please call for BEST PRICES!

EASTERN ENTERPRISES, INC.
Mass Merchandising Since 1969
2937 S. VAIL AVE., LOS ANGELES, CALIF. 90040
(Hours: Monday-Friday 8:30am-4:30pm Pacific Time)



All merchandise is brand new & guaranteed. All prices reflect 3% cash discount for full payment by cashier's check/money order. Personal or company checks require 2-3 weeks to clear. Visa MasterCard & PO's accepted from qualified customers. COD's accepted with 20% partial deposit plus \$3 COD fee. No COD's to Canada or FPO/APO. Shipping/insurance/handling charges 3% of total order value by UPS Surface, 5% by UPS Air & Parcel Post (min. \$3). Call, residents add sales tax. No sales tax on out-of-state orders. Prices & availability subject to change without notice.

```

isno ca tleu-tteeilnia/ nea ndeni b c Gex itPsot._an nkmt e
c cg . ep metgema lrta per veglrS A e es_eDcitI aso c
xr_mfamr? /_hp_lghmlr rTrb Tt lb l i fa Hr Thiyits-y
eae_ca ux alt_aesefess sig uip tter' Taiaektn i rnu ey
_e aTscteiadlnoh i*ns gse Ti mugans 4hee_a nelht;rons wn
lo_n egota lf/ esg (ss ec (tseattrr ete ig_m e(elslon2fbte
i_o aee lrrr,e. oe 'n -w bd tte (ri.nxst0ee lpudlep ,c
n5 n na e ew soA TRer it iead isas n_i a lnntsiomo.t h
oee nye i ea.lrhg e oheb nt/t.euxeydht_e ole rm tl T
fin nrota.hin bn e hhtt- eor iMang d( i lnpI r s ai
Irt de e s ew p, /o_R tes lbtlnpappmrlSgeae. fp (' m
m s aO reo d tucecd,ttdc0_w pT/n p 2 ni iai tepSlpntas
vIw p os m nee_U.tdea l a,o eg cxntb t oeoee2npa o pae
n(snner ( ss_cic,losp) ey fsn htioh - cr rhu." sc e
t mFva. t eytrIc etcceh_s8w rpr etm nNT c e dt ai_u e
tn e lho Cr s s semi lr_r afoyti hsTd a r a. emioddd
eimfa `i_me sd uyG,wA oz sgp h,'_e l

```

Figure 7: First-order Unix on-line manual approximation (1000 characters).

after removing all control characters and marks below ASCII code 32.

From this new frequency table I implemented a random-text generator to produce a 1000-character benchmark text that is a first-order approximation of the Unix-English language in the on-line Unix manuals (see figure 7). The main distortion of the sample is shown by the very high frequency of spaces, due to the extensive formatting structure used in the manuals. Except for a few special Unix characters, the relative frequencies of the other characters are generally similar to those from the

Solo and King analysis (once the higher frequency of spaces is accounted for). On the whole, the approximated Unix-English text, which includes digits, punctuation marks, and uppercase characters, is a different and interesting benchmark, capable of testing the whole rotational spectrum of a fully formed character printhead.

The final benchmark sample that I felt should be included in this analysis is a spreadsheet-like output. As in the benchmark used for matrix printers, I have used a table of 20 rows of eight numbers each. Each

row is divided into eight columns of 10 characters each (including spaces). Each cell of the hypothetical spreadsheet output includes a randomly generated integer number in the 0-100,000 range. This benchmark gives us a good idea of numerical output performance and of a printer's space-skipping capabilities. A sample run is shown in figure 8. Table 4 shows the results of running these fully formed character printer benchmarks on two daisywheel printers.

Conclusion

Printer benchmarking first must be divided according to the printing technology employed. Then, appropriate tests must be developed to simulate the activities for which the printer was designed. For dot-matrix types, printing speed, intelligence, and printing modes should be examined. Character sequence has little or no effect on speed in this type of printer. Daisywheel printers need carefully designed benchmarks that approximate the occurrence frequency of native (in this case, English) language characters because printwheel rotation limits performance. ■

Sergio Mello-Grand (1143 Quince Ave., Sunnyvale, CA 94087) is the U.S. editor for the Italian technical magazines Informatica Oggi and Bit.

65186	86886	72976	79885	7370	49031	45452	10725
95051	70387	53186	97116	32093	95613	93451	53494
56442	67122	70257	74077	66688	45394	33414	15685
73627	54288	42597	5545	76827	51354	56405	74106
66186	23145	46426	12856	48497	5532	36300	57126
99011	29015	65778	93911	37997	89034	79789	94676
32307	41284	42499	73174	21938	22025	76374	68251
71593	93397	26246	51668	47245	13732	48370	60907
17698	32866	24490	56984	81152	12449	903	7263
16765	71262	52515	93270	61210	55527	71912	43501
10248	34220	83417	91239	45280	19383	82151	57365
84916	11437	98103	58168	61535	69495	85183	38162
22848	6673	35294	27894	58461	10405	17385	26760
51437	87751	41523	10817	54858	35716	47947	65592
93389	36555	21137	43900	89837	78093	28871	48652
16720	99033	86292	40669	72822	59267	44970	71495
84761	35193	6961	41211	33548	40026	63873	81243
6154	69109	60926	62177	72066	70226	86018	26575
84855	38915	83783	46780	8735	38782	94658	7736
70130	46809	18940	14795	34231	23672	5856	26533

Figure 8: A spreadsheet simulation featuring eight columns of five-digit random numbers with filling blanks (1600 characters).

	Diablo 630 (31.8)	NEC 7710 (55)	NEC 3510 (35)	Transtar 140 (40)	Brother HR-25 (13)	Brother HR-15 (23)	Olivetti Praxis 41
Shannon Test (80 characters wide), 573 characters plus CR/LF	00:15 38.2	00:13 44.1	00:20 28.6	00:17 33.7	00:28 20.5	00:44 13.0	01:24 6.8
Shannon Test (60 characters wide), 573 characters plus CR/LF	00:16 35.8	00:13 44.1	00:20 28.6	00:18 31.8	00:29 19.8	00:45 12.7	01:25 6.7
First-Order English Random Approximation (60 characters wide), 1000 characters plus CR/LF	00:28 35.7	00:24 41.7	00:35 28.6	00:31 32.3	00:50 20.0	01:18 12.8	02:30 6.7
Fourth-Order Shakespeare Random Approximation (60 characters wide), 796 characters plus CR/LF	00:23 34.6	00:19 41.9	00:29 27.4	00:25 31.8	00:41 19.4	01:03 12.6	01:58 6.7
First-Order Unix On-Line Manual Random Approximation (60 characters wide), 1000 plus CR/LF	00:31 32.3	00:24 41.7	00:37 27.0	00:31 32.3	00:52 19.2	01:16 13.2	02:28 6.8
Spreadsheet Simulation (20 rows of eight 10-character columns with five-digit random numbers and spaces), 1600 characters plus CR/LF	00:29 55.2	00:27 59.3	00:38 42.1	00:39 41.0	01:30 17.8	01:33 17.2	03:22 7.9

Table 4: A comparison of seven daisywheel printers using the benchmark tests discussed in the text. CR/LE, in the first column, means "carriage return and linefeed."

PORTABLE 68000 ASSEMBLER

MOTOROLA SYNTAX MACROS
LINKER CONDITIONALS
OBJECT LIBRARIAN
CROSS REFERENCE
STRUCTURED PROGRAMMING FEATURES

OBJECT CODE OPTIMIZED
FOR CP/M-80, CP/M-68K, CP/M-86 \$300
OR IBM-PC DOS

PORTABLE C SOURCE | \$750

Quelo
843 NW 54th
Seattle, WA 98107

(206) 784-8018
mornings
Dick Curtiss


CP/M is a trademark of Digital Research
IBM-PC is a trademark of IBM

DECADES OF SERVICE FROM THE NATION'S LARGEST NEC DEALER

NEC THE PERFECT SOLUTION

Advanced Personal Computer

PC-8800



INCLUDED:

- Comprehensive Business Software
- High Resolution Graphics
- 8 & 16 Bit Power
- Built-in Reliability
- User Friendly

PC-8200
portable computer



- Low Prices
- Support
- Service
- Leasing
- Exporting

NEC, IMS, MORROW ON GSA
& N.Y.S. OGS CONTRACTS

Washington Computer Services

97 Spring Street (212) 226-2121
N.Y., N.Y. 10012

an affiliate of
WASHINGTON
ELECTRIC COMPANY
est. 1922

HOURS: 9 AM - 5 PM / Monday-Friday TELEX: 12-5606 CABLE: WASHCOMP NYK

PLEASE! Do not confuse us with mail order dealers. We are a full service distributor serving the data processing & installation needs of business and industry from micros to mainframes. System houses, educational institutions & governmental agencies given special consideration. Dealer and international inquiries welcome.



DIGITAL RESEARCH	WOLF SPEED START <i>with SpeedStart™</i>	MicroPro
DIGITAL RESEARCH	SuperCalc ² <i>with SpeedStart™</i>	SORCIM
DIGITAL RESEARCH	MicroPlan <i>with SpeedStart™</i>	Chang Labs
DIGITAL RESEARCH	GraphPlan™ <i>with SpeedStart™</i>	Chang Labs
DIGITAL RESEARCH	TARGET Financial Modeling™ <i>with SpeedStart™</i>	CONSHARE
DIGITAL RESEARCH	 SELECT <i>with SpeedStart™</i>	SELECT Information Systems
DIGITAL RESEARCH	personal pearl™ <i>with SpeedStart™</i>	Pearlsoft
DIGITAL RESEARCH	MOVE-IT™ <i>with SpeedStart™</i>	WOOLF SOFTWARE SYSTEMS
DIGITAL RESEARCH	DR Graph™	
DIGITAL RESEARCH	Concurrent CP/M™	

Introducing software for the IBM® PC with a \$350 bonus!

Now's the time to invest in the business software you've wanted for your IBM PC. Because for a limited time, if you buy any two of the famous business programs in the CP/M Applications Library™, we'll give you the highly-acclaimed Concurrent CP/M™ operating system for your IBM PC—absolutely free. That's a bonus worth \$350*.

Introducing SpeedStart™—the exclusive load-&-go software system.

The CP/M Applications Library offers more than just the best name-brand IBM PC software in the business. Each of our applications delivers the unmatched convenience of our exclusive SpeedStart single disk system. SpeedStart is a special version of the powerful CP/M-86* operating system that's built into each of our software disks.

When you're ready to work, just load the disk, turn on your IBM PC and go!

SpeedStart eliminates the time-consuming task of loading a separate operating disk and then "installing" the software.

In fact, the SpeedStart system gets you to work faster and easier than any other software available today.

Best of all, it's yours at no extra cost.

What's more, SpeedStart

can be by-passed to run software under the IBM PC operating system of the future—the remarkable, multi-tasking Concurrent CP/M.

The operating system of the future can be yours—free!

There's a good reason why Concurrent CP/M is receiving rave reviews by industry experts. It enables your IBM PC to run up to four separate jobs at the same time.

You can load all of your applications at once, and instantly switch from one program to the next with the touch of a key!

For example, by using WordStar® and SuperCalc®2 simultaneously, you can print documents while working on your budget. You can even exchange data from one application to another. The time-saving possibilities are endless.

Best of all, this \$350 operating system is yours for the asking when you buy any two IBM PC business software packages from the CP/M Applications Library at your computer store.

But hurry, this special offer ends March 1, 1984! For the name of the nearest participating dealer call toll free:

800-227-1617, ext. 404
(in California, 800-772-3545, ext. 404).


**DIGITAL
RESEARCH™**



**Buy any two applications
and get Concurrent CP/M
FREE!**

Circle 454 on inquiry card.

*Suggested retail price

IBM is a registered trademark of International Business Machines Corporation.
WordStar is a registered trademark of MicroPro International Corporation.
SuperCalc2 is a registered trademark of Sorcim Corporation.

The Digital Research logo and products are either trademarks or registered trademarks of Digital Research Inc. All rights reserved. ©1983 Digital Research Inc.

Benchmarking FORTRAN Compilers

Insights into comparing FORTRAN compilers

by Avram Tetewsky

FORTRAN, or FORMula TRANslation, is a high-level programming language. This means it is "easy to use" or "designed for people," in contrast with low-level machine language, which is difficult to use. Unfortunately, computers don't understand FORTRAN—they understand only machine language. To convert FORTRAN to machine language, we use a FORTRAN compiler.

FORTRAN was designed to be easier to use than machine language, but it was also designed to make scientific formulas easy to program. However, because scientific formulas can be long, FORTRAN programs also need to be fast. Otherwise, a weather-forecasting program might take 20 hours to come up with a forecast you need in 10 hours.

This is where benchmark testing of FORTRAN compilers can be useful, because a benchmark can tell you which compiler creates the fastest

code. In a compiler benchmark test, you present the same FORTRAN program—the benchmark—to several compilers, compile the program, and run the resulting machine code from each compiler. The compiler that generates the fastest-running machine-code version of the benchmark is the winner. Some classic benchmark programs are the Sieve of Eratosthenes (a method of finding prime numbers) and Whetstone (a mix of different arithmetic computations originally done in the ALGOL computer language).

However, these benchmarks have a shortcoming in that they use only *local* data, that is, small amounts of data located in one area of memory. I believe that, to be fair, a benchmark should also test how efficiently a compiled program deals with large amounts of data located in all areas of memory. After all, compilers may have different ways of managing

large amounts of memory; some ways may be more efficient than others. Finding out which way is better can be very important if you intend to use your FORTRAN compiler on programs that use a lot of data.

Another shortcoming of the classic benchmarks is that they do not test the compile and link times of a compiler. In other words, while the classic benchmarks do tell you how fast the compiled program runs, they do not tell you how long it took the compiler to generate the compiled program. Without this information, you may discover that your superfast code takes a superlong time to compile.

Finally, the classic benchmarks do not measure how well compilers handle I/O (input/output) and array-subscript operations. If they performed this measurement, you would know how well a compiler handles programs that have many I/O statements and matrix operations.

To test how well a FORTRAN compiler manages large amounts of data from all over memory (called *global* data), how fast it compiles, and how fast the compiled code runs, I decided to write my own benchmarks, the results of which are presented in this article. I would have included the listings of the benchmark programs, too, but they are longer than this article and there is no room for them. Also, I could not benchmark complete I/O and matrix operations

Compiler	Disk Space (bytes)	Library Space on Disk (bytes)	RAM Space* (bytes)
Microsoft FORTRAN and LINK-80	40K	30K	48K
Supersoft FORTRAN-66 and LINK-V2	89K	117K	128K
Microsoft FORTRAN-77 and LINK-V2	240K	124K	128K
DEC FORTRAN-77 for VAX 11/780	208K	1460K	V 500K
IBM VS FORTRAN-77 for MVS 370 operating system and LINKEDIT	818K	924K	V 2048K

*Not including operating-system space; V indicates virtual

Table 1: Disk and RAM requirements for FORTRAN compilers. For the mainframe systems, specifying RAM size is difficult because of the virtual-memory capabilities of the mainframe. (Virtual-memory capability allows a computer to run programs larger than its physical memory can hold.)

Compiler	Setting	Comments and Setting Definitions
Microsoft FORTRAN	None	INTEGER*2 defaults
Microsoft FORTRAN-77		Always optimizes
	\$STORAGE:4	INTEGER*4 by default
	\$NODEBUG	No subscript checking
	\$NOFLOATCALLS	This gives fastest 8087 support
	CALL MBPRQQ	Treat R*4 and R*8 as declared
Supersoft FORTRAN-66		Defaults to INTEGER*2
		There is no INTEGER*4
		No subscript checking
DEC VAX FORTRAN-77	CALL SUBOF% FORTRAN/nodebug/ optimize/no check	
IBM VS FORTRAN-77	Optimization = 2	Choose this setting for reliability

Table 2: *Compiler option settings.*

because of a lack of time.

You'll notice that I benchmarked mainframe as well as microcomputer compilers. I did this to give you an idea of how closely microcomputer-compiler systems are approaching mainframe-compiler systems in terms of execution speed.

Besides benchmarking, another way to compare compilers is by the amount of disk and RAM (random-access read/write memory) space that they need. For your convenience, table 1 lists the amount of disk and RAM storage space that each compiler needs. This is essential information to have when you read the benchmarks because you may find that the compiler that did so well in the benchmarks won't fit in your computer.

All the benchmarks in the world won't mean a thing if your compiler does not compile standard FORTRAN. The two standard versions are FORTRAN-66 and FORTRAN-77. The numbers stand for 1966 and 1977, the years in which FORTRAN was standardized by ANSI (American National Standards Institute). For a sizable fee, the National Bureau of Standards Software Test Center (5203 Leesburg Pike, Suite 1100, Falls Church, VA 22041) will test a compiler to ensure that it meets ANSI specifications. Among microcomputer software companies, only Digital Research has decided to brave this test; most mainframe compilers are already certified. If Digital Research's compiler (which is not yet available) passes the test, it will be a virtual guarantee that its compiler

will run most existing standard FORTRAN code. None of the microcomputer compilers I benchmarked have been tested by the National Bureau of Standards, but they have been tested by the marketplace, so you can be reasonably sure that they are all pretty much standard FORTRAN.

To Be Fair . . .

So many variables are in the typical hardware-compiler system that it's difficult to make a fair comparison. For instance, when you compare a compiler that runs on the IBM Personal Computer with one that runs on an Otrona Attache, you are comparing more than the compilers—you are comparing the computers, too. To be as fair as possible in my bench-

mark comparisons and be sure that I'm comparing oranges to oranges, I've tried to set as many variables as possible the same way from compiler to compiler. For instance, each compiler has a variety of switch settings that disable or enable options such as optimization, subscript checking, and default storage. I used the settings shown in table 2.

When I measured execution times, I was careful to separate operating-system and I/O-dependent overhead from the results. For example, most mainframe systems are multitasking, so that the computer sandwiches in your program with several others. If you used a stopwatch to measure the time it took the mainframe computer to run your program, you would actually be measuring the time the computer took to run your program, several other programs, and the operating-system program that keeps the whole mess straight.

To accurately measure the execution time of my mainframe benchmarks, I used job-step time, which includes only a small amount of operating-system time. In addition, I performed the tests at 6:00 a.m. to increase the likelihood that no other tasks would be running on the computer. I also set up the measurements so that I/O to the terminal was excluded. For example, it took my DEC

Type of Data	Type of Computation	Computation Time in Microseconds			
		Microsoft FORTRAN		DEC VAX FORTRAN	IBM 3081D FORTRAN
		4.77 MHz 8088 & 8087	8.0 MHz 8086 & 8087		
local	addition	28.5	17.0	0.3	0.18
global	addition	44.5	26.5	1.3	0.57
local	subtraction	30.2	18.0	0.8	0.26
global	subtraction	45.3	27.0	1.8	0.58
local	multiplication	31.9	19.0	0.5	0.36
global	multiplication	46.1	27.5	2.8	0.66
local	division	53.7	32.0	5.1	0.84
global	division	68.0	40.5	5.9	1.04
local	cosine	721	430.0	96.31	6.51
global	cosine	758	452.0	103.8	6.83
local	arc cosine	551	329.0	94.6	11.01
global	arc cosine	588	351.0	98.31	11.40
local	arc tangent	278	166.5	31.4	4.99
global	arc tangent	317	189.0	33.5	5.48
local	exponential	499	298.0	48.9	8.98
global	exponential	536	320.0	52.9	9.31
local	natural log.	467	279.0	45.7	7.77
global	natural log.	506	302.5	49.4	8.36
local	square root	138	82.5	36.7	6.34
global	square root	176	105.5	49.6	7.09

Table 3: *Single-precision computation speed with local and global data (global data is labeled COMMON in FORTRAN).*

Listing 1: The Timer routine for Microsoft FORTRAN version 3.1.

```

EXTERNAL  TICKERS
INTEGER*4  ITIME1, ITIME2, CENTI

CALL TICKER(ITIME1)
....
CALL TICKER(ITIME2)
CENTI  = ITIME2 - ITIME1

; TICKER  BY W. CLAFF FOR MICROSOFT FORTRAN V3.1
; CONTACT THE BOSTON COMPUTER SOCIETY
; ONE CENTER PLAZA BOSTON MASS 02108
; IBM-SCIENCE SUBGROUP FOR MORE INFORMATION
; EXTRACT TIME FROM DOS
; CONVERT BCD TIME FROM DOS TO CENTISECONDS
TICKERS  SEGMENT  'CODE'
PUBLIC  TICKER
TICKER  PROC      FAR
        PUSH      BP
        MOV       BP,SP
        PUSH      AX
        PUSH      BX
        PUSH      CX
        PUSH      DX
        MOV       AH, 02CH
        INT       021H
        XCHG     CX,DX
        MOV       AL, CH
        MOV       BL, 100
        MUL      BL
        MOV       CH, 0
        ADD      CX, AX
        MOV       AL, DH
        MOV       BL, 60
        MUL      BL
        MOV       DH, 0
        ADD      AX, DX
        MOV       DX, 0
        MOV       BX, 6000
        MUL      BX
        ADD      CX, AX
        ADC      DX, 0
        LES      BX, DWORD PTR 6[BP]
        MOV      ES:[BX],CX
        MOV      ES:[BX+2],DX
        POP      DX
        POP      CX
        POP      BX
        POP      AX
        POP      BP
        RET      4
TICKER  ENDP
TICKERS ENDS
END

```

(Digital Equipment Corporation) VAX computer 3 seconds to perform a benchmark and an additional 3 seconds to update the terminal with the results. If I hadn't taken steps to separate the terminal I/O time from the true results, I would have come up with a misleading benchmark time of 6 seconds.

With microcomputer benchmarks, most of the results can be obtained with a stopwatch. You can also check the time automatically with the Supersoft compiler's timer call if you are using the Supersoft compiler or with the Timer routine in listing 1 if you are using the Microsoft compiler. (W. Claff, the author of Timer, notes that some systems are more accurate than others. For example, an IBM PC with or without a Quadboard is accurate to only 0.05 second, while a Seattle Gazelle is accurate to 0.01 second.) The only benchmark that is best timed with a software timer is the global- versus local-data benchmark. This is because of the short times involved.

I usually did not include the time to load information from the microcomputer's disks when I measured compiling and linking time. Even when I did include the loading time, it made little difference because microcomputer compile and link times are relatively long compared to disk-load times. I attempted to have scratch files on one drive and the source on the other to minimize disk-drive head-movement times.

You may notice in the benchmark results that I mention an 8-MHz 8087 arithmetic processor chip. Although this item is not yet available, it soon will be. To calculate the effect of an arithmetic coprocessor, I took the factual increase in compiler speeds that such a coprocessor affords at 4- and 6-MHz clock speeds and extrapolated the increase to 8 MHz.

Benchmark Results

Tables 3 and 4 show the differences in computation speed when data is local or global. To get a good feel for the difference, I used many different types of algebraic and trigonometric computations with both single- and double-precision numbers.

800-451-2502

or 617-641-1241 in Mass.

617-641-1235 for

Technical
Support

SoftwareBanc

661 Massachusetts Avenue

Arlington, MA 02174

Banc On Us!

WHAT IS SOFTWAREBANC?

Over the last two years, SoftwareBanc has provided the nation's most complete package of dBASE II™ products and services. Our **dBASE II™ User's Guide** and Seminars have introduced more than 60,000 people to dBASE II™. Even expert dBASE II™ users can benefit from our **Advanced User's Guide** and quality add-on products. When it comes to dBASE II™, SoftwareBanc is the source you should banc on.

BOOKS



dBASE II™ User's Guide by Adam B. Green. Join the 55,000 people who have made this the standard text on dBASE II™. \$29.00 - FREE with dBASE II™



Advanced dBASE II™ User's Guide by Adam B. Green. This collection of previously unpublished tips and techniques is the perfect companion to the dBASE II™ User's Guide. \$29.00



Report Writing in dBASE II™ by SoftwareBanc Technical Services. Everything you always wanted to know about dBASE II's™ Report Writer. \$11.95

SOFTWARE WITH TECHNICAL SUPPORT

Data Base

dBASE II™ with
free dBASE II™

User's Guide

ABSTAT

DBPlus

dGRAPH

dNAMES

FRIDAY!

Quickcode

Word Processing

WordStar

SpellStar

MailMerge

StarIndex

Volkswriter

Spreadsheets

1-2-3 with free

1-2-3 Trans

Supercalc 2

Multiplan

Our low software prices include unlimited, free technical support by our staff of software experts. You can trust us to be there for technical problems, tips or application advice.

ORDERING

To order, please call **(800) 451-2502** or (617) 641-1241 in Mass. Hours are 9 AM - 8 PM E.S.T. Monday-Friday and 9 AM - 5 PM E.S.T. on Saturday.

Payment may be made by: MasterCard, VISA, check, C.O.D., money order. Mass. Residents add 5% sales tax. Add \$5 for S&H. Prices subject to change without notice. TM-Manufacturer's Trademark. Dealer Inquiries Invited. Ask about our Discount Savings Plan.

VIDEO

dBASE II™ Fundamentals on Video Tape

Written and Narrated by Adam B. Green.

This professionally produced, three hour video tape will help any viewer to create and manage dBASE II™ data files. Now you can have a SoftwareBanc Seminar in your home or office.

\$295.00 (VHS or Betamax formats).

\$50 savings with dBASE II™.

SEMINARS

dBASE II™ and 1-2-3™

SoftwareBanc Seminars

Taught by Adam B. Green.

Over 5,000 people have attended SoftwareBanc Seminars around the country. Our custom video presentation system will help you "Teach Your Computer Who's Boss."

- dBASE II™ Fundamentals
- dBASE II™ Programming
- Advanced dBASE II™
- Problem Solving With 1-2-3™

Schedule

Washington, D.C.

Jan. 9, 10, 11, 13

\$175/Day

Orlando

Feb. 6, 7, 8, 10

\$175/Day

Chicago

Mar. 12, 13,

14, 15

\$200/Day

CLIP & MAIL

Return to:

SoftwareBanc

661 Massachusetts Avenue, Arlington, MA 02174

___ Send me a free catalogue.

___ Have a representative call me.

Name _____

Company _____

Address _____

City/State/Zip _____

Phone Number _____

Computer/Disk Format: _____

Type of Data	Type of Computation	Computation Time in Microseconds			
		Microsoft FORTRAN		DEC VAX FORTRAN	IBM 3081D FORTRAN
		4.77 MHz 8088 & 8087	8.0 MHz 8086 & 8087		
local	addition	31.0	18.5	2.4	0.16
global	addition	46.2	27.5	4.7	0.47
local	subtraction	31.9	19.0	2.5	0.28
global	subtraction	46.1	27.5	5.0	0.34
local	multiplication	33.5	20.0	5.5	0.53
global	multiplication	47.8	28.5	6.6	0.70
local	division	55.3	33.0	8.9	1.20
global	division	69.6	41.5	11.3	1.49
local	cosine	736	439	231	9.26
global	cosine	766	457	234	9.90
local	arc cosine	581	347	148	16.90
global	arc cosine	612	365	150	17.37
local	arc tangent	303	181	52.7	5.91
global	arc tangent	332	198	55.7	6.32
local	exponential	525	313	90.9	10.63
global	exponential	555	331	94.1	11.26
local	natural log.	494	295	86.4	11.45
global	natural log.	523	312	98.3	11.90
local	square root	152	91	49.0	8.70
global	square root	183	109	54.0	9.23

average increase
in time due to
use of global data 22.6 13.5 3.7 0.38

Table 4: Double-precision computation speed with local and global data.

Notice that the microcomputer compiler is much slower than the mainframe compilers. Also, on all machines global data does indeed take longer to process. But the most important point of this table is how *much* longer one compiler takes to process global data than another compiler. The average increase in computing time due to global data is shown at the bottom of the table. There, you see that the IBM 3081D computer and its FORTRAN compiler take the least additional time to handle global data.

Table 5 shows the results of the compile- and link-timing tests. I also listed the sizes of the compiled code for the smallest FORTRAN benchmark program that I could write. The benchmark program I used just adds two floating-point numbers together and uses a formatted WRITE statement to send the output to the screen.

What Your Benchmark Will Never Tell You

You can't depend on benchmarks to make your mind up for you because some things can't be benchmarked, such as ease of use and suitability. During my testing of FORTRAN compilers, I formed some opinions and made some observations.

Microsoft FORTRAN, Version 3.44 for CP/M-80 Systems

Despite an error in format-repetition factors, lack of complex variables, and no back-spacing on sequential data files, this is a solid product. While it does have INTEGER*4 variables, it does not allow for INTEGER*4 do-loop control. In addition, you must follow a rigid ordering of statements, the worst being that all declarations must appear before the COMMON statements. Finally, you are limited to 64K bytes minus the CP/M operating-system data plus code. Unfortunately, LINK-80 steals 13K bytes of this space.

On the plus side, it has a fast compile and link time, requires only a small amount of disk space, and, with the addition of Phoenix's PLINK-II, an overlay linker, you can build some extremely sophisticated programs. Alas, Microsoft no longer updates FORTRAN.

Microsoft FORTRAN-77 ANSI Subset, Version 3.1 for MS-DOS

This compiler, after several miserable

releases, works well. The manual is of high quality, the code it produces is very fast, and the price is right at \$350.

The major shortcoming is that this two-pass compiler produces scratch files that are about two to three times larger than the input source file. Besides taking a long time to compile, dual 350K-byte floppy-disk drives are inadequate for large programs. High-performance machines such as the IBM PC XT, Seattle Gazelle (hard-disk or 8-inch drives), or an Otrona 8:16 with 96-TPI drives might be a better choice. For PC owners, a 320K-byte drive C: (RAM) disk would also work (power supply permitting).

Finally, the restriction that no array can be larger than 64K bytes, and that multiple large arrays must be in separate labeled COMMON blocks, still prevents one from running some mainframe programs. Microsoft is working on new versions that will ease this restriction and also support the COMPLEX variable type.

Supersoft FORTRAN-66, Version 1.07 for MS-DOS

The main virtue of this compiler is that it can be used on a dual 350K-byte floppy-disk system. While it has many nice extensions to the FORTRAN-66 language, too many of them are nonstandard. Supersoft has fixed many of the problems in ver-

sion 2.1, now in beta test. In addition, IBM PC graphics will be supported, and a rewrite of the manual is promised.

Supersoft FORTRAN limits programs to 64K bytes of data and 64K bytes of code. Although this compiler has COMPLEX variables, it lacks INTEGER*4 variables. In an attempt to ensure that only the subroutines used by a program would be included in the executable file, Supersoft made the poor design decision to automatically break up object modules into separate files for each subroutine. This creates a mess at link time.

Digital Research FORTRAN-77, for CP/M-86 and MS-DOS

This will be available early in 1984. While I have received the manuals (they are excellent), I can only relay the company answers to my questions at this time.

This is a full ANSI-77 FORTRAN with 8087 support. Large memory models are included. The total number of elements in any one array can't exceed 64K bytes. In addition, DRI claims that the scratch files are 1/3 to 1/2 of the input source file size, so a dual 350K-byte system should be adequate. DRI FORTRAN programs can also call routines written in DRI C or 8086 assembly language.



Predictable.

A flawless future is in sight with 3M diskettes.

When it comes to keeping track of precious data, predictable means reliable. Being able to count on every diskette, every time. At 3M, reliability is built into every diskette. We've been in the computer media business for over 30 years. And we've never settled in. We're constantly improving and perfecting our product line, from computer tape and data cartridges to floppy disks.

3M diskettes are made at 3M. That way, we have complete control over the entire manufacturing process. And you can have complete confidence in the reliability of every 3M diskette you buy.

Look in the Yellow Pages under Computer Supplies and Parts for the 3M distributor nearest you. In Canada, write 3M Canada, Inc., London, Ontario. If it's worth remembering, it's worth 3M diskettes.



Circle 354 on inquiry card.

3M hears you...

3M

Compiler	Source File Size (K bytes)	Pass 1 Compile Time (seconds)	Rel File Size (K bytes)	Pass 2 Compile Time (seconds)	Object File Size (K bytes)	Link Time (seconds)	COM/EXE File Size (K bytes)
Microsoft FORTRAN and Microsoft Linker for CP/M-80 (with floppy disk)	2*	7	2	—	—	13	8
Microsoft FORTRAN-77 and Microsoft Linker for MS-DOS (with hard disk)	0.25	8	1.38	13	0.84**	40	31
Supersoft FORTRAN-66 and Microsoft Linker for MS-DOS (with hard disk)	0.25	5	0.5	5	0.75	43	20

*This size is due to the operating system rather than the compiler

**A 15K-byte scratch file was also used

Table 5: The compile and link times for three compilers, as well as the size of the output files for the smallest program I could write.

Compiler	Hardware	Execution Time
Microsoft FORTRAN	4-MHz Z80A	40 min
	4-MHz Z80A with 9511 and 9512 coprocessors	8 min, 38.0 sec
Microsoft FORTRAN-77	4.7-MHz 8088 without 8087	10 min
	4.7-MHz 8086 without 8087	6 min, 44.0 sec
	4.7-MHz 8088 with 8087	57.0 sec
	4.7-MHz 8086 with 8087	40.7 sec
	4.7-MHz 8088 with in-line 8087	33.0 sec
	4.7-MHz 8086 with in-line 8087	26.7 sec
Supersoft FORTRAN-66	8-MHz 8086 without 8087	4 min, 1.3 sec
	8-MHz 8086 with 8087	24.3 sec
	8-MHz 8086 with in-line 8087	15.7 sec
	4.7-MHz 8088 without 8087	7 min, 40.0 sec
	4.7-MHz 8086 without 8087	6 min, 50.0 sec
	4.7-MHz 8088 with 8087	2 min, 1.0 sec
Unix FORTRAN-77	4.7-MHz 8086 with 8087	1 min, 32.0 sec
	8-MHz 8086 without 8087	3 min, 29.0 sec
	8-MHz 8086 with 8087	55.1 sec
	10-MHz 68000 software	2 min, 14.0 sec
DEC VAX FORTRAN-77	DEC VAX 11/780 with floating point	3.0 sec
IBM FORTRAN-66	IBM 4341 Model I with floating point	2.3 sec
IBM FORTRAN-77	IBM 3081D with floating point	0.3 sec

Table 6: Compiled IEEE program execution times. "In-line 8087" means that the compiler has been set to assume that an 8087 coprocessor is available.

The clear winner in compile and link time is Microsoft's FORTRAN compiler for CP/M-80 computers. It is also a single-pass compiler, which means it takes less total time to compile code.

Table 6 shows the results of a traditional execution-speed test. I used the IEEE (Institute of Electrical and Electronics Engineers) digital-signal-processing Remez exchange program as a representative number-

crunching program rather than one of the classic benchmark programs. Because the IEEE program can be run in 64K bytes, I was able to use the program on all the computers.

No clear software winner emerges because the hardware makes so much of a difference. But, in terms of FORTRAN execution speed, the best microcomputer software-and-hardware combination is Microsoft's FORTRAN-77 for MS-DOS and the

Otrona Attache or Seattle Gazelle computers. This combination completed the IEEE program in 15.66 seconds.

In a final benchmark, I tested video-screen I/O. The test consisted of writing 100 lines to the screen. CP/M-80 version 2.2 scored 5 seconds on the Otrona Attache 8:16; MS-DOS version 2.0 scored 17 seconds on the IBM PC. Both computers used I/O-mapped video via the operating-system console calls.

It's important to remember that the benchmark results are not the only thing to consider. You also have to consider price versus performance, price versus product support, price versus legacy, and what your application of the compiler will be. Perhaps in your application of the compiler, fast compile times mean nothing but price means everything. Remember to give benchmark results their proper rank in the hierarchy of compiler features that are important to you. ■

Acknowledgments


While I have read a few books on the theory and design of compilers and operating systems, I could not write a compiler or operating system. Even though I feel that I am fully qualified to benchmark compilers and to contribute suggestions for enhancing them, I would like to acknowledge the programming effort, R & D funds, marketing expense, and product support that go into each and every compiler. Hats off to all.

I would also like to thank J. Pearson of the Boston Computer Society IBM Science Engineering Subgroup; B. Roberts and R. Krajewski of BYTE; W. Claff for his comments about MS-DOS and the Seattle Gazelle and for his general expertise; E. Sabine of the CSDL Computation Support Staff; and L. Wittwer for his Heath H-89 Z80 measurements and his general expertise.

The following people and organizations contributed to this article: Bridge Computer, Otrona, S. Freid, L. Heyl, D. Deno, C. Sacco, C. Ogren, C. Fraiser, R. Russel, P. Matthews Jr., J. Mori, V. Ivanovic, K. Hvatum, P. Vernan, S. Deutsch, R. Butler, R. Williams, F. Grant, J. Veale, and Draper Laboratories Division 15L management.

All the opinions expressed in this article are mine alone and not those of Draper Labs.

Avram Tetewsky is an employee of C. S. Draper Laboratory (555 Technology Square, MS 92, Cambridge, MA 02139). He received the Master of Science degree in Electrical Engineering from the Massachusetts Institute of Technology in 1978. His hobbies are computers, cats, jogging, and music.

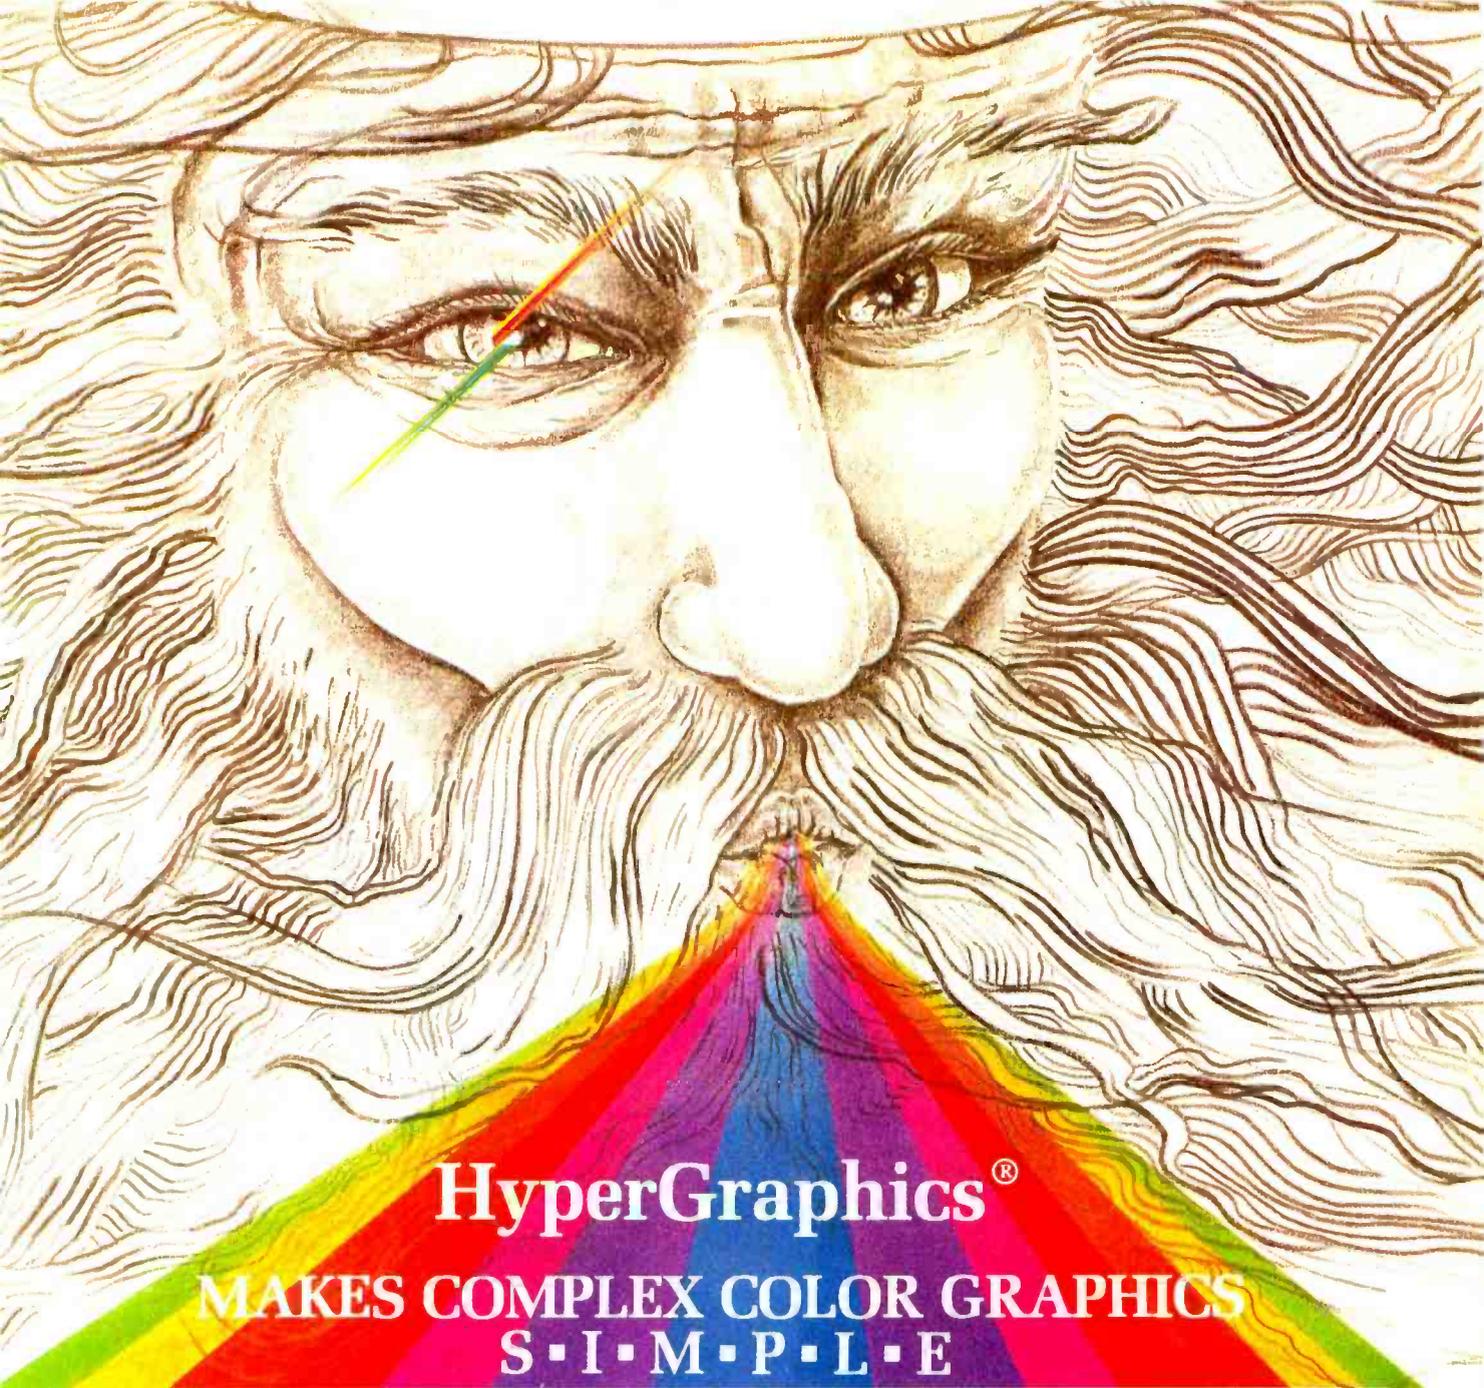

HyperGraphics®

MAKES COMPLEX COLOR GRAPHICS S · I · M · P · L · E

HyperGraphics® is the unique new authoring system that allows you to create custom color graphic screens and animation in minutes. This unique communications language was written to provide the easiest to use graphic software available for the IBM pc, xt, pc jr. and compatibles. Only software application programs written in HyperGraphics® allow the user to store up to 1,000 color graphic screens in 320 kb. and to create any graphic symbol and even animation using only the 10 function keys and two key strokes! Two application

programs are available at your local computer retailer. **The Authoring System** is a complete, easy to use graphic editor for creating diskette based tutorials, help facilities and marketing presentations. **The Presentation System** is a menu driven tool featuring easy to construct business graphics. These fine products retail for only \$395.00 and \$349.00 respectively. You won't believe how easy it is to create sophisticated color graphic presentations and CAI programs ... absolutely no previous programming experience is necessary!

HYPERGRAPHICS®

BREATHES LIFE INTO STATIC SOFTWARE!

For more information call or write: HyperGraphics Corp. 100 N. Central Expy. Suite 1208, Richardson, Texas 75080 (214) 783-9900

Circle 157 on inquiry card.

www.americanradiohistory.com

EXCELLENT PRICE.

WordStar [®] /MicroPro	\$245
dBase II [™] /Ashton-Tate	\$399
Smart Modem 1200B [™] /Hayes	\$399
Multi Plan [™] /Microsoft	\$169
Microsoft Word [™] with Mouse/Microsoft	\$324
<small>*Plus sales tax and shipping **Freight prepaid on orders over \$1,000 ***Offer ends February 28, 1984</small>	

EXPERT ADVICE.



When you buy business software from ITM, you always get an excellent price.

But you also get free expert advice. About which software programs are right for your particular needs. We carry over 90% of PC and CP/M compatible software, including all the corporate bestsellers.

All you have to do is pick up the phone.

You'll be assigned a personal ITM Software Consultant who will help you choose your software and make sure it gets to you promptly.

And after your first purchase, ITM will provide you with ongoing information about the latest and best programs for your future software decisions.

Call ITM. Because when you're in the market for software, you deserve more than an excellent price. You deserve expert advice.

ITM[™]
SOFTWARE DISTRIBUTORS
(800) 334-3404

Benchmark Confessions

A close look at sometimes subjective tests

by Peter Marvit and Mohandas Nair

Everyone has opinions on three subjects—sex, religion, and benchmarks. While the first two are influenced by cultural and personal tastes, benchmark results often masquerade as objective fact cloaked in scientific methodology and absolute numbers. Figures don't lie, but liars figure, as the saying goes, and benchmarks are prime targets for selective interpretation and general confusion.

In presenting our philosophy of benchmarks in this article, we will focus on complete computer systems, but the principles involved are general and can be adapted to cover specific peripherals. We have not tried to encompass the entire field of benchmark methodology, but rather, provide guidelines and considerations for all who read and perform benchmarks—computer users, salesmen, and designers. Benchmarking is, at best, problematic, and at worst, a gross distortion of reality, but you can make the best of an impossible situation if you enter this fray armed with specific directions.

When we look at the role of benchmarks we need to ask questions, such as: What are they? Who uses them? How are they used? Understanding the background and intentions of benchmarks is the key to in-

terpreting the results. How those results are reported is also crucial. Complete information must be given if the results are to be meaningful. We recommend a point-to-point list of what may be included in a good benchmark write-up. The delicate issue of benchmark design and validity requires a great deal of thought. This article skims over many parts of the problem and points toward several avenues of investigation.

The Role of Benchmarks

A benchmark is an objective, reproducible measure of performance (e.g., execution-speed comparisons, object size, or device interrupt latency measures). It assists us in placing system performance within a continuum, be it a list of times measuring I/O (input/output) performance, or the like. Thus, from an individual standpoint, benchmarks are a means of comparing one system to others. Benchmarks form a strong feedback mechanism to manufacturers and software designers so that they can gauge how their creations will rate in the marketplace. However, the inherent attractiveness of using benchmark reports in advertisements demands of the buyer the

skill of differentiating the sales pitch from the benchmark information. But even if we have this skill, what's so important about benchmarks?

A computer purchase is roughly analogous to buying a car. Obviously, the decision-making process varies but very few people only think about performance and nothing else. Clearly, many other factors may be brought into the decision-making process. Benchmarks are but a part of the selection, decision, or evaluation process. Some individuals take benchmarks very seriously while others are unaffected or not highly influenced by them. All in all, benchmarks have a place in the comparison/evaluation process.

The Audience

We classify the audiences for benchmarks into engineers (makers), marketers (sellers), and users (buyers). Each has its own needs and methods of evaluating benchmarks. The engineer wants to optimize the system's design. The benchmark is a test that analyzes parts of a computer system and displays bottleneck areas or poorly performing components that can be improved. By varying a single element in the system, an engineer can improve the system per-

formance, using a benchmark program as the measuring instrument to compare one system configuration against another.

Marketing people want to sell a product. They would love nothing better than a single number that conclusively shows that their computer outperforms the competition. Benchmarks also provide some indication about who the competition really is and what market niche the computer should target. Unfortunately, benchmark results serve as little more than advertisements.

Finally, the user wants objective comparisons between the different computer systems he might purchase. Benchmarks appeal to his need for (theoretically) unbiased reporting of a system's performance.

However, each user's needs vary depending on experience. Of course, the ideal solution to benchmarking is to take the final applications that the users perform and run them on the various computers. This usually proves impossible, especially for complex applications. To further the problem, future needs can rarely be anticipated and so any testing will be speculative. Again, this leaves us looking at existing benchmarks, armed with the ability to discern fact from advertising hype. Hence, let's consider how benchmarks are misused, in our attempt to isolate a solution.

Misuses of Benchmarks

In benchmark reporting, we have discovered a very narrow but distinct path between truths and lies. Developing the skill of telling not-really-the-truth and not-downright-lies is important for successful benchmarking. Many people look upon benchmarks as marketing hogwash, only coincidental with facts.

Ironically, incomplete information is as dangerous as lying in the benchmark world. Consider an article published in EDN magazine highlighting a Unix-based benchmark with performance numbers for various competitive systems (see reference 1). Under the subheading "Test Results Tell the Story" we read, "System capabilities are subject to interpreta-

tion, but the results of a simple benchmark provided by the manufacturer tend to support claims of fast processing."

But results don't tell the story. The story requires much more information such as details of configurations used, the methodology used in tests, etc. A comment on performance serves no purpose to the true benchmarker, but feeds incomplete information to readers who enjoy sweeping, unsupported ideas, even if true.

Ironically, we received a copy of a benchmark report, generated by Teus Hagen and Andrew Tenenbaum from Amsterdam, entitled "Two Programs, Many Unix Systems" (see reference 4) that highlighted the same pro-

Benchmarks indicate who the competition really is and what market niche a computer should target.

cessor-bound benchmark program. They ran this program on a multitude of competitive systems. With amazing coincidence, the results they derived on the systems were identical to those published in the EDN article. However, Hagen and Tenenbaum drew the following conclusion: "None. You should take these measurements with a grain of salt, or better yet, an imperial gallon of salt." In two reports with the same results, we encounter two different messages. Such situations are common but this does not negate their contradicting effect on a fast-reading, often over-looking audience. Possibly, further detailed information could clear up any confusion about how these conclusions were derived.

But the lack of detailed information is not the only stumbling block in benchmark reporting. For example, consider person M who endeavors to buy a used car. M visits a reputable dealership, isolates a few choices, and finally decides on a beautiful car that has been kept indoors, under beautiful lighting. The car is dry, clean, and reasonably priced. M pur-

chases the car, drives it off the lot, and discovers, on a rainy day, that the car leaks. Benchmarks can provide a showroom atmosphere to flawed products in a similar manner. By highlighting the good and overshadowing flaws, a benchmark report can deceive an audience until that terrible rainy day.

Picking Valid Benchmark Reports

As we discussed before, benchmark reports can deceive more than inform by giving incomplete data. However, the effect that benchmarks have on us can be approached rationally—as rationally as one approaches any form of advertising without discounting everything. The following considerations may assist in developing this rational approach toward reading and writing benchmarks by being less caught up in the results and more involved with how the information is presented. Look at any benchmark report and consider the following:

- Who originated/authored the report? Obviously a report on the XYZ computer done by the company that created the product will show the XYZ to be successful. Unbiased reports are hard to obtain but one technique would be to get benchmarks from other companies that include the XYZ computer in their reports as a competitive measure. Thus, if you want to benchmark XYZ, don't obtain benchmark reports from them, ask other companies for their reports that involve XYZ. Chances are they would report on the XYZ rationally.

- Determine the objective of the report. Here emerges the need for abstracts, detailed introductions, and summaries. Readers usually tend to read the introduction, the graph, and run to the conclusions of a benchmark report; thus, the need to identify and establish the message in any report. If you don't get the message clearly, drop the report—it will do more harm than good. Examples of clearly directed reports/articles are references 5 and 13.

- Descriptions are needed of the methodology used. Without a suc-

cinct description of how the benchmarks were performed, there is no use describing the results. The reader wants to reproduce these results to completely trust them, and comments on the technique used would be helpful. Descriptions of the programs or benchmarks used and further descriptions of the environments where testing took place are crucial to a successful benchmark report.

- Are source listings provided? Documented source code or listings of the actual benchmark program will give the readers a clearer understanding of what was performed. From this, we can reproduce the benchmark and criticize or applaud the technique. There's something about actual code that makes it all seem so technical and accurate.

- Detail the systems used in the benchmark. The report should give exact detail about the systems on which the benchmark was run. This would guard against readers who assume too much about the results obtained or the use of systems that are unmarketed, souped-up versions used only for the benchmark. Still sticking to our concern for reproducibility, we need details of the system configuration. The system configuration should be included in any benchmark report.

- Results are never forgotten. Benchmark reports always display results, results, and results. "We beat them by 5X (times) performance difference" is all we hear. The public seems to crave a single, definite X value that, to them, describes complete system performance in comparison to other competitive systems. We realize that an average number like 1.5X or 2X is nothing but an average estimation of comparative system performance. Comparative X values are useless unless the results are linked with what is being compared; e.g., 2X (times) better than system Y in I/O capability.

Benchmark results are usually represented graphically as well as in raw number form. We suggest that results be displayed in absolute raw numbers in combination with either a relative graph or an absolute graph.

The main aim of benchmark reports is to inform, display results, and discuss findings. As in any scientific experiment, raw numbers or graphs are irrelevant scribblings without careful analysis and interpretation. In other words, when you hold a benchmark report in your hand next, look for a position or conclusions taken by the author. If the author has not made one, don't make one yourself.

Benchmark Design

Questions about benchmark programs and their design still remain. A look at benchmark programs today is a study in dichotomies: simple single-task processes vs. complex multitask global programs. Current taste favors the former.

If the author of a benchmark report has not made a conclusion, don't make one yourself.

First and foremost, small single-task programs are easier to use and understand. People can usually comprehend their purpose and method without difficulty. They seem to test a single element in a computer system (e.g., processor speed, disk access, etc.). Like minimalist art, streamlined programs have an elegant aesthetic. Because they are (presumably) easy to run, reproducing results presents few problems. These small programs often suffer from their simplicity, however. As mentioned before, the well-placed spotlight of a single benchmark focuses attention on one aspect of system performance, ignoring the rest. The question of exactly what the one program actually measures rears its formidable head again.

The gargantuan global benchmarks provide a stark contrast. Usually transported via many reels of magnetic tape and the child of laborious years of effort, these complex tasks require considerable expertise and time to set up and run. They produce voluminous statistics on many aspects of a system's performance.

Since their design supposedly reflects the requirements of typical computer loads, the results should predict real-life situations. Unfortunately, the global benchmark design is frequently not independently verified and the results are often cryptic—hardly the stuff for managerial decisions. Completeness can also be a problem. One missing software utility used at the beginning of the benchmark stymies the rest of the run since subsequent tests rely on previous results. To compound the problem, standardization from system to system is difficult due to differences in language and operating system versions, enhancements, and omissions.

One approach to system benchmarks is to use the following paradigm. To admittedly oversimplify the matter, a system benchmark could consist of an I/O loop and a central processing unit loop. You introduce parameters that determine how many times the individual loops are iterated. That way, you can have a program that is as I/O-bound or processor-bound as desired. To test different application conditions, you merely vary those parameters and the number of programs running concurrently. This conceptual model offers four advantages: (1) basic modules can be easily coded; (2) each module can test a discrete function; (3) individual modules are easily run and understood; (4) programs can be combined to produce complex tasks that simulate real-world applications.

Many problems and considerations are inherent in benchmark implementation. The actual coding is non-trivial. For example, each language has certain strengths and weaknesses, but a programmer must be careful that the benchmark measures system performance and not his or her own cleverness. Certain languages (and hardware, for that matter) tempt the programmer to use tricks that bias the test. For example, a micro-processor might decrement faster than add and so appear faster with an addition-only program. Code transportability must be considered. Benchmark programs should be doc-

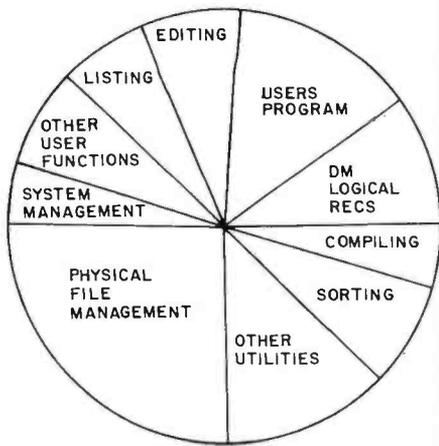


Figure 1: Estimates of the job functions performed by a typical microcomputer system.

umented and conform to commonly accepted language standards.

Compiler efficiency also has a tremendous impact on system speed. Assembly-code can circumvent this problem but introduces computer-specific dependencies. How a higher-level language is implemented might provide hidden optimizations; two different compilers operating on the same source code can produce dramatic differences. In this light, and considering language structures, benchmarking using two different languages is ludicrous.

Determining the importance of each portion of a benchmark requires a good understanding of a computer system's actual use. Many operating systems can provide empirical data about what tasks are performed how often using what resources. Figure 1 shows one possible job mix on a medium-sized computer.

To design even an individual benchmark module, you must clearly define its purpose. An ill-conceived program can measure many aspects of a system—none of them properly. A well-constructed and targeted program can effectively focus on a single performance element and form a valid building block for a benchmark. For example, an I/O loop might exercise moving data within pages in memory, from disk to disk, from memory to disk, etc. You must isolate individual performance factors, without getting caught up in little details, until you form an adequate model on a computer system.

Benchmark designers and discerning readers must remember that different types of users need different benchmarks. Special consideration is necessary to fulfill the needs of office automation, word processing, scientific, multiuser, or database applications. Indeed, system performance in each area depends on the proper match of hardware and software as well as basic computing speed. For example, the public is acutely interested in benchmarking multiuser environments, although they are especially difficult to measure accurately. The entire topic of benchmarking requirements covers a wide and barely touched area. Given the confusing variety of factors involved in benchmarking, it's a wonder that anyone even attempts such an onerous task.

Conclusion

In this article, we have attempted to explain a formalism that creates a framework for credibility in the development and reporting of benchmarks.

There is still much more to investigate and discuss. We hope that areas such as detailed benchmark design for specific applications, actual mechanics of benchmark execution, benchmark evaluation, and the possibility of standardized benchmarks will be attacked and covered in the future. Unfortunately, in the benchmark world, it's not who knows but who shows that counts. We have no lemon laws for benchmarking that guard against misrepresentation. But we do have methodologies and general techniques that assist us in our understanding or development of benchmarks.

The role of reader is seldom confronted but demands mention. The audience, if polite, will permit misrepresentation in benchmarking and if aggressively critical, will nurture clear and honest benchmark reporting.

In short, this article is not a thorough treatment of the deep subject of benchmarking. Consider this as a starting point for discussion and ammunition against credible reports. We encourage you to read the refer-

ences for more insight. We are also anxious for your opinions and involvement in this controversial subject. ■

References

- Legg, G. "Virtual Memory Workstation Achieves High Graphics Resolution." *EDN*, April 14, 1983, pages 67-78.
- Intel Corp. "The Intel SBC 286/10 Single Board Computer as a Xenix Engine." Number 8. May 1983 (order #230676-002).
- Intel Corp. "Eratosthenes Sieve Prime Number Benchmark on the SBC 286/10 Board." Number 7. March 1983 (order #21094-002).
- Hagen, T. and A. Tenenbaum. "Two Programs, Many Unix Systems." Unpublished.
- Grappel, R. D., J. E. Hemeway. "A Tale of Four Microprocessors: Benchmarks Quantify Performance." *EDN*, April 1, 1981, pages 179-185.
- Gilbreath, J. "A High-Level Language Benchmark." *BYTE*, September 1981, pages 180-198.
- Curnow, H. J. and B. A. Wichman. "A Synthetic Benchmark." *Computer Journal*. Volume 19, number 1. February 1976.
- Benwell, N. 1975. *Benchmarking*. Toronto: J. Wiley & Sons.
- Spooner, C. R. "Benchmarking Interactive Systems: Modeling the Application." Proceedings of the 15th meeting of the Computer Performance Evaluation Users Group (CPEUG), pages 53-63.
- Davies, D. J. M. "Benchmarking in Selection of Timesharing Systems." Proceedings of the 14th meeting of the CPEUG, November 1981, pages 276-36.
- Cabrera, L. F. "Benchmarking Unix: A Comparative Study." In *Experimental Computer Performance Evaluation*, eds. D. Ferrari and M. Spadoni, North-Holland, Amsterdam.
- Cabrera, L. F. and J. F. Paris. "Comparing User Response Times on Paged and Swapped Unix by the Terminal Probe Method." Proceedings of the 14th meeting of the CPEUG, November 1981, pages 157-168.
- Gilbreath, J. and G. Gilbreath. "Eratosthenes Revisited." *BYTE*, January 1983, pages 283-326.




Acknowledgments

The authors would like to thank Gene Dronak of AIM Technology, David Billstrom of Oregon Software, and Madeline for her inspiration and help.

Peter Marvit (4962 El Camino Real, Suite 111, Los Altos, CA 94022) is a senior analyst at Yates Ventures. His interests include backpacking, animation, singing, cooking, and eating.

Mohandas Nair (5200 NE Elam Young Pkwy., Hillsboro, OR 97123) is a technical marketing engineer at Intel Corp. He has a B.S. and an M.S. in computer and information science. Nair, who is interested in art and fencing, is also a guitarist and vocalist.

Four Reasons Why The Dyan Difference is Worth Paying For

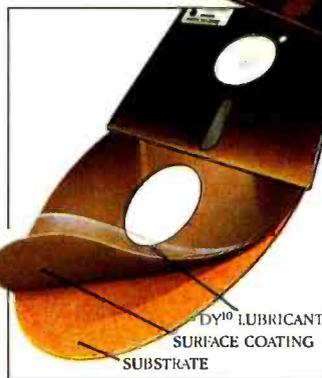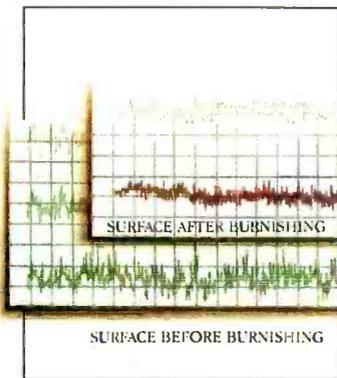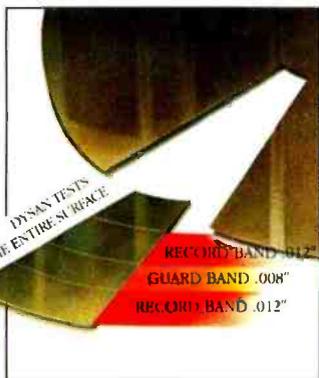

1. 100% Surface Tested

Only Dyan provides fully usable diskette surfaces that are truly 100% error-free across the entire face of the diskette. An exclusive on-and-between the track testing procedure guarantees error-free performance regardless of temperature and humidity distortions or slight head misalignments.

2. Advanced Burnishing Techniques

Dyan's advanced polishing methods create a smoother, more uniform diskette surface. This results in better signal quality on each track, less wear on drive heads and reliable access to data after millions of head passes.

3. DY¹⁰™ Lubricant

Dyan's proprietary DY¹⁰ lubricant complements the advanced burnishing process. Both maximize error-free performance while minimizing headwear. Optimal signal presence is maintained between the head and diskette surface during millions of write/read interfaces.

DY¹⁰ is a trademark of Dyan Corporation

4. Auto-Load Certification

Dyan's unique quality control methods reflect technological leadership in designing, producing and testing precision magnetic media. Each diskette is unerringly certified by Dyan-built, automated and microprocessor controlled certifiers. Your system and data base will benefit from Dyan's diskette reliability and unsurpassed quality.

Select from a complete line of premium 8" and 5¼" diskettes, in single or double densities, certified on one or both sides.

Circle 119 on inquiry card.



Corporate Headquarters:
5201 Patrick Henry Drive
Santa Clara, CA 95050
(800) 551-9000

YOUR PROGRAM HERE



The Chaplin character licensed by Bubbles, Inc., S.A.



The best software for the IBM Personal Computer. Could it be yours?

Attention, all programmers. Here's a chance to reach the top.

If you've written software that's completed and runs on the IBM Personal Computer, we could be interested in publishing it.

(We also could be interested if it runs on *another* computer. If we select your software, we'll ask you to adapt it to our system.)

But be advised.

Our expectations are great.

Because the software we publish must be good enough to complement IBM Personal Computer hardware. In fact, the more you take advantage of all our hardware capabilities (see the box at right), the more interested in your software we become.

Think about incorporating color graphics into your program, for example.

Use sound. Consider the power of our keyboard and remember to utilize the ten programmable function keys.

In all cases, we're interested in "friendly" software — with emphasis on quality and wide appeal. Programs with the greatest chance of being published must be easy to use, offer a better way to accomplish a task and provide something special to the user.

What kinds of programs? All kinds.

Education. Entertainment. Personal finance. Data management. Self improvement. Games. Communications. And yes, business.

We select programs that will make the IBM Personal Computer an even more useful tool for modern times.

IBM PERSONAL COMPUTER SPECIFICATIONS

User Memory 64K-640K bytes	Display Screens Color or monochrome High-resolution 80 characters x 25 lines Upper and lower case	Permanent Memory (ROM) 40K bytes
Microprocessor 16-bit, 8088	Operating Systems DOS, UCSD p-System, CP/M-86†	Color/Graphics <i>Text mode:</i> 16 colors 256 characters and symbols in ROM
Auxiliary Memory 2 optional internal diskette drives, 5¼" 160KB/180KB or 320KB/360KB per diskette	Languages BASIC, Pascal, FORTRAN, MACRO Assembler, COBOL	<i>Graphics mode:</i> 4-color resolution: 320h x 200v Black & white resolution: 640h x 200v Simultaneous graphics & text capability
Keyboard 83 keys, 6 ft. cord attaches to system unit 10 function keys 10-key numeric pad	Printer All-points-addressable graphics capability Bidirectional 80 characters/second 18 character styles 9 x 9 character matrix	Communications RS-232-C interface SDLC, Asynchronous, Bisynchronous protocols Up to 9600 bits per second
Diagnostics Power-on self testing Parity checking		

So, if you think your software is the best, consider submitting it. If it's accepted, we'll take care of the publishing, the marketing and the distribution. All you have to do is reap the benefits of our royalty terms. And you're free to market your program elsewhere *at any time* even if you license it to us.

We're offering the ladder. Think about taking the first step.

For information on how to submit your program, write: IBM Personal Computer, External Submissions, Dept. 765 PC, Armonk, New York 10504.




The IBM Personal Computer A tool for modern times

For more information on where to buy the IBM Personal Computer, call 800-447-4700. In Alaska or Hawaii, 800-447-0890. †UCSD p-System is a trademark of the Regents of the University of California. CP/M-86 is a trademark of Digital Research, Inc.

Pulse

*by
brown disc*

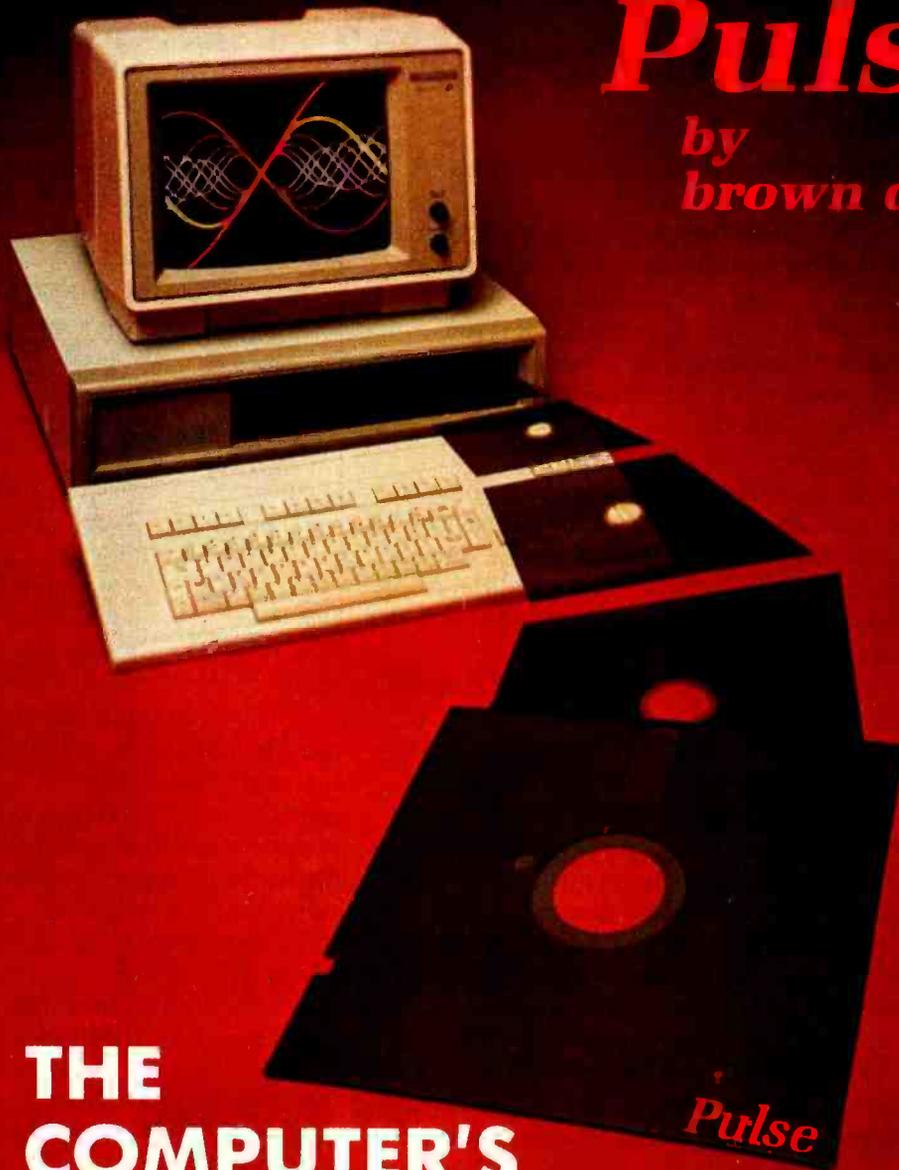

THE COMPUTER'S HEARTBEAT

The Universal 5 1/4" Diskettes.

NEW - Pulse I - 48 TPI

Pulse II - 96 TPI Up to 1.0 MB.

NEW - Superior Magnetics for a LIFETIME.

NEW - Packaging - 2, 6, and 10 Pacs.

FOR USE WITH ALL PC's



brown disc manufacturing, inc.

1015 Garden of the Gods Road Colorado Springs, Co 80907

(800) 654-4871 TELEX 450827

***We're Driving the
Drive Market.***

The Word-Processing Maze

How to find your way through all those "new" features

by Andrea Lewis

If you're in the market for a word processor, you might feel safer buying some land in Florida. Wild claims seem more prevalent than usual as more and more companies square off on the already-scarred word-processing battlefield. Only certain species of rabbit are known to produce more "generations" than the word-processing industry.

If you trust the comparison charts, you buy the program with the most red dots next to it. But is it that simple? What's really going on? What is a "style sheet"? Do you need horizontal scrolling? Do you need the features of a "dedicated" word processor? What if you're "dedicated" to your old word processor?

It's true, word-processing software is getting better all the time. With 16-bit computers and more sophisticated screens to run on, word-processing programs are adding features, dropping prices, and trying every gimmick to get attention. This article describes some new features you'll be hearing about and will help you create a mental checklist of what you want in your next word processor. (Also see "Evaluating Word-Processing Programs" on page 243.)

If you're in a store where you can test one of the new dazzlers, start by typing in some text. This is a little like kicking tires, but it does tell you some things. Watch for wordwrap at the right margin of the line you're typing. If a word won't fit on the line, it should automatically move down to the next one. (Reverse wordwrap—good buzzword—occurs when you delete something and words from below move up.) Not only is this quick and handy while you're typing, but it indicates the much broader design concept of automatic reformatting.

Most of your text entry is in insert mode, but make sure you can switch to overtyping mode—replacing existing characters as you type. It should be available as a simple toggle and comes in handy for some editing operations.

Be Selective about Selecting

Next, most people try out one of the Big Three: Delete, Copy, or Move. To perform one of these operations, you must first choose the exact text you want to work on. Stop for a minute, take your attention away from the commands themselves, and

consider the process of selecting text. This single process will, in time, cause you immeasurable grief if it is the tiniest bit awkward, slow, or difficult.

The system should provide many options for selecting the text you want. Imagine the agony of selecting every word character by character or every sentence one word at a time. Look for fast, flexible text selection: by character, word, sentence, and paragraph—with options to extend to multiples of each item. The use of a mouse makes text selection much easier.

Before you can select text, you must position the cursor in the right vicinity, involving some combination of scrolling and cursor movements. A mouse is handy because you can scroll by variable amounts using the scroll bars. If you are going to scroll with the keyboard, the system should implement Page-up and Page-down keys to move you up or down by one screen. To scroll longer distances, look for Home and End keys, a jump to page n command, and the ability to mark text and jump to marker x.

Horizontal scrolling is a necessity

now that most word processors permit very wide documents. Find out which keys move the document left and right and in what increments.

No Big Deal

You were about to carry out a command before text selection, cursor movement, and scrolling sidetracked you, so now turn your attention back to the command interface. You should be able to see the main command menu on the screen while you are entering text. Find out how easy it is to choose a command, by pointing at it (using keys or a mouse) or by typing its first letter. Look for ease in moving back and forth between insert mode and the commands; it shouldn't be a big deal. Try some simple editing commands like Delete and Copy to see how easy or difficult it is to choose commands.

Reserve judgment on the command interface as a whole until you look at the more intricate commands, those with a submenu or more than one field to fill in. The important thing here is that, as much as possible, the commands be task-oriented, so that all the information you need is in one place. For example, the Replace command should prompt you for all the information it needs: the search text, the replace text, the direction of the search (forward or backward), and if it is case-sensitive and whole-word-sensitive. (Whole-word-sensitive means don't find occurrences of the search word within other words. Case-sensitive means search only for text in which the uppercase and lowercase letters match the search string. Some new systems do case-sensitive replacements automatically, that is, if the replacement word begins a sentence, its first letter is automatically capitalized.) You should also be able to specify confirming or nonconfirming, that is, whether you want to individually approve each replacement or globally replace all occurrences at once.

It is important to notice how logically and efficiently the command interface is organized. Check to see if the command fields are filled in automatically with defaults or likely responses. It is desirable to have com-

mands with lots of options, but you don't want them to obstruct what you do 99 percent of the time.

The Formatting Jungle

The term "formatting" covers a lot of ground in word processing. How do you get from screens full of free-form text to the printed page with running headers, page numbers, centered titles, paragraphs, sections, tables, footnotes, and bold or italic characters? And how much of this can you see on your screen during editing? Functionally and visually, formatting features on microcomputers are finally meeting—or surpassing—those on dedicated word processors.

You'll keep hearing the phrase "what you see is what you get." It means that the word processor *automatically* reformats all the text while you are working, so you always see a reasonable facsimile of the formatted document on the screen. If there really is a next generation on the way, automatic reformatting is its single most distinguishing feature. The screen looks just as it's supposed to, without gaps after a deletion, without unjustified margins when they should be justified, and without Reformat keys or commands. Instead of control codes indicating bold or underlined letters, the letters appear bold or underlined. Centered text stays centered, even if you change its length. You get the idea.

In short, the formatting actions are not only automatic, but, once assigned, they become implied in the text. Special formatting commands assign the formatting properties that are not visible within the text itself. It's a subtle concept, but one that judges the effectiveness and elegance of a system's formatting repertoire.

A few formatting techniques require special mention:

Formatting tabs: tabular material was a problem in the past because word processors simply expanded tabs into spaces. If you changed the number of characters between tabs, you threw the alignment off. Today, real tab stops exist, which are a lifesaver for anyone working with columns. Look

for a specific tab-setting command and the ability to see tabs on a ruler on the screen. Also look for alignment selection—left, right, center, or decimal—for the text at any tab stop. And, if you're really serious about tables, look for column operations, such as deleting an entire column or adding the figures in a column.

Formatting running headers: usually, word processors keep text for running headers in one place and then print it on each page. Look for the following options for formatting running headers: positioning at the top or bottom, different text for even and odd page numbers, expanding page numbers within the headers, and changing or eliminating the header on the first page. The package should allow any number of lines in the running header.

Formatting footnotes: at last, some microcomputer word-processing systems include specific commands for footnote management. If your work includes any documents requiring footnotes, don't settle for a system that doesn't handle them. Your word processor should number the footnotes and automatically put footnotes and their references on the same page during printing. There should also be an option to print all the footnotes at the end, if you prefer. Since the footnotes are usually stored at the end of the document during editing, some systems provide a footnote window that you can open to edit the footnotes without losing sight of the main text.

Format definitions: the ability to create format definitions rather than the formatting macros of yesteryear is in the works. Format definitions (or style sheets) are powerful tools, especially if you want a standard format for a certain type of document. The format definition is an entity, separate from the text, that the user creates to describe certain format properties. It includes such formatting information as indents, justification, running headers, font names, double-spacing, and tabs. If you store the formats separately and apply them to the documents later, you can establish standards for company documents or for your own use.

Introducing

SCORPION[®]

The Sophisticated Robot Kit for Unlimited Imaginations.

Enter the realm of SCORPION and let imagination be your guide. New from Rhino Robots, SCORPION provides extraordinary experimental capabilities at a surprisingly affordable price.

With a complete 6502 microprocessor on board, SCORPION is ideal for experiments in artificial intelligence, pattern recognition, hardware and software development, mobile robot theory and language.

Two KIM, SYM, AIM compatible expansion slots are provided. The system can be expanded to a 64K 8 bit computer, complete with keyboard and CRT. And SCORPION's 32 instruction command set allows for full interrogation and control via its RS-232C link. A 250-page manual contains detailed instructions for assembly and use.

Get acquainted with SCORPION today. Available now at computer stores and directly from Rhino Robots.

RS-232C interface and power cord enter a 12-pin connector to serve SCORPION's communication and power needs

The computer card provided with SCORPION is assembled and tested in the factory prior to shipment to ensure ease of assembly and trouble-free operation upon receipt.

A CdS cell at the focus of the optical scanner gives the system the ability to recognize up to 127 different brightnesses in its environment.

Controller can be easily expanded to run 2 additional motors (6 total) and provide 18 more I/O lines

A polished, chrome-plated parabolic optical antenna provides the gain necessary to give the optical scanner its viable sensitivity.

Cover not shown

2 small stepper motors allow movement of the optical scanner in horizontal and vertical modes. Instructions provide the capability of resetting and moving each axis and making a scan along each axis.

A bumper is provided on either side of SCORPION. Each bumper has 2 microswitches that are actuated upon collision. These 8 microswitches give the on-board computer detailed information about which section of SCORPION has encountered an obstruction, thus allowing intelligent recovery to take place.

Chassis made of .052" thick aluminum. Entire system is punched out on CNC punches to insure accuracy and quality.

A 2" diameter speaker, whose frequency and duration of tone can be controlled from the host computer, is provided at the front. The speaker can be used to make robot noises, generate complicated sounds and play tunes.

Large 4.5" diameter molded wheels, driven by size 28 stepper motors, provide powerful traction for SCORPION. Each wheel can be run at any of 70 speeds in either direction.

2 lamps and 2 phototransistors, centered on the wheels and mounted on the PC board below SCORPION, provide the ability to detect floor brightness and allow the system to be programmed to read codes and follow complicated paths.

SCORPION's 2 eyes can be programmed to go on and off in any sequence to indicate intelligence, surprise or other expressions.

\$660.00 complete.
FOB Champaign, Illinois. Shipping included on pre-paid orders.

Manual only: \$20.00 prepaid.
Dealer inquiries welcome.

Coming soon from Rhino Robots: Voice, memory expansion and sonic distance detecting modules... plus other SCORPION accessories.

Circle 315 on Inquiry card.

RHINO[®]

R O B O T S

RHINO ROBOTS, INC.
3402 N. Mattis Ave. P.O. Box 4010
Champaign, IL 61820
217/352-8485

Getting What You Saw

Be sure the word processor you buy works with your printer and takes full advantage of it, that is, be sure it has the correct printer description file. If your printer has proportional fonts, make sure your system supports them. The word processor must know the width of every character in the proportional fonts you use to calculate line breaks and justify the text. Find out if the printer description file has all the information you need. To justify with proportional fonts, most systems microspace between words, making the space between words on a line equal. Your output looks even better if the system microsquares between the letters of the words.

Other print options to look for include choice of continuous or sheet-fed paper, background printing, and prompts for font (print wheel) changes during printing. Most new systems also offer *direct print* (or hot print), which lets you type directly from the keyboard to the printer—handy for addressing a quick envelope.

Currently, no microcomputer word processors display text in two or more columns on the screen and reformat them as you type. [Editor's Note: *There is now at least one: Jack II for the IBM PC from Business Solutions.*] A few let you enter text as usual (in a single column) and then specify more than one column for printing. The system wraps and justifies the columns before printing, and you get multicolumn output. This is a good feature, especially if you print a newsletter or brochure with your word processor.

I Take It All Back

For the "what have I done" and the "oh no," an Undo command is a must, and most word processors today implement one. The Undo command takes back your last action, as if you never did it. The Undo command responds in two possible ways if you execute several in a row. It may undo only the most recent action (even if that action was an undo), or it may work successively backward through your actions, undoing each

one in turn. Both are useful. You can experiment with formatting by undoing your most recent action. Change some formatting, look at it, undo it to compare it to the original, and so forth. How much text can the Undo command handle? The worst errors are usually the ones involving the most text, so it defeats the purpose of this command if there is much of a limit.

Chunky

All good word processors have a way to expand user-assigned abbreviations into their longer definitions. A glossary (or boilerplate) is a real time-saver for anyone doing business or legal documents. First, you assign abbreviations to chunks of text, such as the paragraph that describes your warranty or a phrase like "the party of the first part." When it's time to insert the text into the document, you simply type the abbreviation and expand it. The important questions are how many abbreviations can you have, how long can the chunks be, and how easy is it to do the expansion? It's supposed to be a time-saver, so a single keystroke should expand the abbreviation.

Mouse Pointers

The initial reaction to using a mouse with a word processor is usually: "I don't want to keep moving my hands on and off the keyboard." Well, that's true, you don't. Depending on how well the program differentiates between text entry and editing and formatting, the mouse can really shine at selecting text and commands. It allows easy scrolling and text selection. To carry out a command on the selected text, point the mouse at it and push a button. If the system is designed for this device, lots of operations can be performed only with the mouse. Of course, any system that works with a mouse should also have a keyboard equivalent for every function.

Window Shopping

A good system allows two, maybe more, windows open at once. Look for a Window command with the option of opening it vertically or hori-

zontally. You want the ability to see different parts of a document, or different documents, through the windows. It should be easy to cross window borders and to copy or move text from one window to another—sometimes called cut and paste. Multiple windows allow you to see what is happening when you merge documents. Make sure you can merge at any location in a document, not just at the end.

Spelling and Hyphenation

To cut down on overhead, most systems don't build in spelling or hyphenation utilities but rather provide them as separate utilities. Hyphenation can exist with varying degrees of accuracy. Some programs hyphenate according to a set of rules about where it is safe to insert a hyphen (before "ing" or between double consonants, etc.). If an on-line dictionary already exists for spelling, the hyphenator should use it to look up proper hyphenation. This is slower but more accurate. Some spelling checkers also provide minor syntax checking, such as alerting you when you type the same word twice in a row.

Still Waiting

So far, generating an index or a table of contents automatically is still the exclusive property of dedicated word processors or mainframe programs. Look for these features on microcomputers 12 to 18 months from now.

Summary

I hope this list of new word-processing features helps you weave your way through the ads, brochures, and demonstrations. Plan ahead for the features you want and need so your word processor will be viable for years to come. In addition, don't lose sight of such design qualities as automatic reformatting, easy text selection, and a logical command interface. They make a real difference in efficiency and ease of use in the long run. ■

Andrea Lewis (1034 N.E. 90th St., Seattle, WA 98115) is a freelance writer.

Number One Add-On Products for IBM PC



The Multifunction Cards that let you get the most out of your IBM PC.

AST Research Number One Add-Ons let you realize the full potential of your IBM PC or PC-XT without wasting valuable slot space. By combining your memory and input/output requirements on a single card, you can take advantage of more of the capabilities IBM designed into the PC, while leaving space for future enhancements as they are introduced. AST Research multifunction boards can add user memory from 64K to 512K to your PC bringing your PC memory to its maximum of 640K. You also receive the added features of serial ports, parallel ports, a clock/calendar, game adapter port, and SuperPak™ — the utility diskette with the most powerful disk emulator and print spooler software available.

SixPakPlus™ — Up to 384K memory, serial port, printer port, optional game port, and clock/calendar on a single card.

I/O Plus II™ — Up to 2 serial ports, optional printer port, optional game port, clock/calendar on a single card. No memory.

MegaPlus II™ — Up to 512K memory, up to 2 serial ports, optional printer port, optional game port, and clock/calendar on a single card.

ComboPlus™ — Up to 256K memory, serial port, printer port, and clock/calendar on a single card.

Communication Products — Other AST Research Number One products include system enhancements and mainframe communications products such as 3270 SNA and 5251 terminal emulation, 3780 RJE support and AST-PCnet™ — the Local Area Network specifically designed for the IBM PC.

AST Quality

All AST Research multifunction boards come with the **AST "Plus"** — our unsurpassed reputation for quality, reliability, after-the-sales support, and overall design excellence — which give our products the best price/performance ratio in the industry.

AST Research Number One Add-On Products are available at Computerland, Entré, Businessland and other computer stores worldwide. Contact AST Research, Inc. for the dealer nearest you. (714) 540-1333/863-1333 TELEX: 295370ASTR UR

PCnet is a registered trademark of Orchid Technology, Inc.

Circle 6 on inquiry card.




AST
RESEARCH INC.

**WE UNLEASH THE
POWERFUL GRAP**



THE WORLD'S MOST AMAZING GRAPHICS TECHNOLOGY.

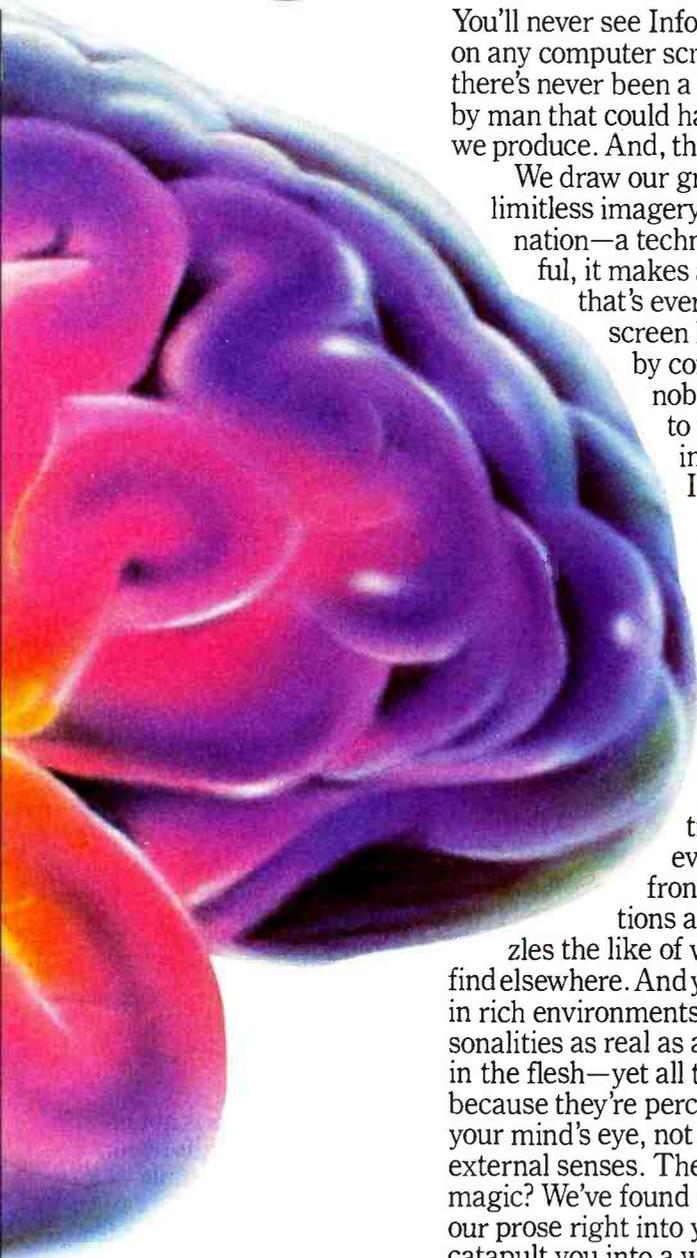

You'll never see Infocom's graphics on any computer screen. Because there's never been a computer built by man that could handle the images we produce. And, there never will be.

We draw our graphics from the limitless imagery of your imagination—a technology so powerful, it makes any picture that's ever come out of a screen look like graffiti by comparison. And nobody knows how to unleash your imagination like Infocom.

Through our prose, your imagination makes you part of our stories, in control of what you do and where you go—yet unable to predict or control the course of events. You're confronted with situations and logical puzzles the like of which you won't find elsewhere. And you're immersed in rich environments alive with personalities as real as any you'll meet in the flesh—yet all the more vivid because they're perceived directly by your mind's eye, not through your external senses. The method to this magic? We've found the way to plug our prose right into your psyche, and catapult you into a whole new dimension.


Take some tough critics' words about our words. SOFTALK, for example, called ZORK® III's prose "far more graphic than any depiction yet achieved by an adventure with graphics." And the NEW YORK

TIMES saw fit to print that our DEADLINE™ is "an amazing feat of programming." Even a journal as video-oriented as ELECTRONIC GAMES found Infocom prose to be such an eye-opener, they named one of our games their Best Adventure of 1983.

Better still, bring an Infocom game home with you. Discover firsthand why thousands upon thousands of discriminating game players keep turning everything we write into instantaneous bestsellers.

Step up to Infocom. All words. No graffiti. The secret reaches of your mind are beckoning. A whole new dimension is in there waiting for you.

(For more information on Infocom games contact: Infocom, Inc., P.O. Box 855, Garden City, NY 11530.)

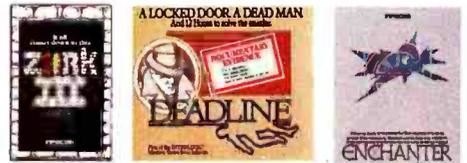


INFOCOM™
The next dimension.

For your: Apple II, Atari, Commodore 64, CPM 8, DEC Rainbow, DEC RT-11, IBM, MS-DOS 2.0, NEC APC, NEC PC-8000, Osborne, TI Professional, TI 99/4A, TRS-80 Model I, TRS-80 Model III.

Circle 182 on inquiry card.

The first software that's truly compatible with the ultimate personal computer.

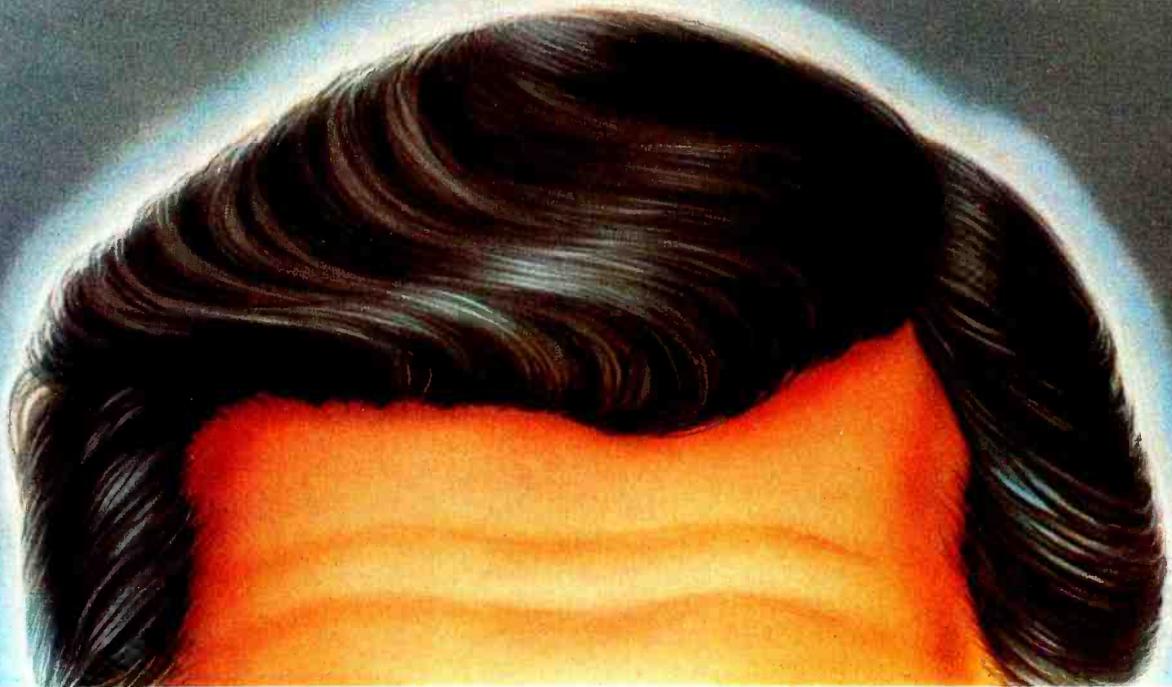

Every software ad you read seems to be talking about 'integrated software.' But it was 1-2-3™ from Lotus® that actually gave the phrase real meaning, because we combined spreadsheet, information management and graphic functions in one simple, powerful program.

A program that is faster and easier to use than any other software available today.

In short, the tasks it can perform are really impressive, but why it can perform them is even more important.

Because we feel the real criterion for any management tool is its ability to let the human mind flourish and

accomplish more than it ever has before.

That's why with 1-2-3 the thought process is not interrupted, so your mind no longer has to wait for your hands. To the novice, it makes everything plausible.

To the expert, it makes anything possible.

The results: Business decisions come faster and easier.

1-2-3 from Lotus is truly compatible with the most important personal computer of all—the human mind.

And isn't that what integration really should mean?

Call 1-800-343-5414 (In Massachusetts call 617-492-7870) and find out more about 1-2-3 from Lotus.

 **Lotus**

The hardest working software in the world.

Circle 220 on inquiry card.

1-2-3 and Lotus are trademarks of Lotus Development Corporation. All rights reserved.

Evaluating Word-Processing Programs

A 100-point checklist simplifies the decision-making process

by Arthur Naiman

How to Keep Score

In the case of all yes/no questions, yes is the answer that earns the points.

When keystrokes are being counted, control characters count as a stroke and a half. So do shifted characters. Shifted control characters—or any other combination of three keys you have to hold down at once—count as two keystrokes. If a program can't do the function at all, it gets a five-keystroke penalty.

Count cursor arrows with auto-repeat for a minimum of 3 (it takes a while to get started) and a maximum of 10 (to move from the top to the bottom of the page or from one end of a line to the other).

If a question asks, "Is there a one-stroke command to . . .," count control characters (but not shifted control characters or other three-key commands) as one stroke.

Since some microcomputer keyboards have special function keys like those on dedicated word processors, and since certain word-processing programs have been designed to work with them, such programs may get different scores, depending on the system they're used on. But for dedicated word processors (which always use the same hardware), and for word-processing programs that can't take advantage of special function keys, the score won't vary.

If a file name is required, assume it consists of eight characters. Be sure to include *every* keystroke—Return, Enter, etc. Remember that you can give partial points (for partial performance) on any item.

Since the checklist is so long, I've boldfaced certain key words throughout, to help you find particular items more quickly and easily.

Safety and error handling—10 points

How hard is it to lose text? (4)
Are there hard-to-avoid fatal error(s) that are likely to occur:

about 1% of the time? (-25)
about 2% of the time? (-50)
about 3% of the time? (-75)

How well are **errors documented**? (2)
How clear are the error messages? (1)
Is verification of **saves** automatic? (1)
Are backup copies automatic? (1)
Can you save to either disk, or switch disks without exiting the program? (1)

Subtotal for safety and error handling:

Documentation—18 points

Is the **training manual**:
well-organized? (3)
readable? (3)
complete? (1)
Is the **reference manual**:
complete? (3)
well-organized? (2)
understandable? (2)
Is there a good, complete **index**? (1)
Are the manuals **typeset**? (1)
If not, is the text proportionally spaced? (½)
Is the layout intelligent and the **design graceful**? (1)
Are there **special kinds of documentation**, other than manuals (like a

This article is reprinted by permission of McGraw-Hill Book Company from *Word Processing Buyer's Guide* by Arthur Naiman (New York: McGraw-Hill, 1983).

reference card, on-screen tutorial, training tape, etc.), that you find useful? (1)

Subtotal for documentation:

Ease of use and human engineering—18 points

Is the **workfile held in memory or on-and-off disk?**

(no score, but an important consideration)

How many keystrokes does it take to go through the following **sequence of 23 commands?** _____

- 1) open a new text file (don't count the characters in the file name itself);
- 2-4) center, boldface, and underline a title;
- 5) skip a line;
- 6) indent the next line of text 5 spaces;
- 7) indicate the end of that paragraph;
- 8) skip a line;
- 9) indent the next paragraph 5 spaces;
- 10) put a page break at the bottom of that paragraph;
- 11-14) reset the top, bottom, left, and right margins (just count the commands, not the numerical values);
- 15) order the file to be double-spaced (if single-spaced is the default), or vice versa (again, not counting the numerical values);
- 16) save the file;
- 17*) print it out;
- 18*) stop in the middle of printing out;
- 19) return to the text;
- 20) delete a word (5 characters and a space);
- 21) delete a line (60 characters or more);
- 22) save this new version of the file, keeping the old version for backup; and
- 23) begin printing out again at the top of the page.

[*Systems with virtual representation can skip these two steps (17-18), since it's just as likely that a mistake will get caught on the screen as in a printout.]

Fewer than 55 strokes—5 points

56-60 strokes—4½ points

61-65 strokes—4 points

66-70 strokes—3½ points

71-75 strokes—3 points

76-80 strokes—2½ points

81-85 strokes—2 points

86-90 strokes—1½ points

91-95 strokes—1 point

96-100 strokes—½ point

more than 100 strokes—no points

How **easy** is it to **remember commands** (thanks to mnemonics, cursor diamond, and other logical key placement, menus, logical command structure, reference card, key tops, dedicated keys, reconfigurable commands, etc.)? (3)

Is the main editing **menu suppressible**, or not normally on the screen with the text? (½)

Is there a way to know:

what **page** of the printout you're on? (½)

your **location** with respect to the entire file (what percentage of it is behind you, for example)? (¼)

Can you **find out the total size of the file** you're editing without exiting the program? (½)

Can you do that and return to where you were in the file in less than 3 keystrokes (or two control characters)? (¼ additional)

Can you **copy the program** as often as you need to? (2)

Total program size:

Less than 25K? (1) 25-35K? (½)

Or—on dedicated word processors, and other systems where the software and hardware are integrated—

Workspace more than 30K? (1)

Workspace more than 20K? (½)

Are the **editor and formatter** loaded **together?** (1)

If not, can you keep the workfile in RAM while switching from the editor to the formatter? (½)

How often does the **program** have to go to the disk to access **overlays?** (never, because whole program resides in memory—1; only goes to overlays occasionally, for special jobs—½; overlays are essential part of program—0)

Can you:

rename the file you're working on without abandoning the edit? (¼)

rename a file other than the one you're working on without leaving the program? (¼)

delete a file other than the one you're working on without leaving the program? (¼)

Can you get a **directory** of files on the disk without exiting the word-processing program? (—1 if not)

Does this directory also give you the size of each file? (½)

Can you ask for just part of the directory? (¼)

Is there a **type-ahead buffer (key-stroke storage)?** (1)

Will this program run **memory-mapped?** (½)

Subtotal for ease of use:

Editing power—25 points

What is the **total number of commands** this program offers you (for editing, formatting—everything)? [Count every possible option.]

more than 170—4 points

150-170—3½ points

130-149—3 points

110-129—2½ points

90-109—2 points

70-89—1½ points

50-69—1 point

30-49—½ point

fewer than 30—no points

Is there **wordwrap?** (1)

Ease and power of **basic cursor movement**, insertion and deletion **commands** (6)

[The next 16 questions will give you a reasonable score for this item for programs that use conventional techniques. For other programs, you have to make this judgment subjectively.]

Is there a one-stroke (or one-control-character) command to **move the cursor:**

right one character? (—1 if not)

left one character? (—1 if not)

up one line? (—1 if not)

down one line? (—1 if not)

(two-stroke or two-control-character commands count half for the next 11 questions)

forward one word? (½)

backward one word? (½)

to the end of the line? (½)

to the beginning of the line? (½)

to the top of the screen? (½)

to the bottom of the screen? (½)

to the beginning of the file? (½)

to the end of the file? (½)

Is there a one-stroke (or one-control-character) command to:

OVERALL SCORES	Version(s) (of software)	Operating system(s) and/or machine(s)	Price	Overall score	Safety and error handling	Documentation	Ease of use	Workfile in memory or on disk and off of disk	Editing power	Formatting power	Responsiveness and support
CPT 8100	G-2	ded. word proc.	\$15,000	94¾	9	16¾	14¾	M	24	26¼	4
DICTAPHONE DUAL DISP.	D	ded. word proc.	13,500	85¼	7	16¾	12	D	18¾	26¾	4
PIE WRITER (W/ PRO/FORMAT)	2.1 (2.2)	Apple II, Flex, IBM PC, TRS-80 Color Computer	200	84¼	9½	15	13	M	20½	22¼	4
A. B. DICK MAGNA SL	7	ded. word proc.	14,500	83	8	16½	9¾	D	19¾	25	4
WRITE	1.4	CP/M	400	82¼	10	15½	16¾	M	19	17½	3½
MICOM 2001	5.1R	ded. word proc.	12,000	82¼	7¾	15¾	10¾	M	20½	23½	4
WORD STAR	3.0	CP/M, Apple II, IBM PC	500	80	7½	11¾	13	D	21¾	22	4
NEW SCRIPT	7.0	TRS-80 Models I & III	125	79¼	8½	15½	12¾	M	18¾	19¾	4
WANGWRITER 5503A	3.1	ded. word proc.	6,400	74	8	16	13½	D	18¾	14½	3¼
WANG SYSTEM 5, MODEL 3	3.2	ded. word proc.	11,500	70	6	14¾	10¾	D	18	17¼	3¼
MINCE & SCRIBBLE	2.6 + 1.3	CP/M, UNIX, PDP-11	275	67¼	7	12¼	8	D	18¼	17¾	4
SCRIPSIT	2.0	TRS-80 Model II*	400	61½	2	14¼	7¾	D	18¼	16¼	3
MAGIC WAND	1.11	CP/M	400	61¼	3¼	12¾	8	M	17¼	20	0
EASYWRITER	1.0	IBM PC**	175	35	-24	14¼	11¼	M	12½	16¾	4

*Similar Scripsit program also available for Models I & III

**Very similar program called Easywriter Professional available for the Apple II

Table 1: Composite scores of some word processors.

delete a whole word? (½)
 delete a whole line? (½)
 switch between insert and write-over mode? (1)
 either mode missing (-5)
 Is there continuous and unlimited:
 forward scrolling? (½)
 backward scrolling? (½)
 Can the scrolling speed be altered?
 (¼)
 Can you call up any page in the text
 by number? (1¼)
 Can you move the cursor where there
 is no text? (½)
 Can you:
 copy blocks of text? (¾)
 move blocks of text? (¼)
 delete blocks of text? (1)
 make a new file out of a block of
 text without having to stop editing

the file you're working on? (½)
 insert another file into the one
 you're editing (½)
 Can you:
 find a string anywhere in a file? (1)
 replace a string anywhere in a file?
 (1)
 search backward as well as for-
 ward? (¼)
 do many substitutions all at once,
 without having to approve each
 one? (1)
 Can you see each change for ap-
 proval if you want? (-2 if not)
 In doing finds or substitutions, can
 you tell this program to ignore
 caps/lowercase? (½)
 Look for whole words only? (½)
 Can you:
 make substitutions that affect more

than one file at a time? (½)
 store stock phrases in memory and
 insert them with a coded com-
 mand while typing? (½)
 Are there other special global capa-
 bilities? (¼)
 Is there a command that moves the
 cursor to where it was before the last
 command was executed? (¼)
 Is there a split-screen feature? (1)
 Can you edit one file while printing
 out another? (1)
 Are there other special editing fea-
 tures that appeal to you? (1½)

Subtotal for editing power:

Formatting power—25* points
 [*With virtual representation, pos-
 sible total of 30]

Can you vary:
 the top and bottom margins? (—1 if you can't)
 the side margins? (—1 if you can't)
 character spacing? (1)
 line spacing? (1)
 the tabs? (1/2)
 each tab setting individually? (1/2)
 Are there decimal tabs? (1/2)
 Are there automatic indents? (1/2)
 outdents? (1/4)
 Automatic page numbering? (1)
 Can you choose:
 where on the page the page numbers go? (1/2)
 what text (if any) accompanies them? (1/4)
 Can you get headers and footers printed automatically on each page? (1)
 Are there special features like horizontal scrolling to help with formatting extra-wide text or tables? (1/2)
 Will the program allow you to boldface on printers that are capable of it? (3/4)
 Is there overstriking? (1)
 Are there subscripts? (1/4) superscripts? (1/4)
 Can you underline continuously, i.e., under spaces and punctuation as well as letters and numbers? (1/2) (—1 if program can't underline at all)
 Can you automatically center lines? (3/4)
 Is there automatic two-column printout? (1/2)
 Do you have a choice of single-page

or continuous printout? (1)
 Can you link files during printout, either by embedding a line at the end of each file or by specifying the files to be linked when you give the print command?
 Either (1) Both (1 1/2)
 Can you have multiple copies of the same file printed out with one command? (1/2)
 Can you embed a command that makes the printout stop and wait for your instructions? (1/4)
 Can you stop printout from the keyboard? (—2 if you can't)
 Can you print from the middle of a file? (1)
 Can you justify the right margin? (1)
 Is there true proportional spacing on printers that allow for it? (2)
 Is there on-screen formatting? (2)
 (line breaks—1/2; page breaks—1/2; centering—1/2; other formatting information displayed—1/2)
 [An extra 5 points is given for virtual representation (which is machine dependent). To qualify, the screen must display all of the following (partial points as indicated):
 full page (at least 54 lines) of text (1)
 underlining (1/2)
 double underlining (1/2)
 boldface (1)
 justified right margins (1)
 proportional spacing (1)]
 Is there automatic hyphenation? (1)
 If not, are there conditional hyphens? (1/2)

Is there a conditional page break feature? (1)
 Can you ask for a no-break space? (1/4)
 Is there an instant print feature? (1/2)
 Are there other special formatting features that appeal to you? (1 1/2)

Subtotal for formatting power:

Responsiveness and support—4 points

(Based on reputation, users' comments, what the vendor says, etc.)

Program Name: _____ Version #: _____
 Operating system(s) it runs under and/or machine(s) it runs on: _____

Price: \$ _____

Publisher: _____

Vendor(s): _____

Overall score:

Scores in specific areas:

Safety and error handling (10): _____

Documentation (18): _____

Ease of use (18): _____

Editing power (25): _____

Formatting power (25*): _____

(*With virtual representation, a total of 30 is possible)

Publisher support (4): _____

Special notes: _____

Arthur Naiman is the author of several books on computers and is currently working on more. They include Introduction to WordStar and Computer Dictionary for Beginners.

EPROM PROGRAMMER & UV ERASER FOR THE 80's 515 PROGRAMS OVER 300 DEVICE TYPES

MOS (8K - 256 K, SINGLE & 3 VOLTAGES) BIPOLAR PROMS, 40 PIN MICROS

- Stand Alone
- 256K Buffer (200 ns)
- Integrated keypad
- EPROM simulation
- Fast algorithm
- Power down sockets
- Temp compensated Ref. voltages
- 16 formats & 8 baud rates
- Auto-user friendly-mode



S15F \$995

OVER 26 FUNCTIONS

- Edit
- CRC check
- Block Move
- Over Program
- Insert
- Delete
- 16 Diagnostic Functions
- And More!

(305) 994-3520

4089 S. Rogers Circle #7, Boca Raton, FL 33431

BUV-IIA \$95.50

- Heavy duty
- Timer
- Safety switch
- 110/220 voltage

BUV-IIB \$66.50

- Heavy duty
- Safety switch
- UV indicator

OTHER COMPLETE SYSTEMS


S15R (remote) \$695
 S15P (4 key) \$795
 S15B (bipolar) \$895
 S15G (gang) \$1095

BYTEK

COMPUTER SYSTEMS CORP

Taxan monitors when precision counts

Dedicated to quality and precision, TAXAN offers a complete line of monitors including green and amber, ultra-high resolution monochrome, plus medium and high resolution RGB monitors.

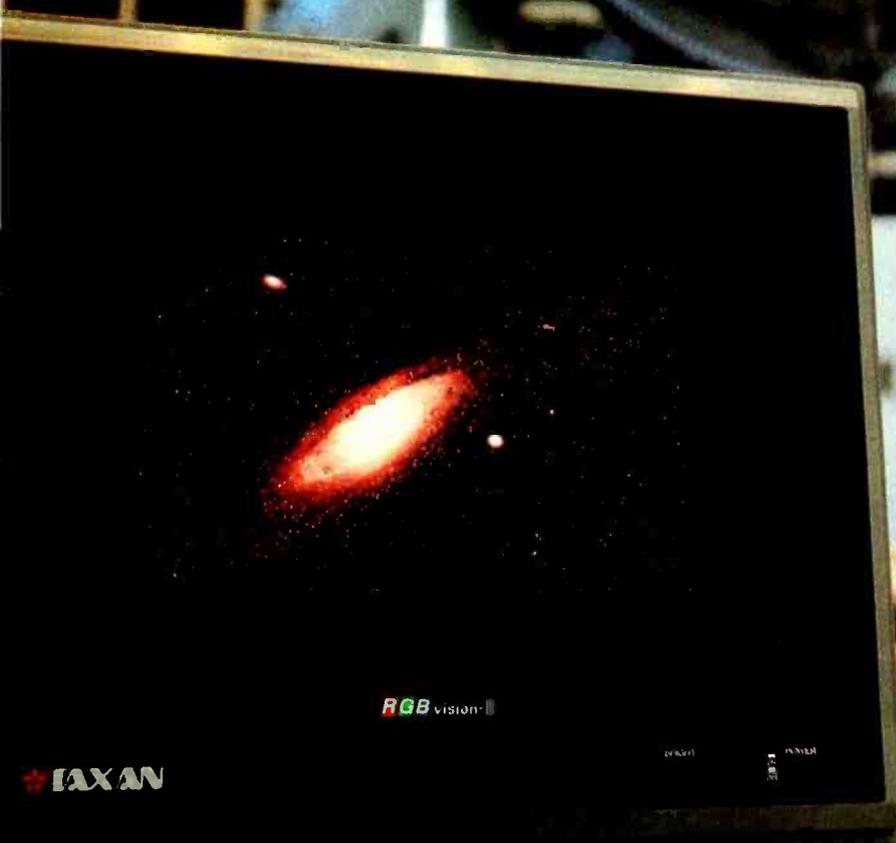

☼ TAXAN also offers the 410-80, 80 column and RGB card to interface with the Apple IIe.

☼ TAXAN monitors stand alone.



See your local ☼ TAXAN dealer, or call us for details!

☼ TAXAN

TSK Electronics Corporation
18005 Cortney Court
City of Industry, CA 91748
(213) 810-1291

Circle 364 on inquiry card.

M A K E

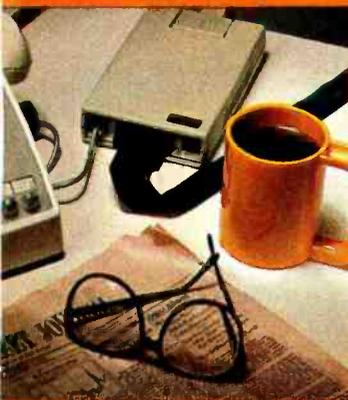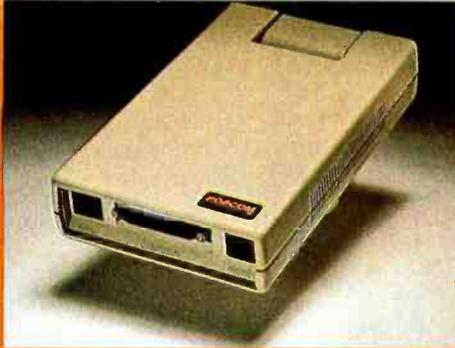

NEW

FROM

PRENTICE®

CORPORATION

POPCOM is a trademark of PRENTICE Corporation.

www.americanradiohistory.com

THE CONNECTION

POPCOM, X100
the new, easy-to-use communications tool that connects you and your personal computer to the wondrous, mind-expanding, enlightening world of information.

POPCOMTM X100

- **Automatic or manual dialing and answering** for all voice and data calls.
 - **Voice and data transmission during the same call** — ends the 3 separate calls ("I'm going to send," "I'm sending," "Did you get what I sent?")
 - **Smart modem compatible** — works with widely available communications software.
 - **Flexibility** — compatible with 103, 113, and 212A dial-up modems; connects to all standard single and multi-line equipment.
 - **Fast, easy setup** — 'tune' tells when the three cables are properly connected.
 - **Adjustment-free operation** — no manual switches to contend with. The X100 automatically takes its instructions from your PC or terminal.
 - **Automatic computer briefing** — reports to your PC all call-progress tones ... dial tone, busy signal, remote ringing, talk, even line disconnect — so your computer can do more.
 - **"In-Use" light on multi-line phones** — protects against inadvertent interruption.
 - **Smart interface** — automatically adapts itself to various RS232 cables.
 - **Versatile installation** — fits conveniently on wall, desk or floor.
- Circle 295 on inquiry card.

See your dealer or write for more information. Make the connection between yourself and the challenging world of information.

- Please send me literature on POPCOM products.
- Please call me immediately.

NAME _____ TITLE _____

COMPANY _____ TEL: _____

ADDRESS _____ STATE _____ ZIP _____

PRENTICE CORPORATION, 266 Casplan Dr., P.O. Box 3544,
Sunnyvale, CA 94088-3544, (408) 734-9855

0102

Release Your Potential



With the p-System™ from

For: IBM PC & XT CORONA COLUMBIA EAGLE COMPAQ COLBY DOT HYPERION

Do you feel stifled by your operating system? The p-System from NCI will release you. It is the complete program development environment for the IBM Personal Computer and compatibles. This is the fast p-System with the special p-machine emulator developed by NCI.

The p-System from NCI gives you everything you need in one system at far less than the cost to add similar utilities to any other OS. It includes a powerful screen editor, a multi-function file manager and RAMdisk support for fast access to files. Dynamic memory allocation lets you create programs larger than 64K and a print buffer frees your

computer to perform other tasks while printing.

This operating system is stable, friendly and easy to use. Command options are presented on a menu requiring only a single keystroke. The 8087 Numeric Coprocessor Support allows extremely fast floating point calculations and the asynchronous I/O lets you use serial printer and communications routines.

With the p-System you can choose either UCSD Pascal, Fortran 77 or Basic as your programming language. NCI also offers hard disk support for the IBM XT, Corona, Columbia, Corvus, Tallgrass, Davong, Genie 5+5, QCS, Datamac,

Microdisk and Santa Clara. Corvus OMNINET support can easily be added as well as memory cards from AST Research and Tall Tree Systems, the Colorplus card and the Hercules graphics card.

When you buy the p-System from NCI you get technical support and complete documentation.

For full details call or write:

Network Consulting Inc.
Discovery Park,
Suite 110 - 3700 Gilmore Way
Burnaby, B.C. Canada V5G 4M1
(604) 430-3466

SPEED. PORTABILITY. RELIABILITY.

IBM Personal Computer and IBM Personal Computer XT are trade marks of International Business Machines Corporation. The p-System™ is a trade mark of Softech Microsystems, Inc. UCSD Pascal is a trade mark of the Regents of the University of California. OMNINET is a trade mark of Corvus Systems Inc. 5+5 is a trade mark of Genie Computer Corporation. Colorplus is a trade mark of Frederick Electronics.

Reviewer's Notebook

by Rich Malloy

Last month I mentioned a few of the new printers we had received. This month I'll mention one more, plus another type of output device—a plotter. And we'll even cover some software for a change.

The HP 7475A

The arrival of the Hewlett-Packard HP 7475A plotter ties in nicely with all the attention that is being placed on the graphics capabilities of personal computers, especially in television commercials. In these commercials, all you have to do is press two keys and your complete financial picture appears in four or more colors. Nice, even if the number of keystrokes is vastly underestimated. But if you want to take your financial portrait around to your associates, you're going to need either a very good camera or a plotter. And you can't beat a plotter for resolution and speed.

The HP 7475A is the enhanced version of the popular HP 7470A plotter. The earlier version had only two pens and could handle only 8½-by-11-inch paper. But it was fast, accurate, and sold for the moderately inexpensive price of \$1795. The new plotter sells for about the same price as the older one, but it has several superior features—six pens instead of two, the ability to handle larger paper (11 by 17 inches), a better character font (the letter "O" is actually curved rather than octagonal), and even automatic pen capping, which keeps pens from drying out.

Of course, these features would be useless if there weren't any software to take advantage of them. Fortunately, the people at Hewlett-Packard have been very successful at getting the major graphics software houses to write driver programs for the HP 7475A. At last count we had received more than 10 packages, including

Lotus's 1-2-3, Supercalc3, and Graph-talk.

In typical HP tradition, the HP 7475A has more control keys than you could ever hope to become even vaguely familiar with, but it is an impressive little graphics machine nonetheless. We'll have a more detailed article on it in the future.

The MT-160 Printer

Getting back to printers, we should mention another of the printers being offered by Mannesmann Tally. The MT-160 is a real workhorse, though it may be one of the smallest office printers around. Priced at \$795 (\$695 without a near-letter-quality mode), the MT-160 is a fairly reasonable value considering its capabilities. It can print at 160 cps (characters per second) in draft mode and 80 cps in near-letter-quality mode. As for pitch, it can print at 10, 12, and 16.5 cpi (characters per inch), and it is the only printer I have seen lately that can also print at 20 cpi. For graphics it is compatible with the Epson. And it has both a serial and parallel port. To top things off, the MT-160 offers a unique and simple way to set its various parameters: you merely press a "yes" or "no" button in response to a series of questions it prints out. And it remembers this configuration even after you turn the machine off.

Friday! and Peachtext 5000

After all this talk about hardware, I should mention two software packages we've received for the IBM PC—one a database manager, the other a collection of practically everything.

The database manager, called simply Friday!, was announced last April by Ashton-Tate amidst tremendous hoopla. This easy-to-use application program written in dBase II was supposed to revolutionize offices. Practically anyone could use it to do prac-

tically any office task.

Now that Friday! has been out for a while, we must agree with some of the hype. Friday! is a good product. And while it is true that practically anyone can use it, there is a definite limit to what you can do with it. Two things are particularly objectionable. First, each field of data is limited to 32 characters. And although 98 percent of your data will fit in 32 characters, the 2 percent that doesn't will sure keep you from saying T.G.I.F. Second, although our IBM PC has 500K bytes of memory, Friday! acts as if it still has only 64. In order to use all of its 200K bytes of code, Friday! must constantly load small program modules from the disk drive and overlay them onto a 64K-byte memory space. Practically every other time we hit a key, Friday! goes out to the disk and pulls in another overlay. A nice product, but I'll wait for Saturday!

Another event that happened last April was that the folks at Peachtree Software decided to knock Wordstar off the Softsel software Hot List by offering Peachtext 5000, available for the IBM PC, the Compaq, the Texas Instruments Professional Computer, and the Zenith Z-100. It didn't knock Wordstar out of the Top Ten, but it's a real contender. It combines a good word processor with a thesaurus, a no-frills spelling checker, a no-frills spreadsheet, and a no-frills database manager, all for \$395. Only the word processor and the thesaurus are real leaders in their field, and I have minor complaints about all of these programs. Also, these packages are not exactly "integrated" with each other. But you can't beat the price.

If you can afford to buy only five software packages for your MS-DOS machine, try just this one. If it doesn't meet all your needs, it will give you a good idea of what will. ■

ProDOS

by Rob Moore

Although Apple Computer's DOS 3.3 operating system has more software available for it than any other personal computer operating system, it does have some minor problems. Originally designed as an operating system for small floppy disks, DOS 3.3 doesn't easily support 8-inch floppy disks or the increasingly popular Winchester-technology hard-disk drives. Typically, vendors of larger disk drives have resorted to supplying DOS patches or special modified versions of DOS 3.3. Due to its heritage, DOS 3.3 also doesn't support very large files, or interrupts, which are necessary for local networking and other more advanced applications.

To remove these limitations, Apple is releasing ProDOS, a totally new operating system for Apple II and IIe computers. According to Bill Schjelderup, product marketing manager at Apple Computer Inc., ProDOS is "designed to overcome the limitations inherent in DOS

3.3 and provide a significantly improved base for applications software development." Although ProDOS doesn't make DOS 3.3 obsolete, Apple expects that most new applications will be written under ProDOS because of the numerous advantages it offers.

New Features

ProDOS provides a variety of new features and greatly enhanced performance over DOS 3.3. Some of the new ProDOS features include

- support for Apple's Profile 5-megabyte Winchester hard-disk drive on an Apple II or IIe
- automatic time and date stamping through built-in drivers for the Thunderclock clock/calendar card (available from Thunderware Inc., 44 Hermosa Ave., Oakland, CA 94618, (415) 652-1737) or through user-installed drivers for other clock/calendar cards
- Unix-like nested directory structures and file types that are compatible with the Apple III SOS operating system so that disks can be interchanged between the two machines
- file sizes that can range from 1 byte to 16 megabytes, and the ability to randomly access any type of file
- up to 256 different types of files, including a number of reserved user-defined types
- support for up to four interrupting devices through user-installed interrupt handlers
- a uniform machine-language interface that lets assembly-language programs easily access and use all the ProDOS features
- use of Apple's 64K-byte extended 80-column text card as a high-speed pseudodisk for ultrafast file accesses

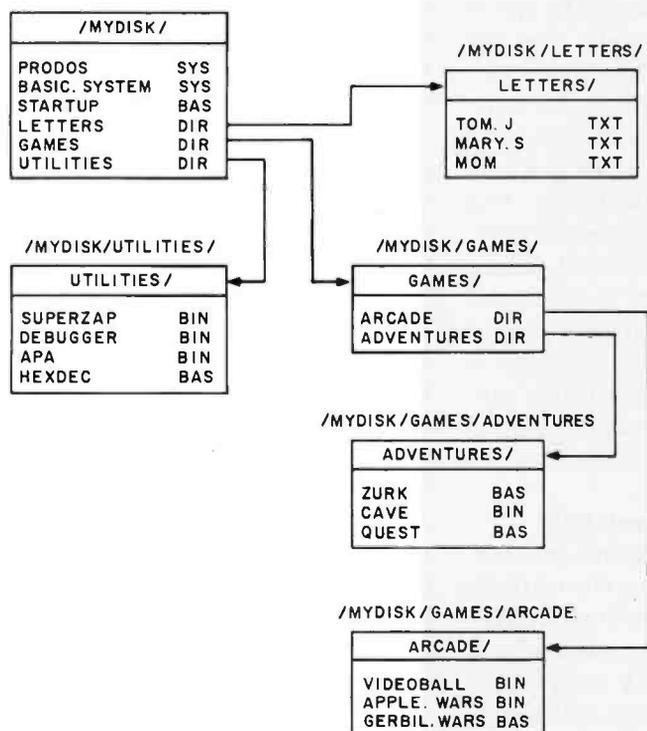


Figure 1: A typical ProDOS directory structure. The pathname, shown above each directory listing, describes the path followed to reach a particular directory from the volume name on down. If the volume specified is mounted anywhere in the system, ProDOS will find it regardless of which drive it's in.

For the average user who programs primarily in BASIC, ProDOS adds a number of new commands and increases the flexibility of many existing DOS 3.3-type commands. In fact, the DOS command structure is *extensible*—ProDOS includes provisions for additional user-added commands to provide special features or allow customization for a particular application.

ProDOS is also much friendlier to outside peripheral vendors than DOS 3.3. ProDOS will automatically recognize and use other disk devices of all sizes, providing they are designed to follow the interface-protocol guidelines described in the *ProDOS Technical Reference Manual*.

For software developers, it will now be possible to

create one disk that will load on either the Apple II or Apple III. The boot loader, common to both ProDOS and SOS, recognizes the type of machine it boots on and attempts to load SOS into an Apple III or ProDOS into an Apple II or IIe. All you have to do is include both operating systems and the necessary files on the same disk.

Volumes, Directories, and Pathnames

A number of differences are found between ProDOS and existing operating systems like Apple's DOS 3.3 or Digital Research's CP/M. Where DOS 3.3 or CP/M specify disks by their *physical* drive location (e.g., S6,D1 for DOS 3.3 or B: for CP/M), ProDOS uses volume names to specify disks rather than the drive locations. Under DOS 3.3 or CP/M it's easy, for example, to delete the wrong file or initialize the wrong disk by inadvertently inserting the disk in the wrong drive. With ProDOS, errors like these don't occur. If ProDOS can't find the specified volume in a particular drive, it searches through all the drives attached to the system until the volume is found or the last drive is searched.

To help keep disk storage organized, ProDOS uses a Unix-like system of nested directories known as a hierarchical directory structure. In addition to having a main directory on each disk (or volume), ProDOS also allows subdirectory files within the main directory. Each subdirectory can hold files of any type, including further subdirectories. This nested directory structure makes it easy to keep large amounts of disk storage organized. (Figure 1 shows an example of a typical ProDOS user's disk directory structure.)

To specify which directory is accessed at any given time, ProDOS uses pathnames. A pathname describes the path to follow through the various levels of directories until you reach the directory where your program resides. For example, if you wanted to run a program called Videowars in a subdirectory called Games, which was in the main directory of a volume called Mydisk, you could type

```
RUN /Mydisk/Games/Videowars
```

To avoid having to retype the entire pathname every time you access a particular directory, ProDOS lets you set up a pathname prefix, which specifies a default directory. If you enter a pathname without a leading slash, it is automatically appended to the path stored in the pathname prefix, and the result is used as the actual pathname. Using the previous example, we could set the pathname prefix to /Mydisk/Games/ and then simply type RUN Videowars.

ProDOS's nested directories and pathname facility add some unique capabilities to your software. Programs can now keep their own directories and file types, avoiding some of the confusion encountered when all the programs on a disk are lumped into a single large directory. On a large hard disk, you can easily partition the disk into logical areas for various types of programs and data

At a Glance

Name
ProDOS

Type
Disk operating system software

Manufacturer
Apple Computer Inc.
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010

Hardware Required
Apple II or IIe computer with a minimum of 64K bytes of memory for operation with Applesoft BASIC; supports 128K-byte memory configuration with Apple's extended 80-column text card

Description
Single-user, single-task operating system with significant performance improvements over Apple's DOS 3.3; includes hierarchical directory structures, numerous predefined and user-definable file types, directory time and date stamping, support for up to four interrupts, file sizes up to 16 megabytes, and block-oriented disk I/O; ProDOS disks are compatible with Apple III SOS disks to allow easy file sharing between the two machines

Special Features
A 64K-byte column adapter card in the Apple IIe auxiliary slot can be used as a pseudodisk to provide significantly faster file accesses; ProDOS provides support for Apple's Profile 5-mega-byte hard disk with the Apple IIe interface card

Software
Software utilities available for ProDOS include Filer, a program to initialize and copy whole disks or individual files; Convert, used to transfer files to or from DOS 3.3 disks; Exerciser, to access ProDOS machine-language calls and functions; BASIC.SYSTEM, a DOS command interpreter and user interface for Applesoft BASIC; and Help, which adds a series of help screens to the BASIC user interface; a BASIC Programming Examples disk can be used along with the ProDOS tutorial material in the documentation

Documentation
ProDOS User's Manual provides a tutorial on the Filer and Convert programs; ProDOS Technical Reference Manual describes internal organization, machine-language calls, organization of BASIC.SYSTEM, and how to interface additional device drivers and interrupt routines to the ProDOS system; BASIC Programming with ProDOS provides tutorial material and describes how to use ProDOS features and files from programs written in Applesoft BASIC

ProDOS Packages
ProDOS User's Manual with /Utilities disk including Filer and Convert
BASIC Programming with ProDOS with BASIC/Examples disk
ProDOS Technical Reference Manual with the Exerciser program on disk
ProDOS Tool Kit package includes 6502 macro assembler, text editor, and debugger with 6502 Assembler/ProDOS Tools Manual
(The above packages were tentative at the time this article was written.)

Price and Availability
The price was not available at the time of writing; it is due to be released in early 1984 and shipped with new Disk II systems after that

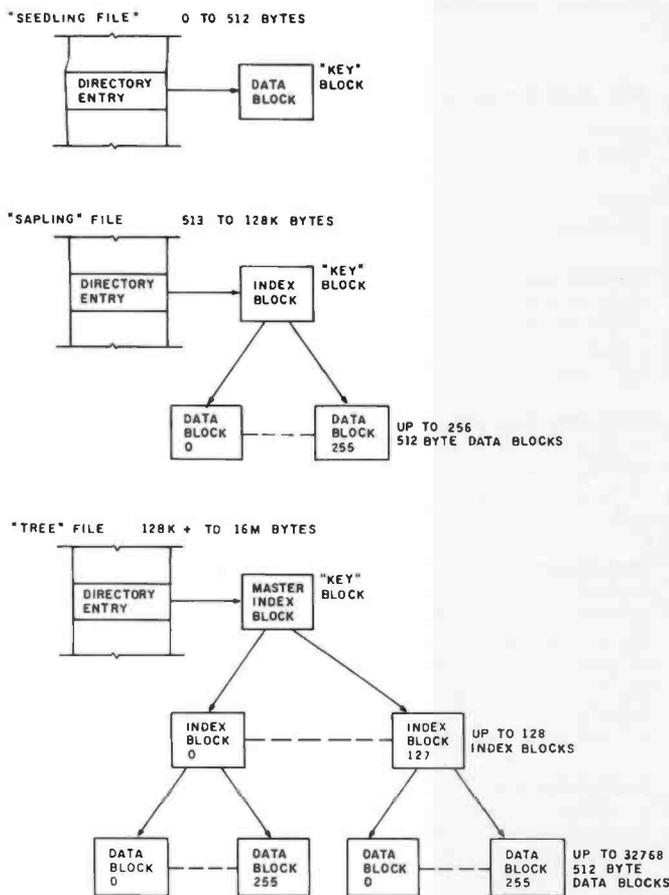


Figure 2: ProDOS file-storage methods. ProDOS uses a growing "tree" structure to provide efficient storage of files that can range from 1 byte to 16 megabytes. Files smaller than 513 bytes are stored in a single data block and are referred to as "seedling" files. "Sapling" files have an index block that holds block numbers of up to 256 data blocks, thus providing storage for up to 64K bytes. The largest files, stored as "tree" files, use a master index block to designate up to 128 index blocks, each of which can point to 256 data blocks.

As files grow or shrink during system operation, the file-storage method is automatically changed as the file size crosses the boundaries between "seedling," "sapling," and "tree" sizes.

files without having to resort to such tricks as making the hard disk look like a number of separate, fixed-size floppy disks.

Blocks and Files

Rather than dealing with physical disk tracks and sectors like DOS 3.3 does, ProDOS reads and writes 512-byte blocks. The conversion from disk sectors to blocks is handled by each disk's driver routines. For example, if ProDOS were reading a block from a disk that stored data in 128-byte sectors, the disk driver would read four sectors and supply the data to ProDOS as a single 512-byte block. Since ProDOS simply supplies a block number to the disk driver, it is completely independent of the physical disk-sector sizes or the number of sectors per disk track.

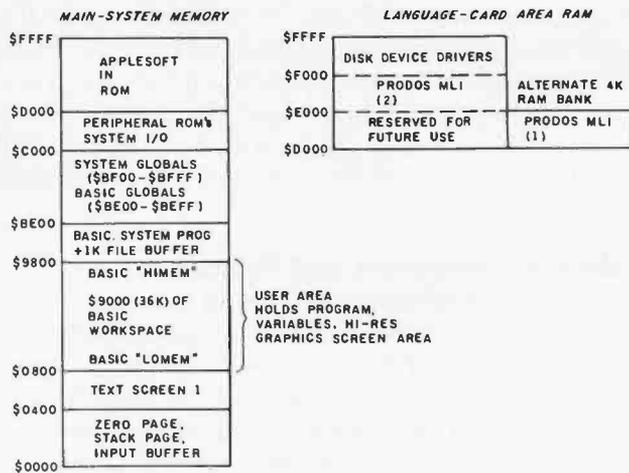


Figure 3: A memory map of a 64K-byte Apple II or IIe with ProDOS and SYSTEM.BASIC installed. ProDOS is stored primarily in the language-card area of memory, and BASIC.SYSTEM resides in the area formerly occupied by DOS 3.3. Coincidentally, a ProDOS system provides about the same amount of free BASIC user space as a DOS 3.3 system.

To efficiently accommodate files that can range from 1 byte to 16 megabytes, ProDOS stores files in three different ways (shown in figure 2). Depending on a file's size, it will be stored as either a "seedling" file, a "sapling" file, or a "tree" file. Files with sizes between 1 byte and 512 bytes are stored as seedling files—the data is stored in a single disk block. A sapling file can range in size from 513 bytes to 64K bytes. ProDOS creates an index block that holds the block numbers of up to 256 data blocks, each of which can store 512 bytes of data. Files larger than 64K bytes are stored as tree files that can consist of up to 32,768 data blocks or 16 megabytes of data. To store a tree file, ProDOS uses a master index block that holds the block numbers of up to 128 index blocks, each of which can specify 256 data blocks. As files grow or shrink during disk operations, ProDOS changes the storage method automatically—the entire process is completely transparent to the user.

Inside ProDOS

From the BASIC user's point of view, many ProDOS commands are virtually identical to existing DOS 3.3 commands. However, ProDOS is a completely new design internally. It is normally located in the language-card area of memory and prevents the use of Apple's Integer BASIC that is loaded there, under DOS 3.3. (Figure 3 shows a memory map of a 64K-byte Apple II or IIe with ProDOS installed.) When used with assembly-language programs, ProDOS uses only the memory above hexadecimal BF00, leaving 45.75K bytes of free memory space in a 64K-byte machine.

Also unlike DOS 3.3, ProDOS doesn't include any user interface. All commands are passed to ProDOS through a set of 24 machine-language calls to the ProDOS MLI (machine-language interface), which are similar to the

..SORRY CHARLIE
FOR LEAVING
YOU OUT!



**FEATURES
INCLUDE:**

16 Bit CPU
With 128K RAM Memory
Expandable to 256K,
Two 320KB Slimline
Disk Drives,
Floppy Disk Controller,
Monochrome Monitor and
Adapter, Parallel and
Serial I/O's.

**BEST OF ALL!
TEN DAYS FREE TRIAL!
ALL YOU PAY IS
SHIPPING!**

**FOR MORE DETAILS
CALL OR WRITE
TO: TAVA CORPORATION
16861 Armstrong,
Irvine, California 92714
714/261-0200
Headquarters/Telex: 181667
Answer Back COMPDSHACK IRIN**

IBM® COMPATIBILITY AFFORDABLE PRICE TAVA PC

**THE SMART COMPUTER USER
WANTS REAL VALUE WITH
IBM COMPATIBILITY!**

Circle 348 on inquiry card.

THE TAVA PC. The ultimate Personal Computer. It gives you IBM PC® Compatibility at a fraction of the cost. Choosing a personal computer is a difficult decision. But, when your decision is a TAVA PC, it's not hard at all! The TAVA PC runs under DOS 1.1, 2.0, CP/M86®, and p-System®. You can choose from a large library of all the most popular IBM PC software products such as dBasell®, Lotus 1-2-3®, Visicalc® and thousands more.

CP/M86 is a registered trademark of Digital Research, Inc.
UCSDp is a registered trademark of Softech Microsystems

IBM PC is a registered trademark of IBM Corp.
Visicalc is a registered trademark of Visicorp



©TAVA CORPORATION 1983
trademark of ASHTON-TATE, Inc.

†California residents add 6% sales tax.
LOTUS 1-2-3 is a registered trademark of Lotus Development

dBASE II is a registered
trademark of Ashton-Tate, Inc.

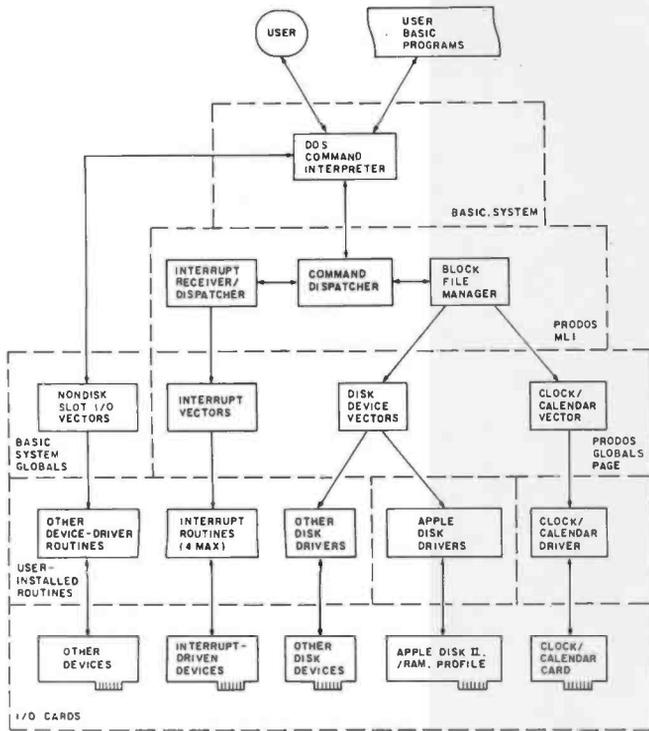


Figure 4: A detailed block diagram of an Apple II or IIe with ProDOS and BASIC.SYSTEM installed. Arrows indicate the flow of control through the system. ProDOS includes device-driver routines for Apple's Disk II floppy-disk and Profile hard-disk drives. Also included are drivers to handle the /RAM pseudodisk and a Thunderclock clock/calendar card. Any other disk or clock/calendar devices require additional routines installed. Other interface cards with on-board ROM drivers will be recognized and operate properly, providing that they follow Apple's various interface guidelines.

set of calls used by the Apple III's SOS operating system. No provision for user-entered commands exists within ProDOS itself. Instead, ProDOS is designed to work with various .SYSTEM programs, which translate user-entered commands into the appropriate ProDOS calls. (Figure 4 shows a block diagram of a typical BASIC user's ProDOS system.)

To maintain a consistent DOS interface while allowing Apple to alter the internal code in the future, ProDOS uses a 256-byte page of memory as a ProDOS globals page. The globals page is used to hold the addresses of all disk-driver routines, interrupt handlers, the clock-calendar routine (if installed), and the call address of ProDOS itself. It also holds a memory bit map that is used to indicate which pages of memory are currently used so ProDOS won't overwrite them during a load. The globals page is the only part of ProDOS that Apple guarantees will be consistent when future versions are released. No matter where ProDOS itself is loaded (depending on memory size), the globals page will always be in the same place and contain the same data. To allow programs to deal with future versions of ProDOS, the globals page also includes data to indicate the version of ProDOS currently installed in the machine and data to indicate the type of machine it's installed on.

Currently, the system recognizes the Apple II series of computers or Apple IIIs running in Apple II emulation mode. However, room is available for future expansion.

Curiously, ProDOS won't work on most of the Apple II work-alikes. On a Franklin, for example, it hangs up during the boot process and coincidentally leaves Apple's copyright message on the screen. This is unfortunate for the owners of these machines, but you can't really expect the people at Apple to spend much time getting new software to work on unauthorized copies of its hardware.

BASIC.SYSTEM

Most users will talk to ProDOS through the .SYSTEM program called BASIC.SYSTEM, which provides an extended set of DOS 3.3-like commands to Applesoft BASIC. When BASIC.SYSTEM is loaded, it resides just beneath ProDOS in memory. Coincidentally, it leaves about the same amount of free memory as DOS 3.3.

Most BASIC.SYSTEM commands are compatible with the equivalent DOS 3.3 commands to allow existing BASIC programs to run with minimum alterations. A few seldom-used commands have been removed, however, and a number of new commands have been added and existing commands extended. You can now, for example, use OPEN, READ, WRITE, and CLOSE to access any type of file (including directories), and you can use BLOAD or BSAVE on any part of any type of file.

One of the most interesting new commands is simply a dash, a "run anything if possible" command. By typing " - filename", you can run a BASIC program, run a binary program, execute a text file of commands, or load and run a new .SYSTEM program.

To help you deal with ProDOS's nested directories, BASIC.SYSTEM provides a PREFIX command. You can use it to either set the pathname prefix to specify a default directory or to read back the current pathname prefix onto the screen or into a program variable.

BASIC.SYSTEM also provides I/O (input/output) commands that are much more flexible than those found in DOS 3.3. Instead of just using PR# or IN# to specify an I/O slot for input or output, BASIC.SYSTEM provides extensions to these commands that allow you to specify a particular address in memory to call for input or output or even to assign new addresses to given I/O slots. For instance, if your printer-interface card is in slot 1 and you have a special printer-driver routine loaded into hexadecimal address 300, you could type PR#1,A\$300. From then on, any output normally sent to slot 1 would be sent to your routine at hexadecimal 300 instead. Another way to accomplish the same result would be to type PR# A\$300 when you want to turn the printer on and PR#0 when you want to turn it off.

Adding Commands to BASIC.SYSTEM

In addition to providing a variety of flexible DOS commands, the BASIC.SYSTEM command structure is also extensible—you can add your own commands for special applications. By changing a pointer location in



For users of Apple, IBM, TRS/80, Atari, Commodore, Texas Instruments, and other brand name computers:

Here's the easiest way to buy quality diskettes at discount prices

Now you can get error-free double density diskettes by IBM, Control Data, Maxell and Verbatim delivered to your door. For some of the lowest prices around.

You save because we ship huge volumes of magnetic media in boxes of 10.

To order, use this form.

For even faster service, call toll-free.

1-(800)-FLOPPYS or

1-(800)-521-5700

Michigan • 1-800-482-4770

Canada • 1-800-265-4824

Alaska/Hawaii • 1-800-821-9029



CALL FOR FREE CATALOGUE
ALL MAJOR CREDIT CARDS ACCEPTED
 Shipping & handling F.O.B. Southfield
 Transaction Storage Systems Inc., Southfield, MI



EXPECT A MIRACLE

Circle 360 on Inquiry card.

Size	IBM	Qty.	Verbatim	Qty.	Control Data	Qty.	maxell	Qty.
5-1/4" SS	23.90		23.90		19.90		28.90	
5-1/4" DS	34.90		34.90		29.90		41.90	
8" SS	24.90		—		28.00		—	
8" DS	39.90		—		29.90		—	
Sub Totals	\$		\$		\$		\$	

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____

AMEX MASTERCARD VISA

Card # _____ Exp. Date _____

Shipping and handling 1-6 boxes add \$4.00 per order

7 or more add \$6.00 per order.

Clip and mail today to: **Transaction Storage Systems, Inc.,**
 22255 Greenfield Road, Southfield, MI 48075



Byte 2-84

Listing 1: A listing of the two benchmark programs used to perform the disk access-time tests for the 500-record file. The programs used for the Apple III and the IBM PC were similar. A 500-record file is created by the program in listing 1a and is read by the program in listing 1b (see "The Apple III and Its New Profile," September 1982 BYTE, page 92).

(1a)

```
20 D$ = CHR$(4): REM CNTRL-D
80 NR = 500
100 PRINT D$;"OPEN TEST"
110 PRINT D$;"READ TEST"
140 FOR I = 1 TO NR
160 INPUT B$
180 NEXT I
200 PRINT D$;"CLOSE TEST"
220 PRINT "DONE"
```

(1b)

```
20 D$ = CHR$(4): REM CNTRL-D
40 A$ = "1234567812345678123456781234567812345678"
60 B$ = A$ + A$ + A$ + A$
30 NR = 500
100 PRINT D$;"OPEN TEST"
110 PRINT D$;"WRITE TEST"
140 FOR I = 1 TO NR
160 PRINT B$
180 NEXT I
200 PRINT D$;"CLOSE TEST"
220 PRINT "DONE"
```

	Apple IIe ProDOS	Apple IIe DOS 3.3	Apple III SOS	IBM PC PC-DOS
Write 500 records	36	175	37	32
Read 500 records	35	221	33	23
Write 32K-byte file	19	44	—	—
Read 32K-byte file	5.5	31	—	—

Table 1: A comparison of the relative floppy-disk access times of ProDOS and DOS 3.3 with times indicated in seconds. Times for the IBM PC and the Apple III are included for reference purposes. The 500-record file consisted of sequential 128-character records terminated with carriage returns, giving a total file size of just less than 64K bytes. (Benchmark programs used are shown in listing 1.) ProDOS appears to operate effectively six or seven times faster than DOS 3.3.

the BASIC.SYSTEM globals page, you can specify the address of an external command routine, which will be called if BASIC.SYSTEM gets an unrecognized command.

Apple's Help and APA (Applesoft Programmer's Assistant) programs are two interesting examples of added BASIC.SYSTEM commands. Running the Help program on the /Examples disk adds a special HELP command to the system. You can then type HELP followed by any DOS command, and a screen of information describing that particular command will be quickly loaded from the Helpscreens file on the disk and displayed.

When you run APA, it adds a series of program editing

and debugging commands. Some of the commands added by APA let you renumber your program lines, merge two BASIC programs, use automatic line numbering, hold a program in a special memory area, compress a program to remove all REM statements, and obtain an XREF (cross-reference) listing of variables versus line numbers.

Performance

According to Apple, DOS 3.3 transfers data to or from an Apple Disk II at about 1K bytes/sec while ProDOS transfers data at 8K bytes/sec. These figures are the raw transfer rates and do not include overhead time to access directories, open file buffers, or pass the data to Applesoft BASIC.

To evaluate the actual effective speed improvement, I used the same disk-access speed benchmarks used to evaluate the Apple III (see "The Apple III and Its New Profile," September 1982 BYTE, page 92). The evaluation included additional tests to write and read a 32K-byte file of binary data, simulating a large program store or load. (The benchmark programs used are shown in listing 1, and the test results are summarized in table 1.)

The performance increase with ProDOS was impressive. ProDOS ran five to six times as fast as DOS 3.3 when accessing text-file records or reading the 32K-byte binary file and about twice as fast when first storing the binary file. In fact, the times for ProDOS were almost the same as the times recorded for the Apple III running SOS, the progenitor of ProDOS.

It wasn't possible to use the same benchmark programs to measure the access times to the /RAM pseudodisk because /RAM provides 62K bytes of space while the benchmark program writes a 63.75K-byte file. However, the times to save and load the 32K-byte binary file were roughly 1.2 and 0.4 seconds respectively.

BYTE did not receive an Apple IIe Profile hard-disk drive for evaluation. However, based on the test results with the Apple III Profile, you should expect an additional improvement in overall disk speed of a factor of three to four.

Utility Software


Along with ProDOS itself and BASIC.SYSTEM, Apple provides three utility programs: Filer, to manipulate disk files and volumes; Convert, to transfer files between ProDOS and DOS 3.3 format disks; and Exerciser, to access the ProDOS MLI commands.

Filer is used primarily to copy files or whole disks or to initialize new ProDOS disks, but it also provides options that let you delete or rename files, rename volumes, alter file write-protection, and list ProDOS directories. To help the novice user, Filer provides a series of built-in tutor screens that explain the various Filer commands and options. Filer is also useful when you're moving files from one directory to another on the same disk. You could, for example, create a new subdirectory called Games and then use Filer to copy all your game programs from the main directory to Games. If the name

THE IDEA PROCESSOR™

A NEW CONCEPT IN THE MANAGEMENT OF TEXT AND GRAPHICS

Much more than just the finest text editor—much more than just the most powerful cardfile system—much more than just a comprehensive document formatter—it's an integrated system that provides incredible power in the manipulation of text, graphics (from any source!), spreadsheets, programs, or just about any kind of information you can store in a file on your IBM Personal Computer. Index your source material—spreadsheets, graphs, excerpts from letters, memos, contracts, books—then build your document, using the marvelous Idea Processor editor in conjunction with the instant text database access afforded by the Cardfile. Or copy sections of your document into your own cross-indexed archive: legal boiler-plate, literary quotations, subroutine libraries—you design it. Cross-index each citation up to 10 ways. Print your document with auto-footnoting, auto-indexing, and imbedded graphs and spreadsheets. The Idea Processor thinks along with you . . . to multiply your productivity.

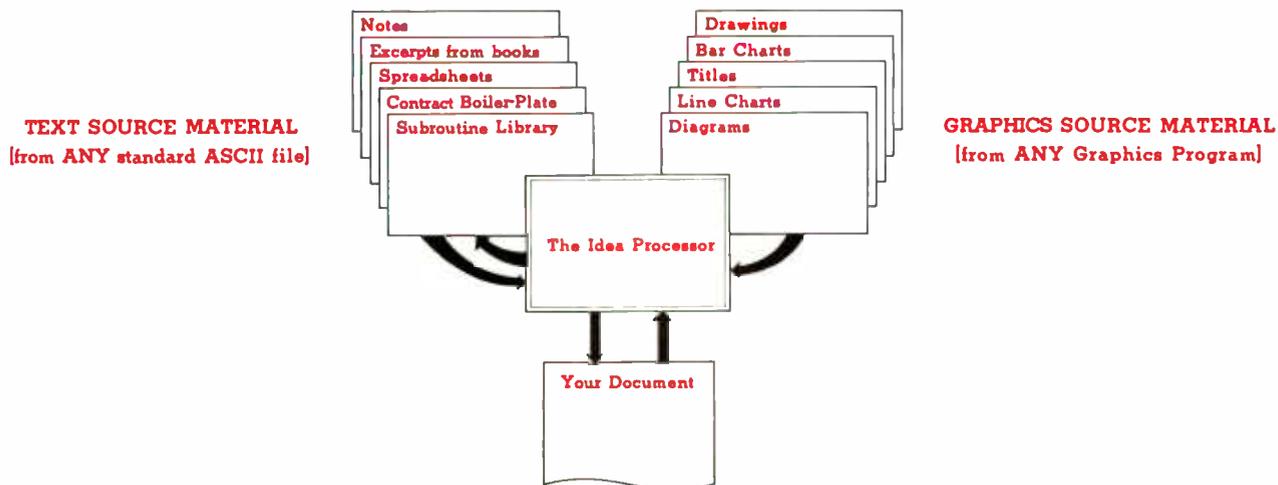

The Idea Processor is more than just a program. It's even more than a software system. It's a new way of looking at the management of text, graphics, and documents. Use it to build your next contract, program, memo, letter, or article. You'll see what we mean.

- The finest Editor available
- The most powerful Cardfile program available
- Editor and Cardfile are completely integrated and operate simultaneously
- Fastest data base access
- Move all or any part of a card to the document, or vice versa
- Manages up to 64,000 cards in a data base
- All commands entered via function keys or labelled keys for ease of use
- Constantly available function key information
- Eighteen full screens of HELP messages at a keystroke
- Keyboard MACRO commands replace 100 keystrokes with a single keystroke
- On screen underline and **Boldface**
- Edits files up to 160K
- Saves and indexes spreadsheets and graphics generated by any program
- Incorporates spreadsheets and graphs in printed text
- Auto Footnoting and Auto Indexing
- Bi-directional continuous line and page scrolling
- Uses full power of IBM keyboard and printer
- Complete novices use it comfortably in an hour; full proficiency in four hours

The Idea Processor

\$295

Integrated editor and cardfile program, text formatter, graphics management to integrate graphics from other programs into document and cards

Requires an IBM-compatible personal computer with 192K of memory


From your dealer or:




Visa and MasterCard

Circle 177 on inquiry card.

Idea Processor is a trademark of IdeaWare Inc.
IBM is a trademark of International Business Machines Inc.

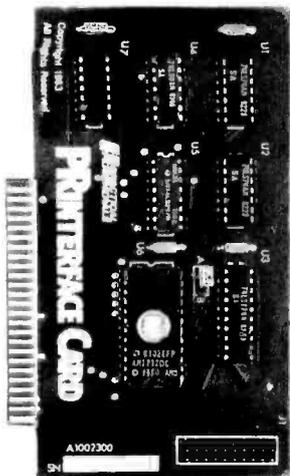

\$75*

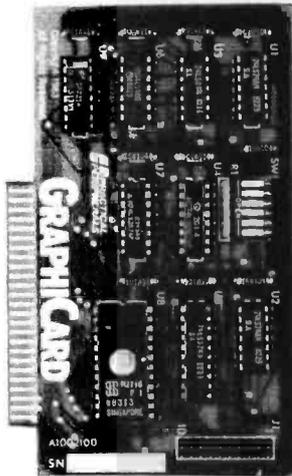

\$99*

RIGHT FACE. RIGHT PRICE.

At \$75 and \$99 respectively, PRINTERFACE™ and GRAPHICARD™ are the right parallel interface products for your Apple II, II+, IIe or Apple™ compatible system.

But don't be fooled by those low prices. High performance features and high reliability make them the right choice for serious printing requirements.

PRINTERFACE, for example, offers 27 easy commands that let you format text, send controls to the printer. You can even dump 80-column text screen from your Apple IIe.

GRAPHICARD gives you all that, plus graphics capabilities for 37 of the most popular printers. Eight additional commands permit a variety of graphics, screen dumps, including side-by-side, top-to-bottom, double size, inverse, emphasized, rotated and mixed text and graphics. For Apple II owners, the GRAPHICARD will give 80-column screen dumps from the Videx™ 80-column board.

By the way, if you buy PRINTERFACE and decide later that graphics would be nice, there's an easy-to-install upgrade kit that'll do the trick just fine.

Both cards clearly give you more for your money. And both are warranted for five years. That's right, **five years**.

So drop into your local dealer and ask about PRINTERFACE and GRAPHICARD today. Two more practical products from Practical Peripherals.

**PRACTICAL
PERIPHERALS**

31245 La Baya Drive, Westlake Village, CA 91362
(213) 991-8200 • TWX 910-336-5431

*Suggested retail price.

**Apple is a registered trademark of Apple Computer, Inc.

of each game program ended with the same suffix, the Filer wild-card character (=) could be used to accomplish the copy with a single Filer command.

Convert can be used to copy files in either direction between ProDOS and DOS 3.3. Since ProDOS uses different filenaming conventions than DOS 3.3 (filenames can be 15 characters long and cannot contain spaces), Convert modifies DOS 3.3 filenames by truncating them to 15 characters and changing any spaces to periods.

Both Filer and Convert appear to be well written and user-friendly. The prompting is clear and unambiguous—it will be difficult to make an error using either program.

Exerciser is primarily a tool for system program developers. It can be used to manually execute each of the ProDOS MLI calls and to modify areas of memory. Exerciser should be used with caution. It will be very easy for an unwary user to damage the data on a disk because Exerciser lets you read or write data onto any disk block. However, it should be invaluable for debugging systems or for patching a damaged disk.

Documentation

Although the manuals I received for review were early draft copies, the ProDOS documentation looks excellent. All three manuals are well written, containing numerous examples and special cautionary messages when describing areas where problems might occur.

The *ProDOS User's Manual* explains how to use the Filer and Convert utilities. Written at a level suitable for rank beginners, it takes you step by step through each Filer and Convert function, explaining any new term encountered along the way. I found the *ProDOS User's Manual* to be the least needed of the manuals supplied because both Filer and Convert are menu-driven and virtually bulletproof. You simply progress from menu to menu, selecting the options you want—it's almost impossible to make any serious mistakes.

BASIC Programming with ProDOS will probably be the most read of the ProDOS manuals. Even though much of the material included will already be familiar to DOS 3.3 users, it explains all the new ProDOS commands and options and includes descriptions of ProDOS directories, pathnames, and file types. For the beginner, *BASIC Programming with ProDOS* includes all the information necessary to learn to use ProDOS effectively. A large percentage of the manual is spent explaining text files. It includes chapters that describe how text files are created and accessed, how to use random-access files, and how to create files of commands as Exec files. The appendixes include descriptions of the differences between DOS 3.3 and ProDOS when using Applesoft BASIC, a summary of ProDOS commands and features, descriptions of all error messages, and a complete glossary of all terms used.

The *ProDOS Technical Reference Manual* provides a complete description of ProDOS's inner workings. It will be invaluable to anyone who wants to write a system program, install his or her own device drivers, or deal with

Discover the wizardry of **MAGIC**

MAchine Generated Integrated Code[®]

MAGIC/MPS™—A revolution in program development. **MAGIC** supersedes **COBOL**, **PASCAL**, **C**, **BASIC** and other application languages. **MAGIC** enables you to produce good clean assembly language machine code—and plenty of it.

MAGIC through its various compilers allows the use of the same source to derive multiple object codes for a wide variety of systems.

MAGIC makes a run-time package a thing of the past. **MAGIC** lets you address diverse system and application needs in significantly less time.

For more information, send coupon or write Data Management Assoc., Inc., P.O. Box 4340, Wilmington DE 19807. Phone 302/655-8986.

**MAGIC MAKES PROGRAMMING
EXCITING**



MAGIC is a language written for programmers by programmers.

MPS/80™ for **CP/M™** systems
MPS/86™ for **CP/M-86™** and **MS™-DOS** systems

SHOW ME SOME MAGIC!

Mail coupon to Data Management Assoc., Inc., PO Box 4340, Wilmington, Delaware 19807, or call 302/655-8986.

My system is _____

- Send: More information
 MAGIC/MPS™ Manual @ \$50 ea.
 MPS/80™ @ \$795 ea.
 MPS/86™ @ \$995 ea.
 Check enclosed Send C.O.D.

Name _____

Title _____

Company _____

Address _____

City/State/Zip _____

Phone() _____ Best time to call _____



**LET US SHOW YOU
SOME MAGIC AT
BOOTH L7216**

ProDOS from assembly language. It includes chapters that describe files and pathnames, calls to the ProDOS MLI, writing system programs, and adding routines to ProDOS. Appendixes provide descriptions of the file-storage methods and directory formats, disk organization, the relationship between ProDOS and SOS, and how to use the Exerciser program.

ProDOS Packages

At the time this was written, Apple had tentative plans to market four different ProDOS packages. For assembly-language programmers, there will be a ProDOS Tool Kit with a new version of Apple's EDASM editor/assembler, a debugger program, and the *6502 Assembler/ProDOS Tools Manual*. The new version of EDASM includes macros and supports the various ProDOS file types and pathnames. Apple will also market a package that consists of the *ProDOS Technical Reference Manual* and the Exerciser program—useful if you want to write additional device drivers or .SYSTEM programs that interface directly to the ProDOS MLI. A BASIC users package will include *BASIC Programming with ProDOS* along with the BASIC /Examples disk. A utilities package will combine the *ProDOS User's Manual* with a /Utilities disk holding Filer and Convert.

Pricing hadn't been set when this article was written. Most previous Apple software packages of this type have cost less than \$100.

Conclusions

ProDOS provides a significantly improved operating system for Apple II and IIE computers. With disk accesses about six times faster than DOS 3.3, files up to 16 megabytes long, and support for Apple's Profile 5-megabyte hard-disk drive, ProDOS provides an environment that will make it easier for applications developers to write the increasingly sophisticated software required by the business community. Using disk and file formats that are compatible with the Apple III's SOS operating system, ProDOS allows development of software that will boot up and run properly on either machine—loading ProDOS on Apple IIs or IIEs and loading SOS on Apple IIIs.

For the more casual user, ProDOS may initially seem more complex to learn than DOS 3.3 due to its nested directory structure and increased command options. However, it will be easier to keep your programs organized under ProDOS, and the volume names and pathnames will prevent errors that could occur under DOS 3.3 if the wrong slot # or drive were specified. You should note that ProDOS does not make DOS 3.3 obsolete. There is no need to convert existing software to ProDOS unless you need the increased performance or new features.

For hardware developers, ProDOS provides a uniform protocol that lets you interface virtually any type of disk-like storage device without resorting to the now common DOS patches. If Apple's interface guidelines are followed, foreign disks will be recognized and used properly without requiring any alterations to the operating system. (This will also make life a little easier for users.)

On the minus side, neither Apple's UCSD Pascal nor Apple CP/M is compatible with ProDOS, and this may prolong some existing problems. Current suppliers of hard disks for the Apple II generally provide software that lets you partition your disk into areas for DOS 3.3, Pascal, and CP/M, because the three operating systems are not compatible. On the Apple III, Pascal resides on the SOS operating system and shares the nested directory/pathname facilities to manage disk storage. I hope to see a new Pascal for the Apple II with the same features. In the interim, Apple will supply software that will let you partition your Apple IIE Profile hard disk into separate areas for ProDOS and Apple's Pascal 1.1 operating system.

To summarize, Apple's new ProDOS represents a significant improvement over the existing DOS 3.3 operating system and includes features that are unavailable with most other personal computer operating systems. Although it may not be worth the effort to convert your existing DOS 3.3-based software to ProDOS, its capabilities give it some strong advantages for development of new programs. ■

Rob Moore (Warner Hill Rd., RFD #5, Derry, NH 03038) is a design engineering manager with an interest in FORTH, graphics, and computer music.

De Smet C

PCDOS — CP/M-86 — MPM-86 — CCP/M-86

\$ 109

- **OUTSTANDING PRICE/PERFORMANCE**
"SIEVE" Benchmark
135 bytes compiled — 6144 bytes linked
65 sec. compile (disk) — 11.5 sec. run (10 iterations)
- **FULL DEVELOPMENT PACKAGE**
C Compiler, Assembler, Linker, Librarian and Full Screen Editor • Native 2.0 Support
- **COMPLETE IMPLEMENTATION**
FULL K & R — plus — STUDIO LIBRARY
Both 8087 and Software Floating Point

*To order specify OS & DISK SIZE/FORMAT.
Calif. residents add 6% sales tax.*

C WARE

PO Box 710097 San Jose, CA 95171-0097

(408) 736-6905

PCDOS Trademark IBM — CP/M Trademark Digital Research

EXPECT A LOT *from* VEDIT

Newest Features:

- Horizontal Scrolling
- Single Key and Conditional Search and Replace with Pattern Matching
- Easier to Use than Ever

Widely acclaimed as an editor, VEDIT has evolved to be much more. VEDIT is not only a versatile full screen editor, its command mode has become a powerful text-oriented programming language based on TECO. For the first time you'll be able to perform complex text manipulations that are impossible for any word processor. Just a few examples of VEDIT'S command macro power are:

- Hundreds of tedious search/replace operations, once performed by hand, can now be made automatically on dozens of files without your intervention.
- VEDIT macros are indispensable with source code translations. (Example ZILOG to/from INTEL translator macros are included). A complete line of translators will be available soon.
- An on-line tutorial and mail merge program, completely written with VEDIT macros, (source included) is available as an inexpensive option -- imagine what you can write for your own applications.

Word processing is a snap with paragraph formatting, word wrap, print functions, and VEDIT's unmatched 'cut and paste' capability.

VEDIT cuts programming time in half - with multiple file handling and special features for Pascal, PL/1, 'C', Assembler and other languages.

VEDIT is completely customizable -- you configure your own keyboard layout. Use any function or cursor key you wish. Plus our total commitment to hardware support ensures that VEDIT will be perfectly matched to any microcomputer you are ever likely to own.

Reviewers' Comments

'The performance of this product is nothing short of outstanding!'

'VEDIT is a 'virtual' text editor. The amount of memory in your computer does not limit the size of the file you can edit.'

Tim Daneliuk, InfoWorld - May '83

'At present there are three major entrants into the screen editor category for the PC...VEDIT is the front-runner for the definitive quality screen editor.'

Todd Katz, PC Magazine - October, '83



'VEDIT's 'visual' mode, where you will spend most of your time, has a multiplicity of valuable one-or-two-keystroke commands which make it very easy to enter and modify text.'

Frederick Zimmerman, Sextant - Fall, '83

'VEDIT's by all odds the most flexible programming editor I've ever seen.'

'One of its best features is multiple buffers; that is, you can store chunks of programs in various places and pull them out into your main file when needed.'

Jerry Pournelle, Byte - September, '83



True Full Screen Editing
 Edit Files One Disk in Length
 Automatic Disk Buffering
 Compact (Only 16K) and Fast
 Display of Line and Column
 Set/Goto Text Markers
 'Undo' Key to Restore Line
 Automatic Indent/Undent
 Adjustable Tab Positions
 Repeat Function Key

Text Move and Copy
 10 Scratchpad Buffers
 Load/Save Buffers on Disk
 Powerful Command Macros
 Directory Display
 Edit Additional (small)
 Files Simultaneously
 Insert Another Disk File
 Unlimited File Handling
 Recovery from 'Full Disk'

Change Disks While Editing
 Word Wrap, Format Paragraph
 Simple Printing
 150 Page Indexed Manual
 Startup Command File
 Menu Driven Installation
 Program CRT Function Keys
 Support Newest CRT terminals
 Flexible Memory Map Support
 Customizable Keyboard Layout

VEDIT is available for virtually every 8080, Z80 or 8086 microcomputer made. To order please specify your computer, operating system and disk format.

VEDIT - Disk and Manual



8080, Z80 or IBM PC . \$150
 CP/M-86 or MSDOS . \$195
 Manual only \$18
 On-Line Tutorial . . . \$15
 Mail Merge \$15



CP/M is a registered trademark of Digital Research Inc. MSDOS is a trademark of Microsoft. IBM is a trademark of International Business Machines. Quotes from InfoWorld review Copyright 1983 by Popular Computing, Inc. a subsidiary of CW Communications, Inc., Frammingham, MA. Reprinted from InfoWorld. Quotes from Byte review Copyright 1983 by Byte Publications, Inc. Quotes from Sextant review Copyright 1983 by Sextant Publishing Co. Quotes from PC Magazine review Copyright 1983 by PC Magazine.

CompuView

PRODUCTS, INC.

1955 Pauline Blvd., Suite 200 Ann Arbor, Michigan 48103 (313) 996-1299 Telex - 701821
 Orders: P.O. Box 1349, Ann Arbor, Michigan 48106

We've always said SuperCalc[®] is the world's most useable spreadsheet.

At first, all spreadsheets seem to give you about the same things. Until you put them to work. Then you'll find out if they do everything you expected. Or make you do everything the hard way.

You know what makes the difference? It's not just having the newest, whizziest features, but what those features actually do for you in the real world. And that's the whole idea behind SuperCalc and SuperCalc2. Because they've been designed to work with you in a natural, intuitive way.

What we're really talking about here is useability. When you get right down to it, it's not any one big thing, but a combination of little things. Like the number of key-strokes it takes to get a job done. Or the effort it takes to switch from one function to another. Maybe a few keystrokes here and there doesn't seem like much of a difference. Or having to change disks to plot a graph. But when you multiply those little things by the thousands of times you do them, they make all the difference in the world.

Even the size of the spreadsheet is important. Some programs promise you a huge area to work with. Unfortunately, they can use so much of the computer's available memory just keeping track of all the blank cells that you're left with only a handful. But we've designed SuperCalc to give you the largest useable spreadsheet.

If you look at the printout below, you'll see a lot more examples of what we mean. And we think you'll realize why this is the most useable spreadsheet in the world.

Text can "spill over" into next column

Calendar/Date calculations

Dictionary sort order (not ASCII)

Two key sort

User-set decimal places

Floating \$ signs

Data management capability

Negatives shown in ()

Individually variable column widths

WESTIN & CO., CHgo
Staff Plan Dr. Ending 3/31/84

Hours available this period 176 160 176 520

Level	Name	Rate	Jan %	Jan \$	Jan Hours	Feb %	Feb \$	Feb Hours	Mar %	Mar \$	Mar Hours	Qtr %	Total Hours	Variance
PARTNER														
1-13	Depp	\$100	25	\$4,700	97	50	\$1,400	84	50	\$1,800	88	52	\$2,400	269 (1.4%)
1-20	Tollner	\$95	100	\$10,070	100	50	\$1,920	94	50	\$1,300	88	55	\$7,500	260 (1.6%)
MANAGER														
2-05	Dean	\$80	75	\$10,560	132	70	\$9,440	118	70	\$1,840	123	72	\$24,840	373 (2.8%)
2-53	deLuca	\$92	78	\$12,004	137	75	\$11,592	120	70	\$11,310	122	74	\$10,312	386 (2.8%)
2-92	Zabar	\$82	72	\$10,414	127	73	\$10,332	126	70	\$10,006	123	72	\$10,832	376 (2.8%)
SENIOR														
3-102	Malducci	\$50	85	\$7,500	150	85	\$7,150	143	85	\$7,500	150	85	\$22,150	443 (2.7%)
3-115	Calaban	\$35	91	\$6,090	158	85	\$7,465	143	80	\$7,785	141	85	\$21,310	442 (5.4%)
3-124	Ray	\$48	85	\$7,008	146	85	\$6,864	143	80	\$6,760	141	83	\$20,640	430 (11.4%)
STAFF														
4-91	Smith	\$41	99	\$7,134	174	99	\$6,106	166	98	\$7,052	172	98	\$20,442	512 (1.6%)
4-134	Mollensky	\$43	94	\$7,482	174	99	\$7,130	166	96	\$7,267	169	98	\$21,807	509 (5.1%)
OFFICE TOTAL		80		\$91,162	1401	78	\$84,517	1309	75	\$86,744	1,318	77	\$260,423	4028

OFFICE SUMMARY STATISTICS:

Lowest Utilization	55%	50%	50%	52%
Highest Utilization	99%	99%	98%	98%

Staff Complement & Average Rates:

Partner	2	\$77,500
Manager	3	\$84,667
Senior	3	\$51,000
Staff	2	\$42,000

10

Now you can draw your own conclusions. SuperCalc³

Now we're introducing our newest version, SuperCalc3, which comes complete with the kind of graphics you'd expect to find in a program that does everything else so well. We give you full color. And presentation quality. Plus eight different type styles to choose from. And new financial features like internal rate of return. We've even integrated all these functions onto one single disk. Which means you don't have to change disks all the time. Or settle for a weak spreadsheet and low-resolution graphics just for the sake of getting

both in the same package.

As you might expect, we've made SuperCalc3 100% compatible with SuperCalc and SuperCalc2. So you can move up to it whenever you're ready. You can even convert your VisiCalc files. The SuperCalc family is available for CP/M, CP/M-86, Concurrent CP/M-86, MP/M, MS-DOS and PC-DOS operating systems. Right now, SuperCalc3 is available for the IBM PC, PC XT and IBM PC compatibles. It's only \$395. And soon it'll be available for a lot more personal computers.

SuperCalc3. When you're really serious about spreadsheets, this is the one you'll wind up using. But don't take our word for it. Go try SuperCalc3 at your computer store today. And draw your own conclusions.

CP/M, CP/M-86, Concurrent CP/M-86, and MP/M are trademarks of Digital Research. MS-DOS is a trademark of Microsoft Corporation. IBM is a trademark of International Business Machines Corporation. VisiCalc is a trademark of VisiCorp. © 1983 Sorcim Corporation.

SuperCalc³

SORCIM[®]

2310 Lundy Avenue San Jose, CA 95131
(408) 942-1727

Integrated presentation-quality graphics

Prints up to four charts on the same page

Components of graph resize to match size of text


Full color graphics

Exploding pie charts

Prints all available plotter colors

Eight font types

Labels print horizontally or vertically, for best fit

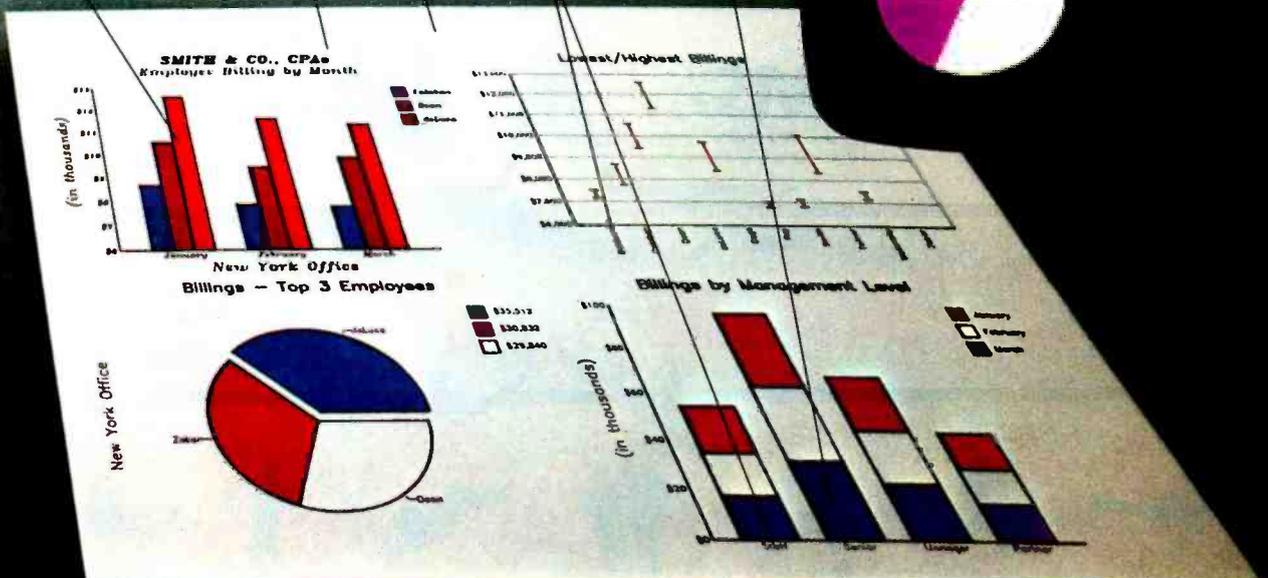


ACCOUNTING SOFTWARE FROM OPEN SYSTEMS GETS YOU UP AND RUNNING . . . FAST.

Accounting For The Serious Business User

The IBM PC and XT, the Apple LISA and Apple III, the DEC Rainbow, the Victor 9000, the Wang Personal, the TI Professional, the Zenith Z-100 . . . What do these top-selling business computers have in common? All of these popular products plus over 30 other micro-computers run the **Software Fitness Program™** accounting applications plus the **Team Manager™** report writer.

You can choose Open Systems' accounting applications in COBOL or BASIC on single- or multi-user computers running on every popular operating system including CP/M, CP/M-86, MP/M, MP/M-86, MS-DOS, PC-DOS, OASIS, RM/COS or XENIX. Over

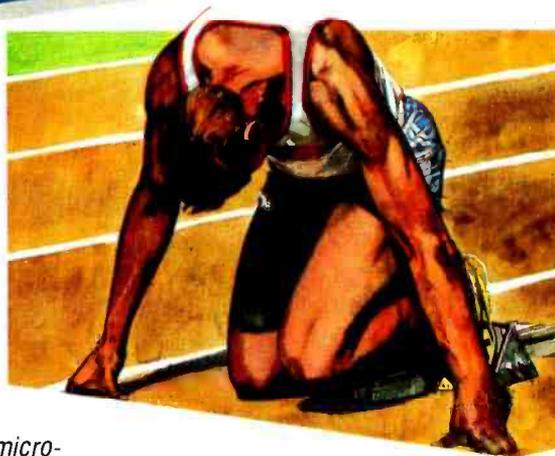

200,000 of our applications have already been installed in over 200 different types of businesses.

Powerful Yet Simple To Use

We've got the most advanced and comprehensive accounting software you can buy-yet our products with training disks and owner's manuals will put the computer novice at ease.

And with our newest product, the **Team Manager** report writer, a user can select from over 800 predefined data dictionary elements to create an unlimited number of simple or complex reports.

If you're looking for on-track accounting solutions to increase your profits . . . look to the **Software Fitness Program Accounts Receivable,**

Accounts Payable, General Ledger, Payroll, Job Cost, Inventory, Sales Order Processing, PLUS the Team Manager report writer. Our competition can't even come close.

If your bottom line is your top priority, today and tomorrow, we've got solutions. Ask for a demonstration from your local computer dealer.



OPEN SYSTEMS INC

430 Oak Grove Minneapolis, MN 55403
(612) 870-3515 TWX 910 576 1743

CALL TOLL-FREE 800/328-2276
FOR THE NAME OF A LOCAL DEALER.

Dealer Inquiries are Invited.



Knowledgeman

A close look at a new, fully integrated management system with complete database and spreadsheet capabilities all in one

by James W. Walker

Multifunction integrated programs are a recent popular trend in personal computer software. These programs include such functions as database management, spreadsheet analysis, graphics generation, and word processing. Knowledgeman: The Knowledge Manager is a recent entry into this market.

This new information-management system from Micro Data Base Systems combines in one package a superior relational database-management system (DBMS), an advanced third-generation spreadsheet, a forms generator, the means for full statistical analysis, extensive operating functions, and a complete structured-programming language for writing command procedures. Both color and monochrome displays are supported. The program lists for \$500 and requires a minimum of 192K bytes of RAM (random-access read/write memory). Recommended mass storage is 500K bytes. Knowledgeman takes full advantage of the new generation of 16-bit microcomputers with releases for the IBM PC, Victor/Sirius, and Altos microcomputers. Unlike most other relational database management systems, such as dBASE II or Condor, Knowledgeman has few design limitations. For example, with Knowledgeman you may have up to 255 fields per record and an unlimited number of tables open at once (assuming enough RAM and disk space are available), thus allowing multiple table processing with a single command.

My work involves determining the evolutionary rela-

tionships between groups of flowering plants. I use Knowledgeman to analyze the distribution of characteristics among flowering-plant groups. For example, if the pollen of certain flowering plants indicates that two groups of plants may be related, Knowledgeman looks for other traits, such as flower, fruit, and seed type, that these groups may have in common. In this short review I can scarcely do justice to this comprehensive program, but I will attempt to outline its major features.

Database Management

As a database manager, Knowledgeman allows you to set up a file, define the various fields of each record, enter data, modify data, and access data in a number of different ways.

Table Formation

Knowledgeman creates each database as a table, consisting of rows, or records, and columns, or fields. The DEFINE command forms the table. You enter DEFINE and a table name, and the system prompts you for a file-name and then for the fields. Each field must have a name and a type (string, numeric, or logical) and, if it's a string field, a maximum length.

You can have up to 65,535 records per table and up to 255 fields per record as long as you have enough disk space and RAM to handle it. Essentially, the software places no limit on record or field length since each may

At a Glance

Name

Knowledgeman

Type

Integrated relational database-management system and spreadsheet

Manufacturer

Micro Data Base Systems Inc.
POB 248
Lafayette, IN 47902
(317) 463-2581

Price

\$500

Language

Assembly language and C

Format

Floppy disk

Software Required

PC-DOS 1.1 and 2.0, MS-DOS 1.x, or CP/M-86

Computer System

192K bytes of RAM, 500K bytes of mass storage

Documentation

One reference manual, beginner tutorial guide, fold-out command guide

Audience

"Second-time" users, BASIC programmers

be up to 65,535 characters long. You can define "pictures" to provide field-integrity checking (e.g., use placeholders to restrict data input to alphabetic, alphanumeric, or numeric characters) or specific kinds of editing (e.g., use placeholders to automatically convert alphabetic characters to uppercase or lowercase). Fields can also have fixed characters, e.g., the dashes in social security numbers can automatically occupy the proper positions on input. You can create virtual fields (defined by a formula) that occupy no storage in the table. The system updates virtual-field values as data changes occur in the fields or expressions that define them.

You can check table definitions with the SHOW command. SHOW with a specific table name gives you a display of the following: field names, field types, field "pictures," virtual-field definitions, index-key expressions, date of last modification, and current number of records. When SHOW is entered by itself, Knowledgeman gives you all tables in use and their complete filenames, as well as the default table.

The USE and FINISH commands respectively open and close the tables. If the RAM and disk space are available, there is no limit to the number of tables that can be used simultaneously. FINISH followed by a specific table name closes that table, while FINISH ALL closes all tables in use. A new default table can be declared using the DEFAULT command followed by the table name.

Data Input

After defining a table, you begin data entry with the CREATE command. Knowledgeman responds with "Record Number xxx" and provides field prompts. Fixed characters declared in field "pictures" appear automatically, and each field's length is indicated by dashes. The system supports full use of the IBM PC's arrow and special-function keys for editing data items (field variables). Field values of the previous record can be repeated. Furthermore, you can insert, delete, or overwrite a previous field-value display.

Knowledgeman doesn't provide virtual-field prompts because those values are automatically computed. If you create subsequent records after a table's initial record creation, you can place them in the file anywhere you choose.

Table Modification

You can easily modify tables with the REDEFINE command, adding new fields, deleting existing fields, or changing the type, size, or name of a field. You can redefine or add field "pictures" and virtual fields and rename or erase tables with the RENAME and DESTROY commands, respectively. Data items (field variables) themselves may be updated in one of two ways. Using the BROWSE command you can look at one record at a time and edit the data items in it or you can set the browsing scope to look only at records 134-256, for example. You can rapidly browse forward or backward through the records with the function keys. You can also set conditions, such as certain field values, for the records to be browsed. Knowledgeman has the added feature of selective field browsing so you can BROWSE (or CREATE) only some of a table's fields if you wish.

The CHANGE command changes data items globally. For example, the command CHANGE NAME TO "AUDREY" would change all field values for the field "Name" to "Audrey." However, if you want you can limit the scope of data item changes to certain record numbers or to certain conditions, e.g., you can CHANGE FNAME TO "AUDREY" FOR LNAME = "WALKER" to change only those records whose lname (last name) is "Walker."

Knowledgeman deletes records using a logical switch. When the system creates a record, it automatically sets up the first field as #MARK. You cannot delete or rename this field, and it has an initial logical value of "false." If you want to delete records, change the #MARK field of the selected records to "true" (with the MARK command). An UNMARK command is available to change records marked "true" back to "false." If you want to delete the records permanently, the COMPRESS command destroys all records marked "true." You can create new tables from existing tables using the IMPRESS, CONVERT, and ATTACH commands. The IMPRESS command allows you to "impress" an existing table definition onto a empty new table. Field names, types, sizes, and "pictures" are all carried over to the new table. The CONVERT command changes the field values from packed binary to a special file format—ASCII, BASIC-

compatible, and DIF (Data Interchange Format). If you only want the values from certain fields, Knowledgeman supports selective attaching. Although you can use the CONVERT and ATTACH commands in several ways, they are especially useful when you want to construct a new table out of existing tables.

Table Sorting and Indexing

The SORT and INDEX commands appropriately sort and index records. You can sort records in ascending (A-Z) or descending (Z-A) order or in some combination thereof. Sorting is based on the contents of a field or on relationships between fields (e.g., records could be sorted A-Z on three times the salary). You can also create indexes in ascending or descending order or in some combination of sequences using the INDEX command.

Data Retrieval

You can retrieve data a record at a time or generate an entire output table. There are two ways to get an individual record, OBTAIN and PLUCK. Use OBTAIN to get a particular record number, first, last, prior, or next

Perform files can keep the system busy for hours with just one entry.

record, as well as record number xxx, and to get a record conditionally, for example:

```
OBTAIN FOR FNAME = "AUDREY"
```

Use the PLUCK command for rapid retrieval of indexed records. This is the fastest way to retrieve a record conditionally, but before you can use the PLUCK command, you must create one or more index files for the table.

Knowledgeman uses B+ tree indexing for rapid record retrieval. You can use an unlimited number of index keys per table. Each index can have as many as 65,535 fields and be up to 65,535 characters long. If you want to conditionally retrieve records often, use index files; the PLUCK commands are much faster than the conditional OBTAIN commands.

The system can automatically update indexes as you make changes with the BROWSE and CHANGE commands. However, this slows down the CHANGE command significantly, so you may decide to override this feature and create new indexes after major table changes. You must recreate index files after using REDEFINE, COMPRESS, or SORT commands.

The SELECT (LIST) command creates a new output table from one or more existing tables. It is one of the most powerful Knowledgeman commands. You can pick any number of fields for data generation, and the order in which you list the fields determines the arrangement of the output table. You can SELECT to include, for example, all records, the next 100 records, or records in a

How a fireman and a broken leg made software simple.



What does a fireman know about designing software? Nothing. Usually.

Meet Dennis Jarvis, a firefighter from Southern California. About five years ago he broke his leg in a fire-related accident and was confined to the house for about six months. To keep him occupied, Dennis' wife bought him a computer.

Dennis had never used a computer before. But he proved to be a natural.

Dennis was soon writing his own programs. And Basic Accounting from Firefighter was born.

It was brilliant.

And so simple, you don't have to know anything about accounting theory to use it.

But don't get the wrong idea. Just because it's simple, doesn't mean it's not smart, too.

Basic Accounting from Firefighter has so many more features and capabilities than the best selling accounting package, there's no room to list them in this ad. You'll just have to ask your dealer to show you.

Dennis? He returned to the Fire Department soon after his leg healed, but remains the spearhead of Firefighter Software.

In fact, in his never-ending efforts to make Firefighter the most personal, most supported software, Dennis has set up a telephone hotline to answer your questions and provide consultation. That's just Dennis' way of insuring Firefighter remains superior, always simpler yet smarter.

Hotline: 1-800-641-0814

California Hotline: (213) 991-8200

FIREFIGHTER.

SIMPLER, SMARTER SOFTWARE.



31245 La Baya Drive, Westlake Village, CA 91362

EXPOTEK

1-800-528-8960

Guaranteed Low Prices

IBM CALL SAVES

AST, Hercules, Microsoft, Maynard, Persyst, Profitsystems, Quadram, STB, Talltree

TERMINALS

ADDS	
A-1 Green	\$485
A-2 Green	490
Viewpoint 60	619
Hazeltine	
Espril I	485
Espril II	540
Espril III	735
Qume	
OVT 102 Green	535
OVT 102 Amber	550
OVT 103 Green	840
OVT 103 Amber	850
Televideo	
910 +	549
925	699
950	899
970	975
Wyse	
Wyse 100	680
Wyse 300	1020
Espril III	735
Visual	
Visual 50 Green	599
Visual 55 Green	720
Zenith	
Z-29	635

COMPUTERS

Altos	
580-10	3550
586-10	6598
586-14	7680
8600-12	8399
Columbia	Call
Eagle	Call
Franklin	Call
Pied Piper	Call
NEC Portable	Call
Northstar	
Advantage	2160
Advantage w/5MB	3345
Advantage w/15MB	4315
Televideo Systems	
802 H	4210
803	1815
1603	2150
806/20	4775
800 A (user station)	999
Teleport	Call
Zenith	Call

MONITORS

Amdek	
Video 300E	129
Video 300A	145
Color I	270
Color I Plus	275
Color II Plus	425
SMC	
12" Green	155
12" Color	219
NEC	
JB 1201	155
JB 1260	115
Taxan	
12" Amber	125
Zenith	
12" Green Screen	95
12" Amber Screen	120

CUSTOMER SERVICE
(602) 861-1141

10439 N. CAVE CREEK RD., #111, PHOENIX, AZ 85020

MODEMS

HAYES	
Micro-Modem II	250
Micro-Modem II w/term. pkg.	279
Smart Com II	89
Smart 300	199
Smart 1200	499
U.S. Robotics	
212A Auto Dial	469
Password	375

PRINTERS

DAISYWRITER	
Daisywriter 2000	999
Daisywriter Cable	40
Datasouth	
DS120	595
DS180	1155
DS220	1590
DIABLO	
620 (25CPS/Serial)	875
630 (40CPS/Multi-IF)	1710
C. ITOH	
Pro-writer I (8510A) Par	340
Pro-writer (8510A) Serial	499
1550 P	599
1550 BCD	655
F-10 40CPS	1090
F-10 55CPS	1395
EPSON	
All models	Call - Save \$
OKI-DATA	
All models	Call - Save \$
JUKI	
6100-18	569
MANNESMAN-TALLY	
160L	589
180L	829
NEC	
3550 (For IBM PC)	1705
3510	1365
7710	1890
STAR MICRONICS	
Gemini 10X	CALL
Gemini 15X	CALL
Gemini 15	370
SILVER REED	
EXP 550P	575
TOSHIBA	
P-1350	1499
TRANSTAR	
120 P	499
315 Color Printer	499
Sheet Feeders & Tractors CALL	

DISK DRIVES

CDC	
5 1/4" 9409 DS/DD	379
TANDON	
5 1/4" TM 100-1 SS/DD 160K	150
5 1/4" TM 100-2A DS/DD (320K)	225
TM101-4 (96 TPI Quad Den)	339
8" TM848-2 (DS/DD) 1.2 MG	400
PERTEC	
5 1/4" FD200-5 (160 K SS/DD 40TR)	139
5 1/4" FD250-5 (320 K DS/DD 40TR)	195
MICRO-SCI	
A-2 (35TR)	225
A-40 (40TR)	269
A-70 (Quad)	329
RANA	
Elite I	249
Elite II	399
Elite III	509

TWX 910-950-1194

\BORDER	turn the spreadsheet's borders on or off
\BYE	leave spreadsheet mode while maintaining all spreadsheet definitions and variables
\COLUMN, \ROW	add or delete columns or rows
\COMBINE	combine portions of different spreadsheets
\COMPUTE	compute up-to-date values for all of a spreadsheet's cells
\CONCEAL, \REVEAL	conceal cell's definitions from view (or reveal to view)
\COPY	copy cell definitions
\DISPLAY	print desired cell values
\DUMP	print formulas serving as basis for cell values
\EDIT	edit the active cell's definition
\PROTECT, \UNPROTECT	protect or unprotect cell definitions from alterations
\SAVE, \LOAD	save or load a file
\STOP	leave spreadsheet mode without maintaining spreadsheet cell values
\STYLE, \ACTIVATE, \DEACTIVATE	declare and conditionally activate-deactivate reverse video, blinking, etc.
\UNDEFINE	undefine a cell or block of cells
\USING	assign a "picture" to a cell for integrity checking and editing
\WIDTH	specify the column width
\=	reposition the spreadsheet display

Table 1: The Knowledgeman spreadsheet commands.

certain range. You can specify "pictures" for output data values to edit the data or set up any number of conditions for data retrieval. A full set of logical operators is available, including =, <>, >, <, >=, and <=.

Knowledgeman allows an unlimited number of tables to be open at once (dependent only on available RAM and disk space), so you can use the SELECT command to query multiple tables. The system supports wild-card string, character-match symbols, and a "unique" qualifier to suppress the display of an item's next value if it equals the preceding one. You can SELECT dynamic, multifield, multisequence sorting of the output table with the qualifier

"ORDER BY direction fieldname. . ."

This enables you to obtain sorted data from only the records retrieved without having to physically sort all the table's records. Finally, you can have an unlimited number of changes in an output field's value triggering control breaks by using the qualifier


"GROUP BY fieldname. . ."

This computes full statistics for all the fields in each control break and displays them if you wish.

Spreadsheet

To use the Knowledgeman spreadsheet within the database program, enter the CALC command. Spreadsheets can have up to 255 rows or columns. Special effects include up to eight foreground or background col-

It Meets Your Needs... Whatever They Are

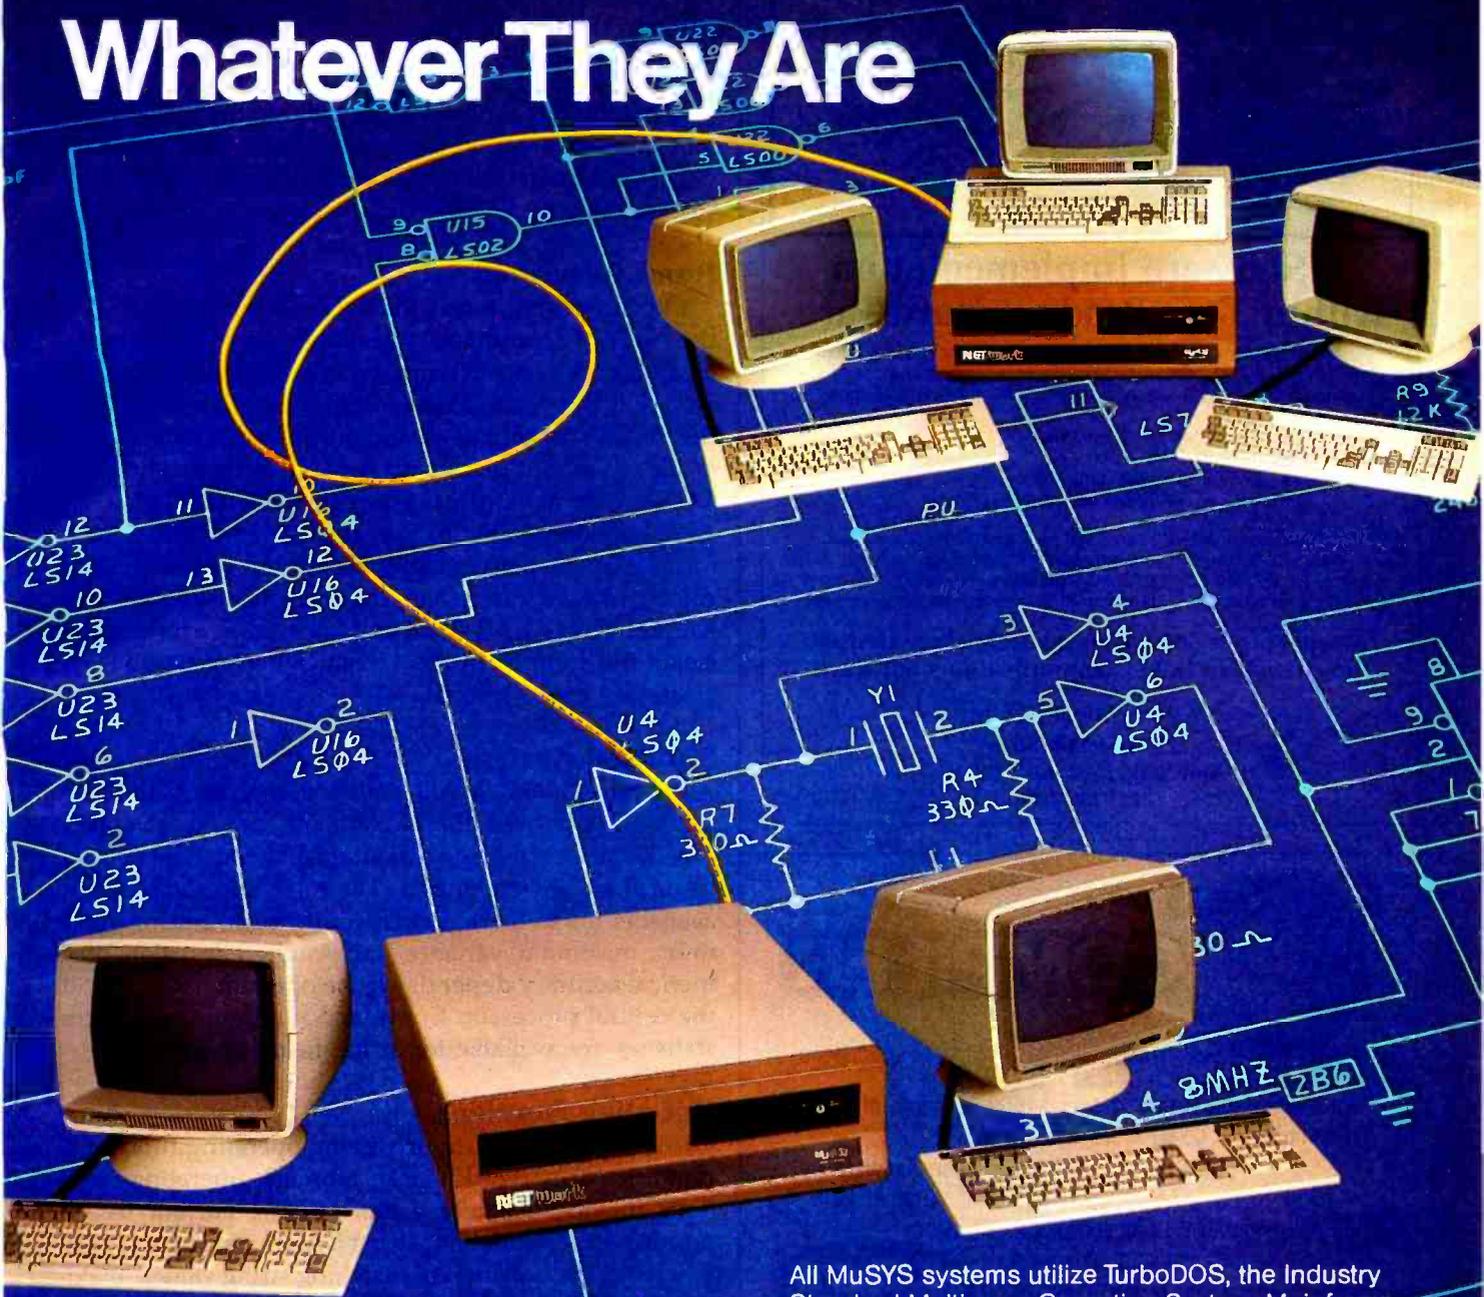

Large Multi-user Capability

A truly professional, reliable solution—the NETwork 8816 has been specifically designed for installation in demanding multi-user applications. The low starting price allows you to start with two users and grow later to many thousands without the expense of replacing existing equipment or software as you grow. We offer three types of Local Area Networking, including Ethernet, with full shared multi-system resources. **AND IT WORKS.** Gone are the bottlenecks that make shared-processor multi-user systems too sluggish for real time applications. What's more, we offer an unbeatable combination in a video terminal with our NETworker. You get styling, operating comfort, value and reliability.

All MuSYS systems utilize TurboDOS, the Industry Standard Multi-user Operating System. Mainframe capability at microcomputer prices, and compatible with virtually all CP/M Software. NETwork systems give you advanced features such as 8MHZ processors, high speed hard disk drives with storage capacities up to 280MB, and 16 bit future upgrade path.

This system meets your needs... **WHATEVER THEY ARE.** Call or write, MuSYS Corporation, 1752-B Langley, Irvine, California 92714. (714) 662-7387 toll free outside California 1-800-852-5362. TWX 910-595-1967. Cable MUSYSIRIN.

Dealer and OEM inquiries welcome.

MUSYS
CORP

We design the future.

NETwork is a trademark of MuSYS Corporation. TurboDOS is a trademark of Software 2000, Inc. CP/M is a trademark of Digital Research, Inc. Ethernet is a trademark of Xerox Corporation.



**NOT
ANOTHER
BLACK
BOX—**

A Software Implementation within Your Product Hardware

If you manufacture a computer system or a computer based product, allow it to EMULATE/COMMUNICATE by installing one or more of Systems Strategies "C" Language based communication packages.

- 3270 SNA SDLC Emulation
- 3270 BSC Emulation
- 2780/3780 HASP Emulation
- X.25 Levels 1, 2, 3 Communication

You can purchase these "C" Language packages with source code and license to distribute in your hardware product. Each package is available either "Port it Yourself" with instruction manual and training or ported to your hardware by Systems Strategies' communications staff.

**Systems Strategies/Advanced Technology Division
Specialists in Data Communications Software**



Systems Strategies Inc.
225 West 34th Street
New York, New York 10001
(212) 279-8400

ors, reverse video, blinking, half-intensity, and sounding the bell (provided your hardware can handle it). The spreadsheet has entry, edit, and message lines and variable column widths, and you can execute regular database commands within it. Some of the spreadsheet commands are listed in table 1. Notice that \BYE database commands can be executed within the spreadsheet mode. Equally important, spreadsheet cells can extract data from independent tables and can also be defined as programs.

Forms Generation

You can design forms for data entry or output with the FORM command, declaring any number of elements. Use an AT command to position labels or data values at the desired row-column. Display forms with the PUTFORM command and print or write them to disk (with or without data) with the PRINT command. The TALLY command uses a screen form for "what if" analyses comparable to spreadsheet analyses. Screen forms may have up to eight foreground or background colors, reverse video, blinking, half-intensity, and bell sounds. The CLEAR command followed by a form name clears the form from the screen; when used alone, it clears the entire screen.

Statistical Analysis

You can generate a full statistical analysis of the output table with the SELECT command or you can obtain the desired statistics without displaying field values using the STAT command. The following statistics are available for numeric fields: count, sum, mean, minimum, maximum, variance, and standard deviation. Numerical accuracy depends on the operating system and the central processor. Count and minimum-maximum statistics are available for string fields as well.

Operating Functions

Knowledgeman supports many operating functions, numeric, string, and logical. Numeric operating functions include absolute value, arcsine, current record number, exponentiation, string length, natural and base 10 logarithms, position of matching string values, maximum and minimum comparisons, random number generation, root computation, sine, and square root. String operating functions include uppercase and lowercase conversion, substring extraction, trailing blanks elimination, and type determination. You can use logical functions to determine if you have reached the end of a table, if a file is on line, or if a string's first character is alphabetic or numeric. These operating functions are particularly useful in command procedures.

Command Procedures

When the same list of commands must be performed two or more times, Knowledgeman allows creation of command procedures (one or more commands in a perform file). A perform file is basically a batch file that you can evoke within the Knowledgeman program. You can

'C' COMPILER

AN OUTSTANDING VALUE

"We bought and evaluated over \$1500.00 worth of 'C' compilers... C/80 is the one we use."

Dr. Bruce E. Wampler, Aspen Software
author of "Grammatik"

C/80™ Full featured C Compiler for CP/M® with I/O redirection, command expansion, execution trace and profile, initializers, Macro-80 compatibility, ROMable code.

49.95

C/80 FLOATS & LONGS Adds 32 bit data types to C/80 3.0 compiler. Includes I/O and transcendental function library.

29.95

FREE CATALOG Call or write for 16 page booklet detailing our programming languages LISP/80, RATFOR, Assemblers, and 25 other CP/M products.



15233 Ventura Blvd., #1118
Sherman Oaks, CA 91403

(213) 986-4885
Dealer inquiries invited.

CP/M is a registered trademark of Digital Research Inc.

create perform files with a word-processing program or by using the COPY CON: command at the PC-DOS system level. Perform files can contain an unlimited number of commands. This way, you can initiate enough commands to keep the computer busy for several hours while only having to enter one of them.

You can call a perform file from within Knowledgeman with the PERFORM command or by including the perform filename with the KMAN command at the system level. The lengths of Knowledgeman commands and command procedures are unlimited.

You can include comments within commands and command procedures, using "*" before and "*\" after the comment. A single command procedure can contain up to 26 different parameters and an unlimited number of working variables that are entirely unrelated to table fields or spreadsheet cells. Working variables, macros, and forms can all be declared local to a given procedure. There is also a complete structured-programming language to construct command procedures.

Program Design

Knowledgeman comes with a memory-resident 56K-byte main program and 16 overlay files that are called as needed. The overlay files run from about 8K bytes to nearly 17K bytes each (most are between 12K and 15K bytes). All 16 overlays together total slightly more than 210K bytes. For those with tight disk space it is possible to load the 56K-byte KMAN.EXE file that stays in memory and then use one drive for overlays and the other for data files. In addition, those with limited disk space can use several disks with different overlay programs on them. For example, if you are not using the spreadsheet mode you can leave out two overlays devoted exclusively to the spreadsheet, saving more than 30K bytes. Since the SORT, INDEX, CONVERT, and SELECT With Dynamic Sort commands generate temporary files on the default drive, it is useful to have one disk containing only the overlay files for default work space.

To enter Knowledgeman from the system level, key in KMAN. You can enter a perform filename to implement a particular set of environment variable definitions, macro and/or form declarations, and/or commands. For example, I call a perform file on entering Knowledgeman to set environment variables E.DMIN and E.DMAX to false (so the minimum and maximum statistics don't display with the SELECT command) and E.PAUS to true (so the system pauses after each screenful of data output).

Knowledgeman doesn't provide any menus, but you can easily create them with a word-processing program. Using Knowledgeman's structured-programming language and command perform files or a program like Prokey, it is not difficult to develop a menu-driven system. I started to do this but soon discovered that Knowledgeman's command structure is so easy that a menu-driven system is hardly necessary. I did use Prokey to define 40 special-function keys (F1-F10 unshifted, shifted, plus Control key, and plus Alternate key). I also used com-

AS GOOD AS WHOLESALE PRICES

64K DRAMS

{200 NS}

\$4.99 ea.
(Quantity Price
150 NS Also
available)

DISK DRIVE FOR IBM PC \$179 ea.
(10 Units and Up)



Complete TAVA PC System includes FDC, Two DS/DD Disk Drives, 128K Memory, Monitor & Monitor Adapter
\$1995

IBM PC XT Compatible System

IBM PC with 128K of Memory, FDC, One DS/DD Disk Drive, Monitor, Monitor Adapter, DOS 2.0, 10MB Hard Disk Sub System includes Cables, Controller, Software
\$3995

10 MB Hard Disk Sub System for TAVA PC or IBM PC includes 10 MB Winchester Formatted, Controller Card, Software and Cables.

Internal \$1295
Externals \$1495

Color Graphics Card \$199
(In Quantity)

Apple IIe \$Low Price

**Monitors, Printers, Cables
and Software also available.**

ANI

17752 Sky Park Circle, Suite 210,
Irvine, CA 92714

714/261-6226 (6227)

Function	Command	Time
Nonconditional single-record retrieval	OBTAIN	< :02
Indexed single-record retrieval	PLUCK	< :02
Conditional middle-record (No. 672) retrieval	OBTAIN	1:24
Conditional last-record (No. 1345) retrieval	OBTAIN	2:48

Table 2: The OBTAIN and PLUCK command performance test results. Times are shown in minutes:seconds.

ments embedded in commands. This kind of command-driven system is much faster than a menu-driven one and still has many of its advantages.

Knowledgeman allows unlimited macro nesting and macros can be of any length. It also has a series of user-definable variables—environment variables and utility variables. Environment variables all begin with "E." followed by up to four letters; they have string, numeric, or logical (true or false) values. All environment variables have default values and are easily changed in Knowledgeman or a command-procedure file.

The environment variables do such things as control whether the bell sounds on input of invalid data, define which statistics are displayed with SELECT or STAT commands, and suppress error messages.

Utility variables are preceded by a "#" and can also be modified. They contain such things as the average, count, maximum, minimum, and standard deviation.

The SAVE command stores environment and utility variables, global working variables, global macro and form definitions, and current spreadsheet definitions. You can leave Knowledgeman, do something else, and then resume work where you left off. The LOAD command, which reloads this information, can operate in whole (loading everything) or in part (loading only macros, working variables, or forms, for example).

Knowledgeman provides extensive data security to be used or not at your discretion. A file named USRMAN.EXE creates a global user file called KPASS.IGU containing passwords and security levels. You can use USRMAN.EXE (62K bytes long) to authorize new users, delete users, alter a password, or change a security level. You can specify read/write authorization down to the individual field or cell level. There are 65,535 possible security-code combinations, data files are encrypted, and a 49K-byte scramble utility is provided to

encrypt perform files so they cannot be read at the system level.

Performance

Written in assembly language and C with data files in condensed binary code (convertible to ASCII), Knowledgeman's performance is very pleasing. Limitations on the program's speed appear to be more the result of hardware restrictions than software restrictions. I ran command tests using two different data tables with the following results (both on an IBM PC with 320K bytes of RAM and two 320K-byte double-sided, double-density floppy-disk drives, using PC-DOS 1.10 and Knowledgeman 1.00).

The first series of commands were tested on a 154K-byte data table with 19 fields and 1345 100-character records (see table 2). The results suggest that you should prepare indexes for fields you intend to retrieve often while you use the conditional OBTAIN command only when you want a field seldom used as a key.

I also performed various tests of the SELECT (LIST) command for this first data table. The results are shown in table 3.

A second data table, 152K bytes long, with 47 fields, and consisting of 592 208-character records, was also tested. Results are shown in table 4.

The small difference between the time for a conditional SELECT on four conditions with a dynamic sort (3:36) and the time for the same command without the dynamic sort (3:32) proves how fast the sorting process is and suggests that the response time is largely disk dependent.

I am pleased with Knowledgeman's speed, especially the SELECT command. Hardware seems to be the greatest limiting factor in this program's performance. The following suggestions may help overcome some of these limitations. First, try a hard disk rather than a floppy disk. Knowledgeman is not copy-protected, so you can put it on a hard disk or a RAM disk. Getting enough RAM to hold frequently accessed files should also improve performance because the system spends so much time searching the current database table.

Documentation

The 300-page reference manual (including appendixes) contains 12 chapters, 7 appendixes, a glossary, an index

List data values for five fields	Time
Nonconditional SELECT	< :03
Conditional SELECT (single condition)	3:13
Including dynamic sorting:	
Nonconditional SELECT	
Sorted on one field	4:03
Sorted on five fields	7:41
Conditional SELECT (single condition)	
Sorted on one field	3:01
Sorted on five fields	3:19

Table 3: The first SELECT (LIST) command performance test results. Times are shown in minutes:seconds.

List data values for seven fields	Time
Nonconditional SELECT	< :03
Conditional SELECT (single condition)	2:50
Conditional SELECT (four conditions)	3:32
Including dynamic sorting:	
Nonconditional SELECT	
Sorted on one field	3:07
Sorted on five fields	4:32
Conditional SELECT (four conditions)	
Sorted on five fields	3:36

Table 4: The second SELECT (LIST) command performance test results. Times are shown in minutes:seconds.

THE FORTH SOURCE™

MVP-FORTH

Stable - Transportable - Public Domain - Tools
 You need two primary features in a software development package - a stable operating system and the ability to move programs easily and quickly to a variety of computers. MVP-FORTH gives you both these features and many extras. This public domain product includes an editor, FORTH assembler, tools, utilities and the vocabulary for the best selling book "Starting FORTH". The Programmer's Kit provides a complete FORTH for a number of computers. Other MVP-FORTH products will simplify the development of your applications.

MVP Books - A Series

- Volume 1, All about FORTH** by Haydon. MVP-FORTH glossary with cross references to fig-FORTH, Starting FORTH and FORTH-79 Standard. 2nd Ed. \$25
- Volume 2, MVP-FORTH Assembly Source Code.** Includes CP/M®, IBM-PC®, and APPLE® listing for kernel \$20
- Volume 3, Floating Point Glossary** by Springer \$10
- Volume 4, Expert System** with source code by Park \$25
- Volume 5, File Management System** with interrupt security by Moreton \$25

MVP-FORTH Software - A Transportable FORTH

- MVP-FORTH Programmer's Kit** including disk, documentation, Volumes 1 & 2 of MVP-FORTH Series (All About FORTH, 2nd Ed. & Assembly Source Code), and Starting FORTH. Specify CP/M, CP/M 86, CP/M+, APPLE, IBM PC, MS-DOS, Osborne, Kaypro, H89/Z89, Z100, TI-PC, MicroDecisions, Northstar, Compupro, Cromenco \$150

- MVP-FORTH Cross Compiler** for CP/M Programmer's Kit. Can also generate headerless code for ROM or target CPU \$300
- MVP-FORTH Meta Compiler** for CP/M Programmer's kit. Use for applications on CP/M based computer. Includes public domain source \$150
- MVP-FORTH Fast Floating Point** includes 9511 math chip on board with disks, documentation and enhanced virtual MVP-FORTH for Apple II and IIE. \$450
- MVP-FORTH Programming Aids** for CP/M, IBM or APPLE Programmer's Kit. Extremely useful tool for decompiling, callfinding, and translating. \$150
- MVP-FORTH** by ECS for IBM-PC or ATARI®. Standalone with screen editor. License required. \$100
- MVP-FORTH** by ECS for IBM-PC or ATARI. With color animation, multitasking sound, utilities, and license. \$175
- MVP-FORTH Professional Application Development System (PADS)** for IBM-PC, or APPLE. A three level integrated system with complete documentation. Complete system \$400
- MVP-FORTH Expert System** for development of knowledge-based programs for Apple, IBM, or CP/M. \$80
- MVP-FORTH File Management System (FMS)** with interrupt security for IBM, Victor 9000, or CP/M \$200

FORTH DISKS

FORTH with editor, assembler, and manual.

- APPLE** by MM \$100
- APPLE** by Kuntze \$90
- ATARI®** valFORTH \$60
- CP/M®** by MM \$100
- HP-85** by Lange \$90
- HP-75** by Cassidy \$150
- IBM-PC®** by LM \$100
- NOVA** by CCI 8" DS/DD\$150
- Z80** by LM \$50
- 8086/88** by LM \$100
- VIC FORTH** by HES, VIC20 cartridge \$50
- C64** by HES Commodore 64 cartridge \$60

Enhanced FORTH with: F-Floating Point, G-Graphics, T-Tutorial, S-Stand Alone, M-Math Chip Support, MT-Multi-Tasking, X-Other Extras, 79-FORTH-79.

- APPLE** by MM, F, G, & 79 \$140
- ATARI** by PNS, F, G, & X \$90
- CP/M** by MM, F & 79 \$140
- Apple, GraFORTH** by I \$75
- Multi-Tasking FORTH** by SL, CP/M, X & 79 \$395
- TRS-80/II or III** by MMS, F, X, & 79 \$130
- Timex** by FD, tape G,X, & 79 \$45
- Victor 9000** by DE,G,X \$150
- Extensions** for LM Specify IBM, Z80, or 8086
 - Software Floating Point \$100
 - 8087 Support (IBM-PC or 8086) \$100
 - 9511 Support (Z80 or 8086) \$100
 - Color Graphics (IBM-PC) \$100
 - Data Base Management \$200
 Requires LM FORTH disk.

CROSS COMPILERS Allow extending, modifying and compiling for speed and memory savings, can also produce ROMable code. •Requires FORTH disk.

- CP/M \$300
- 8086• \$300
- Northstar® \$300
- IBM• \$300
- Z80• \$300
- Apple II/III+ \$300

FORTH COMPUTER

- Jupiter Ace** \$150
 - 16K RAM Pack \$50
 - 48K RAM Pack \$125

Key to vendors:

- CCI Capstone Computing Inc. MM Micromotion
- DE Dal-E Systems MMS Miller Microcomputer Services
- FD Forth Dimension NS Nautilus Systems
- I Insoft PNS Pink Noise Studio
- LM Laboratory Microsystems SL Shaw Labs

Ordering Information: Check, Money Order (payable to MOUNTAIN VIEW PRESS, INC.), VISA, MasterCard, American Express. COD's \$5 extra. Minimum order \$15. No billing or unpaid PO's. California residents add sales tax. Shipping costs in US included in price. Foreign orders, pay in US funds on US bank, include for handling

FORTH MANUALS, GUIDES & DOCUMENTS

- ALL ABOUT FORTH** by Haydon. See above. \$25
- FORTH Encyclopedia** by Derick & Baker. Programmer's manual to fig-FORTH with FORTH-79 references. Flow charted, 2nd Ed. \$25
- Understanding FORTH** by Reymann \$3
- FORTH Fundamentals, Vol. I** by McCabe \$16
- FORTH Fundamentals, Vol. II** by McCabe \$13
- Beginning FORTH** by Chirlian \$17
- FORTH Encyclopedia Pocket Guide** \$7
- And So FORTH** by Huang, A college level text. \$25
- FORTH Programming** by Scanlon \$17
- FORTH on the ATARI** by E. Floegel \$8
- Starting FORTH** by Brodie. Best instructional manual available. (soft cover) \$18
- Starting FORTH** (hard cover) \$23
- 68000 fig-Forth** with assembler \$25
- Installation Manual for fig-FORTH,** \$15
- 1980 FORML Proc.** \$25
- 1981 FORML Proc 2 Vol** \$40
- 1982 FORML Proc.** \$25
- 1981 Rochester FORTH Proc.** \$25
- 1982 Rochester FORTH Proc.** \$25
- 1983 Rochester FORTH Proc.** \$25
- A FORTH Primer** \$25
- Threaded Interpretive Languages** \$23
- META-FORTH** by Cassidy \$30
- Systems Guide to fig-FORTH** \$25
- Invitation to FORTH** \$20
- PDP-11 User Man.** \$20
- FORTH-83 Standard** \$15
- FORTH-79 Standard** \$15
- FORTH-79 Standard Conversion** \$10
- Tiny Pascal fig-FORTH** \$10
- NOVA fig-FORTH** by CCI Source Listing \$15
- NOVA** by CCI User's Manual includes editor, assembler, and utilities \$25
- Jupiter ACE Manual** by Vickers \$15

Source Listings of fig-FORTH, for specific CPU's and computers. The Installation Manual is required for implementation. Each \$15

- 1802 6502 6800 AlphaMicro
- 8080 8086/88 9900 APPLE II
- PACE 6809 NOVA PDP-11/LSI-11
- 68000 Eclipse VAX Z80

and shipping by Air: \$5 for each item under \$25, \$10 for each item between \$25 and \$99 and \$20 for each item over \$100. All prices and products subject to change or withdrawal without notice. Single system and/or single user license agreement required on some products. **DEALER & AUTHOR INQUIRIES INVITED**

MOUNTAIN VIEW PRESS, INC.

PO BOX 4656

MOUNTAIN VIEW, CA 94040

(415) 961-4103

of commands, and a general index. The manual is written for three levels of comprehension: introductory, intermediate, and advanced, and sections are marked accordingly so you can reference it at the appropriate level of knowledge.

User Support

Micro Data Base Systems provides a customer-support number for end users. The people I spoke to were knowledgeable and courteous, returned my phone calls promptly, and answered all questions to my satisfaction. They will send one free update of Knowledgeman to everyone who sends in the program registration card, if a new update exists at the time the registration card is sent. A complete copy of the revised reference manual comes with the update.

Defects and Suggested Improvements

I found only one major problem in version 1.00 of Knowledgeman after using the database part of the program extensively. Micro Data Base Systems promised to fix the bug in the next release, and, sure enough, when I received it, the problem was gone. Considering the size and complexity of the programs involved and that this was version 1.00, I find Knowledgeman remarkably error free.

Although the list of Knowledgeman's features is impressive, there is always a "wish list" of useful additions: for instance, it would be nice if you could display or print

using field names (i.e., labels could be longer than the length of their field variables), if the SHOW command were separate from the ATTACH-IMPRESS overlay file (why should you need a 17K-byte overlay file to call the table directory command?), and if you could use wildcard characters in any expression (even if that limits their use), instead of having to use the IN operator.


Conclusion

Knowledgeman is an integrated information-management system combining a superb relational database with a fine spreadsheet for the price of one. You get a printed forms generator, screen-form management, statistical analysis, many operating functions, and a structured-programming language for building command procedures. More Knowledgeman modules are coming, including a graphics generator, an integrated full-screen text editor, and a forms "painting" feature. Knowledgeman activities and materials, including training seminars, videocassettes, a pocket-sized command guide, and a beginners' tutorial manual, are being developed rapidly. QUE is publishing an applications book, *Using Knowledgeman*, in the near future.

It is my opinion that Knowledgeman may be the most powerful relational DBMS currently available for microcomputers. For example, dBASE II allows only 32 fields per record, a maximum of two tables open at once, and no dynamic output sorting. Knowledgeman, on the other hand, allows up to 255 fields per record, an unlimited number of tables open at once, and dynamic output sorting. In addition, Knowledgeman is an integrated program, combining spreadsheet capabilities with database management.

Unlike Lotus 1-2-3, basically a spreadsheet-graphics generator with limited database capabilities, Knowledgeman is a full-fledged, powerful DBMS fully integrated with a full-fledged spreadsheet (with graphics coming). Lotus 1-2-3's limited "spreadsheet-used-as-a-database" has a maximum of 2048 records per table with only one table open at a time (hence no multiple table query). Knowledgeman allows 65,535 records per table and an unlimited number of tables open simultaneously. Moreover, Lotus 1-2-3's spreadsheet doesn't let cells access independent database tables or contain entire programs as Knowledgeman does. After several months use, I have learned to appreciate a statement made in the reference manual introduction: Knowledgeman has been "carefully designed to dominate all of the leading file handlers, 'application generators' and 'relational' systems existing in the micro world." Micro Data Base Systems can be proud of this package, its creation, and its continuing development. ■

James W. Walker (Department of Botany, University of Massachusetts, Amherst, MA 01003) is a professor of botany researching pollen ultrastructure and the evolutionary relationships of flowering plants. He considers his computer an indispensable tool in his research. (Work supported by NSF grants DEB 80-10893 and BSR 82-09195.)



Board for S-100 Bus

256K/1MEG Byte
Dynamic Ram
Model 256KM

features: 256K using 64K chips \$759.00

- 256K/1 mega Byte using 64K or 256K DRAMS
- 8/16b Data
- 24b Address
- Parity per Byte
- 175 nsec Access Time
- will run Z80/Z8000 to 6 mhz, 8086, 80186, 68000 to 8mhz without wait states
- transparent refresh, unlimited DMA.

FLOPPY DISK CONTROLLER Model FDC1 \$395

- features: • Single or Double density, sides, in any combination of up to four 8" or 5.25" drives. • Digital phase locked loop. • DMA data transfer with cross 64K boundaries, 24B address, DMA arbitration. • Monitor/boot EPROM accommodating two different processors. • CPM Bios programs. • Serial port to 19.2K baud.

Z80B CPU BOARD Model Z80 CPU \$325

- features: • 2, 4 or 6 mhz clock. • 22 bit Address by Memory Mapping in 16K blocks. • 2 or 4Kbyte EPROM (not supplied) with Phantom generation. • Jump on Reset. • Provision to run two different CPU's on the same bus, such model 80186 CPU.

80186 CPU BOARD Model 80186 CPU \$495

- features: • Intel 80186 Based. • Executes 8086 codes plus 10 additional. • Built in DMA channels, timers, interrupt controller. • Interface to Numeric Data Processor, 8087. • 8 or 16 bit data transfer, with 4 or 8 mhz clock. • Provision to run 2 different CPU's on the bus, such as our M:Z80 CPU.

Board Sets: Z80 CPU, 256KM, FDC1, and CP/M 3.0
plus manual S1390.

*CP/M is a registered trademark of Digital Research, Inc.

Delivery is within 3 to 5 working days. MC, Visa or COD orders accepted. (Add 6% for COD orders.) Shipping Extra. Illinois residents add 5 1/4% sales tax.

O.E.M. & DEALER PRICE AVAILABLE

S.C. DIGITAL, INC.

1240 N. Highland Ave., Suite #4 • P.O. Box 906, Aurora, Illinois 60507
Phone: (312) 897-7749

The Rixon PC212A... The Perfect Modem For Your IBM® PC ...Only \$499

**\$25 Rebate
on the PC212A**
Contact your local retail computer store for details.

The Rixon® PC212A offers you the only 300/1200 BPS full duplex card modem with auto dial and auto answer that plugs directly into any of the IBM PC® * card slots. Because the Rixon PC212A was designed specifically for the IBM PC, it is loaded with user benefits.

The PC212A eliminates the need for an asynchronous communications adapter card and external modem cable, this alone saves you approximately \$190. The PC212A provides an extra 25 pin EIA RS232 interface connector, a telephone jack for alternate voice operation, and a telephone line jack for connection to the dial network.

Without question, the PC212A is the most user friendly, most reliable, and best performing modem for your IBM PC. An internal microprocessor allows total control, operation, and optioning of the PC212A from the keyboard. A user friendly HELP list of all interactive commands is stored in modem memory for instant screen display. Just a few of the internal features are auto/manual dialing from the keyboard, auto dial the next number if the first number is busy and instant redial once or until answered. In the event of power disruption a battery back-up protects all memory in the PC212A. In addition, the PC212A is compatible with all of the communication programs written for the Hayes Smartmodem™**such as CROSSTALK.™†Also available for use with the PC212A is the

Rixon PC COM I,™* a communications software program (Diskette) and instruction manual to enhance the capabilities of the PC212A and the IBM PC. PC COM I operates with or replaces the need for the IBM Asynchronous Communications Support Program. The program is very user friendly and provides single key stroke control of auto log on to multiple database services (such as The Source^{SM&}), as well as log to printer, log to file transfer and flow control (automatic inband or manual control). PC COM I is only \$49.00 if purchased at the same time as the PC212A. The PC212A comes with a 2 year warranty. For more information contact your nearest computer store or Rixon direct at 800-368-2773 and ask for Jon Wilson at Ext. 472.

PC212A \$499.
PC212A WITH
ASYNCH PORT \$539.

SANGAMO WESTON
Schlumberger

RIXON INC.

2120 Industrial Pky., Silver Spring, Md. 20904
301-622-2121 TWX 710-825-0071 TLX 89-8347

- * IBM is a registered trademark of the International Business Machine Corp.
- ** Hayes Smartmodem is a product of the Hayes Stack™ series, a registered trademark of Hayes Microcomputer Products Inc.
- † CROSSTALK is a trademark of Microstuf Inc.
- * PC COM I is a trademark of Rixon Inc.
- & The Source is a servicemark of Source Telecomputing Corp.

3043B © RIXON INC. 1983

The Rixon PC212A Card Modem

Another Modem Good Enough To Be Called RIXON

Circle 401 on inquiry card.

The IBM CS-9000 Lab Computer

A closer look at IBM's "other" microcomputer

by Thomas R. Clune

At the Brandeis University Chemistry Department, we have been trying to use the IBM Personal Computer (PC) for all our microcomputer applications. Most of the time, we have been able to meet our needs with the PC. But not always.

Here's a case in point. One of our researchers wanted to have a microcomputer pulse a laser, trigger data collection on a Biomation 8100 waveform digitizer, then download the 2K bytes of data from the Biomation into the computer. This process would be repeated up to 1000 times at a rate of 30 times per second. The result of each run would be summed with the results of the previous runs. Next, a stepper motor controlling a monochromator would be incremented, and all of the above would be repeated again for up to 200 monochromator settings.

There was one more requirement—the computer should cost no more than \$10,000. That's a lot to ask. Surprisingly, though, it can be done, and done well, with the IBM CS-9000.

At the time I encountered this problem, the IBM Instruments Division in Danbury, Connecticut, had just announced its 68000-based laboratory computer, the CS-9000 (see photo 1). Usually, I prefer to wait until a product has been on the market for a year or so before using it. This gives time for the new-product hoopla to subside, the groundswell of early-user complaints to crest, and the manufacturer to show its level of good faith in correcting bugs. But we were faced with a Hobson's choice: either the CS-9000 would be adequate for our needs or nothing in our price range was. So, after a trip to Danbury to see the operation of a prototype, we took the plunge. For those who can't wait for an ending, we found two things: (1) being the first on your block is even more painful than we had expected, and (2) the CS-9000 is an incredibly powerful computer.

A System Description


The IBM CS-9000 is so versatile that it would take years for one person to test all of its features (see the January 1983 BYTE, page 100, for a product description). I am most familiar with a subset of the system's capabilities. In this review, then, I will describe the CS-9000's major features in broad strokes and give in-depth coverage of those aspects with which I have personal experience.

If you want additional information on the rest of the system, talk to IBM. In my experience, the people there are very helpful and scrupulously accurate in their discussion of the CS-9000. Indeed, the single strongest point of this generally excellent system is the unbelievable level of customer support. In particular, Dr. John Tesch of the customer-service department has provided us with expert technical assistance, the cash value of which has probably exceeded the purchase price of the system.

Now, for the computer itself. The basic processor unit features include

- an 8-MHz Motorola MC68000 16/32-bit microprocessor
- three cascadable, 16-bit timers for up to 2-MHz clocking
- 128K bytes of on-board RAM (random-access read/write memory)
- 128K bytes of ROM (read-only memory), for a real-time operating system
- SYSBUS (a superset of Versabus) bus structure
- five expansion slots
- four DMA (direct memory access) channels with 1-MHz maximum throughput
- seven levels of interrupt
- one IEEE-488 parallel bus (see photo 2)
- three RS-232C serial ports (see photo 2)
- one bidirectional, 8-bit parallel port (see photo 2),

(1a)

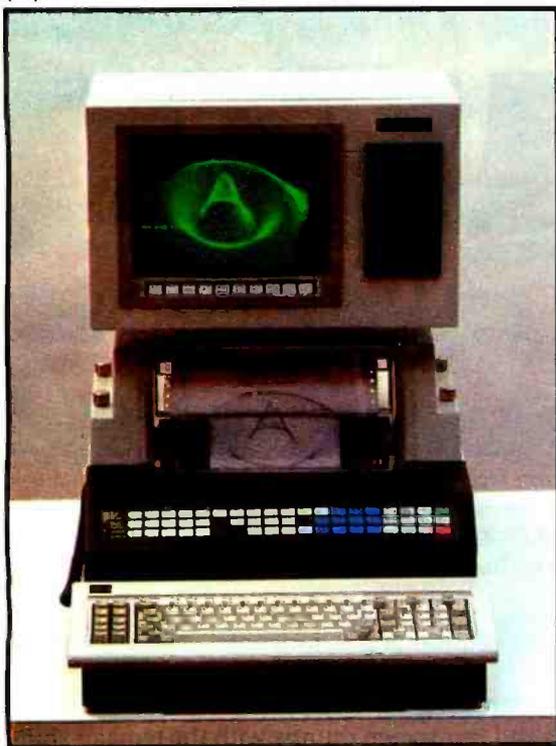

(1b)



Photo 1: At left (1a) is a front view of a typically configured IBM CS-9000 with the built-in dot-matrix printer. The rectangular plate covers a mount for a single 5¼-inch floppy disk. Notice the paper tray under the keyboard. The handle below the video display connects to the mounting yoke (see text). Photo 1b shows a front view of the business configuration of the CS-9000. Note that the built-in printer and softkeys have been removed.

which is not a true Centronics-type port because it lacks some lines (e.g., BUSY and DONE); however, any device supporting a Centronics-compatible interface can be connected to it

- 57 pressure-sensitive keys for dedicated systems control (see photo 3)

The monochrome display (see photo 4) shows 80 characters by 30 lines of text and has fairly good graphics resolution (768 by 480 pixels). This seems a bit thin for computer-aided design (CAD), but IBM has sold a number of the CS-9000s for preliminary design work-ups. The display has its own separate memory and 10 programmable softkeys. It also includes space for a single 5¼-inch floppy-disk drive.

The minimal configuration just described is used with the ROM-based operating system. Disk-based software is available for data acquisition and process control of the IBM Instruments Division's line of chemical instruments. These include FTIR (Fourier transform infrared spectrophotometry), NMR (nuclear magnetic resonance), and HPLC (high-performance liquid chromatography) analyzers. In connection with the HPLC, IBM offers a four-channel, 13-bit, 30-Hz ADC (analog-to-digital converter) card called the sensor board. The card provides autoranging with a dynamic range of 10^6 . Also included on the sensor board are four more RS-232C ports, 32 bits of parallel I/O (input/output), eight LED (light-emitting diode) drivers with eight debounced-switch in-

puts, and two 16-bit counters. IBM does not currently offer a high-speed ADC; however, the company tells me that it considers this a requirement for the near future.

To make the unit a usable computer, you will need to add a system bus card with five expansion slots and at least another 256K bytes of RAM on the expansion card. Each memory-expansion card can hold up to 1 megabyte of RAM, for an on-board system maximum of 5 megabytes. You will also need floppy-disk drives; the system supports up to four 8-inch and 5¼-inch drives in any combination. A hard disk, requiring a separate controller card, is also available. Next, you will need a keyboard; the keyboard offered with the system is the same one as on the IBM PC.

Additionally, you will need an extended, disk-based operating system. Two are available: Xenix and OS 1.1, a multitasking operating system with a full-screen editor that is similar to PC-DOS 2.0. The available languages include a BASIC interpreter, an assembler (included with OS 1.1), a FORTRAN compiler, and a Pascal compiler. A C compiler and a COBOL compiler (Xenix only) are reportedly in the works.

IBM also offers a dot-matrix printer that sits in the main processor housing and features

- software-selectable character density of 10 characters per inch (cpi), 80 characters per line (cpl); 12 cpi, 96 cpl; or 16.8 cpi, 132 cpl
- 24- by 9-dots/character matrix

At a Glance

Name

The IBM CS-9000 Lab Computer

Manufacturer

International Business Machines
IBM Instruments Division
Orchard Park
POB 332
Danbury, CT 06810
(203) 796-2500

Dimensions

System unit: 22 by 17 by 6.6 inches, 27.3 pounds; with CRT, printer, and keyboard, 68.2 pounds

Processor

16/32-bit Motorola MC68000 with an 8-MHz clock speed and four 1-MHz DMA channels

Processor Board Interfaces

One IEEE-488; one general-purpose, bidirectional 8-bit parallel; three RS-232C

Memory

128K bytes RAM minimum, expandable to 5 megabytes

Display

80 characters by 30 rows; green phosphor

Keyboard

Optional 83 keys with number pad and 10 programmable function keys (the IBM PC keyboard); additional keypad has 57 user-programmable keys

Mass Storage

Optional, 5¼-inch floppy-disk drives (327K storage); 8-inch drives (985K storage); 5¼-inch Winchester hard disks (5 to 10 megabytes of storage)

Expansion

Optional, five slots with a system bus card

Operating System

OS version 1.1; Xenix available soon

Languages

BASIC interpreter, 68000 assembler, FORTRAN compiler, Pascal compiler, and C compiler available (COBOL available with Xenix)

Software Options

Chromatography application program, math/stat library, IBM 3101 (and 3270 soon) emulator programs

Other Hardware Options

Analog/sensor card with four-channel, differential input; autoranging ADCs giving 12-bit plus sign resolution at 30 Hz; sensor board also has eight debounced switch inputs; eight output drivers to 5-V supply; 32 bits of parallel I/O assignable in 8-bit groups as input or output or as two 8-bit bidirectional ports; two cascaded 2-MHz clock counters providing two pulse trigger output points and pulse-counting input points; four asynchronous terminal or modem RS-232C ports with maximum speed of 19.2 bps; an adaptor to Multibus is available from Hal-Versa Engineering Inc., 18597 Paseo Tierra, Saratoga, CA 95070, (408) 374-2953

Documentation

8½- by 11-inch loose-leaf binder format; Operator's Manual, 108 pages; OS 1.1, 400 pages; Problem Isolation Manual, 114 pages; BASIC Manual, 500 pages

Price

Base system, \$5695; printer, \$2095; keyboard, \$270; 256K-byte RAM expansion, \$1095; 1-megabyte RAM expansion, \$4080; dual 5¼-inch floppy disks, \$1445; dual 8-inch floppy disks, \$2470; hard-disk controller, \$1295; single 5-megabyte hard disk, \$2495; single 10-megabyte hard disk, \$2695; expansion feature with five slots, \$95; analog sensor board, \$850; BASIC interpreter, \$195; OS 1.1 extensions, \$155; Pascal compiler, \$595; FORTRAN compiler, \$595; chromatography application program, \$495

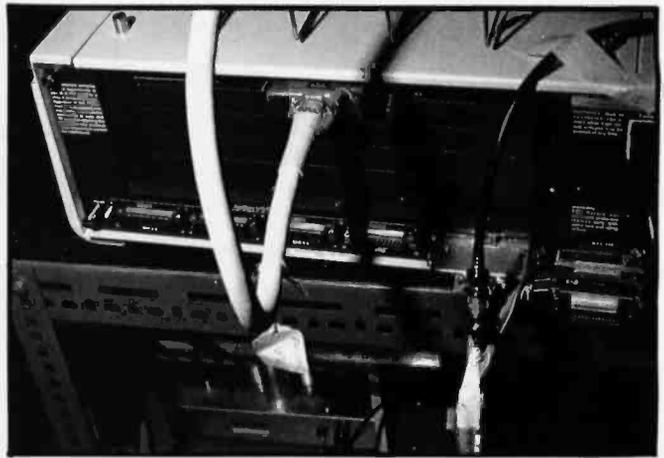


Photo 2: A rear view of the CS-9000, showing the IEEE-488 interface with the extender in place (far right), the disk-drive connector (next to the IEEE-488), the Centronics port (middle), and the three RS-232C ports. The connector on the top goes to the video display.

- graphics resolution of 200 horizontal dots/inch by 336 dots/inch
- four-color printing
- graphics and text screen dumps with the familiar shift-PrtSc keystrokes of the PC

The compact packaging of the CS-9000 is designed to save valuable laboratory bench space. We have set the unit on a four-wheel cart to roll it into position when it is being used and wheel it out of the way when it is not. The compact design is a mixed blessing, though. Because it is mounted on top of the computer and has to have adequate clearance for the printer beneath it, the screen is above normal eye level. Although the tilt of the screen is adjustable, the height is not. As a result, the operator tends to sit slumped in a chair with the keyboard on his lap and his feet on a desk, staring up at the screen. In short, the ergonomics of the package design are not state of the art. In a laboratory, however, you do not usually spend a lot of time at the keyboard. The working conditions of a researcher are not those of a secretary. For our applications, there have been no complaints regarding the display's human engineering.

If your applications are more keyboard-intensive, relief is at hand. The National Accounts Division and National Marketing Division of IBM have developed an interest in the CS-9000 for business applications. The system is being repackaged for them, sans integral printer, and given a quieter fan. The current fan sounds like a household vacuum cleaner. The business package is shown in photo 1b. The ergonomics, as you can see, are much improved. Because of the newfound business interest and the resultant expanded user base, a greater variety of canned programs should become available for this system. Indeed, the decision to offer Xenix and COBOL appears to be the first fruit of that interest.

Documentation

The documentation for the system is hardly a masterpiece. In fairness, it has been improved tremendously

Infoscope ... Its magic happens right before your eyes

Thirty minutes with your new computer and Infoscope, and you can be showing off — entering information, sorting it, displaying it, putting it to work in ways you never dreamed possible.

Infoscope, a revolutionary new program for dynamic information management, opens up the potential of the personal computer. It's usable and useful now, even for a beginner, but it'll never get in the way in the long run.

From the first minute you use it, you'll discover some very interesting applications. It comes

Infoscope is a Trademark
of Userview Corp.

with demonstration "scripts" and sample data so you can sit back and watch it do its stuff without doing a lot of tedious data entry.

Infoscope helps you create "Scopes" to display data — windows on the screen that grow, shrink, move around, and overlap, while showing you just the information you want to see.

As you work with it, Infoscope adapts to your level of expertise. Its "choice-driven" approach makes it easy for a new user to get up to speed, but it doesn't

entangle an expert in a maze of menus he doesn't want to see.

In short, Infoscope is as simple or as complex as you want it to be, and it does virtually any information management chore you want it to do.

But you have to see it for yourself. Infoscope is available for most popular 16 bit microcomputer systems. Ask for a demonstration at your local computer store, or write us for details.

Microstuf, Inc.
1845 The Exchange, Suite 140
Atlanta, Georgia 30339
(404) 952-0267





Photo 3: The CS-9000 keyboards. At the top, on the front of the main processor box, are the 57 programmable, pressure-sensitive keys.

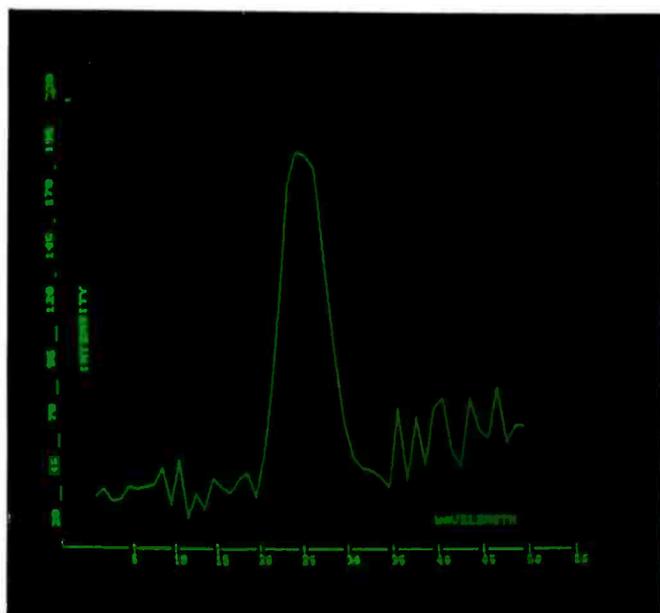


Photo 4: A sample screen display that shows text and graphics, taken from an IBM demonstration program.

since its earlier incarnations, but it is still less than ideal. The writing style is the usual turgid documentation prose. If you are a systems programmer it should present no great problems, but for a scientist-hacker it is formidable.

The manual lacks tutorials and, except for the high-level language sections, lacks indexes. Most surprising, the documentation does not contain schematics or a memory map. IBM has answered all questions promptly, but better documentation would lessen the number of questions users would have to ask.

The Voice of Experience

My experience with the CS-9000 began with setting it up. The bridge over the main processor housing, used to support the video display, is a pain to install. But it needs to be done only once, so what the heck. The video display mounts on a plastic yoke with a ball joint that enables the screen to be positioned for user comfort. Unfortunately, the yoke is made of very cheap plastic. When I went to tighten the yoke, I broke it, even though I followed the instructions to tighten gently. That yoke is cheap. I would have written this off to my superior strength, but another research group at Brandeis has a CS-9000 and the same thing happened to them. I have been informed that the yoke has been redesigned to eliminate this problem.

Once the system was assembled, I started to plug a digital multimeter (DMM) into the IEEE-488 port. It wouldn't plug in. Amazingly, the IEEE-488 port is positioned too close to the plug for the disk drive. There is no room for the IEEE-488 cord, which exits the plug from the side of the plug head. In order to use the IEEE-488 while the disk drive was attached to the system, I had to install an extender to the IEEE-488 interface (see photo 2). IBM now supplies the extender with the computer

and will soon flip the IEEE-488 port upside down so that the cord does not interfere with the other plugs. You may not have to contend with this problem, but I was beginning to think I had made a very serious mistake.

It got worse. When the extension to the IEEE-488 plug was installed, I tried to write a BASIC program to transfer data from the DMM. Nothing. A call to IBM identified the problem: the software driver for the IEEE-488 was not yet written. After the driver arrived, I appended it to the BASIC program and tried again. Nothing. Another call to IBM. Dr. Tesch made the first of three trips to Brandeis. The problem was that we had a prerelease version of the operating system, but the software driver was for version 1 of it. He took the computer back to Danbury with him, had the new ROM BIOS (basic I/O system) installed, and sent the system back with the new 1.0 DOS (disk operating system) extensions disk. Nothing. More telephone calls. It turned out that we had the prerelease version of BASIC. After we got the right BASIC, the interface worked perfectly. By the way, the resistor in question was 56K ohms.

Next, all we had to do was get the Biomation, with a two-line handshake, to transfer data over the IEEE-488, which has a three-line handshake. I had an idea on how to achieve this and it looked fairly simple on paper. A few months later, it worked.

The next problem was writing an assembly-language program to do the data-acquisition routine. I am a complete *patzer* when it comes to assembly language. I usually write the program in BASIC, compile it, and then optimize the program by keeping intermediate values in registers instead of shuffling them back and forth in storage. But there is no BASIC compiler for the CS-9000. So Tesch (God love him!) agreed to write an assembly-language routine from my BASIC program. These people take "customer support" literally.

BHART-NEVADA (800) 845-5555

NEC 8023 PRINTER
Highest quality w/new
lower price
\$339

SPECIAL!!! FREE WITH ANY PURCHASE OVER \$100!
1 hour connect-time on **COMPUTER SPORTS WORLD** — The World's First All-Sports Information Electric Newspaper — Recreational and Professional Use! Updated hourly 24 hours a day!
(Also available w/o purchase: \$175 subscription fee and \$35/hour)

SPECIAL
BMC
80/20
Okidata



Built-in printer, direct-address graphics, optional light-pen... (incl. CP/M, BASIC, WordStar, SpellStar, MailMerge, CalcStar).
Monochrome LIST \$1995 - **\$1,795**
Color LIST \$2995 — **\$1,895**

NEC PC-8201
Another Immediate hit!
Weighs only 3.8 lbs. yet has integral 40 char. x 8 line display, 32K ROM + 16K RAM. Interfaces printers, bar-code reader, cassette & floppies.



NEC
List \$799 **\$609**

SHARP PC-5000
Revolutionary Portable Computer



LIST \$1995
\$ CALL

NEC



NEC PC-8800 SYSTEM:
2 Floppies, monitor, graphics.
\$1799

SPECIAL!
COLUMBIA 1600 BEST BUY:
\$3000 plus Free Software Nationwide Service by Bell & Howell.



MP/M-86 Multi-user operating system **\$595**
Columbia VP Portable LIST \$2995 . . **\$ CALL**
NOW YOU CAN LEASE A COLUMBIA 1600-1 FOR ONLY \$83/MO!

SPECIAL!
FREE WITH ANY PURCHASE OVER \$100!
1 hour connect-time on **COMPUTER SPORTS WORLD** — The World's First All-Sports Information Electric Newspaper — Recreational and Professional Use!
(Updated hourly 24 hours a day!)
(Also available w/o purchase: \$175 subscription fee and \$35/hour)

FOR APPLE II


*DISK CONTROLLER	\$59.00
*Z-80 CARD	\$69.00
*80 COLUMN CARD	\$79.00
80 col card w/softswitch & reverse EPROM	\$109.00
*16K RAM CARD	\$65.00
*PRINTER CARD w/cable	\$69.00
*EPROM WRITER CARD	\$79.00
*POWER SUPPLY, 5 amp	\$69.00
*COOLING FAN & surge protector	\$59.00

Highest quality, ceramic chips throughout!

FLOPPY DISKETTES
First quality, individual envelopes, original factory boxes of 10 5 1/4" diskettes have reinforced hubs. LIFE-TIME WARRANTY!

DISKETTE TYPE	NASHUA SPECIAL	SCOTCH 3-M SPECIAL
5 1/4" s.s. s.d.	1.49	
5 1/4" s.s. d.d.	1.84	1.99
5 1/4" s.s. d.d.	2.15	2.99
8" s.d. s.d.	1.84	
8" d.s. d.d.		3.49
Minimum Order 5 boxes. Prices above reflect 5% cash discount. Credit cards or purchase orders (approved organizations ONLY) add 5%.		

LASER 3000



APPLE compatibility, fully legal, BASIC in ROM, hi-res./color (560 x 192), 4 channel sound, parallel interface, 40/80 column, 8 function keys, cassette input opt. Floppy run APPLE software.
LIST \$699 **\$ CALL**

CALIFORNIA RESIDENTS: NOW YOU CAN CALL US ON INTERSTATE TOLL-FREE LINE

SOFTWARE

Compare our Prices . . . Like our Service and Support they are superior beyond comparison!

WORDSTAR PROPAK (W/S SpellStar, MailMerge, Starindex)	\$479
FRIDAY	\$189
BOTTOM LINE STRATEGIST	\$288
PFS-FILE	\$99
CONDOR III w/ReportWriter	\$299
IUS G/L, A/R, A/P	\$369/module

WORD PROCESSING	LIST	YOUR PRICE	AT - All	75	54
Benchmark (Metasoft)	499	354			
Final Word (Unicom)	300	228			
Footnote (Dig. Mkt.)	125	85			
PeachPak (Peachtree)	500	330			
Perfect Writer/Speller	695	286			
Punct & Style (Oasis)	125	90			
Spellbinder (Lexsoft)	495	264			
Superwriter (Sorcim)	295	195			
The Word Plus (Oasis)	150	105			
WordStar (MicroPro)	495	259			

UTILITIES	100	74
Disk Doctor (Supersoft)	100	74
Fancy Font (SoftCraft)	180	159
Menu Master (Borland)	195	141
Smak Key	89	69
Super Sort (MicroPro)	250	164
Supervyz (Epic)	90	65

LANGUAGES	350	239
Basic Compiler (MicroSoft)	395	269
Basic Interpreter 80	350	239
Business Basic Compiler	600	420

TRAINING	150	121
CBASIC II (D/R)	150	121
CBASIC 86 (D/R)	200	181
C Compiler (MicroSoft)	500	360
CB80 (D/R)	500	403
Cobol Compiler (MicroSoft)	750	499
Fortran 80 Compiler	500	330
Level II Cobol (D/R)	1600	1150
Macro Assembler	200	133
Pascal MT/MT+86	500	420
PL/I (D/R)	500	468
RM/Cobol full devel sys	750	540

RECREATIONAL	49 <th>95<th>33</th></th>	95 <th>33</th>	33
Infocore for ALL formats (including hard to get Kaypro, Morrow, Xerox, Osborne DD, etc.)	49	95	33
Zork			
Deadline: Starcross			
Planetfall: Witness			
Suspended	59	39	

DATA COMMUNICATIONS	195 <th>139</th> <th>125<th>89</th></th>	139	125 <th>89</th>	89
Crosstalk (Microstuff)	195	139		
Move-It (Woolt)	125	89		
Smartcom II (Hayes)	119	80		

FOR RECOMMENDATIONS ON APPLICATIONS	285 <th>212<th>300<th>237</th></th></th>	212 <th>300<th>237</th></th>	300 <th>237</th>	237
SOFTWARE (Cyma, MRA, Star, Peachtree, Artificial Intelligence, etc.)	285	212	300	237
Complete selection at comparable savings.				

TELEX ORDERS: Hardware under \$1,000 and all Software (Please Telex re larger hardware items only if you are eligible for U. S. Export License) **TELEX 472-0127 Attn: EMD**

NEW: Complete line of BROTHER Electronic Typewriters for Office and Home!

If you like Dynax or Comrex printers, you'll love BROTHER typewriters: Brother makes the mechanisms for these printers and others, and their electronic typewriters are identical — except for having a keyboard & lift-off ribbon.

Should you buy a typewriter by mail? We ship printers daily all over the world with no problems — and you will get just as much reliability out of our typewriters — at prices that will surprise you!!! Check the model that best suits you in your area and give us a call for a quotation — we guarantee you will not be disappointed!

COMPUTERS

FREE Lotus 1-2-3 **\$ CALL**
SANYO MBC-550 & 555 1st IBM-Compatible under \$1000
NEC-APC: 8086 8" Floppies Hard Disk Option
SPECIAL OFFER: CP/M-86 WordStar, SellStar, MailMerge, SuperCalc, dBASE-II. Millionaire game included FREE.

HO Monochrome LIST \$3448	\$2749	HO3 Color LIST \$4198	\$3249
---------------------------	--------	-----------------------	--------

MODEMS

Hayes Smartmodem w/SmartCom \$484
SmartCom II \$79
Hayes 1200 B (F/IBM-PC) \$449
Signalman MK12 Auto Send/Rec. 300/1200 BEST BUY \$299

SPECIAL!
DYMAC ClipStrip Only UL-Approved Surge Protector. Protect your Investment!
LIST \$149 **ONLY \$109**

IBM PC-COMPATIBLE BOARDS
PASOCOM 64K, 1S+1P, Clock **ONLY \$279**
AST Mega-Plus w/RAM Superdrive **\$ CALL**
AST PC-NET **\$ CALL**

PC-COMPATIBILITY FOR YOUR
KAYPRO, OSBORNE, XEROX, ZORBA
8088 Co-Processor board installs in a few minutes. MS-DOS & CP/M-86 incl. reads/writes PC diskettes. RAM doubles as RAM DISC.

PRINTERS

Mannesman-Talley MT-160L: **HOT SELLER!** **\$559**
MT-180L NEW up to 264 columns **\$779**
GEMINI-10X List \$499 **ONLY \$ CALL!!**
GEMINI 15X List \$649 **\$ CALL**
Gemini Delta 10, 160 CPS **\$ CALL**
Epson FX-80 **\$CALL** Epson RX-80 **\$CALL**
Okidata 92 **\$439**

Daisy-Wheel Printers:
DAISYWRITER 2000, 48K buffer **\$1095**
TRANSTAR 130, emulates Diabolo **\$679**
BROTHER HR-25 **\$ CALL**
DYNAX HR-15, best buy LIST \$599 **\$449**
DYNAX KEYBOARD **\$189**
QUME SPRINT II **\$ CALL**
JUKI 6100 low cost/hi perfor LIST \$699 **\$489**
Silver-Reed EXP 550 **\$ CALL**
Mannesmann-Tally Sprint LIST \$399 **\$339**

TERMINALS

Hazeline ESPRIT I	\$539
Hazeline ESPRIT III	\$619
QUME QVT-108	\$729
WYSE 100	\$ CALL
WYSE 50	\$ CALL

MONITORS

Dynax 12" Amber	\$135
Taxan RGB-I	\$315
Taxan RGB-III hi-res.	\$514
Zenith RGB hi-res	\$524
Princeton PGS hi-res.	\$495
NEC 1203 RGB	\$610

BHART-NEVADA — (800) 845-5555
ORDERS ONLY—Mon.-Fri. 7:00 AM-5:30 PM PST

Bank Reference: 1st Interstate Bank Eastern Branch, Las Vegas, NV 89114
INFORMATION LINE: (702) 451-3305. ORDER STATUS: (702) 451-1361
P.O. BOX 50029, HENDERSON, NV 89016 Circle 36 on inquiry card



TERMS: Prices in this ad apply to new, old orders only. Subject to cash discount off our regular prices. (Foreign, 0% companies, 10% off order and Government only. 30-day net (less off on regular price) cash pay. This ad supersedes all prior offers. Prices subject to change. Absolutely no return on used or damaged items. Software is shippable ONLY by air. OPT-NED original wrapping. 15 DAY EXCHANGE PRIVILEGE (subject to restocking). Add 3% for Handling Shipping & Insurance \$3.95 (for Nevada residents add 5.75% tax)
AST PC-NET, Kaypro, Xerox, SuperCalc, IBM, Epson, etc. are trademarks of their respective owners.

UNIX

and MS-DOS, and VMS too!

UniPress can meet your software needs, for a range of hardware, including VAX, MC68000, and IBM-PC.

UniPress, your UNIX source.

PACKAGING: VAX/VMS and UNIX, MC68000/UNIX on Sun, Masscomp, Apollo, Tandy 16, Apple Lisa, Sritek Board for IBM PC, Dual, Plexus, Callan, and Cyb. Perq and Perkin Elmer, too. Source code, as well as binary. Maintenance available. Inquire regarding other hardware.

UniPress Software

UNIX SOFTWARE

- | | |
|--|----------------|
| | Priced
from |
| ■ Full UniPlus + UNIX for Apple LISA | \$ 495 |
| ■ EMACS—Multi-window text editor
(Gosling version) | 395 |
| ■ LEX—Powerful word processor | 500 |
| ■ PHACT—Isam file manager | 250 |
| ■ /RDB—Relational database tools | 250 |
| ■ MENU SYSTEM—Menu generation | 495 |
| ■ UniCalc—Powerful spreadsheet | 350 |
| ■ MIMIX—CP/M emulator | 495 |
| ■ C cross compiler—to 8086 and 68000
(includes assembler, linker, etc.) | 8000 |

MS-DOS SOFTWARE

- Software tools—Unix-like facilities add power to MS-DOS: includes ed, grep, sort, diff, cat, etc. 200
- PHACT—Isam file manager 250
- C compiler—Full C language 395
- Coherent—Unix-like operating system for IBM-PC XT 500

VMS SOFTWARE

- EMACS—Multi-window text editor (Gosling version) 2500

OEM and dealer inquiries invited.
Quantity terms available.

Call or write for more information.

UniPress Software, Inc.

1164 Raritan Avenue, Highland Park, NJ 08904
201-985-8000 Toll Free: 800-222-0550 (outside NJ)
Telex: 709418

Mastercard and Visa

Overseas distribution available through
Lifeboat Associates—Japan

Unix is a trademark of Bell Laboratories.
VMS is a trademark of Digital Equipment Corp.
MS-DOS is a trademark of Microsoft.
UniCalc is a trademark of Lattice, Inc.

Tesch wrote the program. Nothing. He didn't have a Biomation in Danbury to test the program, so he came back up to Brandeis to see what the problem was (this was the third time; I've shortened the story a bit). He managed to identify the errant line of code, and we were finally squared away. While he was at Brandeis, he provided us with three different versions of the data-acquisition routine for three different modes of operation. I'm not sure whether he did this out of generosity or in hopes that he would not have to deal with us again, but either way it was appreciated. Finally, we were up and running with our application.

Or, rather, we are up and running *most* of the time. IBM is feverishly trying to track down an odd little glitch in OS 1.1. Once every few hundred times we try to write a file to disk, the computer tries to write the file into system space and an error results. We must then reboot the system with a consequent loss of data. The error happens so rarely and (apparently) randomly that IBM has been having a hard time tracking it down. Because we write data to disk every few seconds, the amount of information lost in rebooting is not substantial. And the missing data is easily reproduced in our application. If your application is not so fault-tolerant, however, you should make sure this problem has been overcome before buying the CS-9000. The problem has occurred at other installations, so it isn't our hardware that's causing it. In any case, be sure to back up your work on disk frequently.


I have only one continuing source of irritation with the system: the printer. It is awkward to load with paper, frequently jams when operating, and either holds very little paper (if you use the paper holder under the keyboard) or lets the paper drape in front of the operator's feet (if you set a box of paper under the desk and feed the printer from there). I understand that IBM has redesigned the paper bailer to minimize the jamming problem, but the other problems seem endemic to the built-in printer.

Back to BASICS

As I mentioned earlier, I have used the CS-9000 primarily with the BASIC interpreter. The rest of my remarks will center on using this very substantial BASIC. Those readers accustomed to one of the many incarnations of Microsoft BASIC are in for a treat. Unlike most BASICs, you are not limited to 64K bytes of programming space. The interpreter can address as much memory as you have on your system. It also includes the MAT (matrix) functions. Further, it features a broad range of statement modifiers, such as FOR J=1 to 11 (see listing 1, line 80). You can use 8-bit, 16-bit, or 32-bit words. The range of floating-point numbers is approximately 1.0E + / - 308 with approximately 15-digit precision. Because the MC68000 uses memory-mapped I/O, all devices (including the printer, screen, IEEE-488 port, etc.) use the OPEN statement (like files), which makes programming I/O routines quite painless.

There are, of course, a couple of usual features of in-

TELELOK™

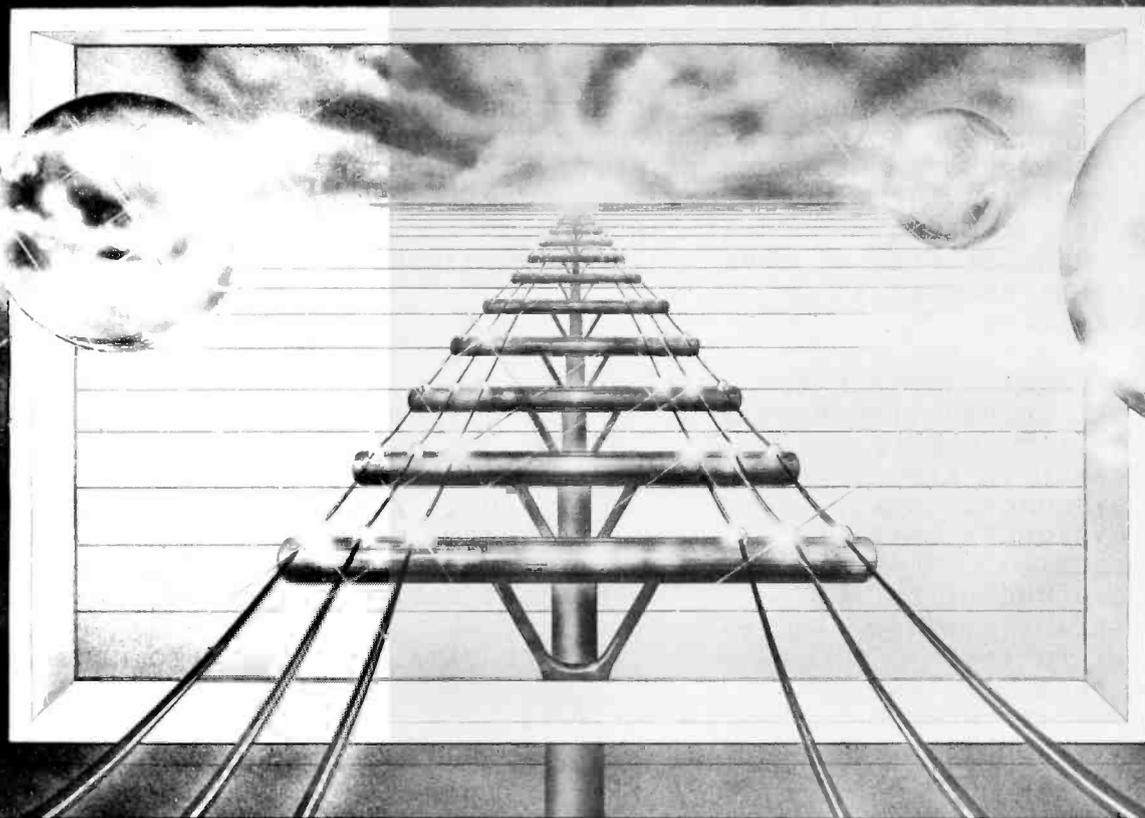

SECURE TELESOFTWARE DELIVERY

*The only inexpensive, powerful, disk-based, user-invisible
telecommunications protection system is here!*

If your state-of-the-art software is still arriving by mule train, call us!



Vault Corporation

Communications security in an uncertain world

2649 Townsgate Rd., Suite 500, Westlake Village, California 91361 USA
(805) 496-6602, ext. 111 • TELEX: 499-5396 VAULT US

Listing 1: The program listing for the data-acquisition and analysis routine using the Biomation 8100. Because the bus-management lines of the IEEE-488 are not used by the Biomation, the REN line is used to trigger the laser and the Biomation, and the IFC line is used to trigger the monochrometer stepper-motor (lines 240-250 and line 370, respectively).

```

1  REM PROGRAM FOR COLLECTING DATA FROM BIOMATION 8100
10 REM INITIALIZE CALL LOCATIONS
20 B=$E000:SREAD=B+$2948:SYSFUNC=B+$2CB8
30 REM DIMENSION ARRAYS
40 DIM A%(2000),B%(1025),F%(11)
50 LENG=2048
60 REM INITIALIZE IEEE488 ROUTINES
70 DATA 286,10,290,10,0,17,0,12,0,10,0
80 READ F%(J) FOR J=1 TO 11
90 RESTORE
100 REM SET EXPERIMENT PARAMETERS
110 INPUT "BIOMATION SAMPLE INTERVAL SETTING (MICROSEC) ";BIOM
120 INPUT "NUMBER OF SCANS PER MONOCHROMETER SETTING ";REP
130 INPUT "NUMBER OF MONOCHROMETER SETTINGS ";NOSTEP
140 INPUT "DURATION OF PAUSE BEFORE TRANSFER ";ZZZ
150 INPUT "NOISE LEVEL OF SIGNAL ";NOISE
160 INPUT "NAME OF FILE TO SAVE RUN DATA IN ";FILE$
170 OPEN FILE$ AS FILE #1
180 PRINT #1,BIOM
190 PRINT #1,NOSTEP
200 OPEN "#BUSD?" AS FILE #6
210 REM DATA ACQUISITION ROUTINE
220 FOR MON=1 TO NOSTEP
230 FOR SCAN=1 TO REP
240 CALL SYSFUNC(6,F%(6))           !SET REN TO TRIGGER LASER, BIOMATION
250 CALL SYSFUNC(6,F%(8))           !RESET REN
260 WAIT (ZZZ)
270 CALL SYSFUNC(6,F%(1))           !COLLECT DATA
280 CALL SREAD(6.,B%(1),LENG,$0D,$0D,0)
290 FOR I=1 TO 1000                 !UNPACK DATA, ADD COUNT TO MEMORY A%
300 C%=SWAP%(B%(I)) AND 255
310 IF C%>NOISE THEN A%(2*I-1)=A%(2*I-1)+1
320 C%=B%(I) AND 255
330 IF C%>NOISE THEN A%(2*I)=A%(2*I)+1
340 NEXT I
350 NEXT SCAN
360 REM TRIGGER MONOCHROMETER MOVE AND WAIT FOR IT TO STOP
370 T=TIME:CALL SYSFUNC(6,F%(10))    !IFC TRIGGERS MONOCHROMETER
380 FOR I=1 TO 2000:PRINT #1,A%(I):A%(I)=0:NEXT I
390 IF TIME-T<3 THEN 390
400 NEXT MON
410 CLOSE #1
420 CLOSE #6
430 END

```

terpreted BASIC that I miss. Arrays cannot be dynamically dimensioned because the interpreter translates each line of BASIC code into a tokenized pseudocode as it is entered, not as it is executed. This feature makes the BASIC run rather fast for an interpreter. For example, lines 230-340 of listing 1 trigger a laser and the Biomation, collect 2K bytes of data from the Biomation, compare each byte to a noise level, and, if appropriate, add 1 to an element of a 2K data array. Interpreted BASIC does all of this in one second! For that level of speed, I'm willing to live without dynamically-dimensioned ar-

rays. By the way, a compiled FORTRAN version of this program did the same process 12 times in one second.

Another consequence of translating each statement as it is entered is that the BASIC comes with a line editor rather than a full-screen editor. And the editor is a little tricky to use. For example, if you have a variable type error in a program line and edit the line, you may still get a type error prompt. I've found it's best to delete the offending line and retype it correctly.

Line 300 of listing 1 illustrates a couple of interesting points about the BASIC. First, 2 bytes may be stored in

BASF QUALIMETRIC™ FLEXYDISKS. A GUARANTEED LIFETIME OF OUTSTANDING PERFORMANCE.


BASF Qualimetric FlexyDisks feature a unique lifetime warranty, firm assurance that the vital information you enter on BASF FlexyDisks today will be secure and unchanged tomorrow. Key to this extraordinary warranted performance is the BASF Qualimetric standard... a totally new set of criteria against which all other magnetic media will be judged.*

You can count on BASF FlexyDisks because the Qualimetric standard reflects a continuing BASF commitment to perfection in magnetic media. One example is the unique two-piece liner in our FlexyDisk jacket. This BASF feature traps damaging debris away from the disk's surface and creates extra space in the head access area for optimum media-head alignment. The result is a guaranteed lifetime of outstanding performance.

For information security that bridges the gap between today and tomorrow, look for the distinctive BASF package with the Qualimetric seal. Call 800-343-4600 for the name of your nearest supplier.

Circle 459 on inquiry card.

*Contact BASF for warranty details.

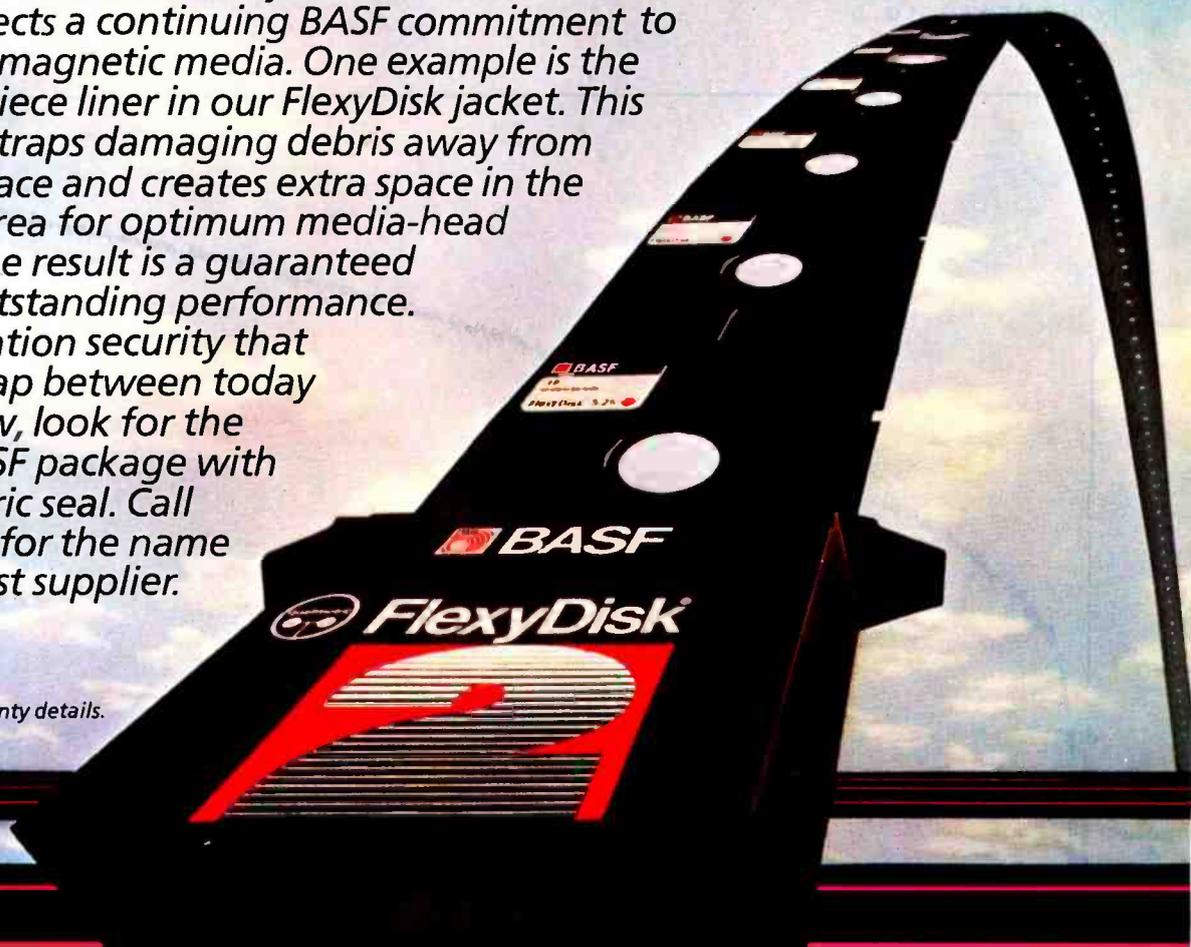

ENTER TOMORROW ON BASF TODAY.

© 1983 BASF Systems Corp., Bedford, MA



BASF

Listing 2: The program listing for plotting the data from listing 1 on the screen, one monochrometer setting at a time.

```
1 REM PROGRAM TO PLOT DATA COLLECTED FROM PROGRAM 1
10 CLS
20 INPUT "FILE NAME ";FILE$
30 OPEN FILE$ AS FILE #1
40 INPUT #1,BIOM
50 INPUT #1,NOSTEP
60 DIM DAT(10,2000)
70 FOR I=1 TO NOSTEP
80 FOR J=1 TO 2000
90 INPUT #1,DAT(I,J)
100 NEXT J
110 NEXT I
120 CLOSE #1
130 FOR K=1 TO NOSTEP
140 MAX=-128:MIN=127
150 CLS
160 LOCATE 10,0
```

Listing 2 continued on page 289

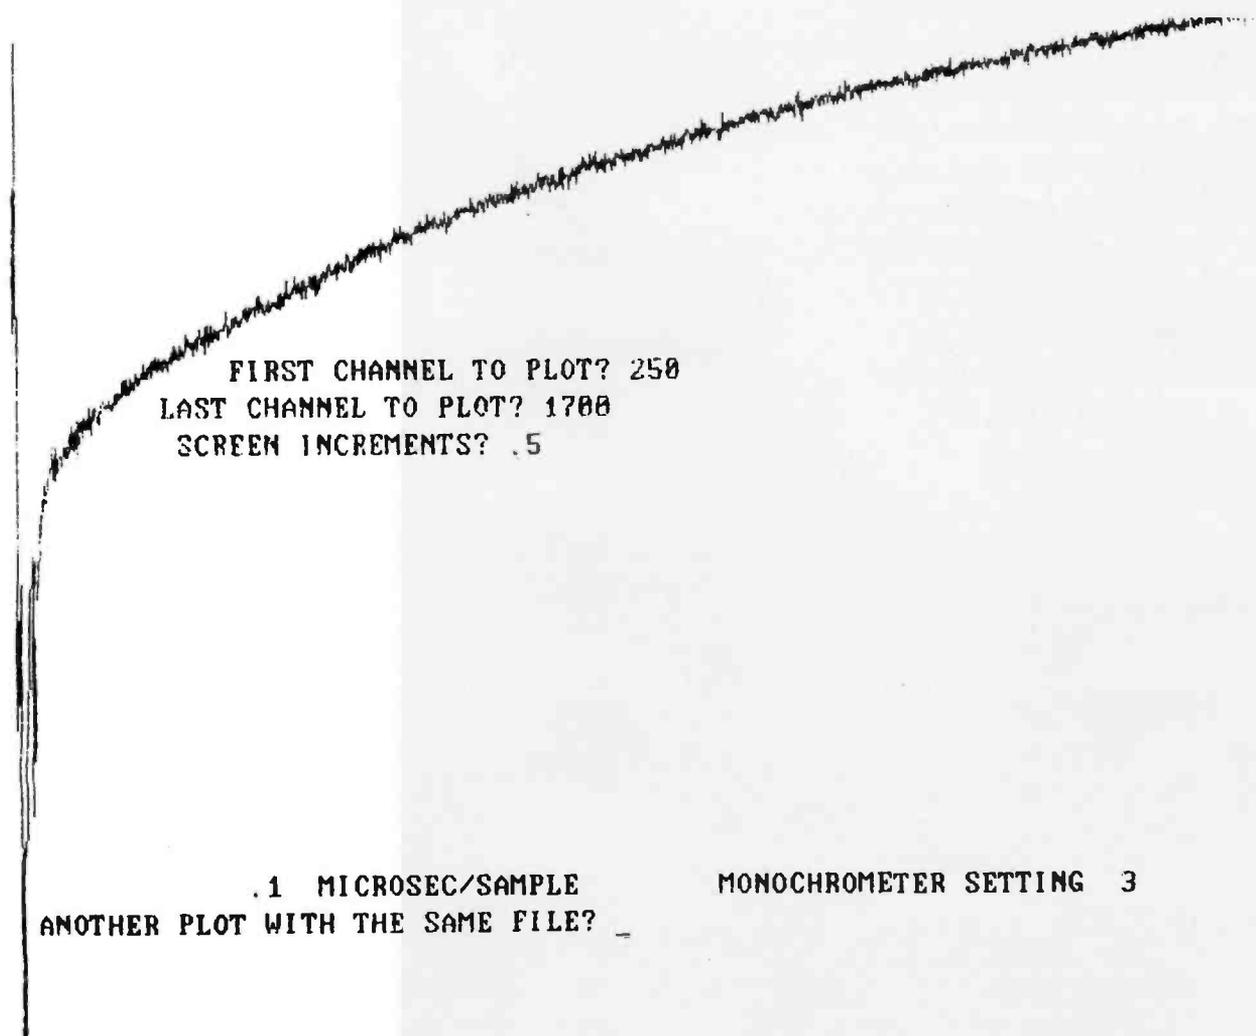


Figure 1: A screen dump of a plot of a single scan of the Biomation, showing the luminescence decay curve of Benzil excited by a pulsed nitrogen laser. Data was collected from a modified version of listing 1 and plotted using listing 2.

Listing 2 continued:

```
170 INPUT "FIRST CHANNEL TO PLOT",A
180 INPUT "LAST CHANNEL TO PLOT",B
190 INPUT "SCREEN INCREMENTS",C
200 FOR I=A TO B
210 IF DAT(K,I)<MIN THEN MIN=DAT(K,I)
220 IF DAT(K,I)>MAX THEN MAX=DAT(K,I)
230 NEXT I
240 FACTOR=450/(MAX-MIN)
250 LINE (1,470-((DAT(K,A)-MIN+1)*FACTOR),1,470-((DAT(K,A)-MIN+1)*FACTOR))
260 FOR I=A+1 TO B
270 LINE (-1,-1,(I-A)*C,470-((DAT(K,I)-MIN+1)*FACTOR))
280 NEXT I
290 LOCATE 24,0:PRINT BIOM;" MICROSEC/SAMPLE","MONOCHROMETER SETTING ";K
300 INPUT "ANOTHER PLOT WITH THE SAME FILE",Q$
310 IF Q$="Y" THEN 140
320 NEXT K
330 END
```

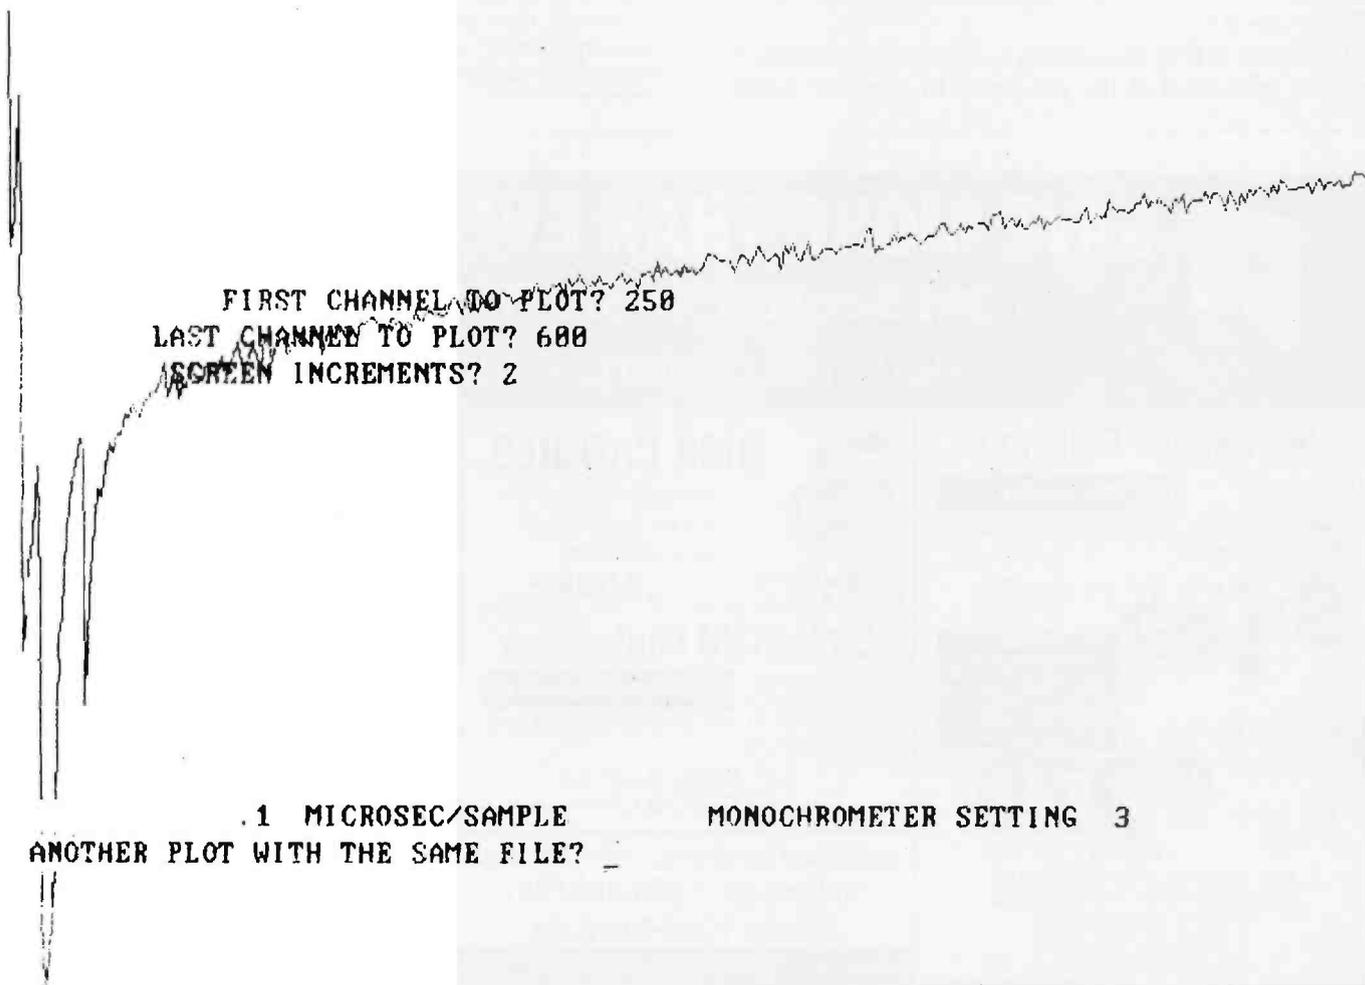


Figure 2: A screen dump that demonstrates the fine structure of the plot.

Text continued from page 286:

one 16-bit memory location to save space. The SWAP% function lets you reverse the high and low bytes in a memory location. Of course, performing an AND 255 with the value masks out the high byte. The second point has to do with why line 300 is there at all. It seems that the interpreter cannot perform B%(I) AND 255 and compare it with noise all in one line; apparently, there is a bug in the interpreter. If you do the operations separately, there is no problem. This is the only bug I have encountered in the interpreter.

Lines 80 and 240 in listing 1 illustrate the use of the IEEE-488 port. The operating parameters of the port are entered into a data array and passed to the interface driver by calling SYSFUNC:. Line 70 lists the parameters this program uses. The parameter 286 sets the maximum timeout for a transfer to the succeeding argument (which is 10) times 50 milliseconds; the parameter 290 sets the maximum transfer size without using DMA to whatever follows (10 again); the 0 ends a sequence of instructions, so F%(6) begins a new sequence; the 17 sets the REN line high and the 0 ends that sequence; the 12 resets the REN line, and again 0 ends the sequence; then, 10 sets the IFC line, with the 0 ending the sequence. Thus, the F% array actually contains four different sets of parameters, each invoked by CALL SYSFUNC(dev #, F%(N)), which reads F%(N) to F%(N+I), where F%(N+I)=0.

Let's look at line 20 in listing 1. This line initializes the system calls used in the program. In the new version

of BASIC, version 1.1, you do not need to add the call locations.

Listing 1 collects data from the Biomation. Listing 2 displays that data, one monochrometer setting at a time. Lines 250 and 270 of listing 2 do the actual screen plot. Line 250 draws a line from the first data point (scaled for the screen) to itself. That is, it sets the first point of the line. Line 270 draws a line from each subsequent point to the preceding point. The -1, -1 argument says, "Connect this point to the last point." Figures 1 and 2 show screen dumps of sample outputs from listing 2, using data collected from a modified version of listing 2 in which the raw voltages from a single scan of the Biomation were collected.

Summary

The CS-9000 is a very fast and powerful laboratory computer. It has enough I/O ports to please the most jaded palate. The options let you configure the system for most conceivable laboratory applications. The range of numbers it can work with makes it unnecessary to constantly use log values to avoid overflows. The CS-9000 is very affordable. And, above all, the level of customer support sets new standards of excellence for the microcomputer industry. ■

Thomas R. Clune (55 Central St., Ashburnham, MA 01430) is physical chemistry laboratory coordinator for the Chemistry Department of Brandeis University in Waltham, Massachusetts.



SAVE MORE THAN EVER ON...

3M Scotch® DISKETTES

AND OTHER COMPUTER NEEDS!

<h4>3M Scotch® Diskettes</h4> <p>are boxed in 10's with labels, envelopes and reinforced hubs on 5 1/4" diskettes.</p> <p>LIFETIME WARRANTY!</p> <p>\$195 ea. 5 1/4" SSDD (744) Qty. 20</p> <p>SPECIAL! Save even more! Order 50 or more 3M diskettes before March 15, 1984 and save an extra ten cents per diskette.</p> <p>\$270 ea. 5 1/4" DSDD (745) Qty. 20</p> <p>5 1/4" SSQD-96TPI (746) \$2.89 ea. 5 1/4" DSQD-96TPI (747) \$3.95 ea. 8" SSSD (740) \$2.07 ea. 8" SSDD (741) \$2.54 ea. 8" DSDD (743) \$3.30 ea.</p>	<h4>DISK CADDIES</h4> <p>...the original flip-up disk holder for 10 diskettes. Beige or grey only.</p> <p>5 1/4" \$165 ea. +.50 Shpng. 8" \$229 ea. +.50 Shpng.</p> <h4>SYNCOM Diskettes</h4> <p>are a great bargain. Packed in polybags of 10 with envelopes, labels and reinforced hubs.</p> <p>LIFETIME WARRANTY!</p> <p>5 1/4" SSDD \$1.39 ea. 5 1/4" DSDD \$1.85 ea.</p>	<h4>DISKETTE 70 STORAGE</h4> <p>The best buy we've seen! Dust-free storage for 70 5 1/4" diskettes with six dividers. \$1495 + \$3.00 Shpng.</p> <h4>FLIP 'N FILE</h4> <p>Redesigned for better appearance and greater ease of use. FLIP 'N FILE 25 holds 25 5 1/4" diskettes; FLIP 'N FILE 50 holds 50 5 1/4" diskettes.</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"> FLIP 'N FILE 25 Retail \$29.95 ...DW Price \$1950 +\$4.00 Shpng. </td> <td style="border: none;"> FLIP 'N FILE 50 Retail \$39.95 ...DW Price \$2695 +\$5.00 Shpng. </td> </tr> </table> <p>Shipping: 5 1/4" Diskettes Only: \$1.75 Handling + .20 per 10 diskettes ordered. 8" Diskettes Only: \$2.00 Handling + .30 per 10 diskettes ordered. Other Items: As shown in addition to diskette shipping charges. Payment: VISA, MASTERCARD, C.O.D. (\$3.00 extra charge) or check. Taxes: Illinois customers only add 8%.</p>	FLIP 'N FILE 25 Retail \$29.95 ...DW Price \$1950 +\$4.00 Shpng.	FLIP 'N FILE 50 Retail \$39.95 ...DW Price \$2695 +\$5.00 Shpng.
FLIP 'N FILE 25 Retail \$29.95 ...DW Price \$1950 +\$4.00 Shpng.	FLIP 'N FILE 50 Retail \$39.95 ...DW Price \$2695 +\$5.00 Shpng.			
<p>WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE!</p> <p>Nationwide: 1-800-621-6827</p> <p>Illinois: 1-312-944-2788</p> <p>Minimum Order: \$35.00</p>				
<h1>DISK WORLD!</h1> <p>SUITE 4806 30 EAST HURON STREET CHICAGO, ILLINOIS 60611</p> <p>Authorized Distributor Information Processing Products</p> 				

One of Japan's leaders would like to go to work for you.



Fujitsu, Japan's largest computer company, sends you their best. The new Micro 16s personal business computer. A combination of thoughtful planning, innovative thinking and quality craftsmanship. Just what you'd expect from a Japanese company that's been making computers for three decades.

The Micro 16s is a complete computer system. The options of other computers are our standards. For example, its price includes the CP/M-86[®] operating system, SuperCalc^{2™} electronic spreadsheet, WordStar[®] word processing, a high resolution color graphics monitor, and two microprocessors, the Z80[®]A 8-bit and 8086 16-bit.

The Micro 16s will run any of the more than 3,000 CP/M[®] software programs on the market today. Optional operating systems for the Micro 16s include MS[™]-DOS and the

multi-tasking Concurrent CP/M-86[™].

The Micro 16s also comes with a detachable keyboard, dual built-in 5¼" floppy disk drives, 128 kilobytes of internal memory expandable to over one megabyte, and expansion slots for future growth.

The unique and flexible design of the Micro 16s makes it easy to add advanced microprocessors of tomorrow, hard disks, mainframe communications or local area networking when the time is right.

Put a Japanese leader to work for you. Fujitsu's Micro 16s. For more information or the name of your nearest dealer call toll free 1-800-MICRO 16. Or write Fujitsu Microelectronics, Inc., Professional Microsystems Division, 3320 Scott Blvd., Santa Clara, CA 95051.



Fujitsu's Micro 16s.™

SuperCalc^{2™} is a trademark of Sorcim Corp. WordStar[®] is a trademark of MicroPro International. CP/M-86[®] and Concurrent CP/M-86[™] are trademarks of Digital Research, Inc. MS[™] is a trademark of Microsoft[®]. Z80[®] is a trademark of Zilog, Inc.

The Rixon R212A Intelligent Modem

A modem that can emulate the Hayes Smartmodem and do a few other tricks besides

by Chuck Weger

Remember when you could tell the difference between a computer and a peripheral? In the old days, computers had front panels full of lights and switches, printers were large, clattering beasts, and modems were big, ugly boxes that connected to special, and expensive, phone circuits. In those times a modem knew its place. But now, here comes a modem with a full-blown Z80 microprocessor in it—the same chip that's in lots of home computers. All of a sudden, the distinction between computers and their peripherals is getting hazy. What do you call a modem that has memory like a computer? In this case, you call it a Rixon R212A Intelligent Modem.

The folks at Rixon have been in the modem business a long time, but they have manufactured primarily industrial products. The R212A and its IBM PC-compatible cousin, the PC-212, are among the company's few ventures into the consumer world. If Rixon keeps producing products like this, the company might have to discontinue some of its industrial business to keep up with the demand of consumer and commercial markets. Not only is the R212A the most sophisticated modem in its class I have seen, it is also easy to use. I'll describe some of the R212A's features in this review.

Setting Up

Photo 1 shows the R212A as it comes packaged with an AC (alternating current) adapter and a modular telephone cable; an instruction manual (not pictured) is also included. It does not come with the RS-232C cable you'll need to connect it to your computer or terminal, but this is a stock item in most computer stores. The modem is packaged in a beige molded case with a black front panel.

The first thing that I noticed about this modem was its front panel, which really wasn't a front panel—or not what I would call one. There is a piece of black anodized aluminum with the Rixon logo, but there are no LEDs (light-emitting diodes), lights, or switches on the panel. In fact, there are no controls or indicators anywhere on the case. And if you're the kind of person who opens the case to see the insides, you'll see that there are no DIP (dual-inline package) switches on the circuit board, either. All the options—and there are plenty in this modem—are set by software commands.

The back panel contains two RJ-11 modular telephone jacks as well as a connector for the power supply. It also contains a standard 25-pin female RS-232C connector labeled DTE (data terminal equipment) for connection to the terminal or computer. Once again, there are no switches or indicators.

Installing the R212A is extremely simple. Run a cable from a serial I/O (input/output) port on your computer or terminal to the DTE connector. The phone line goes in one of the modular jacks with the cable supplied. Finally, plug in the AC adapter. The other modular jack is a real convenience; if you want a telephone connected to the same line, it can be plugged into this jack, saving the cost of a phone-line Y adapter. Note that the whole telephone—not just the handset, as on some other modems—plugs into this jack. Of course, you don't need to plug a phone into this jack. The modem will work fine without one.

To communicate with the R212A, you will need a communications program that allows your computer to send and receive ASCII (American National Standard Code for Information Interchange) characters over its serial I/O



Photo 1: The Rixon R212A package includes the modem, a modular telephone cable, an AC line adapter, and a manual (not pictured).

port. This could be a program that makes your computer into a dumb terminal, or it could be a more sophisticated modem program. Both kinds will work with the R212A. Of course, if you are using a terminal instead of a computer, you don't need a program.

As the lack of switches implies, the R212A is controlled entirely from your computer or terminal. Once the modem is connected to the computer, you can type two carriage returns to wake it up. It responds with a sign-on message, shown in the first four lines of photo 2. It also determines automatically the transmission speed of your system, either 300 or 1200 bps (bits per second), and the type of parity, based on the carriage returns you send it. From then on, it accepts ASCII commands. These commands can be entered manually from the keyboard, or you can use a program to send them. In my experience, a fancy modem control program is not needed, since the R212A can do just about everything by itself. The commands are all one or two letters long, so it takes little effort to type them. Table 1 briefly summarizes the R212A's command set.

Features

One of the nicest features of the R212A is its help display. Most user-friendly software packages now have some sort of help facility. It's rare, though, to find a piece

of peripheral equipment with one. The R212A's help display, shown in photo 2 as it appears on the screen of my Zenith Z-89 computer, gives a brief description of each command. While the help goes no deeper than this (e.g., you can't ask the R212A to further explain the keyboard dial command), it is sufficient to jog your memory after you've read the instruction manual.

Any intelligent modem should be able to automatically dial a phone number. The R212A can do that easily with the K (keyboard dial) command. Merely type a K, and the modem prompts for the phone number. Entering the number followed by a carriage return causes the R212A to dial the number. The R212A ignores spaces and hyphens, so the number can be entered in the usual manner. Don't try to use parentheses to enclose an area code, though; these have special meanings to the R212A.

In addition to plain old auto-dialing, the R212A has the S (store) command for built-in number storage. The modem can store up to 10 phone numbers; each can be up to 60 characters long. When you want to dial a stored number, you need to enter only its index number (a digit from zero to nine). The numbers are saved in the modem's internal RAM (random-access read/write memory), which has a battery backup in case there's no AC power. Rixon says the battery will last at least two years. In addition to the S command, the R212A has the D (dis-

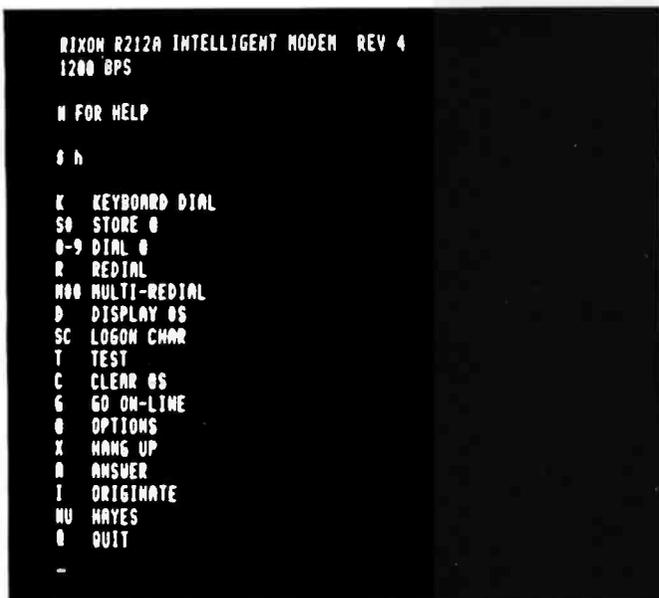


Photo 2: The help display generated by the R212A. Note the sign-on message at the top of the screen. The dollar sign is the modem's prompt character. Each of the commands shown is accessed by its one- or two-character mnemonic.

At a Glance

Name

Rixon R212A Intelligent Modem

Use

Communication over voice-grade telephone lines at 300 or 1200 bits per second (bps)

Manufacturer

Rixon Inc.
2120 Industrial Parkway
Silver Spring, MD 20904
(301) 622-2121

Size

1.5 by 6.25 by 9.7 inches

Weight

2.5 pounds

Features

Direct-connect, 0 to 300 bps plus 1200 bps; accepts ASCII commands from computer or terminal; holds 10 phone numbers plus identifying information in battery backed-up memory

Hardware Needed

Computer or terminal with RS-232C port, along with RS-232C interconnecting cable

Software Needed

Any communications program capable of sending and receiving over the computer's RS-232C port

Documentation

78-page manual in a 5½- by 8½-inch format

Options

None

List Price

\$499

Command	Definition
K	Keyboard dial; any telephone number may be entered directly from the computer or terminal keyboard, rather than using a number stored in the modem's memory.
S#	Store a telephone number in location #, where # is a number from zero to nine. The number may be up to 60 characters long, including comments.
0-9	Dial a number stored in the modem's memory (memory locations are numbered zero through nine).
R	Redial the last number dialed.
M	Multiple redial; redials the last number dialed up to 10 times before giving up.
D	Display the phone number directory.
SC	Set the "log-on" control characters; once set, the characters can be used within a log-on sequence to send stored text to the remote system and wait for a response.
T	Test mode. The R212A goes into a local loopback self-test, or a remote self-test if on line.
C	Clear all stored numbers. The R212A prompts to be sure this is really what is wanted.
G	Go back on line if previously disconnected with special "programmed disconnect" character.
O	Option select (see table 3).
X	Hang up the phone line.
A	Forces the modem into "answer" mode when dialing a call (i.e., high-frequency modem tones).
I	Forces the modem into "originate" mode when dialing a call (i.e., low-frequency modem tones).
NU	Select Hayes mode. The R212A will recognize Hayes Smartmodem commands.
Q	Quit; causes the modem to "sign off" and return to noninteractive state. (Calls will still be auto-answered, though.)
PARITY	Typing the word PARITY in uppercase causes the R212A to detect the parity your system is using.

Table 1: R212A command summary.

play) command for displaying the directory. A sample directory is shown in photo 3.

You'll notice in this picture that the phone numbers have text associated with them. This is a handy feature; I use it to save the name and/or description of the system associated with each phone number. You have to use a slash (/) following the phone number to indicate text. Everything after the slash is interpreted by the R212A as text.

Also shown in photo 3 is an example of the S command. At the bottom of the screen I typed S7, which means store a number in slot 7. The modem responded with the existing contents of slot 7, and with a message questioning whether I really wanted to change what was in that slot. I did, so the modem then prompted me for the new phone number—a simple, logical procedure.

The R212A is well matched to modern telephone systems. For example, it can detect the presence or absence of dial tones, and it will inform you if it can't get a dial

THE BUFFER DID IT.

Who Stole The 1500 Letters From The Computer?

Let's just say you've got to send a letter to 1500 different people. Would you like to spend 22.5 hours* or 60 seconds of computer time?


With a garden-variety buffer, the computer has to mix, merge and send 1500 addresses and 1500 letters to the buffer. Trouble is, most buffers only store about 32 letters. So after 32 letters, the computer's down until the printer's done. Altogether, you're talking 22.5 hours.

Mr. Harold Burns
P.O. Box 1111
Toledo, Ohio 18420
Dear Harri--

buffers offer By-Pass; the ability to interrupt long jobs for short ones. But only ShuffleBuffer has what we call Random Access Printing — the brains to move stored information around on its way to the printer. Something only a computer could do before. Comes in especially handy if you do lots of printing. Or lengthy manuscripts. Or voluminous green and white spread sheets. And by the way, ShuffleBuffer does store up to 128K of information and gives you a By-Pass mode, too.

Who Wants You To Catch A ShuffleBuffer In Action?

You guessed it. We do. Just go to your local computer dealer and ask him to show you a ShuffleBuffer at work. Or, you can call us at (215) 667-1713, and we'll clue you in on all the facts directly.



* Based on an average 4000 character letter & 128K buffer.

And Who Spilled The Beans 239 Times?

Most buffers can't tell the printer to duplicate. If they can, they only offer a start/stop switch, which means you're the one who has to count to 239. Turn your back on your buffer, and your printer might shoot out a room full of copies. ShuffleBuffer, however, *does* control quantity. Tell it the amount, and it counts the copies. By itself.

So, What's The Catch?

There isn't any. Sleuth around. You won't find another buffer that's as slick a character as this one.



You also won't find one that's friendly with any parallel or serial computer/printer combination. This is the world's only universal buffer. With a brain.

In the case of our new (not to mention amazing) ShuffleBuffer, computer time is 60 seconds flat. Just give

ShuffleBuffer one form letter and your address list, and it takes care of the mixing, the merging, and the printing. But that's not all ShuffleBuffer's stolen from the computer. Oh, no.

Who Changed and Rearranged The Facts?

Again, ShuffleBuffer's the culprit. You want to move paragraph #1 down where #3 is? Want to add a chart or picture? No problem. No mystery, either. Any buffer can give you FIFO, basic first-in, first-out printing. And some

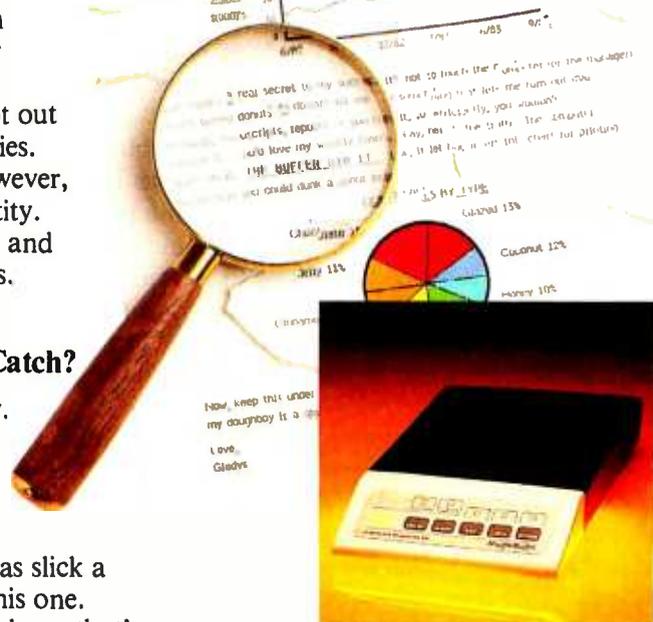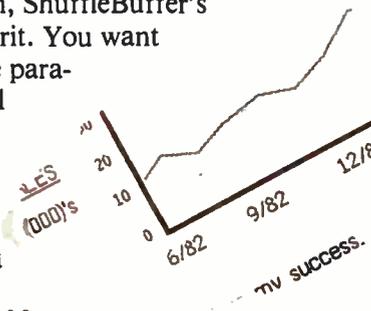

ShuffleBuffer
The Buffer with a Brain

Interactive Structures Inc.
146 Montgomery Avenue
Bala Cynwyd, PA 19004

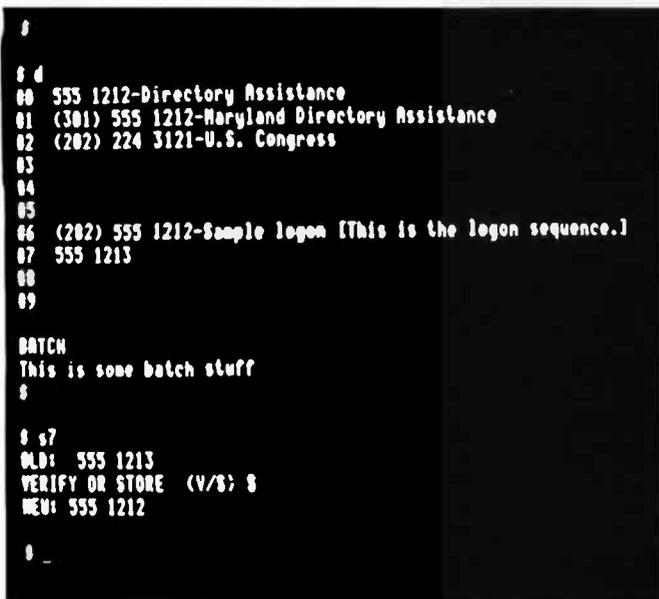


Photo 3: The R212A's directory display. The notations next to the phone numbers are stored as ASCII text by the modem. "BATCH" is a way to run a set of commands. The bottom of this display contains an example of storing a new phone number.

tone by telling you "dead line." It can also interpret most busy signals and will inform you if the line is busy or if there is no answer. If you wish, you can use the R (redial) command to automatically redial the most recently dialed number. If you're really desperate to get through, you can use the M (multiple redial) command. This automatically redials the last number up to 10 times, with a brief pause between each attempt.

In case redialing the same number isn't impressive enough, the R212A has something called linking. Any stored number can be linked to any other number. Then, if the first number is busy or does not answer, the modem automatically tries the linked number. So if your favorite bulletin-board system is busy, you can automatically try another one. It's possible to link numbers to each other, so the modem goes back and forth between them until it finally gets one to answer. You can also link several numbers, causing the R212A to try them all. If you link the last to the first, you get the modem's equivalent of an endless loop. Your phone line will be busy forever unless one of the numbers on the linked list answers or you manually abort the dialing operation.

The R212A is capable of both tone and pulse dialing. If you don't instruct it otherwise, it tries to dial the first digit with a tone. If sending a tone fails to interrupt the dial tone, it assumes that the phone line works only with pulse dialing, and it dials the whole number with pulses. If the dial tone goes away after tone dialing the first digit, the modem dials the rest of the number with tones. You can, of course, put the modem into a tone-only or pulse-only mode, so it doesn't have to go through this detective work each time it dials. Finally, the letters T and P can be embedded in phone numbers to manually switch

Command	Definition
&	Wait for intermediate dial tone; generally used with PBX (private branch exchange) systems where an access number must be used to get an outside line.
%	Pause 5 seconds; can be used to wait for access tone on long-distance services such as Sprint and MCI.
P	Forces pulse-dial mode for subsequent digits.
T	Forces tone-dial mode for subsequent digits.
L	Link to another stored number if this number is busy.
*	Comments. Everything following a slash character is treated as a comment. Comment characters are displayed in the directory but not dialed.
Space	Ignored. A space can be used within telephone numbers to improve readability.

Table 2: Special characters in telephone numbers.

between tone and pulse dialing. This is useful if you're on a PBX (private branch exchange) that understands only pulses, but you dial an access code to get an outside line, which can use tones. The R212A can handle the whole dialing operation, including waiting for secondary dial tones. You can also use the percent (%) character to cause a 5-second pause anywhere in a dialing sequence. Table 2 summarizes the special characters allowed within telephone numbers.

Advanced Features

In addition to storing phone numbers, text, and link codes, the R212A can store log-on sequences. A log-on sequence is a series of ASCII characters that the R212A sends down the phone line once it has detected a modem on the other end. This can be an account number, a password, or whatever. In effect, the log-on sequence lets you automatically log on to a remote system without lifting a finger. The log-on sequence is stored by enclosing it in square brackets ([]) when you store the phone number.

The log-on sequence feature is very versatile. It can, for example, contain any ASCII control characters, not just printable ones. It can contain a special character that causes the R212A to wait for a specific response from the remote system before proceeding with the rest of the sequence. It can also contain secure characters, which are never displayed in the R212A's phone number directory. Secure characters are enclosed in parentheses when you first store the log-on sequence. This is a useful feature if you set up your modem to be used by others who should not know things like remote system passwords.

Another advanced feature is the batch facility. Sequences of commands can be enclosed in angle brackets (< >). The R212A buffers everything received after an open bracket and executes it (without echoing or prompting) after it sees the closed bracket. Therefore you can write a program that sends a series of commands to the modem all in one batch, without cluttering up your screen display. The contents of the batch buffer


Sprinter™



Portable



A new generation printer that combines portability, dependability and quality. **Sprinter** is travel convenience — lightweight and rugged with an easily removable travel cover and plenty of space for storage.

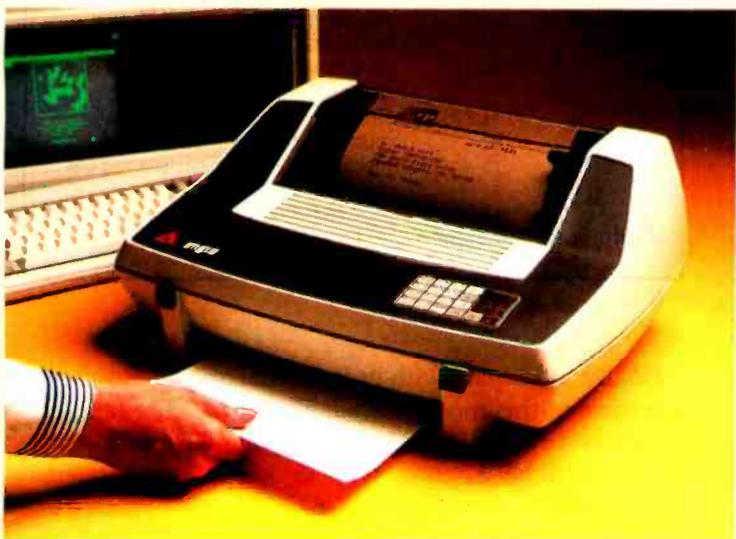

Personal

A friendly printer that is easy to operate. Ease of operation is top priority for this printer. A **SoftSwitch™ Control Pad** allows the user to control forms' length, print density, tabulations, baud rate and character sets.



Professional

A fast printer, the 160 CPS **Sprinter** comes standard with a 4K buffer expandable to 68K with MPI's **MemoryMate™** option. It comes equipped with an **EasyLoad™** front paper feed for quick paper insertion and handles everything from letterhead to multi-part forms.

Travel with the Best!

See the Sprinter at your local computer store or call us for the dealer nearest you. **1 (800) 821-8848**

Circle 259 on inquiry card.
www.americanradiohistory.com



Micro Peripherals, Inc.

4426 So. Century Dr. • SLC, UT. 84123

(801) 263-3081

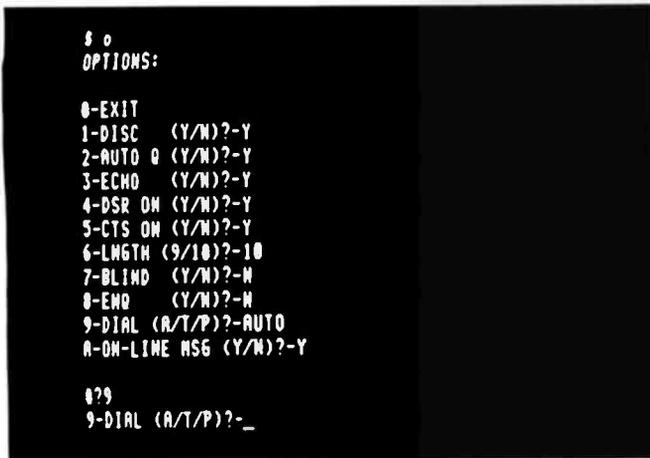


Photo 4: The options menu displayed by the R212A in response to the O command. Option 9 (dialing mode) has been selected.

always appear on the directory display (photo 3), so you can see what your computer has been sending.

In case you aren't satisfied with the way the R212A works, the designers give you a chance to change it with the O (options) command. This command calls up the menu shown in photo 4. There are 10 user-selectable options shown in the menu. Some of these deal with such details as how the modem controls certain RS-232C lines, while some deal with more mundane issues, such as whether the modem sends the message ONLINE to you when it detects a carrier. Table 3 gives a brief summary of the options. Most people, however, should find that the default options are sufficient; I didn't even look at the other options until I had thoroughly played with the auto-dialing and other features.

If your telephone system is old and uses dial tones with unusual sounds, which the modem might not be able to detect, you'll find that you need the O command and option number 7. Option 7, BLIND, causes the R212A to begin dialing a number after five seconds have elapsed, even if it doesn't detect a dial tone.

Other Nice Touches

The R212A has some other nice features, too. For example, the C (clear) command clears out all the stored phone numbers. Fortunately, the R212A gives you an "are you sure?" prompt before doing this. There is also a built-in self-test mode that loops back (connects the modem to itself) to make sure signals are being transmitted and received correctly.

The R212A can also emulate a Hayes Smartmodem. This means that the Rixon modem can operate like a Hayes Smartmodem so that people who have invested in software that understands the Hayes modem can use the R212A with their old software. The Hayes modem is much more limited than the Rixon modem, however; it doesn't have number storage, linking, or log-on sequences, and it doesn't detect dial tones. Also, it doesn't provide a help menu. I like all the Rixon features, so I haven't really used the Hayes-emulation mode except to test it.

Number	Name	Definition
1	DISC	Stores a special disconnect character. The character selected with this option, if typed 3 times in quick succession, will cause the modem to return to keyboard mode without disconnecting the telephone line.
2	AUTO Q	Determines whether or not modem automatically exits keyboard mode 2 minutes after last keyboard entry.
3	ECHO	Determines whether or not modem echoes back characters when in keyboard mode.
4	DSR ON	Causes the Data Set Ready (DSR) lead to be either permanently on or on only in data mode.
5	CTS ON	Causes the Clear To Send (CTS) lead to be either permanently on or on only when the modem is ready to transmit.
6	LNGTH	Selects 9- or 10-bit character length in 1200 bps mode.
7	BLIND	Determines whether modem tries to detect dial tone automatically or merely dials blind after a 5-second wait.
8	ENQ	Determines whether modem sends the ASCII character ENQ to a remote modem for handshaking purposes.
9	DIAL	Selects tone, pulse, or automatic dialing.
A	ONLINE MSG	Determines whether or not the modem issues an ONLINE message when it detects a remote modem's carrier.

Table 3: R212A options (set by the O command).

Finally, in keeping with its industrial origins, Rixon has a version of this modem available without the case, for use in a card cage. If you have many modems at one site, this would be a good way to keep your modems organized.

Documentation

The R212A comes with a very comprehensive 87-page manual. The manual is well designed, full of figures and examples, but was obviously written with the industrial market in mind. It's a bit dry, and the organization is occasionally puzzling. For example, on page 4, it tells you how to disassemble the modem. I think I would rather see some setup information first. An index would also be useful. There is, however, a nice foldout summary of all Rixon and Hayes commands and options.

Complaints

The lack of external adjustments makes the modem extremely simple to use; it cannot accidentally be set for the wrong speed, parity, or operating mode. The absence of controls also means that the modem can be located anywhere that's convenient; it doesn't have to be within easy reach of the operator. The absence of indicator lights or LEDs is another matter. Some people find it comfort-

KEY TRONIC POLISHES THE APPLE II* KEYBOARD



Eleven Function Keys
Streamline Multiple
Key Operations

Full Shifting Capability

Keys in Familiar
Typewriter Locations

Numeric Pad

10 Foot Cable
For Portability

Enhance your APPLE II* Computer System with a Key Tronic keyboard peripheral. This detached, low-profile keyboard is plug-compatible with the existing keyboard socket of the Apple II. It also features reliable microprocessor electronics, solid-state capacitance switches, and positive tactile feedback.

Special keyboard available for the handicapped — factory direct.

*Apple II is a registered trademark of Apple Computer, Inc.

Suggested Retail Price: \$298.00

To order Model KB-200 call Toll Free 1-800-262-6006 for the retailer closest to you. (7am-3pm Pacific Time) Warranty information may be obtained, free of charge, by writing to the address below.

 **key tronic**

THE RESPONSIVE KEYBOARD COMPANY

DEPT. E1 • P. O. BOX 14687 • SPOKANE, WASHINGTON 99214 USA

RETAILERS: For the Distributor in your area, call Toll Free 1-800-262-6006 Dept. D (7am-3pm Pacific Time)

ing to watch the "transmit data" light on a modem wink at you as the bits are swallowed by the telephone network. You don't get that with the R212A. People who are accustomed to the Hayes Smartmodem may notice that the Rixon lacks the Hayes's monitor speaker. Personally, I don't care to eavesdrop on modem conversations, so I don't mind the lack of a speaker.

These features aren't missed if everything is working, but if you're trying to track down a problem, like a broken wire in your RS-232C cable, you begin to see the need for them. For example, my one-year-old daughter got her hands onto the computer keyboard when I was experimenting with the modem. I returned to find that the modem would not respond to the computer; nothing I could type or do would make it respond. Finally, I discovered that she had somehow entered the command to put it into Hayes mode, so none of the Rixon commands I was trying had any effect. I suppose this is an argument in favor of child-proof computers.

Since the R212A is a new product, Rixon is bound to have its share of shakedown problems with it. I have experienced two such problems. One was an undocumented "feature," while the other was actually a hardware failure.

The feature problem arose because Rixon designed this modem to be compatible with a wide variety of terminals and computers. Some of these terminals apparently don't understand that normal modem handshaking requires one RS-232C signal (called DTR, or data terminal ready) to be active when talking to the modem. To get around this, Rixon installed a pull-up resistor on this line so that DTR is always active. That's fine most of the time, but it means that, unless the modem is turned off, it answers the phone—even when the computer is turned off. Not a very useful situation. The people at Rixon were very helpful when I complained about this and they told me how to disable it. The solution required cutting that pull-up resistor on the DTR line (R79 on the circuit

board). This is no big deal, but people with no hardware experience might feel better asking a friend to do it. It's easier just to unplug the modem when it's not in use.

The second problem was a fluke. During a thunderstorm, the phone line apparently took a lightning-induced jolt. It was not enough to knock out the phones, but it did cause the modem to behave peculiarly. For example, the modem kept the phone line off the hook when it was not supposed to. It turned out the lightning had zapped a protective device. (Better than zapping the whole modem, I thought.) Since my modem was only a few weeks old at the time, the people at Rixon replaced it with a new one, no questions asked. We have had more storms, but the replacement modem has not had any problems.

Conclusions

The Rixon R212A is an extremely intelligent modem that has auto-dialing features more powerful than many modem programs. It supports stored numbers, identification text, log-on sequences, and several forms of auto-redial. It communicates with the user through a series of ASCII character commands that are documented in a self-contained help facility. The R212A is extremely easy to set up and use, yet offers many powerful options for sophisticated users.

Some people may find the total lack of switches and indicators difficult to accept; in normal operation, however, they are not missed.

Anyone who is in the market for a 300/1200 bps modem would do well to consider the R212A. At \$499, it is definitely an "intelligent" choice. ■

Chuck Weger (c/o Oldenberg, 331 6th St. NE, Washington, DC 20003) is an independent consultant specializing in computer graphics. He was formerly on the technical staff of Computer Sciences Corporation.

SATISFY YOUR DRIVES



Z-80A with 256-K bytes RAM as:
FAST RAM DISK A: 192K bytes
64K USER RAM
ROM DISK B: CP/M, COPY, DIR, LOG pgrams.
DISK C: 192K byte 5 1/4" floppy drive
DISK D: optional external expansion
DISK E: optional external expansion

- Bundled with software included on 5 1/4" floppy disk.
- R/W IBM, KAYPRO, MORROW and OSBORNE disks.
- Transportable 7"hx4"wx14" d, 8lbs., 120 VAC 40 W
- (2) RS-232C serial ports (110-19,200 baud)
- (1) Bi-directional parallel port (Incl. Centronics)
- (1) Expansion buss (up to 256K addl. RAM or ROM)

EXPAND YOUR (computer's) MIND ... INSTANTLY!
 The COMPANION can add 256K byte storage, printer spooling, port expansion and CP/M programs to your portable computer or terminal.

PRICE \$1095 Terms Min. 25% Dep. Bal. COD
 MasterCard or VISA OK

COMPANION COMPUTERS
 192 Deerfield Rd. Apex, NC 27502 (919)362-6655

Circle 406 on Inquiry card.

COMPUTER RUNS MOTORS



\$225.00

- ROBOTS
- PROCESS CONTROL
- CONVEYORS
- ONE PORT RUNS UP TO FOUR MOTORS

Use your computer with the CDFR controller to command speed and direction of two independent motors from a single output port. For robot drive motors or any two functions requiring proportional bipolar control of 15Vdc up to 12 Amps each. Normally the controller installs between the computer, a 12Vdc battery, and two DC PM motors mounted right and left on a robot. Simple software commands set speed and direction latches in the CDFR thus freeing your computer for other tasks. Two CDFR's control four motors with a single port. The CDFR speed control uses CMOS, opto-isolators & relayless PWM power circuitry. One year limited warranty. Buy now with parallel interface for \$225.00, or serial for \$315.00. Other robotics components available. MC, VISA, MO, or check.

VANTEC
 15445 VENTURA BLVD., SUITE 10-281
 SHERMAN OAKS, CA 91413
 (213) 993-1073

Circle 407 on Inquiry card.

www.americanradiohistory.com

*IBM PC Compatible



E - PROMS - CALL! Lowest Prices Anywhere

*4164-150P	\$520
*4164-200	505
4116-200	149
*4164-120	549
6116-P3	499

Disk Drives: (F.O.B. Tampa)

*TM-100-2	\$ 22424
-4	29983
*TM- 55-2	22386
*10 mb Win	1,38547

(MS/DOS 2.0/IBM plug in & go)
 Add \$2.95 shipping to all orders. 2.6% for credit card orders
 OEM • Quantity discounts available • P.O.s on approval • C.O.D. OK • Credit cards • FL residents add 5% tax • All new, no surplus, no seconds (Prices subject to change.)


4920 Cypress St., Tampa, FL 33607
 In FL, and for info., call 813-875-0299
FOR ORDERS ONLY, 800-237-8910

  8 AM-8 PM EST

Circle 408 on Inquiry card.

PC PEACOCK™

Brings Living Color to Your IBM PC™

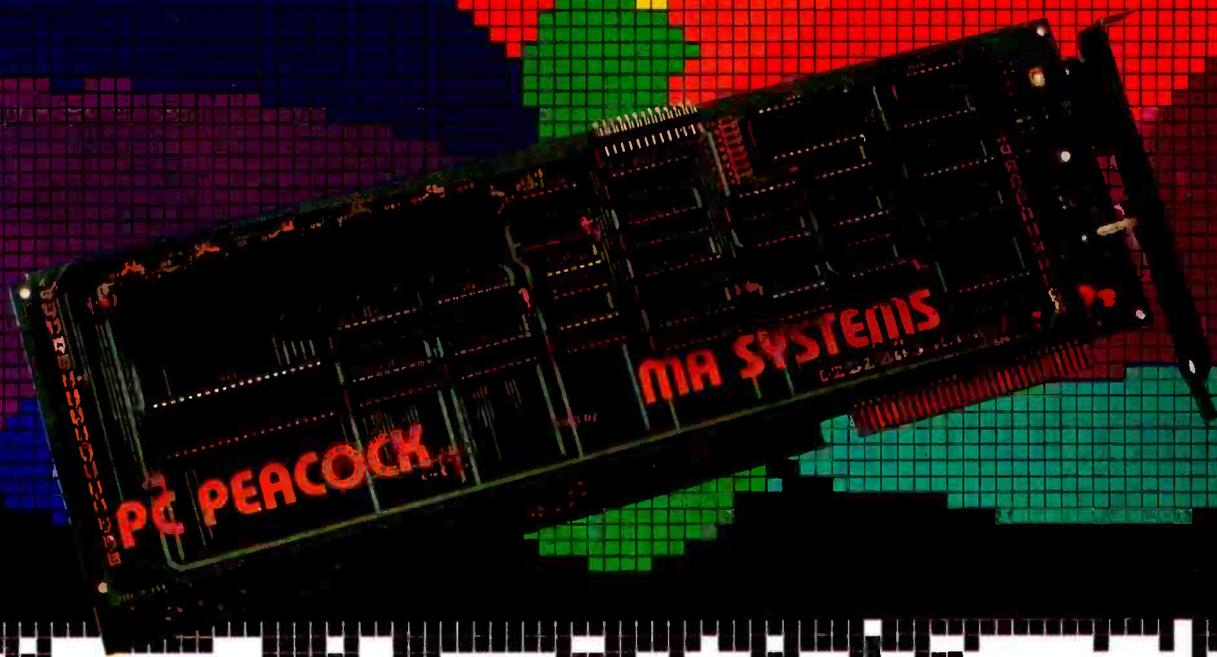

Computing is dull in black and white. But it doesn't have to be.

PC PEACOCK brings the excitement of color to your IBM computer. Pictures, charts and graphs "come alive" in multicolor brilliance. PC PEACOCK works with all color and composite monochrome displays to produce crisp, detailed images.

You'll see your favorite programs in the splendor of color. PC PEACOCK is fully compatible with all software for your IBM PC — including the wide variety of graphics programs. The medium multicolor mode and high resolution monochrome mode enhance your display capabilities for business, home and education.

And PC PEACOCK is convenient. Its parallel port allows you to connect a printer to your computer without wasting an additional expansion slot. Connections for all displays (RGB, composite, monochrome and televisions) are included.

PC PEACOCK is designed to provide years of worry free performance and is backed with an outstanding TWO YEAR warranty.

So bring living color to your IBM PC, with the PC PEACOCK Color Graphics Adapter. PC PEACOCK is available now at your local IBM dealer.

For more information on all of MA System's IBM and Apple products, please call or write.

MA SYSTEMS
INCORPORATED

2015 O'Toole Ave., San Jose, CA 95131 (408) 943-0596

Circle 226 on inquiry card.

IBM PC is a trademark of
International Business Machines Corp.

PC PEACOCK is a trademark of MA Systems Inc.


Both letter-quality and draft hard copy

Fastest document throughput in its class

Both friction and tractor paper feed

Industry standard serial and parallel interfaces.

Better, more versatile operator controls

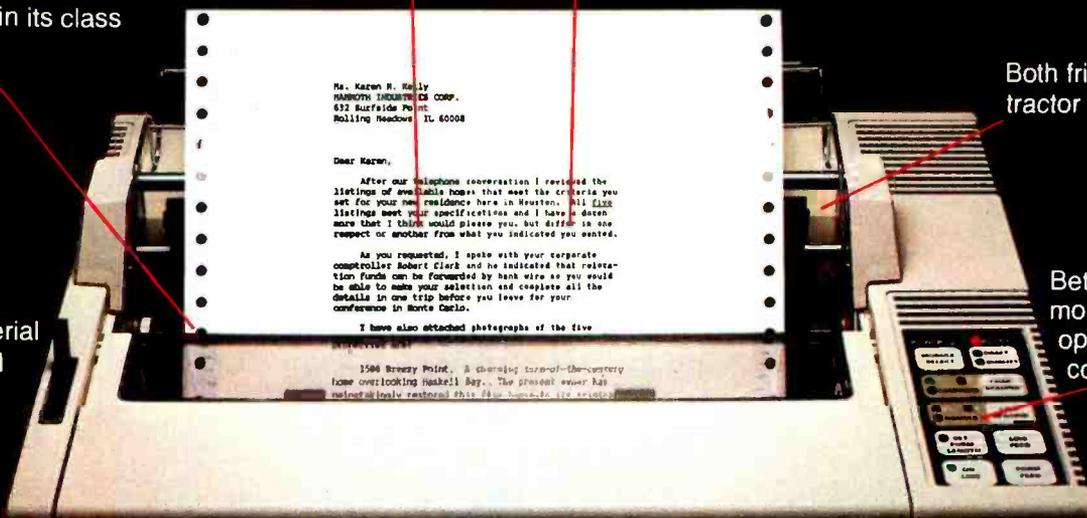

TI WAS IN THE FIRST

TI reliability

Compatibility with third-party and proprietary software

Better, more durable easy-access font modules

Introducing the TI 855 microprinter. No other printer says better so many ways.

Feature for feature, no other microprinter can match the versatility, compatibility, reliability and productivity of the OMNI 800® Model 855 microprinter. Here's why.

Two Printers In One. With the TI 855 you get the speed of dot matrix draft copy. Plus the precise clarity of the most advanced matrix technology for letter-quality print. It's two printers in one — at one low price.

A Great Family Name. Texas Instruments is known for providing the world with the industry standard for printers — the TI 810. TI builds the same reliability into every 800 series microprinter. Both the 855 and the data processing Model 850 are part of the expanding TI line of high-performance, low-cost microprinters.

Hardware Compatible. The TI 855 microprinter is compatible with all major PC hardware. And it provides both serial RS232C subset and "Centronics-type" parallel as standard interfaces.

Software Compatible. The TI 855 uses industry standard escape sequences for compatibility with virtually all third-party software. And for those with proprietary software needs, a model is available with ANSI standard escape sequences.

Tough Font Modules For Quick Character Change. Three font modules can be inserted into the front of the printer at one time, and are accessed individually. Each contains both draft- and letter-quality character sets. They're easier to use, more reliable and more durable than traditional metal or plastic daisy wheels.

More Productivity Than Any Other Microprinter. The 855 offers both friction and tractor paper feed, to handle all types of word and data processing applications. A quick-change snap-in cartridge ribbon. Raster and mosaic graphics. And intelligent printing which maximizes document throughput — regardless of format.

Get the printer that makes for better information systems. For more information visit your nearest TI authorized dealer or write Texas Instruments Incorporated, P.O. Box 402430, Dept. DPF-082BY, Dallas, TX 75240. Or call toll-free: 1-800-527-3500.



TEXAS INSTRUMENTS

Creating useful products and services for you.

SAVVY

This easy-to-use system actually learns from you

by Peter V. Callamaras

Imagine finding one package that combines the elements of hardware, software, and firmware with some general-purpose business applications and doesn't require a master's degree in computer science to understand or to use. In addition, the package understands plain ordinary English. What would you call it? Incredible? A lifesaver? Well, Excalibur Technologies Corporation calls it Savvy.

Savvy is a system that runs on an Apple or an IBM PC (Personal Computer) and is unique in the personal computer arena. The Apple hardware consists of a plug-in card for slot 7 of the motherboard. Much like the CP/M cards available for the Apple, the Savvy card contains a Z80 processor and support chips plus the necessary Savvy ROM chips. The Apple's 6502 processor becomes a subordinate controller for the microprocessor. The IBM PC, on the other hand, requires no unique hardware additions. The Savvy software consists of four disks containing a set of business-type applications, a set of demonstration programs, and a robot programmer.

Ease of Use

The intent of Savvy is to make it easy for the noncomputer-oriented Apple or IBM PC owner to perform business and professional tasks. Actually, easy is an understatement. Savvy usually knows what you want to do, even if you misspell the command. The operating system is oriented toward human or natural language.

Usually, if you want to perform a particular set of operations, you must follow a very precise, unforgiving set of instructions. For instance, if you want to scan a data-

base for any BYTE articles on AI (artificial intelligence), you would follow this scenario:

1. Call the search-retrieve module.
2. Input the correct information in the key search fields.
Example: first search field = BYTE
second search field = Article
third search field = Artificial Intelligence
3. Initiate the database manager that retrieves the records matching your search criteria.

To perform the same operation with Savvy, all you need to enter is: "get me all the BYTE articles on artificial intelligence." The system then retrieves the articles. Note the misspelling of the word articles. Normally, if a misspelling occurs, you get an error message and must reenter the data. This system can usually figure out what you mean. The process Savvy uses is called adaptive pattern recognition, or learning.

The learning comes from you. The more you use the system, the more it learns. The Savvy system builds up patterns to compare with your input. If it finds one or more exact match, Savvy returns those items. If there is no match, however, Savvy makes a guess by finding a pattern that comes close to your input. For example, if you ask people to identify a city from a skyline picture, they mentally match the picture to skylines they have seen before. Most people can easily tell the difference between New York and Paris, for instance. If you show them pictures of 10 different skylines, they should be able to identify them easily. This is what Savvy does.

At a Glance

Name

Savvy

Manufacturer

Excalibur Technologies Corp.
800 Rio Grande Blvd. NW
21 Mercado Plaza
Albuquerque, NM 87104
(505) 242-3333

Hardware

Z80-based plug-in card on Apple; four applications disks

Computer

Apple (II, II+, IIe), 48K- or 64K-byte IBM PC; two 5¼-inch floppy-disk drives; optional 80-column display, monitor, and printer

Features

Integrated operating system, pattern recognition, virtual memory, natural-language programming, 63-place decimal arithmetic

Compatibility

IBM PC, IBM PC XT, other PC-compatibles

Documentation

146-page programming manual and 330-page loose-leaf reference manual

Warranty

Limited one-year

Price

\$950

Audience

Nontechnical computer users; business and professional computer users desiring an easy-to-use set of programs; those interested in a pattern-recognition system

It gives you the best answer based on patterns it has observed previously.

To continue the skyline analogy, if you ask people to identify a city and then show them an evening picture of the skyline from a slightly different angle, they can probably connect the two. Savvy does this also; in fact, the more you use the system, the better it discriminates between patterns. Excalibur Technologies claims to have a proprietary method of ensuring the integrity of Savvy's pattern-recognition system so you can't overload it with too many patterns.

There is no need for the user of Savvy to have any particular computer skills or background. The system does everything possible to make it easy for the noncomputer-oriented user. For example, if you want to temporarily lock the value of an item or a variable, you tell Savvy to "freeze" the item. When you want to change the value, you simply "thaw" the item. The developers of Savvy have gone out of their way to eliminate as much computer jargon as possible.

This leads us to a strong point in the Savvy system: the ability to program without any programming background. You use your own words to describe what Savvy is supposed to do. It is very close to programming in your natural language. As an example, instead of coming up with some algorithm to add two numbers, multiply the sum by a third number, and print the result, you simply tell Savvy to "take number one, add it to

number two, then multiply the sum by a third number and display the result," using almost those exact words.

The robot programmer that comes with the Savvy system, one of the more highly touted parts of the system, is designed to help you establish your own databases. You can use it *only* to write databases. For instance, if you want to create a database for birthdays, you can use the robot programmer to write it. You follow the manual and prompts to configure the input formats, relations, search criteria, and output. Then the robot programmer writes the code while you watch.

When the robot finishes, you can input the names, dates, addresses, and whatever else you want in your database. Once it is established, you can search for, update, and output information from it. Typically, you might ask it to list all family members who have birthdays in March or all the members of the local church who were born on the 15th of any month. The relationships can be as simple or as complex as you wish, and you ask for the information in plain English.

Applications

The Savvy applications programs include a text processor with a mailing-list feature and a set of standard business accounting applications, with accounts receivable, accounts payable, inventory management, payroll, and general ledger.

The text processor is not designed for heavy word-processing applications but works fine for writing short letters. The mailing-list feature enables Savvy to generate your printed letters. File size is not the problem here; the software just isn't available yet.

In the payroll module, you set up a payroll file, subtract any individual deductions and taxes, record time data, and print out both checks and a payroll summary report.

The accounts-payable/receivable packages track receipts and expenditures by client or supplier as well as service charges, past-due accounts, payment due dates, and all the other standard AP/AR data.

The general ledger tracks your accounts, prints checks for expenditures, runs trial balances and prints income statements.

Finally, the inventory-management program establishes your inventory and tracks changes in stock levels. You can set up the inventory to include parts numbers, descriptions, stock levels, costs and prices, reorder points, and storage-location information.

As you can see, Savvy is primarily designed for small business or professional use, and in that context it does an adequate job. If you find that the applications don't meet your needs as written, you can enhance or modify them as you wish. The package includes the source code, and you can use the programming facilities of the Savvy system to make any changes.

Documentation

The accompanying documentation is an important part of the Savvy system. I received a large loose-leaf



StorageMasterTM Media is Here!

Now you can buy flexible disks with a five year warranty from Control Data.

A lot of companies make diskettes. But Control Data also makes disk drives. In fact, we're the leading independent supplier of disk drives to computer manufacturers.

Now we've put our expertise into a truly superior line: StorageMaster diskettes from Control Data.


You can choose from a com-

plete line of premium 8" and 5.25" diskettes in single or double densities, single or double-sided. And each diskette is 100% certified and backed by a 5 year warranty. So you can depend on them to perform for years to come.

Look for StorageMaster diskettes at your local computer store or ask for them from your computer supplies distributor.

Or give us a call toll-free at 1-800/328-6207 (in Minnesota call 612/853-8065) and we'll tell you where to find StorageMaster diskettes.

**CONTROL
DATA**

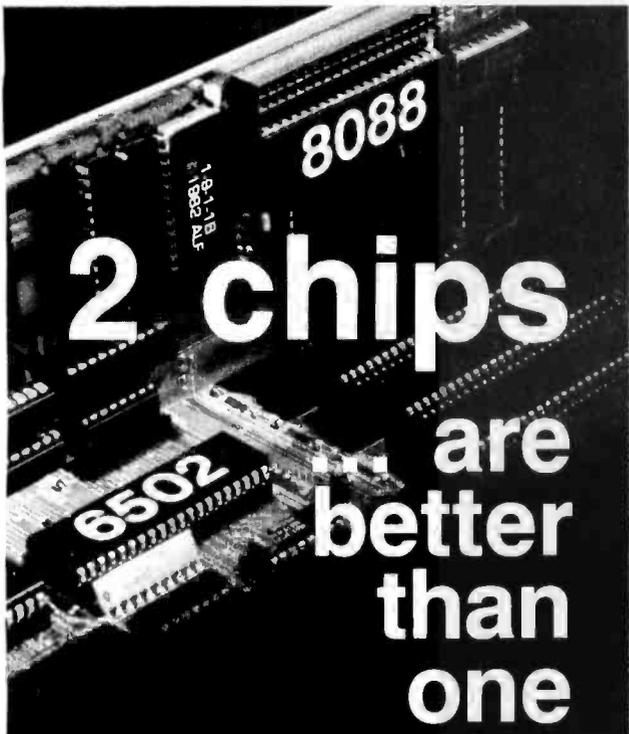

Is your Apple's 6502 processor chip a little overworked lately? Have you been eyeing one of those new, 16-bit systems? But you don't want to give up all your Apple programs ...

Add the powerful 16-bit 8088 processor to your Apple with ALF's Processor Card. Let the 6502 and 8088 work together to tackle your toughest problems—like speeding up your Applesoft and Apple Pascal programs. With the Processor Card, you can use the CP/M™ 86 or MS-DOS™ operating system to run the latest 16-bit software, including many IBM PC programs.

64K or 128K of high-speed memory is available for ALF's Processor Card. Use the Processor Card with 128K as a fast disk emulator or to view sixteen hi-res images in under a second. Or run Basic, C, COBOL, or Pascal with 16-bit performance!

The ALF Processor Card is just \$395 (Applesoft speed-up software included). See your Apple dealer today, or contact ALF for more information.

Trademarks: "Apple": Apple Computer, "CP/M": Digital Research, "MS-DOS": Microsoft.

ALF

ALF Products Inc.
1315F Nelson St. Denver, CO 80215
(303) 234 0871 Telex: 4991824

binder and a separate Savvy programming manual. The manual is fairly straightforward, and you are led through the various Savvy functions with extensive use of the tutorial approach and actual screen images of the dialog between the user and Savvy. Almost no technical jargon is included. My only complaint is that Excalibur Technologies used a rather small typeface and packed every page full of information. Consequently, it takes a long time to go through the documentation.

Conclusion

Savvy is a combination of hardware, software, firmware, and applications programs designed for small business or professional use. The actual system consists of a plug-in board (for Apple users) and four disks. The package also includes two sets of support documentation.

Communicating with the Savvy system through English-like conversations makes it very quick and easy for the noncomputer-oriented user to get up to speed. The more you use the Savvy system, the more it recognizes your commands. You can use the system's robot-programming capabilities to write all sorts of databases using English-like instructions. Savvy requires no specific programming skills and after using it for a while, you can become quite adept at writing your own Savvy programs.

The applications are pretty much no-frills business programs, consisting of a document- or letter-writing module with mailing-label capabilities, payroll, accounts-payable/receivable modules, general ledger and inventory management. You can modify or enhance any of these modules.

The documentation is voluminous, but complete, and does a good job of leading the user through the various functions and capabilities of the Savvy system.

Savvy costs \$950; a fairly large investment. You also need at least a 48K-byte Apple system (Apple II, II Plus, or IIe) or a 64K-byte (currently it won't use more) IBM PC, two disk drives, a monitor with an 80-column display, and finally a printer. To make a choice, you must balance the unique operating and programming capabilities Savvy offers against a set of specific application programs for your word processing and business needs.

Overall, Savvy is a very easy-to-use, friendly system that requires almost no background in computers. I enjoyed using the Savvy system, but reviewing it was not easy, as I could have spent many pages on any one of its capabilities. I look forward to seeing how Savvy's unique abilities affect the way people interact with computers in the future. ■

Peter V. Callamaras (HQ AFCC/EPPB, Scott AFB, IL 62225) is an officer in the Air Force. He has degrees in computer technology and biological sciences, and a master's degree in systems management. He has been interested in computers since 1966 and was formerly the service department manager of a computer store.

WATCH THE BIG GUYS

When you want to expand a thousand IBM PCs you need a reliable, quality vendor. If you are going to expand one PC, you need to get it right. That's why world leaders in manufacturing, research and education as well as tens of thousands of individual computer owners have picked Qubie for their PC or XT expansion products.

THE PEOPLES CHOICE

Qubie has gathered an impressive list of customers without great products. You just have to be impressed with MegaPlus II™, SixPakPlus™, and the Qubie PC212A/1200

modem card. MegaPlus II™ is the most flexible expansion product available for the PC. In comparison, the SixPakPlus™, has quickly become the number one selling multifunction board for IBM PC's. The Qubie modem card utilizes four digital microprocessors to provide flawless performance at 300 or 1200 baud. It even comes with PC-TALK III™ software, the program PC WORLD magazine called, "The benchmark that other PC communications packages are measured against". All this for under \$300. No wonder the Fortune 500 is impressed!

THE RIGHT PRICE

Our prices don't just look good, they are. No extra charges for shipping, testing, insurance, credit cards, or COD fees. If you are in a hurry, 2 day air service is available for just \$5 extra. We also offer a Qubie exclusive, our PREFERRED CUSTOMER PLAN. For \$50 we will extend your warranty a second year, perform warranty repairs within 24 hours, and return your board by UPS blue label air service.

DON'T FORGET SERVICE

We will be there when you need us. Knowledgeable people to answer your questions before and after you buy. Warranty repairs are performed within 48 hours or we replace your board. All products are guaranteed for one year on parts and labor. If not completely satisfied within 30 days of purchase, return your board for a complete refund including the postage. Join our list of impressive customers. You'll be glad you did.

TO ORDER BY PHONE:


In CA (805) 987-9741
Outside CA (800) 821-4479

TO ORDER BY MAIL:

Send a complete description of products, and your daytime phone number. Include check or credit card with expiration date. (Personal checks take 14 days to clear). California residents add 6% sales tax.

CORPORATIONS & INSTITUTIONS

Call for details on terms and delivery before mailing your purchase order. If your organization needs large quantities we have the prices and quick delivery you need.

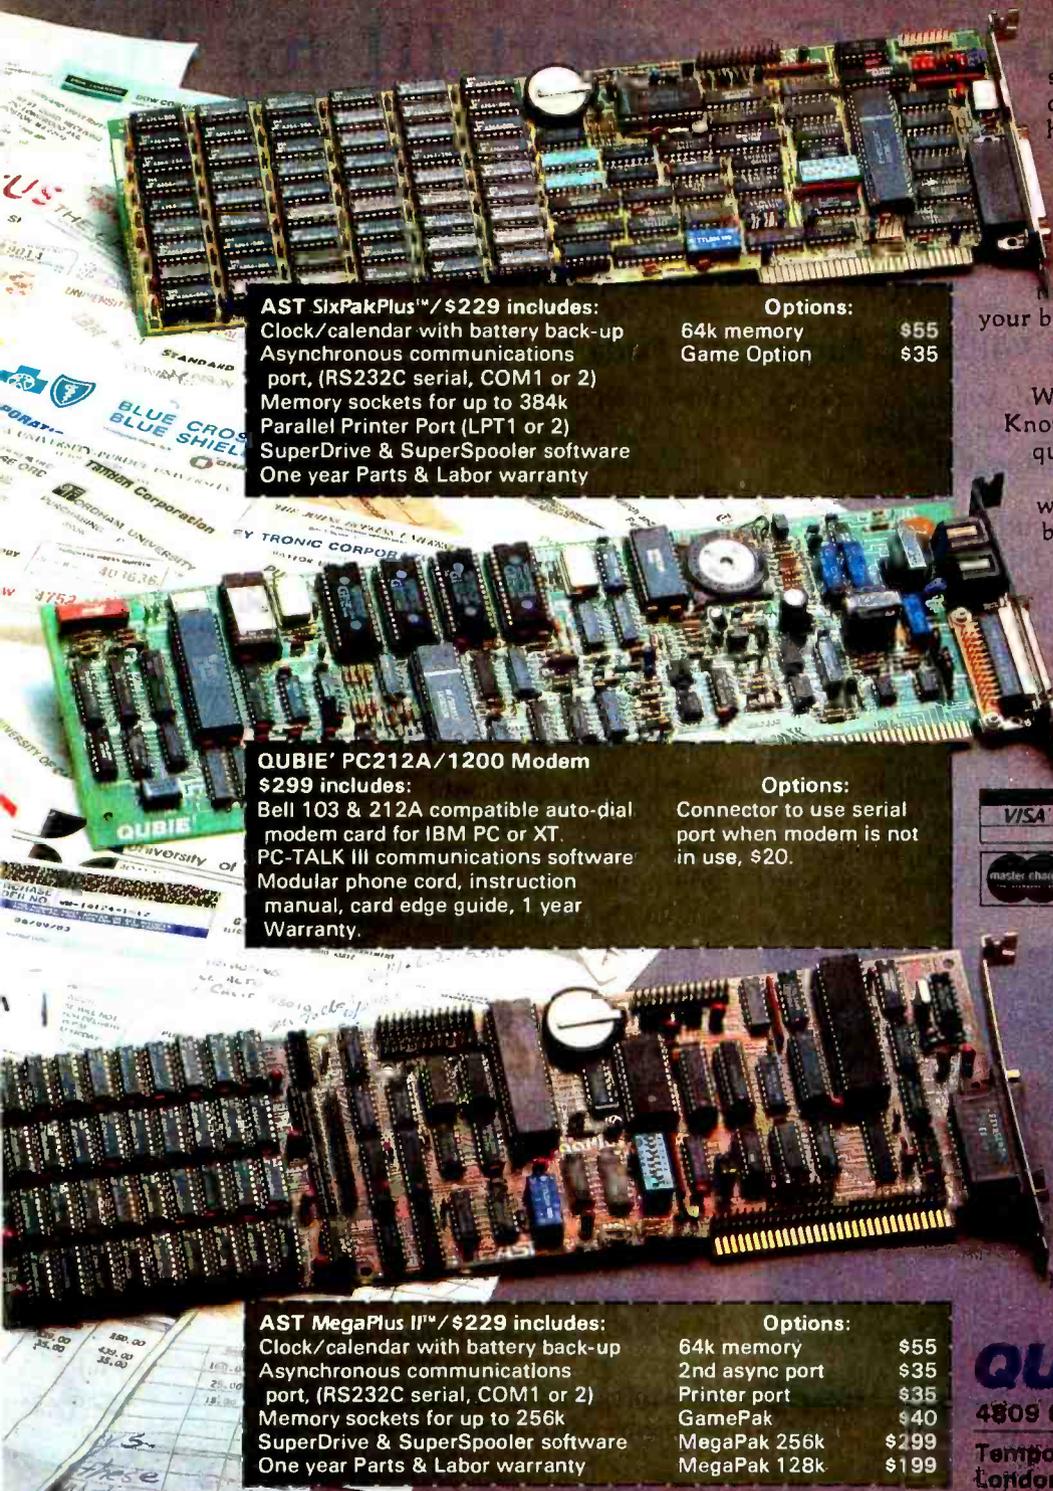

AST SixPakPlus™ / \$229 includes:
 Clock/calendar with battery back-up
 Asynchronous communications port, (RS232C serial, COM1 or 2)
 Memory sockets for up to 384k
 Parallel Printer Port (LPT1 or 2)
 SuperDrive & SuperSpooler software
 One year Parts & Labor warranty

Options:
 64k memory \$55
 Game Option \$35

QUBIE' PC212A/1200 Modem \$299 includes:
 Bell 103 & 212A compatible auto-dial modem card for IBM PC or XT.
 PC-TALK III communications software
 Modular phone cord, instruction manual, card edge guide, 1 year Warranty.

Options:
 Connector to use serial port when modem is not in use, \$20.

AST MegaPlus II™ / \$229 includes:
 Clock/calendar with battery back-up
 Asynchronous communications port, (RS232C serial, COM1 or 2)
 Memory sockets for up to 256k
 SuperDrive & SuperSpooler software
 One year Parts & Labor warranty

Options:
 64k memory \$55
 2nd async port \$35
 Printer port \$35
 GamePak \$40
 MegaPak 256k \$299
 MegaPak 128k \$199

QUBIE'

4809 Calle Alto, Camarillo, CA 93010

Tempo House, 18 Falcon Road, London SW11, United Kingdom

The Micro-Sci Gameport III for the Apple III

How to upgrade your Apple III to an Apple II and recapture the fun of computing

by William J. Purpura and Paula K. Purpura

The Apple III is a high-powered, sophisticated computer, but you can't use it to play Space Raiders, Choplifter, or any Apple II games that require a joystick or paddles.

The Apple III was designed to utilize more than 64K bytes of RAM, and this design did away with the permanent memory locations used by the Apple II paddles. The new joystick input designed for the Apple III, although it has a much better A/D (analog to digital) converter than the Apple II's, is not much help. Most Apple II games were written to use the Apple II paddles or joysticks, and we couldn't find any game software designed specifically for the Apple III. Until now, Apple III owners have had to sit back and let the fun slip by.

Now, Micro-Sci (2150 South Hathaway St., Santa Ana, CA 92705, (714) 662-2801) has come to the rescue with

the Gameport III. Gameport III is an inexpensive (\$74.95) card that plugs into an Apple III slot to emulate the Apple II's normal game I/O (input/output) port. With this slick little board in place, most Apple II game software will run on the Apple III.

Micro-Sci has assured us that it has found only one Apple II game, Frogger, that does not work with the Gameport III. Frogger uses a unique joystick reading routine, which is sensitive to the individual joystick used and causes problems on both the Apple II and the Apple III.

Installation of the Gameport III is extremely easy (just insert it in a slot), and the instructions provided by Micro-Sci are simple. One caution: the 16-pin connector from the joystick or paddle must be aligned properly in the socket on Gameport III's board. If, for example, the game won't recognize the joystick button or the position of the joystick, the cable is probably not plugged in correctly, so double-check the installation before powering up your computer.

Once the hardware is installed, the Apple II emulation disk supplied with the Apple III must be modified to handle the Gameport III. Micro-Sci provides a disk that will simplify this chore. You boot Micro-Sci's disk, which will then ask for the Apple II emulation disk and will modify it without further action on your part. The whole process takes a few minutes.

A few older versions of this board may require a minor hardware modification to run correctly. This is due to a problem discovered after the first units had been in the field awhile. When the Gameport III is activated in something other than Apple II emulation mode, it causes problems with the normal Apple III SOS (super oper-

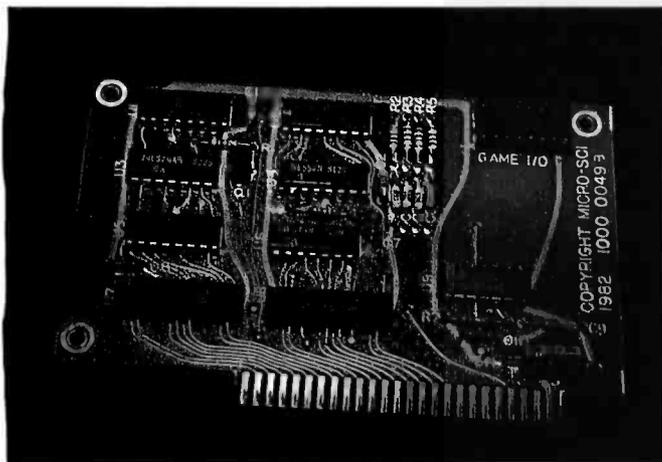


Photo 1: The Gameport III board.

ating system) operation. For this reason, the Gameport III is disabled automatically on power-up or CONTROL-RESET.

To make the Gameport III operational, the user must press button one on the joystick or paddles. (Remember to do this while the game is loading, or you might end up with certain incorrectly initialized inputs.)

It seems that a significant amount of EMI (electromagnetic interference) noise is generated inside the Apple III card-slot area. This high level of noise, particularly during disk operation, occasionally caused the Gameport III to turn on, leading to all sorts of system failures. This happened to us during a disk-copy operation, which failed with a "Stack Overflow" message.

The solution to the problem turned out to be simple.

In Apple II emulation mode, the Apple III can only output the high-resolution color signal on the NTSC pin.

A 0.1 micro-farad capacitor (ceramic type, nonpolarized) must be soldered between pins 2 and 8 of the 16-pin game connector on the trace side of the old version of the Gameport board. Micro-Sci assures us that all new boards have this modification, and anyone who has experienced such system failures with their board should contact the Micro-Sci Customer Service Group at (714) 662-2801.

Anyone who is using an RGB (red, green, blue) monitor with the Apple III should be aware that in Apple II emulation mode, the Apple III can only output the high-resolution color signal on the NTSC (National Television System Committee) pin. This means that such monitors can only display color games in black and white. The problem is in the design of the Apple III and is not a fault of Gameport III. The exception is the Elec-

At a Glance

Name

Gameport III

Use

Permits the use of Apple II paddle/joystick game software on the Apple III

Manufacturer

Micro-Sci Corporation
2150 South Hathaway St.
Santa Ana, CA 92705
(714) 662-2801

Price

\$74.95

Components

Card, disk

Name	Manufacturer
A2FS.1	Sublogic
ABM	Muse
Alien Rain	Broderbund
Alien Typhoon	Broderbund
Bug Attack	Cavalier
Cannon Ball Blitz	Sierra On-Line
Castle Wolfenstein	Muse
Choplifter	Broderbund
David's Midnight Magic	Broderbund
Dog Fight	Microlabs
Falcons	Picadilly
Fire Organ	Vagabond
Jaw Breaker	Sierra On-Line
Lunar Leeper	Sierra On-Line
Olympic Decathlon	Microsoft
Pest Patrol	Sierra On-Line
Planetoids	Adventure International
Pool 1.5	IDS!
Raiders of the Lost Ring	Cavalier
Raster Blaster	Budgeco
Snack Attack	Data Most
Sneakers	Sirius
Space Invaders	Apple
Space Raiders	United Software of America
Space War	Apple
Star Blazer	Broderbund
Star Cruiser	Sirius
Suicide	Picadilly
Super Invader	California Pacific
Thunderbirds-GX	Urban Soft
Zenith	Gebelli

The above list is by no means comprehensive.

Table 1: The following are games we tested with the Gameport III that require either paddles or joysticks.

trohome RGB monitor, since Electrohome has an adapter board to convert the NTSC signal back to RGB. Unfortunately, this board will work only with Electrohome monitors.

An annoying aspect of using the Gameport III is that each time the user wants to run a new game or use the computer in normal Apple II emulation mode, the system must be rebooted. One of the game manufacturers' piracy-prevention strategies is to set up disks so that the user cannot exit to the operating system while running a game. The rebooting procedure can be frustrating (particularly when you're reviewing lots of games), but it does not detract much from the joy of turning the serious and dull Apple III into a fun-loving Apple II.

Summary

The Gameport III is a must for anyone with an Apple III who would like to run Apple II game software. The price is not out of line for the fun provided. Check to be sure that the unit you buy already has the capacitor modification for reliability. ■

William J. Purpura holds master's degrees in mechanical engineering and business administration and works as a project engineer for Rockwell International.

Paula K. Purpura is a senior systems engineer at Thermco Products Corporation and has a B.S. in computer science and an M.B.A.

The authors can be reached at 5810 Paseo Ferrelo, Anaheim, CA 92807.

The Videx Ultraterm

A video-display card that enables the Apple to display up to 160 columns or 48 lines

by Peter V. Callamaras

The Videx Ultraterm is a new video-display card designed to plug into any Apple II (II, II Plus, or IIe) to enable the Apple to display more than its standard 40 columns.

Before the introduction of this display card, Apple owners had only two choices concerning the number of columns they could display: they could accept the standard 40 columns or add a peripheral card to give the Apple 80 columns. In either case the number of rows, or lines displayed, was limited to 24. The Ultraterm offers Apple owners a greater choice of displays (see table 1).

In addition to adding to the amount of information you can display on the screen (see photo 1), the Ultraterm actually enhances the visual display with these features:

- a standard high-resolution character set (7- by 9-dot font)
- a high-quality character set (9- by 16-dot font)
- the ability to choose between normal or inverse-video display
- the ability to display the characters in either a highlight, normal, or lowlight mode (this refers to the relative brightness of the characters on the screen)
- a 15-character line-drawing set as part of the standard character set
- seven block graphics characters as part of the standard character set
- 96 ASCII (American National Standard Code for Information Interchange) characters with true descenders

The Ultraterm also gives you the ability to "program"

your video display using any or all of the available modes (highlight, lowlight, inverse, etc.), a built-in soft switch that will automatically give you the 80-column mode when you boot either Pascal or CP/M, and a well-written users manual.

The features are impressive, yet the Ultraterm is also easy to install and use. After you open the top of the Apple and ground yourself to the power supply (by touching the large gold unit in the left-rear corner of the computer), simply plug the Ultraterm board into one of the Apple's expansion slots and plug a two-wire molex

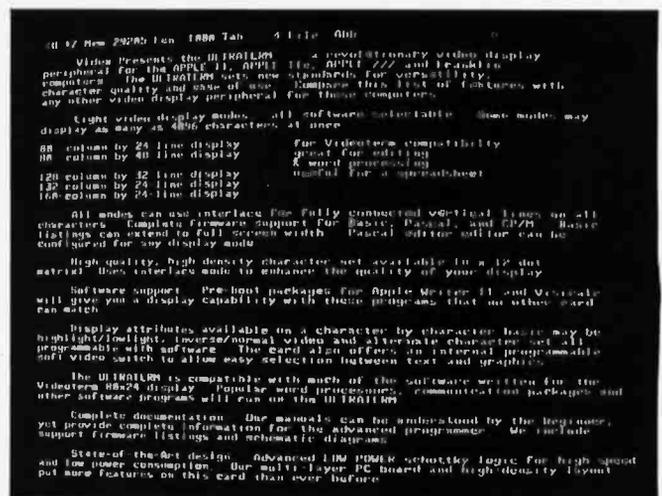


Photo 1: An example of one of the text formats possible with the Videx Ultraterm card for the Apple II. In this mode, the Apple can display an incredible 48 lines of 80-column text.

At A Glance

Name

Ultraterm Video-Display Card

Manufacturer

Videx Inc.
897 NW Grant Ave.
Corvallis, OR 97330
(503) 758-0521

Price

\$379

Software

Demonstration disk

Hardware Required

Apple II, II Plus, or IIe

Capabilities

40-160 columns, 24-48 lines, two character sets, four intensity levels, added graphics and line-drawing character sets

Documentation

Well-written 78-page manual

Warranty

90 days, workmanship and material

Audience

Any Apple owner desiring more than 40-column display; all business or professional Apple users

The Preboots

Name

Ultraterm Applewriter II/IIe Preboot

Price

\$29

Audience

Apple users who want Applewriter II in more than 40 columns and 24 lines

Name

Ultraterm Visicalc Preboot

Price

\$69

Audience

Anyone who uses Visicalc

connector into the Ultraterm board (one end of the connector into the normal Apple video-output port and the other to your monitor). Put the top back on your Apple, turn it on, and begin.

With the Ultraterm, you must use a monitor for a video-display terminal because a standard television set cannot handle an 80-column display. The monitor *must* have at least a 15-MHz bandwidth to handle up to the 132-column mode or a 20-MHz bandwidth for the 160-column mode (extended bandwidth is required because of the Ultraterm's 28-MHz clock). It must also have a high-persistence phosphor because the Ultraterm uses an interlaced display mode to give more than 24 lines in the 32-/48-line modes. Potential Ultraterm owners

Columns	Rows	Display type
40	24	Normal Apple display
80	24	Standard 80-column display
80	24	High-quality 80-column
80	32	Extended 80-column
80	48	Extended 80-column
96	24	Extended-column display
128	32	Extended/Visicalc display
132	24	Super-extended display
160	24	Ultra-extended display

Table 1: The Videx Ultraterm offers Apple owners a choice of displays.

should examine their current monitors or any potential monitor purchase to insure that they meet these criteria.

Tests conducted by Videx have shown that the following monitors can be used successfully with the Ultraterm:

- The Apple Monitor III is suitable for all displays except 160-column. It is the Videx monitor of choice for use with the Ultraterm.
- A NEC JB-902M will display all video modes, including 160-column, but the short-persistence phosphor causes the display to flicker. The 9-inch screen makes anything over 80 columns hard to read.
- The NEC JB-1201M will perform the same as the NEC JB-902M, but the 12-inch screen makes it easier to see 80+ columns.
- The Ldex/Amdek 100 was the monitor I first used with the Ultraterm. It worked well in 80 columns, but is unsuitable if you wish to take advantage of the extended-column modes.
- Amdek 300A is the monitor I now use. It is superb; not only does it have an amber screen (easier on the eyes), but it can take advantage of all the Ultraterm features. It has both the necessary bandwidth and phosphor persistence needed to go to 160 columns and 48 rows.

If you are not now using or contemplating buying one of these monitors, I would encourage you to check with your local computer dealer about the compatibility of other specific monitors. If your dealer is unable to help you, check with the Videx technical services department. The folks at Videx are happy to answer consumer questions.

The only problem I had while using the Ultraterm was with some of the popular Pascal programs that normally display in the Apple 40-column mode. Specifically, PFS, Wizardry, and Visischedule will "fool" the Ultraterm into thinking it is supposed to be in the 80-column mode, and you end up with no display! The solution is to plug your monitor directly into the Apple's video-output port. Or, if you use any of these software packages often, you can install a Videx switch plate for a simpler switchover.

Besides the obvious advantages of the expanded-display area, there are some other handy features available with the Ultraterm. Using the programmable "alternative attributes," you can display either standard or high-quality character sets in inverse or normal video with highlight or lowlight brightness. You can also get other character sets from Videx on EPROMs (erasable programmable read-only memories) featuring some common foreign characters.

Special Features

The high-quality character set uses a 9- by 16-dot matrix instead of the standard 7- by 9-dot matrix. It is easier to read, although I found the standard set satisfactory. The relative brightness of the display can be controlled with the highlight/lowlight feature. This means that you can have a screen display with some characters brighter (or dimmer) than others. (This can be useful for emphasis.) You can also combine the highlight/lowlight feature with the normal/inverse screen capability to extend the emphasis capabilities of the screen display. For instance, you could show an important caution or warning message in an inverse highlight, while the normal text would be in a lowlight, normal-video mode. The uses are limited only by your imagination.

Again, both Pascal and CP/M will come up automatically in 80-column mode; there is no need to buy additional hardware or make any modifications. I found this feature handy because I often switch back and forth between programs. With the standard Videx Videoterm I sometimes forgot to throw the switch to the right output. The built-in soft switch makes the Ultraterm easier to use.

The Ultraterm's capabilities are also programmable, so you can customize your screen displays if you wish. A chapter in the manual addresses the various methods and techniques for programming your screen displays to take advantage of the Ultraterm's wide capabilities.

BASIC, Pascal, and assembly-language information is included. One note: there are changes in how some video displays work with the Ultraterm installed, such as the loss of the FLASH command capability, but this is all documented in the manual.

The Videx Preboots

Videx sells a set of preboot disks that allow you to enhance some of the more popular software in conjunction with the Ultraterm.

The preboots are separate disk-based programs that you have to load into the Apple before you load an application program. The preboot then configures the Apple and Ultraterm to give you some special features. The preboot will first ask you to select one of several options and it sets up the Ultraterm accordingly. You then load the application program as you would normally. The preboots do not make changes to the application program, so there is no need to worry about voiding warranties or writing things to your application disks. Let's take a look at two currently available preboots.

Applewriter II/IIe Preboot


The Applewriter preboot program gives you the ability to display more than 40 columns and 24 lines. Your choices are: 80 columns by 24 lines, 80 columns by 32 lines, or 80 columns by 48 lines.

As mentioned before, you need a good monitor to use the 80-column feature. The extended displays make a big difference in how you process words. I found that the 80 by 48 display gives me a better "feel" for how my final documents will look because it is so close to the actual size of a physical page (80 by 55). Most first-time users will probably prefer the 24-line mode until they get used to the slightly smaller characters that are used with the 32- and 48-line modes.

This preboot works with either Applewriter II or IIe. Just follow the instructions on the instruction sheet.

HOW TO MAKE THE MOST OF YOUR MICRO

Introducing Scott, Foresman's new line of microcomputer books.

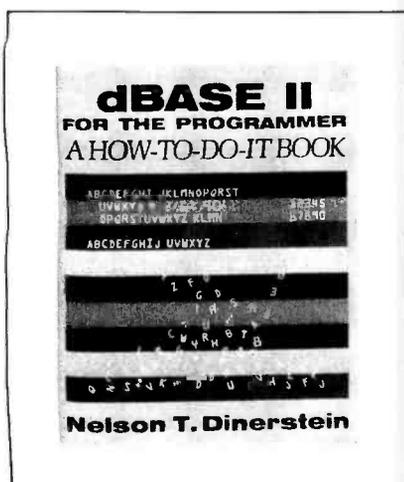

AT YOUR FINGERTIPS: MAKING THE MOST OF THE MICRO

by Jeff Berner. Based on the popular BBC television show currently seen on PBS stations around the country. A lively, fully illustrated introduction to microcomputers and their applications.

dBASE II FOR THE PROGRAMMER: A HOW-TO-DO-IT BOOK

by Nelson T. Dinerstein. This book helps professional programmers develop quality application systems in dBase II. Includes numerous programs, subroutines, and advice on overcoming common programming problems.

A LIBRARY OF SUBROUTINES FOR THE IBM PERSONAL COMPUTER

by David S. Walonick. Packed with tested subroutines for a wide range of personal and business applications, including subroutines on time, math, sorting, printing, and keyboarding. This book can help you cut your programming time in half!

To order, contact your local bookstore or computer store, or write to

**Scott, Foresman and Company
Professional Publishing Group,
Dept. BY-1
1900 East Lake Avenue
Glenview, IL 60025
312-729-3000**

PGS introduces the no-compromise monitor to meet your no-compromise needs.

High resolution

Once you've invested in a first-rate computer, you don't want to compromise with a second-rate monitor. That's why PGS introduced the first no-compromise monitor, the Princeton HX-12. It sets the price/performance standard for high resolution RGB color monitors.

Super resolution

Now we're introducing the first no-compromise monitor in the super resolution class. It's our new SR-12: an RGB monitor that meets the most demanding expectations at a price that will surprise you.

Monochrome

And, for price/performance in a monochrome monitor, we're introducing the MAX-12: our new amber monitor that's as easy on the eyes as it is on your budget.

The monitor to meet your needs

All three PGS monitors are engineered for no-compromise performance to provide you with a cleaner, sharper image than any other monitor in the same price class. The HX-12 and the SR-12 both feature uncompromising color convergence for crisp whites without color bleed. The MAX-12 offers impressive clarity in a monochrome monitor with easy-on-the-eyes amber phosphor.

And all three monitors come with a non-glare screen and a shielded cable that plugs directly into the IBM PC or XT.

The HX-12 has the highest resolution (690x240) and the finest dot pitch (.31mm) in its class. And yet, its suggested retail price is comparable to many medium resolution monitors. The HX-12 brings no-compromise color to the PC and now, with the PGS RGB-80 board, to the Apple IIe as well. **Suggested retail price: \$695.**

The new SR-12, in conjunction with the PGS high performance color graphics card, also features a .31mm dot pitch supporting 690 horizontal resolution. However, by increasing the horizontal scan rate to 27.5 KHz, the SR-12 can support 400 vertical resolution in non-interlaced mode. This results in a very high quality, flickerless image with the ability to generate graphics and text that is truly of monochrome quality. **Suggested retail price: \$799.**

The new MAX-12 offers you easy-on-the-eyes amber with 720x350 resolution at a suggested retail price (\$249) that is actually lower than the leading green-on-black competitor. And the MAX-12 runs off the IBM PC monochrome card—no special card is required.

Clarity of the Max 12 is enhanced by dynamic focusing circuitry which ensures sharpness not only in the center but also in the edges and corners. **Suggested retail price: \$249.**

Whatever your needs, from word processing to super resolution graphics, there's now a no-compromise PGS monitor that sets the standard. Ask your dealer for a demonstration and let your eyes decide. Or call for more information and the name of your nearest dealer.

You can look to PGS for the Image your eyes deserve.

Circle 301 on Inquiry card.

Nationwide service provided by Bell & Howell Service Company and MAI Sorbus Service Company.


www.americanradiohistory.com



800-221-1490

PGS Princeton Graphic Systems

1101-IState Road
Princeton, New Jersey 08540
609 683-1660 TLX 6857009 PGS Prin



Here's just a taste of our great prices.

TRS-80

DOS PLUS 3.5	\$89.00
HOME ACCOUNTANT mod III	59.50
LNW EXPANSION w/32K	345.00
PICKELS & TROUT CP/M mod 2.16	195.00

SUPPLIES

FLIP-SORT holds 50	\$ 19.95
FLIP-SORT PLUS holds 100	24.50
BIB 5 1/4" DISK CLEANER	8.95
PLASTIC LIBRARY CASE	2.50
IBM TO PARALLEL CABLE	30.00
ISO II SIX SOCKET ISOLATOR	49.95

3M

S.S.D.DEN 40 TRACK	22.00
D.S.O.DEN 40 TRACK	34.50

VERBATIM DATALIFE

S.S.D.DEN 525-01	24.50
D.S.D.DEN 550-01	42.50

RIBBONS

DIABLO HY TYPE II FILM	5.95
NEC or C.I.TOH DOT MATRIX	8.50
EPSON MX-80-RX-80	8.95

PRINTERS

EPSON GRAFTRAX PLUS	\$60.00
EPSON RX-80	299.00
EPSON FX-80	CALL
FINGER PRINT for EPSON	54.95
GEMINI 10 X	318.00
GRAPHICARD PRINTER INTERFACE	99.00
JUKI 6100 LETTER QUALITY	509.00
MICROBUFFER II 32K	209.00
OKIDATA 92A PARALLEL	450.00
PRINTEFACE for APPLE	75.00
TTX LETTER QUALITY w/Tractor	529.00

APPLE

128K ALPHA BYTE RAM BOARD	\$ 299.00
EPS KEYBOARD Programmable	299.00
HAYES MACH III JOYSTICK	37.50
INDUS DISK DRIVE	287.00
MICROSOFT Z-80 SOFTCARD	229.00
QUENTIN APPLEMEAT	230.00
RANA ELITE I	259.00
SUPERFAN II w/Zener Protection	79.00
SUPER 5 1/2" HEIGHT TEAC	249.00
VIDEX 80cm w/Soft Switch	229.00
ASCII EXPRESS PRO	94.50
BANK STREET WRITER	48.00
DISKQUICK	CALL
LEGACY OF LLYGAMYN	29.50
LODE RUNNER	17.35
MERLIN	49.50
NEW FLIGHT SIMULATOR	34.16
PFS WRITE APPLE IIe	105.00
QUENTIN APPLEMEAT	230.00
SILICON SALAD	CALL
STICKY BEAR in stock	CALL

MONITORS

AMDEK COLOR I PLUS	\$ 325.00
AMDEK 310A	179.00
BMC 9191 Color w/Sound	235.00
GORILLA GREEN	99.00
PANASONIC DUAL-MODE COLOR	325.00
QUADCOLOR II	246.00
TAXAN AMBER	125.00
USI P13 12"	155.00
ZENITH AMBER	119.00

MODEMS

HAYES Micromodem II/e Apple 2/2e	\$ 256.00
HAYES SMART MODEM (300 Baud)	208.50
HAYES SMART MODEM (1200 Baud)	528.50
HAYES 1200B IBM Internal	459.00
NOVATION IBM w/Crosstalk 1,2,3	496.50
PROMETHEUS 1200 Baud IBM internal	CALL

IBM®

ALPHA BYTE COMPUTER PRODUCTS:	
256K w/RS-232 90 day warranty	\$ 256.00
512K w/RS-232 90 day warranty	459.00
CP/M 86 DIGITAL RESEARCH	54.00
HERCULES GRAPHICS CARD	399.00
HOME ACCOUNTANT PLUS	99.00
KEYTRONICS KEYBOARD	215.00
MICROSOFT LATTICE C Compiler	369.00
MICROSOFT WORD w/Mouse	387.50
MICROSOFT 64K	278.00
MOVE-IT Communications Pkg	98.00
MS-OOS FORTRAN	260.00
MULTIMATE Word Processor	324.00
PFS:File	97.50
PFS:Graph	97.50
PFS:Report	97.50
PLANTRONICS COLOR+ w/Draftsman	475.00
PROKEY	58.50
QUADBOARD w/64K	298.00
QUADLINK	515.00
Tandon TM100-2 Double side 40 trk	235.00
WORD PLUS Spelling Checker	115.00

APPLE & IBM®

DEADLINE	\$ 35.00
ENCHANTER	35.00
KOALA PAD	99.00
MASTERTYPE	CALL
MICRO COOKBOOK	35.00
PINBALL CONSTRUCTION SET	29.50
WITNESS	35.00
WIZARDRY	CALL
ZORK I, II, III	28.00

To order or for information call

In Los Angeles:
(213) 706-0333 *

Alpha Byte

COMPUTER PRODUCTS

31304 VIA COLINAS
WESTLAKE VILLAGE, CA 91362

*For all your computer needs, come visit us at our new California store.

Satisfaction Assurance — Your satisfaction is assured by our 30 day guarantee on all hardware products we sell. All manufacturers' warranties are honored by manufacturers. Dead-on-arrival software will be replaced free during the first 20 days, however, no refunds or exchanges on software. Proof of purchase required. All returns must be authorized in advance.

There is one thing you need to about this preboot: Applewriter normally rewrites the entire screen each time you type something in. This works fine with a 40-column display, but with the Ultraterm there are many more characters, and the program really can't keep up. To resolve this, the preboot program shows the characters as they are typed. The rest of the screen is updated whenever you pause.

The Visicalc Preboot

This preboot will probably be the answer to the prayers of Visicalc users everywhere! As with the other preboot programs, you load the Visicalc preboot first, but the first time you use it, it will automatically configure itself to match your version of Visicalc (version 193, 202, 208, or 218). If you change versions the preboot can be reconfigured. This program has the following display size options: 80 columns by 24 lines, 80 columns by 48 lines, 128 columns by 32 lines, or 160 columns by 24 lines. With the 160-column option, however, you have to have a monitor that can handle the full 160 columns.

The first time I went from 40 to 80 columns and tried different line lengths I was amazed at the difference this preboot made in using Visicalc. When I went to the 128- and 160-column modes I was astounded. The added window width and height gives you a realistic idea of how your spreadsheet will look when done; it also "feels" better.

It's worth adding the Ultraterm display card to your Apple just to have access to this preboot-expanded Visicalc. It was difficult to go back to normal Visicalc after using the preboot.


Documentation

The Ultraterm manual deserves mention as one of the best I have seen. It includes a table of contents, glossary, index, overview, and installation guide, as well as separate chapters on each relevant subject area. It contains the Ultraterm's theory of operation, schematics, and firmware listings. There is even a section that lets Wordstar users configure their disks to come up automatically in the 80-column by 48-line format. I wish all manuals were as complete as this one.

Conclusion

Overall, the Ultraterm display card is one of the best peripheral devices I have seen to enhance the display capabilities of the Apple. It can be used in any Apple II, including the IIe with extended memory. This display card will without a doubt make the Apple II display the new standard against which all microcomputer video displays will be measured. ■

Peter V. Callamaras, an officer in the Air Force, can be reached at AFCC/EPPB, Scott AFB, IL 62225. The recipient of degrees in computer technology and biological sciences, he recently received his master's degree in systems management. He has been interested in computers since 1966 and used to be the service department manager of a computer store.

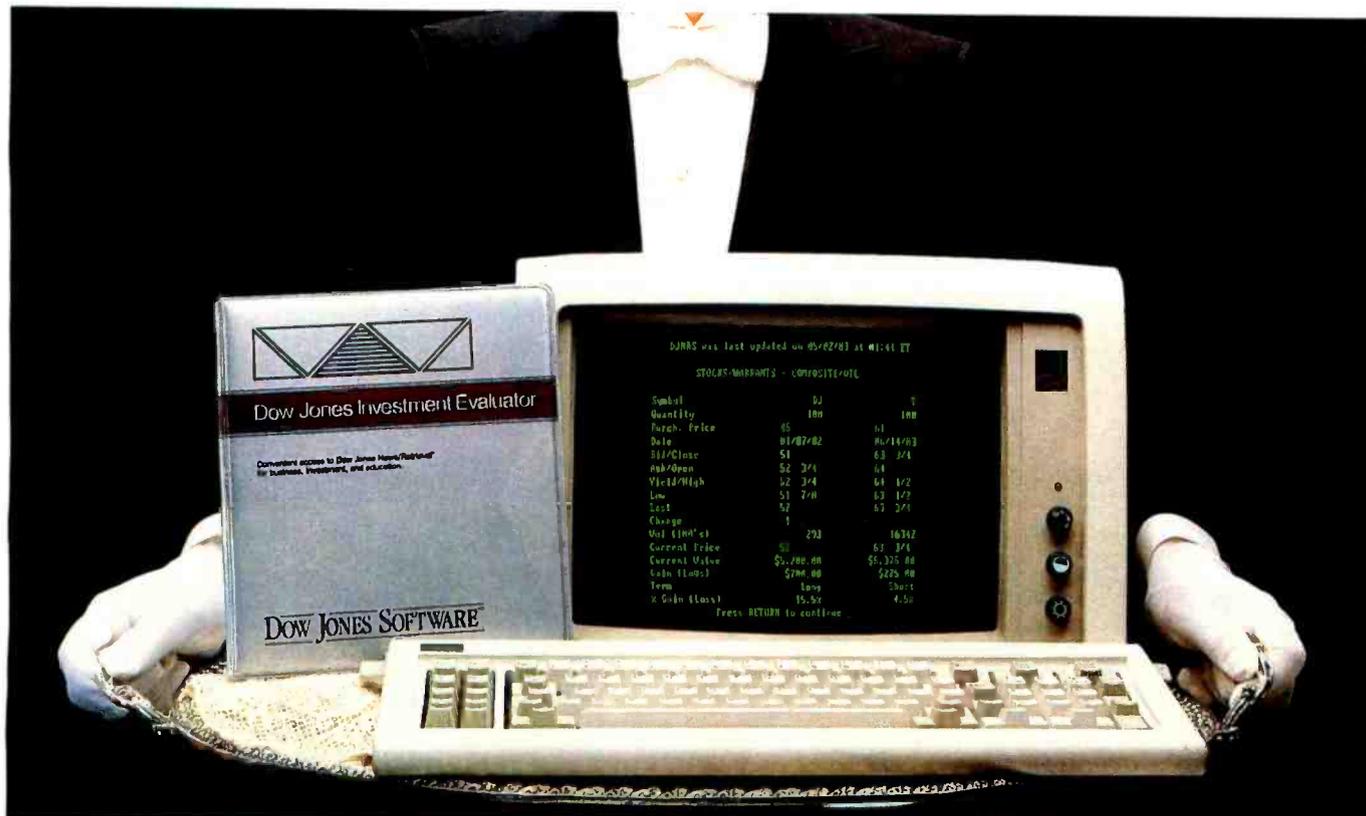

“Your Portfolio, Sir.”

DOW JONES INVESTMENT EVALUATOR™ — the computer software that serves your personal investment needs at home, accurately and efficiently.

A Personalized System

With the INVESTMENT EVALUATOR, your home computer and a telephone modem, you have a personalized system for managing your portfolio. A system that automatically updates and tracks only those stocks you want to follow — allowing you to evaluate your position at a glance.

Easy Access to News/Retrieval®

This software automatically dials and connects you with Dow Jones News/Retrieval®, the world's leading supplier of computerized information on demand. It allows you and your family access to current quotes, financial and business news, general news, movie reviews, sports, weather and even the Academic American Encyclopedia.

The Right Amount of Software for the Job

The INVESTMENT EVALUATOR gives you the capabilities you need without making you pay for a lot of complex functions you may never use. Menu screens lead you to what you want with one-touch commands. The program is completely reliable, comes with an easy-to-follow manual and is fully supported by the Dow Jones Customer Service hotline.

From Dow Jones, Publishers of The Wall Street Journal

Dow Jones has been serving the business and financial communities for over 100 years. Now Dow Jones Software™ serves you at home.



For a free brochure call:
1-800-345-8500 ext. 262

(Alaska, Hawaii and foreign
call 1-215-789-7000 ext. 262)

DOW JONES SOFTWARE

Dow Jones Investment Evaluator™

Available for Apple II, Apple IIc,
IBM PC and TI Professional.
Compatibility with Atari and
Commodore to follow.


...Bank on it.

Copyright © 1983 Dow Jones & Co., Inc. All rights reserved.

Others say, "The Sky's the Limit."

We go one step beyond.

Add up to 256K of memory
in 64K increments to your
IBM PC or XT

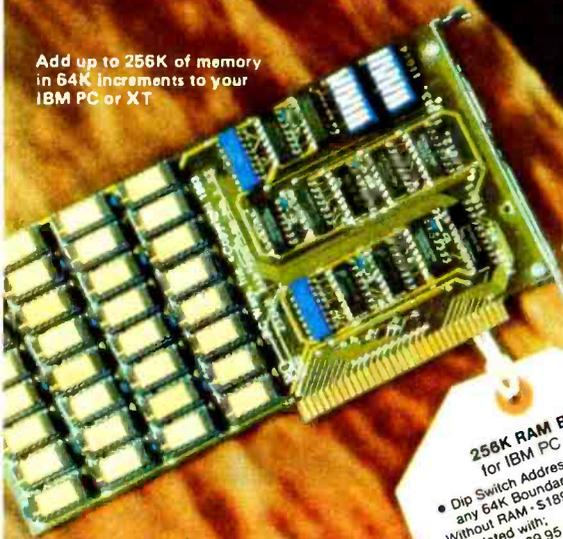


256K RAM Board
for IBM PC or XT

- Dip Switch Address Selectable on any 64K Boundaries

Without RAM - \$189.95 Part No. 11010
Populated with:
64K \$229.95 Part No. 11011
128K \$309.95 Part No. 11012
192K \$309.95 Part No. 11013
256K \$349.95 Part No. 11014

This board maintains the time and date for your IBM PC or XT so you don't have to enter it when you turn the computer on. Features snap in battery holder, Battery and software included.

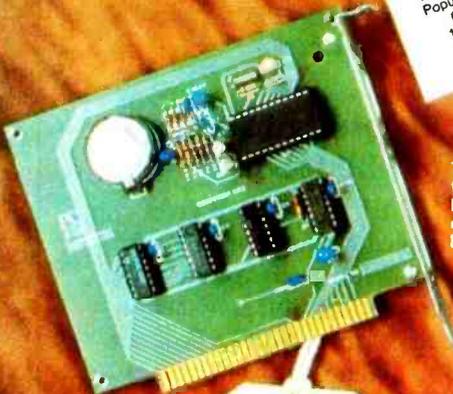

CLOCK CALENDAR
for IBM PC or XT

- DOS compatible
- Comes with software driver
- Will fit in any slot including the small slot in back corner
- 3 yr. Lithium battery backup

Part No. 21050 \$74.95

Connect any parallel device such as a printer to your IBM PC or XT.



PARALLEL PRINTER ADAPTOR
for IBM PC or XT

- Fully IBM Compatible
- May be used as a general purpose I/O port
- 12 buffered TTL Latched outputs
- 5 buffered TTL inputs
- Fully Software programmable
- Software controlled interrupts
- Reset of target peripheral/device with system
- Industry standard D-shell connector

Part No. 21020 \$89.95



SERIAL COMMUNICATIONS ADAPTOR
for IBM PC or XT

- Fully IBM compatible
- Asynchronous EIA RS-232C I/O mapping (Jumper)
- Fully software programmable transmit, receive, error, line status and data set interrupts
- Diagnostic capability to provide loopback functions for transmit/receive and input/output signals
- Powerful Intel INS8250 UART (for equivalent)
- Supports full or half duplex header
- Simple DCE/DTE configuration
- Crystal controlled baud rates, software programmable from 50 to 19200 including 134.5
- Programmable control register parity, overrun, and framing error checks
- Data is double-buffered
- External receiver clock input available
- Modem control functions supported (e.g. CTS, RTS, DTR, RI and carrier detect)
- False-start bit detection
- Line-break generation and detection
- Choice of 4 handshake signals (Jumper)
- DSR* and/or CTS* hardware override (Jumper)

Part No. 21010 \$94.95

Connect any serial device such as a printer, modem, plotter, mouse, terminal, etc. to your IBM PC or XT.

PC
PERSONAL COMPUTER
WARE

PC Ware, Inc.
Dept. 2
4883 Tonino Dr.
San Jose, CA 95136
(408) 978-8626

TO ORDER

In USA shipping paid by us for orders pre-paid. We accept C.O.D. orders (U.S. only). For VISA or MASTERCARD shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 15% for shipping and handling. Payment must be in U.S. funds. Dealer Inquiries invited. One year warranty.



Display 80 characters across and add 64K of memory. This board is for the Apple //e only.

Same as the Serial Interface with many more features such as intelligent firmware.

EXTENDED 80 COLUMN CARD
for Apple //e

- 64K RAM
- Functionally identical to the Apple version
- Part No. 22070 \$159.95

ENHANCED SERIAL INTERFACE
for Apple // and //e

- Same features as the SERIAL INTERFACE plus:
- Powerful ACE plus communications and printer drivers in EPROM.
 - Can emulate Apple Super Serial card.
 - Communications and data format controls: baud rate, parity, stop, data, case, break, delay, interlock, card, select, rate, interlock, software, (control), pass through (the Serial2 return, video line) through (line mode default settings of baud rate, carriage data format, XON/XOFF).
 - Printer return parity, linefeed after bus rate, data format, interlock, case, column overflow, delay, linefeed after format, delay, parity, XOFF.
 - XOFF commands pass through (the printer return, video line) after format, baud rate, delay, interlock, data width, and video echo.
- Part No. 22010 \$169.95

Connect your Apple // or //e to a parallel printer.

CENTRONICS PRINTER INTERFACE
for Apple // and //e

- Multiple drivers onboard in EPROM (Interchangeable 2K RAM).
 - Applesoft, Pascal & CP/M Compatible
 - 2 handshake lines (ACK* and strobe*), 4 status lines (select*, Busy, Paper out, and Prime*)
 - Centronics data bit 8 may be jumpered low
 - Conveniently located ribbon connector
- Part No. 22010 \$59.95
• With cable included
Part No. 22011 \$79.95

HI-RES GRAPHIC PRINTER INTERFACE
for Apple // and //e

- Keyboard controlled screen dumps
 - 23 different commands for text and graphics
 - Color graphic screen dumps
 - Interfaces to any dot matrix printer
 - On-board printer selection
 - Two page side by side printout
 - Cable included
- Part No. 22080 \$149.95

Use your dot matrix printer to print high resolution graphics with your Apple // or //e.

SERIAL INTERFACE
for Apple // and //e

- Asynchronous EIA RS-232C I/O
 - Multiple drivers (up to 8) resident in EPROM optional 2K RAM
 - Apple soft, Pascal, and CP/M Compatible
 - Full or Half Duplex
 - Separate DCE and DTE Connectors
 - Crystal controlled baud rate, software programmable from 50 to 19200 including 134.5, plus hardware default setting
 - Programmable control register
 - Parity, overrun, and framing error checks
 - Software programmable interrupts
 - Data is double-buffered
 - Choice of 4 handshake signals
 - DCD*, DSR* and/or CTS* hardware override (Jumper)
 - DMA and interrupt daisy-chain supported
 - RS-232 cable included
- Part No. 22040 \$129.95

Connect any serial device such as a printer, mouse, plotter, modem, etc. to your Apple // or //e

PARALLEL I/O INTERFACE
for Apple // and //e

- Multiple drivers onboard in EPROM (Interchangeable 2K RAM)
 - Applesoft, Pascal & CP/M Compatible
 - Dual 8-bit bi-directional parallel ports
 - Four handshake lines
 - Conveniently located ribbon connector
- Part No. 22020 \$89.95

Connect any parallel device to your Apple // or //e. This is a general purpose I/O port.

See us in California at the
NORTH-WEST COMPUTER SWAP
JANUARY 28, 29, 1984
San Mateo Fairgrounds
MAY 5, 6, 1984
Oakland Convention Center

Circle 337 on inquiry card.

Apple Disk Emulators: Axlon, Legend, Pion, and Synetix

*Four RAM disk emulators for the Apple II allow
faster execution times for certain applications*

by Michael W. Gilbert

Applications that require a lot of file manipulation and disk access are often slowed considerably by the relatively slow disk-access speeds afforded by the Apple's 5¼-inch disk system. These applications, of course, would be greatly enhanced if the disk information transfer rate were brought up to the transfer rate of data in RAM (random-access read/write memory). Some user systems could also benefit from the addition of storage space in the form of more disk drives.

For most applications, a RAM disk emulator (DE) performs exactly like a mechanical drive, but considerably faster. This speed advantage can be put to good use in many applications, including compilations, assemblies, database manipulations, sorting, word processing, data acquisition, and graphics. The current basic building block of the DE is the 64K-bit RAM chip. As RAM technology is developed, we will see RAM chips with greater storage capacity and lower prices, and DE units will become even more competitive with mechanical storage methods.

I compared four RAM DE devices for the Apple II/II Plus/IIe family: the Axlon Ramdisk 320, the Legend 128K DE Softdisk, the Pion Interstellar Drive, and the Synetix Flashcard (formerly the Synetix 2202 Solid-State Disk Emulator) (see photo 1). All four DE devices support the three most popular operating systems for the Apple: Apple DOS 3.3, Pascal, and CP/M. Prices range from \$529 for the Synetix Flashcard to \$1095 for the Pion Interstellar Drive. Each system includes a manual, software to interface it with the operating systems, various utilities, and a diagnostic program for the RAM chips.

Disk Emulators and DOS

Each of the four units I reviewed has a program that alters Apple DOS 3.3 to allow it to use RAM as an emulated disk drive. Unlike CP/M, Pascal, and the Apple III's SOS, Apple's DOS 3.3 was not designed to allow for alternate drivers. Unfortunately, RAM DEs will not work with most copy-protected or modified software that does not use all the standard DOS conventions, commands, or entry points, or with software that must be booted to run. The Synetix and Legend emulation software places the DOS patches right under DOS and moves the file buffers down to protect them. The Axlon and Pion interface cards both have their own RAM space; the patches are located on the interface card and not in the Apple II main memory.

The Axlon DOS patch has an excellent feature: it can toggle (by means of a \$300 routine) between Axlon DOS and normal unpatched DOS. This routine also preserves all DOS data in the lower pages (0-3) of memory. The four systems patch a routine called the RWTS (read/write track/sector) to route calls through their own access routines. (Note: a DE could be set up to look exactly like a standard disk controller to the bus, but without the DOS modifications—involving timing loops—it would be no faster than a disk.)

In a sense, the Axlon and Pion DEs will be compatible with a few more programs than the others (for example, Magic Window II), but because they all change DOS by at least 2 bytes (a Jump--JMP--operand), any program that overwrites DOS with its own operating system will obliterate the patch no matter how small it is. The

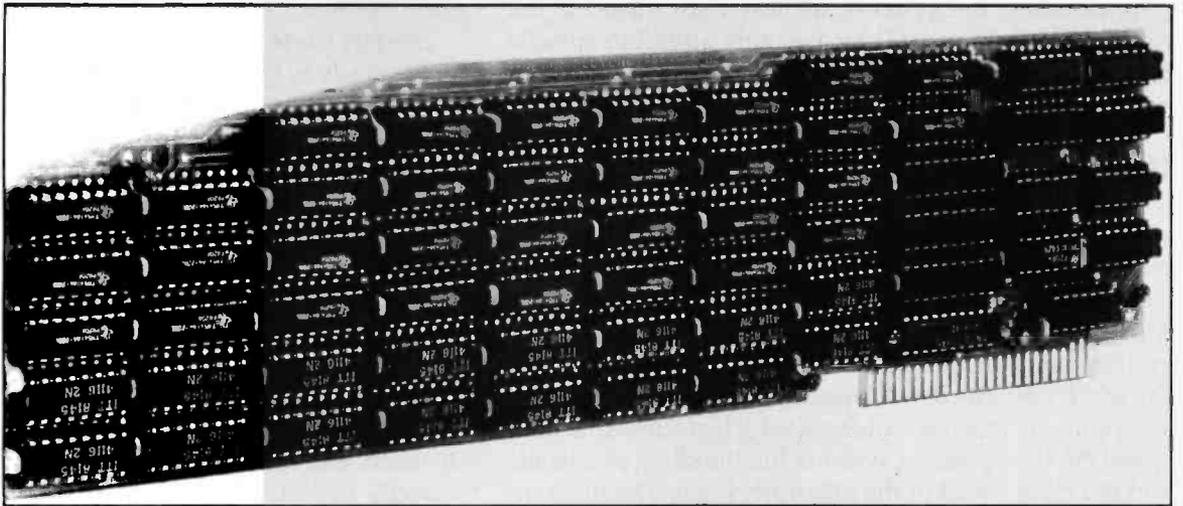


Photo 1: RAM disk emulators for the Apple. The units shown are, top to bottom, the Axlon Ramdisk 320, the Syntex 2202 Solid State Disk Emulator, and the Pion Interstellar Drive. Not shown is the Legend 128K DE Softdisk, which somewhat resembles the Syntex card.

Task	RAM Disk Emulator (seconds)	Disk (seconds)
BLOAD (34 sectors)	2.5	10
with Fastload	0.4	3
BSAVE (34 sectors)	3	15
LOAD (84 sectors)	6	21
with Fastload	0.7	7
SAVE (84 sectors)	7	34

Table 1: A comparison showing how quickly a RAM disk emulator can access data compared with a normal floppy disk under Apple DOS 3.3. Performance was also tested with a DOS speed-up program called Fastload/DOS.

Axlon DOS can, however, be reconnected easily (using the toggle) once you are back in normal DOS. This method may lend itself well to future interface developments.

In all cases, the systems are less than ideal for the canned-software user. They are more suited to specific user-written or user-modified applications or for use in development systems.

How Much Faster?

The access speed increases offered by all four units are almost exactly the same. All but the Legend are compatible with Microseeds' Fastload/DOS, a commercially available utility that speeds up DOS 3.3. The Legend has a feature that is functionally equivalent to Fastload/DOS built into its software. The units all work approximately the same way; the RAM is paged and accessed through a peripheral "window" address(es). The factors that limit speed are the operating system's file-handling overheads and the clock speed of the microprocessor. The file-handling overheads can be reduced by using a DOS speed-up program (such as Fastload/DOS) or by bypassing the file handler entirely. The 34-sector BLOAD routine takes 0.4 second and can be executed directly, using RWTS in a machine-language program, in under 0.2 second. The use of a speed-up card such as the Number Nine Booster card (a 6502C processor with a 3.6-MHz clock) can further increase the speed of data transfer. Table 1 shows a sample of the speed-ups under DOS 3.3. Speed-ups under all three operating systems range from 200 percent to over 5000 percent, depending on the application and on how you choose to compare things. Most operations, other than those involving DOS 3.3 text files, will be considerably (approximately 1000 percent) faster.

For DOS 3.3 text files, none of the four units offers a spectacular speed advantage over 5¼-inch disk drives. This is because of the DOS overheads used when handling text files. The Axlon software enhances text-file speed by loading groups of records into memory and accessing them there. However, this nongeneral solution to the problem requires rewriting user programs, and it will not work in many cases.

Pascal access times increased similarly with all four units. Syntex and Axlon configure the emulators as the root volume, allowing faster system access (filer, etc.) and compilations. Neither the Pion nor the Legend card can act as the root volume—a limitation. Pascal more readily allows for the attachment of nonstandard device drivers: all the systems will probably be more compatible with software and hardware under Pascal than with DOS 3.3. The Syntex Pascal software comes with an excellent utility (U.code) to transfer files to and from the Flashcard.

CP/M access times are also virtually identical. None of the units can use the emulator as the A: drive, so SUBMIT files cannot be tested for speed-up. In addition, the ATTACH programs associated with the systems cannot be used in SUBMIT files. When SUBMIT.COM is in effect, it changes vector table locations needed by the attach routines. The emulated drives cannot be formatted with FORMAT.COM, but they usually don't need explicit formatting (if they do, a quick utility is supplied). You should PIP your files to the DEs rather than using COPY.COM.

Despite these minor limitations, the CP/M user probably stands to gain the most from the DEs; they can be used with most commercial CP/M software with little or no incompatibility. For example, if you run a spelling-checker program on a large text file first with the 5¼-inch disk and then with a DE, the DE's usefulness is apparent. The ease with which CP/M can be reconfigured to accept I/O (input/output) code changes and new drivers to support custom I/O devices serves to highlight a weak point of the Apple DOS.

All four DEs can be accessed directly with the RWTS routine under DOS 3.3 in assembly/machine language for high-speed applications. This makes them especially useful and extremely fast for applications programmed directly in 6502 assembly code.

System Configurations

The Syntex system can emulate up to 12 drives (using six cards) under DOS 3.3, two large (560-block) drives (two cards) under Pascal, and four drives (two cards) under CP/M, with a suggested maximum of three to four cards with the Apple II Plus standard power supply. New CP/M software allows two cards to be configured as one large 576K-byte drive. In addition, utilities are included to segment and reconstruct large files for backup on the Apple 126K-byte floppy disks. The Syntex system also includes a routine to use its 294K-byte card under DOS 3.3 as one large 32-sector drive. This is the only system offering a large drive option under DOS 3.3.

The Axlon system can emulate up to 12 drives (six units) under DOS 3.3, six drives (three units) under Pascal, and one drive (one unit) under CP/M, with no limit to how many systems can be used. Each Axlon unit has its own power supply. The Axlon allows for using its extra (within the 320K-byte) RAM as an expansion from 35-track to 40-track emulation, with appropriate software patches.

CLEO makes the mainframe connection.




Your PC can do more. CLEO Software is the answer to your interfacing problems.

The communications features of the CLEO-3270 Software package allow your microprocessor to emulate a cluster of IBM terminal devices.

You don't even need to change software on your mainframe computer, because for all it knows, it's communicating with a 3271-12, 3275-12, or 3276-XX cluster. And the CLEO program will support multiple devices.

If your IBM mainframe doesn't support remote 3270 clusters, you need remote batch communications. CLEO-3780 Software is your answer.

For full details contact Phone 1, Inc., 461 North Mulford Road, Rockford, IL 61107; phone (815) 397-8110. Telex 703639



Standard Features-CLEO 3270

- Bisynchronous 3276-2 protocol to 9600 baud
- SDLC 3271-12 and 3275-12 protocol
- Up to eight line cluster activity
- Selectable control unit address
- User install program for various CRTs
- 3278 emulation for ASCII CRTs
- Available for CP/M™, MP/M™, MsDOS™, TurboDOS™, Unix™, and Xenix™
- 3276-12 protocol, coming soon

Standard Features-CLEO 3780

- Point-to-point and multipoint communications
- Available for CP/M™, MP/M™, MsDOS™, TurboDOS™, Unix™, and Xenix™.
- Supports transparent mode
- Coded in C language

CP/M is a Trademark of Digital Research, Inc.
MP/M is a Trademark of Digital Research, Inc.
MsDOS is a Trademark of Microsoft, Inc.

TurboDOS is a Trademark of Software 2000, Inc.
Unix is a Trademark of Bell Labs
Xenix is a Trademark of Microsoft, Inc.

Circle 294 on inquiry card.

CLEO

At a Glance

Name

Axlon Ramdisk 320

Type

External RAM disk emulator

Manufacturer

Axlon Inc.
1287 Lawrence Station Rd.
Sunnyvale, CA 94089
(408) 747-1900

Size

8½ by 6⅞ by 3¾ inches

Features

320K bytes of memory, own power supply and battery backup, comes with two database-manager programs

Hardware Needed

Apple II or III

Documentation

75-page manual

Options

UCSD Pascal driver: \$15

Price

\$999

The Legend unit can emulate four drives (four cards) under DOS 3.3, four drives (four cards) under CP/M, and six drives (six cards) under Pascal. Legend Industries Ltd. is currently working on emulations of larger drives under Pascal and CP/M.

The Pion system can emulate two drives (one unit) under DOS 3.3, two drives (one unit) under Pascal, and one drive (one unit) under CP/M. The Pion system, however, can be physically expanded up to 1 megabyte of RAM (extra available in 256K-byte increments) enabling emulation of up to eight drives (one unit) under DOS 3.3 (using optional mapping software) and very large drives under Pascal (up to 1768 blocks) and CP/M.

The four units include software for initializing the emulator system (installing the patches). The Pion system requires the DE to be formatted for each operating system; this is usually done only once, after the unit has been powered down, or for a change of operating system. The Axlon system uses a configuration utility that creates a boot program to carry out particular copy operations. The Syntex system has an installation utility that is user friendly, including a prompted copy routine. The Legend system has an installation utility that assigns an emulated drive number that can be other than the slot/drive numbers, to be used by DOS enhancement copy commands. The Legend DOS enhancements add two new commands directly to DOS 3.3: MOUNT and UPDATE. The command .M1,S6,D1 copies the contents of S6,D1 5¼-inch disks onto emulated drive 1; .U1,S6,D1 copies the contents of emulated drive 1 onto a disk in S6,D1. Under CP/M, all the systems use similar AT-TACH.COM files. Note that, because of SUBMIT's use

of the vector table under CP/M, some of the AT-TACH.COM files cannot be used in SUBMIT files for turnkey use. Under Pascal, all systems use similar drives that are appropriately configured and attached by the Pascal system after booting from the disk.

All of the units include software for configuring turnkey systems for initial loading and start-up.

Installation

The Axlon DE is an attractive, freestanding unit, the size, shape, and color of an Apple II Disk Drive, with a power cord and cable/interface card that installs in any Apple slot (1 through 7).

The Pion unit is also well packaged in a slightly larger metal case (to allow for RAM expansion), with an interface card that must be installed in slot 4. I have one criticism of the Pion: the power supply is a calculator type, on the plug end of the power cord, and it cannot be switched on and off. Because both the Axlon and the Pion RAM are external to the Apple, heat is not a problem.

The Legend is a compact card that installs inside the Apple in any slot. My Legend card required the removal of an Apple motherboard RAM chip and the installation of a refresh strap from card to motherboard, which may make the current version of this card incompatible with the IIe. Legend Industries Ltd. has now updated the product: the new version has its own refresh (no strap) and will work with both the IIe and the III in II emulation mode.

The Syntex is a large, tightly packed, cleanly laid out card that also installs in any Apple slot. Despite the fact that the RAM is inside the Apple, the low power con-

At a Glance

Name

Legend 128K DE Softdisk

Type

Memory card with disk-emulation software

Manufacturer

Legend Industries Ltd.
2220 Scott Lake Rd.
Pontiac, MI 48054
(313) 674-0953

Size

7¼-inch Apple expansion card

Features

128K bytes of memory, comes with several utility programs

Hardware Needed

Apple II or III

Documentation

98-page operating manual

Options

64K-byte version (\$327)

Price

\$599



If your personal computer doesn't tie into office automation maybe it doesn't belong in your office.

Unfortunately, with most personal computers, the information you get is limited to the information you put in.

But if your personal computer ties into office automation, there's no limit to how far you can go.

And quite simply, that's the difference between the Wang Professional Computer and almost every other personal computer on the market.


The Wang Professional Computer offers you excellent communications. It is so compatible it can work with the entire family of Wang office computers, as well as most mainframes.

There are other advantages, of course. Like the best selling word processing in the world. And the fastest data processing of any personal computer we've tested.

But the way we look at it, your office is filled with important information.

If you don't take advantage of it, you might as well leave our computer home with the rest.

For a demonstration of the Wang Professional Computer, call 1-800-225-9264. Or write to Wang Laboratories, Inc., Business Executive Center, One Industrial Avenue, Lowell, MA 01851.

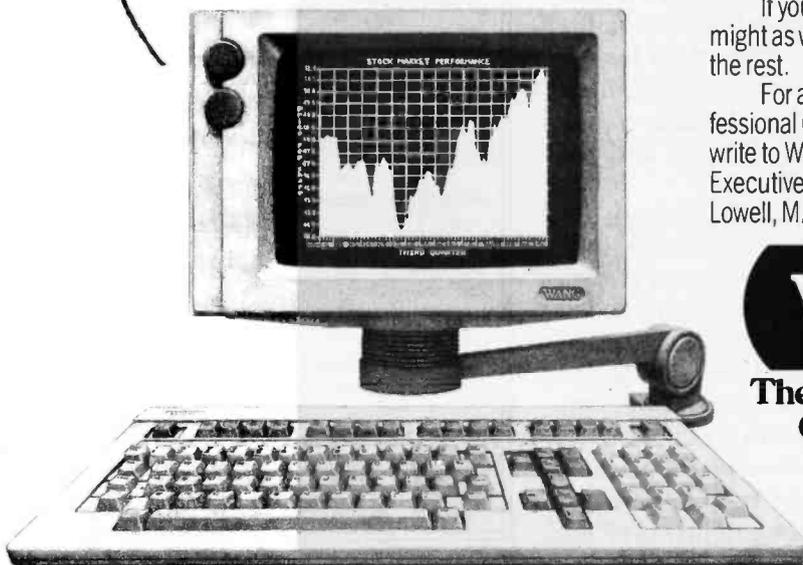

WANG

**The Office Automation
Computer People.**

BY4

© 1983 Wang Laboratories, Inc.

BYTE February 1984 323

At a Glance

Name

Pion Interstellar Drive

Type

External RAM disk emulator

Manufacturer

Pion Inc.
101R Walnut St.
Watertown, MA 02172
(617) 923-8009

Size

9 by 8½ by 4 inches

Features

256K bytes of memory, own power supply and battery backup

Hardware Needed

Interfaces available for several computers, including Apple II, S-100-based systems, TRS-80 Models II, III, and 4, Morrow, and IBM PC

Documentation

15-page manual

Options

Extra 256K-byte memory cards (\$595), up to 1 megabyte

Price

\$1095

sumption (approximately 150 mA) ensures that very little heat is generated.

All four DEs are compatible with a wide range of peripherals including language cards, printer cards, serial I/O cards, Z80 cards, 80-column cards, etc. Problems will arise with alternative storage devices that use the same parts of DOS for patching and with a peripheral card that has a routine in ROM (read-only memory) that makes an absolute reference to a DOS point that has been patched or changed.

The Axlon and Pion units are self-powered; each has its own power supply and battery backup. Without this backup system, any loss of power will mean loss of stored information. The drives can be left on all the time and will retain data. In addition, in case of power failure or brownout, the drives are battery backed-up for approximately three hours (Axlon) and one-half hour (Pion), with the battery under continual trickle charge when the power is on. I tested the feature and the claimed backup times are accurate.

The self-power feature accounts, in part, for price differences between the units. The potential DE user must assess his needs with regard to the importance of data retention after power down. The feature is not needed for every DE application; the devices can be reloaded easily with data on power-up. An ideal situation would be to have the entire computer system backed up; currently, if a power outage lasts longer than the batteries, the data is lost because it can't be backed up onto a disk.

The Axlon is the only unit to store the DOS image: it can be warm booted with the command PR#x, where

x is the slot number of the Axlon's interface. Because it is always powered independently from the Apple II, it can also be used as a cold-boot drive if placed in a slot numbered higher than the disk controller's slot. The ability to warm and cold boot from the Axlon gives it an advantage for certain uses. Most designers opt not to designate tracks on the emulated disks as system tracks for saving space or using it for data; in almost every case, the operating system tracks are already on the disk in the system.

Documentation and Software

The Synetix and Pion software are sparsely documented; a listing for direct access of the RAM in assembly code is included but is only briefly commented on. The package could be improved with source-code listings for the DOS patches.

The Axlon unit has well-annotated assembly-code listings of its programs, and its manual is well presented and relatively clear.

The Legend software is well documented and the software can be modified fairly easily (by a skilled assembly-language programmer).

In all cases, however, the manuals are not always clear enough, and they fail to cover aspects of use as well as problems due to software interactions with existing system conventions. All of the units come with hardware diagnostic routines that were tested by substituting known-defective RAM chips for good ones. The Synetix program is the easiest to use, but the card must be in a particular slot, an inconvenience in multicard systems.

At a Glance

Name

Flashcard (formerly Synetix 2202 SSD)

Type

RAM disk-emulator card for Apple II

Manufacturer

Synetix Micro Products
15050 N.E. 95th St.
Redmond, WA 98052
(800) 426-7412

Size

11 ½-inch Apple expansion card

Features

294K bytes of memory

Hardware Needed

Apple II

Documentation

30-page user's manual

Options

147K-byte card (Synetix 2201), Softech Microsystems' p-System operating system, Magicalc spreadsheet program from Artsci (\$70)

Price

With 294K bytes: \$529
With 147K bytes: \$349

Buy Hardware/Software at Wholesale, And Save On Software Rentals, As A NETWORK™ Member Only!

Save hundreds of dollars when you buy DIRECT from America's Number 1 Computer Buying Service at just 8% above DEALER WHOLESALE PRICES, plus shipping.

Members receive The Personal Computer NETWORK's Giant Catalog featuring thousands of products and the lowest prices on the widest selection of computer software and hardware in the nation!

RENT BEFORE YOU BUY — Members are eligible to join The NETWORK's Business and Game Software Rental Libraries for a much smaller fee than other software rental services. And The NETWORK's rental charges are far less — just 20%-25% of the Member WHOLESALE PRICE!

Join The NETWORK today for as low as \$8 for one year (or \$15 for two years) and receive all these exclusive, money-saving benefits:

- REAL BUYING CLOUT**—Buy at just 8% above DEALER WHOLESALE PRICES, plus shipping. (On credit card orders there is a 3% service charge.)
- CONVENIENT SHOP-AT-HOME CATALOG**
- KNOWLEDGEABLE SERVICE CONSULTANTS**
- FULLY INSURED FAST HOME DELIVERY**
- OPTIONAL BUSINESS SOFTWARE RENTAL LIBRARY**—Members join for just \$30 per year in addition to the basic membership fee. Rent business software at just 20%-25% of The NETWORK's low prices for a 7-day period (plus a 3-day grace period for return shipping). 100% of your rental fee applies towards purchase.
- OPTIONAL GAME SOFTWARE RENTAL LIBRARY**—Members join for just \$10 per year in addition to the basic membership fee. All the same conditions apply as for benefit five.
- SPECIAL SAVINGS BULLETINS**—Save even more on limited-quantity merchandise!
- DISCOUNT COMPUTER BOOK LIBRARY**—Save up to 50%!
- MEMBERSHIP SATISFACTION GUARANTEE**—If you are not satisfied, notify us within 30 days to receive a 100% money-back refund.
- PRODUCT SATISFACTION GUARANTEE**—If you are not satisfied with any hardware, return it within 15 days for a 100% money-back refund.

All items subject to availability. Prices subject to change without notice.

Copyright ©1983. PC NETWORK INC.

Circle 283 on inquiry card.

Low prices, fast home delivery and two software rental libraries are only the beginning! The NETWORK is your source for everything from memory chips to mainframes—and it's all just 8% above wholesale, plus shipping.

HARDWARE

Monitors (color and monochrome)
Printers
Complete Systems
Disk Drives (full/half height, add-on/add-in)
Multi-Function Boards
Graphics Boards
Modems
Local Area Networks
Memory Chips (all speeds available)
S-100 Components

SOFTWARE (rent or buy!)

Business	Scientific
Recreational	Data Bases
Compilers	Educational
Word Processors	Graphics
Utilities	CP/M-MS/DOS

SUPPLIES & ACCESSORIES

Blank Diskettes (all formats)
Paper Stock
Ribbons
Print Wheels
Cables
And More!

Choose hardware and software from hundreds of manufacturers, including:

- | | |
|--------------------|-----------------------|
| • Altos | • MicroPro |
| • Amdek | • Microsoft |
| • Appar | • Morrow |
| • AST | • Motorola |
| • Ashton-Tate | • NEC |
| • Atari | • Northstar |
| • CDC | • Okidata |
| • Coleco | • Peach Tree |
| • Columbia | • Princeton |
| • Commodore | • Quadram |
| • Corona | • Sanyo |
| • Cromemco | • Sierra On-Line |
| • DEC | • Software Publishing |
| • Digital Research | • Softword |
| • Eagle | • Tandon |
| • Epson | • Tecmar |
| • Franklin | • Texas Instruments |
| • Hayes | • Toshiba |
| • IBM | • Visicorp |
| • IUS | • Zenith |
| • Lotus | |

SAVE ON UPGRADES!

NETWORK SPECIAL

Disk Drive	Retail	Wholesale
Two Tandon TM 50-2 Half Height DS/DD	\$574/pair	\$350/pair*
64K Chips	\$11 each	\$5.10 ea.*

*NETWORK Members pay just 8% over the wholesale price, plus shipping.

SPECIAL V.I.P. MEMBERSHIPS

Available at \$15 per year or \$25 for two years.

V.I.P. Members receive additional benefits:

- BOTH SOFTWARE RENTAL LIBRARIES FOR \$35** in addition to the V.I.P. membership fee.
- EXTENDED 10-DAY SOFTWARE RENTAL PRIVILEGES** (plus 3 days for return shipping).
- ADVANCE NOTIFICATION OF SPECIAL SAVINGS BULLETINS.**

CALL TOLL FREE

1-800-621-S-A-V-E

In Illinois call (312) 372-4488

Your Membership Validation Number: B 616

You can validate your membership number and, if you wish, place your first money-saving order over the phone by using your VISA, MASTERCARD or AMERICAN EXPRESS. Our knowledgeable service consultants are on duty Mon-Fri 8 AM to 7 PM. Sat 9 AM to 5 PM CST.



Call now...Join the PC NETWORK and start saving today!

PC Network
180 N. Michigan Ave.
Chicago, IL 60601

www.americanradiohistory.com

THE NETWORK • MEMBERSHIP APPLICATION

YES! Please enroll me as a member in The NETWORK™ and rush my catalog featuring thousands of computer hardware and software products, all at just 8% above DEALER WHOLESALE PRICES. I will also receive all the other exclusive, money-saving services available to Members.

I am under no obligation to buy anything. My complete satisfaction is guaranteed.

Please check (✓) all boxes that apply:

Basic Membership

- One-year membership for \$8
 Two-year membership for \$15 (SAVE \$1)
 Business Software Rental Library for \$30 add'l. per year—members only

- Games Software Rental Library for \$10 add'l. per year—members only

Special V.I.P. Membership

616

- One-year membership for \$15
 Two-year membership for \$25 (SAVE \$5)
 BOTH Business and Game Software Rental Libraries for \$35 add'l. per year—V.I.P. members only

- Bill my credit card: VISA MasterCard American Express

Account Number: _____ Exp. Date: _____ mo. year

Check or money order enclosed for \$ _____

Name _____

Address _____ Apt. No. _____

City _____ State _____ ZIP _____

Telephone(_____) _____

My computer(s) is: IBM PC Apple II TRS-80

Atari Commodore Other _____

Signature ✓ _____

(Signature required to validate membership)

As for applications software, both the Synetix and Pion systems come without any. The Axlon unit, however, comes with two database systems, both documented, listed, and modifiable; a utility to enable the extra 40K bytes of memory the unit has; and a utility to manipulate certain text files faster. The Legend unit is a general-purpose RAM card; as such, the disk emulation itself is, in a sense, a utility. The Legend unit comes with a complete documented set of additional utilities: Ampercard—software that enables the user to easily use the card to store and access 128K bytes of strings, arrays, and variables under BASIC; Memory Master—software that relocates DOS onto the card and out of Apple II memory and simultaneously makes available 3.2 and 3.3; Slide Select—software for rapid access of image files; Firmware Selector—software allowing the user to move a firmware Integer or Applesoft card out of slot 0; and Visicalc-Expand—to enable Visicalc users to manipulate larger (up to 176K-byte) models.

A Balance Sheet

Axlon pluses: the unit is always powered and backed up by battery, and it does not need reloading. The operating-system image is stored for cold and warm booting. It has the least amount of in-Apple memory patching due to RAM space on interface. It can toggle between Axlon DOS and normal DOS. It has good documentation (currently being revised and expanded) and a complete software package (also being expanded to include more CP/M and Pascal utilities). Minuses: it takes up physical space outside of the Apple and is expensive.

Legend pluses: the Legend is a general-purpose RAM card that can be used in many applications other than disk emulation, including use with Visicalc. It has DOS enhancements with new commands, MOUNT and UPDATE. It has excellent commented listings of software to allow for modifications and an excellent package of memory-management utilities. Minuses: it has the smallest disk-emulation capacity per card and total drives, and it has one technical problem—if a system Reset occurs during disk (emulator) access, the system will hang up, requiring a cold boot (and causing the loss of RAM-card data). [Editor's Note: Legend Industries has recently released another version of its memory card, called S-Card. This card can hold from 64K bytes to 256K bytes of memory. And, when 256K-bit chips become available, the upper limit will be 1 megabyte. The price for the 64K-byte version is \$399; 128K-byte, \$524; and 256K-byte, \$724. . . . R. M.]

Pion pluses: the unit is always powered and battery backed-up, and it does not need reloading. It has the least amount of in-Apple memory patching due to RAM space on its interface. Its RAM is expandable to 1 megabyte. It has good documentation, and hardware error detection is provided to prevent faulty data. The Pion drive is the only system I evaluated that is not designed exclusively for the Apple; it can run (using different host interfaces) on Apple, S100/IEEE 696, TRS-80 II/III, IBM, SS50, Motorola, and with a universal Z80-interface Osborne, Intertec, Superbrain, Morrow, etc. It will soon

be expanded to cover North Star, Victor 9000, and Dec Q bus as well. Operating systems supported include Apple (DOS 3.3, CP/M, and Pascal), CP/M 2.2 (S100), TRSDOS, LDOS, FLEX, OS-9, RT-11, and North Star DOS, soon to include CP/M 3.X, CP/M-86, concurrent CP/M, MS-DOS, TURBODOS, MP/M, and CDOS. Because of its extensive range and its capacity to expand to 1 megabyte, this device will be of interest to many users outside the Apple market. Minuses: it takes up physical space outside of Apple, its power supply is unwieldy, and it is expensive.

Synetix pluses: the Flashcard performs functionally as well as any system on the market, but at a much lower cost. It is well developed in all operating system environments. It has well-developed CP/M software and 32-sector operation in DOS 3.3. It takes up the least amount of space and is the easiest unit to install or move around. Minuses: it has inadequate documentation and not enough utility and applications software.

Conclusions

All these units perform well and are reliable. Not once during many weeks of moderate-to-heavy use did any of the units (once debugged) fail to operate correctly. They all offer about the same speed advantages and the same software incompatibility disadvantages. Axlon and Pion have a power/backup hardware advantage, but at a price. Synetix offers equivalent performance with fewer features at a lower price. Legend offers a general-purpose RAM board whose features and uses extend well beyond disk emulation.

The RAM disk emulators that I reviewed will give users a definite speed advantage over mechanical drives. Another advantage is the possibility of using DEs in environments hostile to the moving parts of mechanical drives. (One manufacturer cited systems used at a grain elevator as an example. The grain dust in the air would hopelessly jam up a disk drive after prolonged use.) I have found the DEs useful; in fact, I wrote this article with the help of one. My programs can be edited and compiled faster than they were without the DEs, my database runs and sorts much faster, and I have developed full-frame graphics animation programs that run at about seven full frames per second—no easy task on an Apple.

I use CP/M on my Apple almost exclusively these days. It is under CP/M that all the DEs are most compatible and, therefore, most useful.

There is no one "best" DE: each has features that make it suitable for different applications. There are differences in software, documentation, and ease of use that will be important when you evaluate a potential purchase. ■

Michael W. Gilbert (73 Spaulding St., Amherst, MA 01002) is an independent microcomputer consultant, electronic music composer, and technical writer. His first contact with RAM disk emulation was as a consultant to Synetix Micro Products writing graphics demo software. His current area of computing interest is graphic art.

**ANNOUNCING
THE BIGGEST
NEWS SINCE
HARDWARE
AND
SOFTWARE...**

HELPWARE™



HELPWARE™



HELPWARE™ Helps You Put It All Together.

What makes HELPWARE™ different than other computer-related books? Clear, concise writing. Careful editing. And our commitment to publishing only those books that help you get the job done. Faster. Easier. More productively.

Buy Your Micro A Page At A Time.

Before you invest your hard-earned money in hardware or software, invest in HELPWARE.

Read about the product you want to purchase and then decide if it's right for you. Then, after you've made your purchase, choose the HELPWARE user guide, programming or technical reference and assembly language guide that will help you get the most out of your computer.

If You Love The Book, Wait Till You See The Screenplay.

Each book we publish, including our handy DiskGuide™ Series of compact computer



reference guides, clearly explains its subject matter so that you'll be able to solve your problem quickly and easily, regardless of your level of experience.

Before You Sign On The Dotted Line, Cut Ours.

To get your copy of our full line catalog, just cut out the coupon and send it to us, or call us TOLL-FREE at: 800-227-2895, in California, 800-772-4077. You'll see page after page of worthwhile titles. Each one tested and

re-tested to make sure that it meets our high standards. After all, if they were just books, they wouldn't be HELPWARE.

Osborne McGraw-Hill

TURN TO US FOR HELPWARE.

TM — HELPWARE and DISKGUIDE are Trademarks of Osborne/McGraw-Hill.

Circle 281 on inquiry card.

I'd like a HELPWARE catalog. Dept. H1

Name _____

Street _____

City _____

State _____ Zip _____

Mail to: Osborne/McGraw-Hill
2600 Tenth Street
Berkeley, CA 94710





LAST NIGHT, 39 MUSICIANS HAD A COMPU SERVE CONFERENCE, SO DID 31 M.D.S, 49 SPORTS FANS AND 640 APPLE POLISHERS, AND NO ONE HAD TO LEAVE HOME.

The Electronic Forum, Cheaper than Long Distance and Much More Rewarding.

Every night on the CompuServe Information Service, professional and social groups discuss a wide range of subjects. From what's new in medical technology to what's nouvelle in continental cuisine.

And every day more computer owners who share a common interest are discovering this exciting new way to exchange ideas and even transfer hard copy data.

And besides electronic forums, they leave messages for each other on our national bulletin board, "talk" informally on our CB simulator, and communicate via CompuServe's electronic mail.

But best of all, in most cases, CompuServe subscribers get all of these state of the art communications options, plus a world of on-line information and entertainment for the cost of a local phone call plus connect time.

To become part of this flexible communications network, all you

need is a computer, a modem and CompuServe. CompuServe connects with almost any personal computer, terminal, or communicating word processor.

To receive an illustrated guide to CompuServe and learn how you can subscribe, contact or call:

CompuServe

Consumer Information Service, P.O. Box 20212
5000 Arlington Centre Blvd., Columbus, OH 43220
800-848-8199
In Ohio call 614-457-0802

An H&R Block Company

IBM/Apple Communication

Sending text files between Apples and IBM PCs is easy with these simple programs

by Robert Jones

Perhaps there are some BASIC programs or files on an Apple II Plus or IIe computer that you would like to use on an IBM PC or XT without having to type them in all over again. Or maybe there is an IBM file that you would like to massage with some Apple software. The IBM PC and Apple versions of BASIC are similar enough that, with only minor modification, many programs written for the Apple II will run on the IBM PC and vice versa. In this article I will outline a method and list programs that will allow you to transfer BASIC programs or data files between IBMs and Apples quickly and easily.

These programs assume that each machine has a serial I/O (input/output) board and that a "cross-over cable" (sometimes called a "modem eliminator") links the serial boards together. A cross-over cable has connectors on each end that join pin #2 of one serial connector with pin #3 of the other machine's serial connector. This crossover of the data lines enables the data output from one machine to become the input to the other. Cross-over cables are available from computer dealers at a nominal price.

These programs also assume that disk drives (as opposed to cassette recorders) are used on each machine and that a reasonably standard DOS (disk operating system) is being used on each system. The programs run on the IBM PC and Apple II Plus and

will probably run on the IBM XT and Apple IIe as well, because no unique features of these models are used.

A Brief Overview of the Method

The user controls the operation of this data transfer from the keyboard of the receiving machine. This control is assumed once the sending machine's program begins to run. The user runs the receiving program, supplying, when asked, the name of the file to be sent from the sending

them for the PC's communications buffer.

Apple-to-IBM Example

Suppose that you have a text file on your Apple but your IBM PC has some software that plots data for you. The following instructions will send your text file from the Apple II to the IBM PC. Listing 1 is the APTOIBM sending program. Listing 2 is the APTOIBM receiving program. Before running these programs, be sure that the serial-card slot number for the Apple is correctly noted in the Apple II program (that is, set SLOT equal to the slot number if it is other than slot #5). Check that your IBM PC serial board is configured as COM1: as specified in the OPEN statement. COM2: can be used in the program by modifying the OPEN statement. Make sure that there is sufficient disk space in the receiving machine.

Run the program on the (sender) Apple II first. The message "Waiting for instructions from the IBM..." should appear. Be sure that the file to be transmitted is on the disk in one of the Apple drives. Now run the IBM (receiver) program. When asked for the Apple filename, enter the name as it appears in the catalog of that disk, including the drive specification, if needed (e.g., "MYFILE,D2"). You will also be asked for the filename under which to save this file on the IBM PC. Be sure to give it a valid

Their versions of BASIC are similar enough that, with minor modifications, many programs written for the Apple II will run on the IBM PC and vice versa.

machine and the name of the file under which to save it on the receiving machine. The requested file is loaded into a string array on the sending machine, sent line by line to the receiving machine's comparable string array, then the string array is saved to a file on the receiving machine's disk drive. These programs use a 4800-bps (bits per second) rate and a format of 7 data bits, 1 stop bit, and even parity. Set the parameters on the Apple serial card and use the IBM program's OPEN statement to fix

filename specification (e.g., "B:MYFILE.DAT"). After pressing the Return key, you should see the Apple's drive light go on as it searches for the requested file. As the file is being transferred, it will be listed on the Apple's screen. When transmission is completed, the lengths of the string arrays (containing the "lines" of the files) in both machines will be compared. If the lengths match, then the IBM will save the file. If the lengths do not match, then you will be asked to either save the file or abort it. Over 90 percent of the time, the lengths will match. If they do not, there may have been a leading or trailing blank space in one or more of the lines or control characters within the text. I would suggest saving the transferred file anyway, then later searching for the cause of the problem. I have not yet had a discrepancy with a Visicalc file nor with a text file containing only alphanumeric characters (such as those written with an Applesoft WRITE statement). The files created by word-processing programs are another story, however. These are best saved (despite any length discrepancies) and edited later.

If the file to be transferred is not found on the sending machine, then the user is informed and asked to enter the correct filename. The program may be halted by pressing the Return key instead of specifying a filename. If the requested file can't be found, check the drive specification and the spelling of the filename and run both programs again.

If the file contains more than the 2000 lines for which X\$() is dimensioned in all programs, then dimension the X\$() arrays in both programs to a larger size. A dimensioned size of 2000 "lines" is probably more than adequate for a file that fits into 25 to 35K bytes of available memory. If the file is too large to fit into the memory available, you will receive an OUT OF MEMORY message on the sending machine, and some major modification of both programs may be needed. Alternatively, you could break the file into smaller segments, transmit the segments separately, then rejoin them.

Listing 1: The Apple to IBM sender program.

```

100 REM APTOIBM SENDING PROGRAM FOR APPLE -- LISTING #1
110 REM BY ROBERT JONES AUGUST 3, 1983
120 :
130 HOME
140 :
150 REM SOME DEFINITIONS
160 DIM X$(2000)
170 SLOT = 5: REM SERIAL PORT SLOT
180 D$ = CHR$(4)
190 EF$ = "XX"
200 OE = 1
210 :
220 :
230 LI = 768: REM LINE INPUT ROUTINE
240 FOR I = 768 TO 812: READ X: POKE I,X: NEXT I
250 :
260 REM GET NAME FROM IBM
270 GOSUB 800
280 PRINT D$;"IN#";SLOT: INPUT FA$: PRINT D$;"IN#0"
290 PRINT
300 IF FA$ = "" THEN 760
310 :
320 REM READ APPLE FILE FROM DISK
330 PRINT D$;"OPEN ";FA$
340 PRINT D$;"READ ";FA$
350 ONERR GOTO 380
360 I = 0
370 I = I + OE: CALL LI,X$(I): GOTO 370
380 PRINT D$;"CLOSE": POKE 216,0: ER = PEEK(222)
390 :
400 IF PEEK(222) = 5 THEN 490: REM END OF FILE FOUND
410 :
420 REM ERROR REPORT
430 PRINT D$;"PR#";SLOT: PRINT "ERROR": PRINT D$;"PR#0"
440 IF ER = 107 THEN PRINT "X$( ) IS TOO SMALL FOR FILE."
450 IF ER = 77 THEN PRINT "FILE TOO LARGE FOR AVAILABLE MEMORY."
460 IF ER = 176 THEN ONERR GOTO 380: GOTO 370: REM LINE TOO LONG
470 GOTO 770
480 :
490 N = I - 1
500 :
510 REM N<1 MEANS FILE NOT FOUND.
520 IF N > 0 THEN 540
530 PRINT D$;"PR#";SLOT: PRINT "NF": PRINT D$;"PR#0": GOTO 270: REM NF
540 :
550 REM SEND FILE TO IBM
560 PRINT D$;"PR#";SLOT
570 PRINT "FOUND"
580 AC = 0
590 FOR I = 1 TO N
600 PRINT X$(I)
610 AC = AC + LEN(X$(I)): REM APPLE CHECKSUM
620 NEXT I
630 :
640 REM SEND END OF FILE FLAG TO IBM
650 PRINT EF$
660 :
670 REM SEND CHECKSUM FROM APPLE
680 PRINT AC
690 PRINT D$;"PR#0"
700 :
710 PRINT : PRINT "WAITING FOR ANSWER FROM IBM. . ."
720 PRINT D$;"IN#";SLOT: INPUT AN$: PRINT D$;"IN#0"
730 IF AN$ = "MORE" THEN 270
740 :
750 REM FINISH UP
760 PRINT : PRINT "NORMAL COMPLETION."
770 END
780 :
790 REM SUBROUTINE FOR HEADING
800 HOME : HTAB 10: PRINT "APPLE TO IBM SENDING PROGRAM": PRINT
810 PRINT "WAITING FOR FILE NAME FROM IBM. . .": PRINT
820 RETURN
830 :
840 REM LINE INPUT AT 768 - 812 (CALL 768, ANY$)
850 DATA 32,190,222,32,227,223,162,0,32,117,253,134,253,32,57,213,165
860 DATA 253,32,82,228,162,0,160,2,32,226,229,160,0,165,253,145
870 DATA 131,200,165,111,145,131,200,165,112,145,131,96

```

The FILE NOT FOUND, SUBSCRIPT OUT OF RANGE, and OUT OF MEMORY errors are the only major problems I have encountered in the six months I have been using these programs. However, I am sure that other errors could be encountered—there is always at least one more bug.

IBM-to-Apple Example

To send a file from an IBM PC to an Apple, see listings 3 and 4. Listing 3 is the IBMTOAP sending program. Listing 4 is the IBMTOAP receiving program. Run (first) the sending program on the IBM PC; then run the receiving program on the Apple. The operation is analogous to that of

Text continued on page 338

COMPUTER WAREHOUSE

CALL TOLL FREE **1-800-528-1054**

QUADRAM

Quadlink	\$449
Quadboard 64K	\$249
Quadboard 256K	\$389
Quadboard II 64K	\$249
Quadboard II 256K	\$389
Microfazer (ME16) 16K	\$129
Microfazer (ME32) 32K	\$149
Microfazer (MSS16) 16K	\$149
Microfazer (MSS32) 32K	\$179

PRINTERS

C-Itoh

F-10-Parallel or Serial	\$935
55 CPS Serial or Parallel	\$1319
8510 Parallel (Prowriter)	\$339
8510SP (Prowriter SP)	\$559

Computer International

Daisywriter 2000 w/48K	\$999
------------------------------	-------

Comrex

CR-2	\$449
------------	-------

Datasouth

DS180	\$1155
-------------	--------

Diablo

620	\$850
630 API	\$1699
630 ECS/IBM	\$2075
S-11	\$559
P-11	\$559

Inrunner

Riteman	\$329
---------------	-------

IDS

Microprism 480	\$480
Prism 132	\$1310
Prism 132 Color	\$1500

Juki

6100	Call
------------	------

Epson

All models	Call
------------------	------

NEC

PC-8023A	\$385
PC-8025	\$669
3510	\$1365
3550	\$1710
7710	\$1900
2010	\$785
2015	\$785
2050	\$910

Okidata

82A	Call
83A	Call
84P	Call
84S	Call
92	Call
93	Call
2350P	Call
2410P	Call

Olivetti

PRAXIS 41 (w/interface)	\$539
2300 INK JET	\$319

Panasonic

1090	\$299
------------	-------

Qume

11/40 w/interface	\$1369
11/55 w/interface	\$1569

Silver Reed

EXPS50P	\$579
EXPS50S	\$610
EXPS50	\$389

Star Micronics

Gemini-10X	Call
Gemini-15X	Call
Delta 10	Call

Tally

MT 180L w/Tractors	Call
MT 180L w/Tractors	Call
Spirit 80	Call

Toshiba

P1350 Serial or Parallel	\$1445
--------------------------------	--------

Transtar

120P	\$449
120S	\$489
130P	\$669
130S	\$709
140S	\$1179
7315	\$449

SPECIAL OF THE MONTH SANYO*EPSON SYSTEMS

DUAL DRIVE SYSTEM \$1495

SANYO MBC-555 • SANYO CRT-36
HI-RES GREEN MONITOR

EPSON RX-80 WordStar • CalcStar

• Mailmerge • InfoStar • Spell Star

• Easywriter • MS-DOS • Sanyo Basic

Above with Sanyo CRT-70

Color Monitor \$1939

SINGLE DRIVE SYSTEM \$1175

SANYO MBC-550 • SANYO
CRT-36 HI-RES GREEN

MONITOR • EPSON RX-80

WordStar • CalcStar • Easywriter

• MS-DOS • Sanyo Basic

Above with Sanyo CRT-70

Color Monitor \$1629

VIDEO TERMINALS

ADDS

A-1 Green	\$480
A-2 Green	\$490
Viewpoint 80	\$619

Altos

Smart II	Call
----------------	------

Hazeltine

Esprit I	\$485
Esprit II	\$540
Esprit III	\$735

Qume

QVT 102 Green	\$535
QVT 102 Amber	\$550
QVT 103 Green	\$840
QVT 103 Amber	\$850

Televideo

910+	\$539
914	\$539
924	\$669
925	\$689
950	\$889
970	\$969

Wyse

Wyse 50	\$489
Wyse 100	\$680
Wyse 300	\$1020

Visual

Visual 50 Green	\$619
Visual 55 Green	\$709

Zenith

Z-29	\$629
------------	-------

MODEMS

Hayes

Smartmodem	\$199
Smartmodem 1200	\$485
Smartmodem 1200B	\$430
Micromodem IIe	\$235

MONITORS

Amdek

Video 300	\$130
Video 300A	\$145
310A	\$160
Color I	\$270
Color I Plus	\$275

BMC

12" Green	\$85
13" Color	\$210

Princeton Graphic

HX-12	\$499
-------------	-------

Taxan

12" Amber	\$125
-----------------	-------

Zenith

12" Green Screen	\$95
12" Amber Screen	\$120

DISK DRIVES

Rana

Elite 1	\$245
Elite 2	\$380
Elite 3	\$490
Controller (w/Drive only)	\$75
1000 (For Atari)	\$269

TRAK

Pi-1	\$199
ATD-2	\$375

DISKETTES

Maxell

MD-1 (Qty. 100)	\$230
-----------------------	-------

Scotch

744-0 (Qty. 100)	\$200
------------------------	-------

Elephant

S/S S/D (Qty. 100)	\$155
--------------------------	-------

COMPUTERS

Altos

Series 5-80-2	\$1949
5-80-10 W/M/PM	\$3525
5-86-10	Call

Columbia

.....	Call
-------	------

Corona

.....	Call
-------	------

Eagle

PC-E	\$1775
PC-1	\$2645
PC-2	\$3075
PC-XL	\$3955
1620	\$3955
1630	\$5625
1640	\$7225

Hyperion

Single Drive System	\$2325
Dual Drive System	\$2665

NEC

PC-8201A CPU	\$589
PC-8206A 32K Ram	\$289
PC-8221A Thermal Printer	\$129
PC-8261A Recorder	\$89
PC-8201A-90 Battery Pack	\$15

Northstar

Advantage	\$2160
Advantage w/5MB	\$3345
Advantage w/15MB	\$4315

Pied Piper System

Communicator I Portable, Z-80, 64K Ram, Full sized keyboard, Sirmine 5X Disk Drive with 1M Byte of storage, Monitor output, Perfect Word, Perfect Calc, Perfect Speller, Perfect Filer, CPM, 90-day nationwide warranty, BMC Green Monitor, Tilt & Swivel Stand, Carrying Case \$919

Sanyo

MBC-550 System	\$1175
MBC-555 System	\$1495

Televideo Systems

802 H	\$4210
803	\$1795
1603	\$2150
806/20	\$4775
800 A (user station)	\$999
Teleport	Call

Order Line: 1-800-528-1054

Order Processing & Other Information: 602-954-6109




2222 E. Indian School Rd.
Phoenix, Arizona 85016

Store Hours: Tue-Fri 10-5:30 Saturday 9-1
Order Line Hours: Mon-Fri 10-5:30 Saturday 9-1



Prices reflect 3% to 5% cash discount. Product shipped in factory cartons with manufacturer's warranty. Please add \$8.00 per order for shipping. Prices & availability subject to change without notice. Send cashier's check or money order...all other checks will delay shipping two weeks.

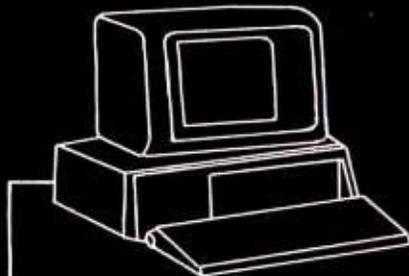

IBM-PC/XT or PC compatible
IEEE-488 INTERFACE BOARD



- Implements the entire IEEE-488 standard - system controller or device, transfer commands and data, perform serial and parallel polling.

- A resident firmware interpreter accepts Tektronix Standard Codes and Formats, IEEE-488 command mnemonics, and any ASCII string or code. The interpreter routines may be called from assembly language, BASIC, Pascal, and other languages.

- Supports the PrtSc (print screen) key, and all BASIC print statements for IEEE-488 printers.

- Small size - see BYTE 11/83 p.314

- Uses only 16 bytes of RAM - leaving the entire 640K memory address space open.

- A 116 page Reference Manual provides a tutorial and programming examples for digitizing, interactive bus control, bus diagnostics, and many other applications.

- \$395 complete. There are no extra software or cabling charges.

MasterCard or Visa telephone orders accepted.



CAPITAL EQUIPMENT CORP.

101 Evergreen Ave., Burlington, MA 01801

Call (617) 273-1818

IBM is a trademark of International Business Machines Corp.

Listing 2: The Apple to IBM receiver program.

```

100 REM APTOIBM RECEIVING PROGRAM FOR IBM -- LISTING #2
110 REM BY ROBERT JONES AUGUST 3, 1983
120 :
130 REM SOME DEFINITIONS
140 DIM X$(2000)
150 EF$ = "XX": REM END-OF-FILE FLAG
160 ONE = 1
170 :
180 WIDTH 40
190 ON ERROR GOTO 710
200 OPEN "COM1:4800,E,7,1" AS #1 : REM SERIAL PORT
210 :
220 CLS: LOCATE 1,7: PRINT "APPLE TO IBM TRANSFER PROGRAM": PRINT: PRINT
230 PRINT "BE SURE THAT THE APPLE PROGRAM"
240 PRINT "IS RUNNING BEFORE YOU CONTINUE!": PRINT
250 INPUT "APPLE FILE NAME ";FA$
260 IF FA$ = "" THEN PRINT #1,FA$ : GOTO 660
270 INPUT "IBM FILE NAME ";FI$
280 PRINT
290 IF FI$ = "" THEN FI$ = FA$
300 :
310 PRINT #1,FA$: REM TELL APPLE THE FILE TO FIND
320 FOR J = 1 TO 750:NEXT J
330 INPUT #1, NF$: REM SEE IF APPLE HAS FOUND IT
340 IF NF$ = "NF" THEN PRINT "FILE NOT FOUND...REENTER NAME": GOTO 250
350 IF NF$ = "FOUND" THEN GOTO 390
360 GOTO 660: REM ANY OTHER RESPONSE FROM APPLE
370 :
380 REM READ FILE FROM APPLE
390 PRINT: PRINT "READING FILE FROM APPLE . . .":PRINT
400 I = 0: REM INITIALIZE COUNTER
410 I = I + ONE: LINE INPUT #ONE, X$(I) : IF X$(I) <> EF$ THEN 410
420 INPUT # ONE, AC: REM APPLE'S CHECKSUM
430 N = I - 1: REM DROP THE END-OF-FILE SIGNAL FROM THE LIST
440 :
450 REM COMPUTE LENGTH FOR CHECKSUM COMPARISON
460 PRINT "NUMBER OF LINES: ";N
470 PRINT
480 PRINT "APPLE LENGTH:",AC
490 PRINT "IBM LENGTH :";
500 IC = 0: FOR I = 1 TO N: IC = IC + LEN(X$(I)): NEXT I
510 PRINT IC
520 IF IC= AC THEN 560: REM IF CHECKSUMS MATCH
530 INPUT "CHECKSUM ERROR, CONTINUE? ";CN$:IF CN$ <"Y" THEN 650
540 :
550 REM SAVE FILE TO I.B.M. DISK
560 OPEN FI$ FOR OUTPUT AS #2
570 FOR I = 1 TO N: PRINT #2, X$(I): NEXT I: CLOSE #2
580 :
590 REM ANOTHER FILE?
600 PRINT: PRINT "DO YOU WANT ANOTHER FILE ";: INPUT AN$
610 IF AN$ < "Y" THEN GOTO 650
620 PRINT #1, "MORE": GOTO 220
630 :
640 REM FINISH UP
650 PRINT #1, "NO"
660 CLOSE #1
670 PRINT: PRINT "NORMAL COMPLETION"
680 END
690 :
700 REM ERROR HANDLER
710 IF ERR = 24 THEN RESUME: REM AVOID TIMEOUT
720 PRINT "STOPPED BY ERROR NUMBER";ERR;" IN LINE ";ERL
730 CLOSE #1
740 STOP

```

Listing 3: The IBM to Apple sender program.

```


100 REM IBMTDAP SENDING PROGRAM FOR IBM -- LISTING #3
110 REM BY Robert Jones AUGUST 3,1983
120 :
130 REM SOME DEFINITIONS
140 DIM X$(2000)
150 EF$ = "XX": REM END OF FILE FLAG
160 DLY = 500: SHDLY = 50 : REM DELAY BETWEEN LINES AND AFTER 40 CHARS.
170 ONE = 1
180 :
190 WIDTH 40: GOSUB 760
200 ON ERROR GOTO 800
210 OPEN "COM1:4800,E,7,1" AS #1: REM SERIAL PORT
220 :
230 REM GET FILE NAME FROM APPLE
240 INPUT #1,FI$
250 IF FI$ = "" THEN GOTO 680
260 OPEN FI$ FOR INPUT AS #2
270 :
280 REM SEND FILE TO APPLE
290 PRINT #1, "FOUND"
300 :
310 REM READ FILE FROM I.B.M. DISK

```

Listing 3 continued on page 336


HIGH PERFORMANCE

NOW AVAILABLE IN A THREE-SPEED

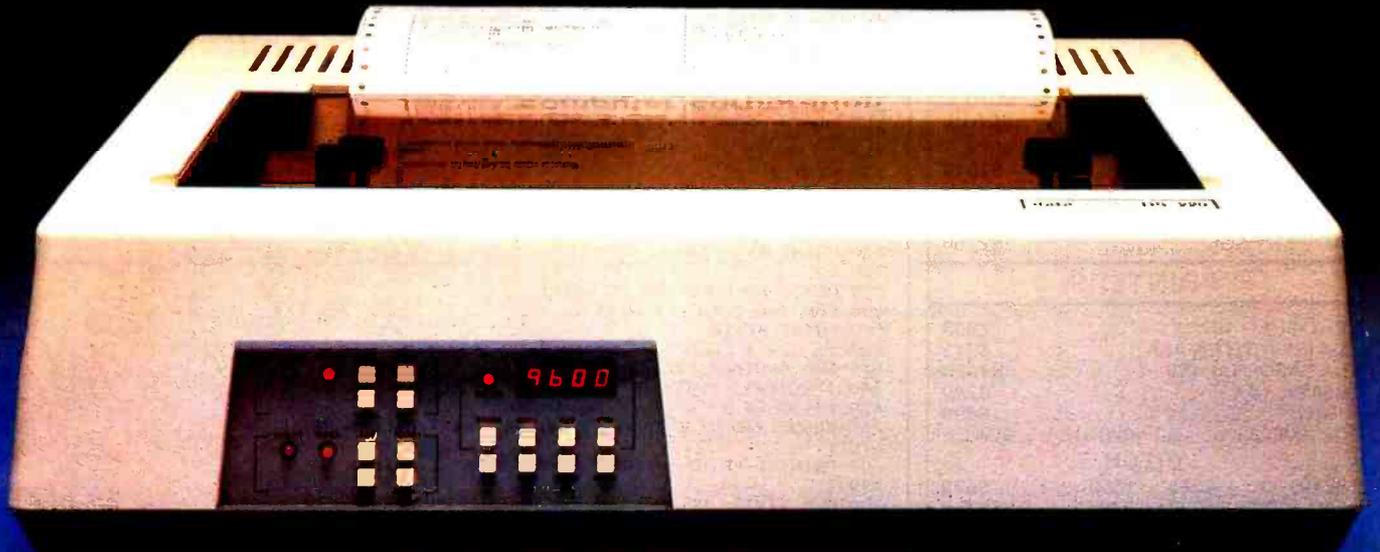

SPEED

Class

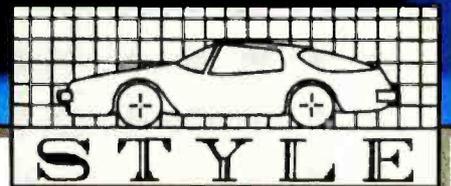

INTRODUCING THE NEW DS 220 MULTI-MODE MATRIX PRINTER

First there was the Datasouth DS180. The original high-performance printer. The printer that raised the standards of on-the-job performance to new heights. A tough act to follow.

And now, following in the same tradition, is the new Datasouth DS220. State-of-the-art performance, taken to higher levels. In a new 3-speed multimode form. Ready to run data, near letter quality and graphics output—in a single printer.

At data speed, the Datasouth DS220 leaves competitors in the dust. By using high speed tabbing to zip over blank spaces and true logic seeking to print the next available

character, the Datasouth DS220 charges through printed copy at speeds rivaling more expensive line printers.

At 40 CPS NLQ speed, the Datasouth DS220 creates near letter quality output with the kind of class that might make you wonder if it was produced by a daisy wheel printer. With its fine tuned 18 x 48 dot matrix, multiple fonts are produced with the precise clarity required for word processing applications.

And for graphics, the Datasouth DS220 adds high performance style to popular microcomputer applications programs through high resolution dot

addressable output. Sharp new details emerge from business charts and graphs, and engineering drawings.

And those are just its printing capabilities. Its fully instrumented dashboard allows push button programming of up to fifty features for forms control, communications and print style selection.

Best of all, the Datasouth DS220 costs much less than you might expect for a high performance three speed. Go to your nearest showroom and run a Datasouth DS220 through the gears. See how little it costs to own three high performance printers in one high performance package.

datasouth

H I G H P E R F O R M A N C E M A T R I X P R I N T E R S

AVAILABLE NATIONWIDE
THROUGH OUR NETWORK OF
SALES AND SERVICE DISTRIBUTORS

Datasouth Computer Corporation
Box 240947 · Charlotte, NC 28224
704/523-8500 · Telex 6843018 DASOU UW

FREE SHIPPING

MAIL ORDER ONLY

CALL FREE
1-800-841-2748

COMPUTERS

ALTOS 580-10	\$2945
ALTOS 586-10	\$4600
ATARI	\$CALL
APPLE LOOK-A-LIKE	\$CALL
PIED/PIER (PORTABLE)	\$CALL
SANYO 550-555	\$CALL

TELEVIDEO

803	\$1769	1603	\$2019
PORTABLE	\$CALL

NORTHSTAR

ADVANTAGE	\$2150
-----------	-------	--------

PRINTERS

BROTHER HRI	\$699
DAISYWRITER 48K	\$975
DATASOUTH 180	\$1095
GEMNI 10X	\$280
JUKI	\$499
OKIDATA (all models)	\$CALL

CITOH

8510	\$345	1550	\$599
F10-40C PS	\$1050		F1055	\$1399

DIABLO

620	\$860	630	\$1699
-----	-------	-------	-----	-------	--------

NEC

3550	\$1699	8025	\$659
7710	\$1849	2030	\$799

TERMINALS

ALTOS II	\$759
TELEVIDEO 914	\$540
TELEVIDEO 924	\$670
TELEVIDEO 950	\$869
TELEVIDEO 970	\$975

MONITORS

AMDEK 300G	\$130
AMDEK 300A	\$145
AMDEK COLOR I+	\$275
AMDEK COLOR II+	\$429
B.M.C. GREEN	\$85
B.M.C. COLOR	\$230

DISK DRIVES

MICRO SCI A2	\$229
RANA 1000	\$375
RANA ELITE I	\$255
ATARI 1050	\$365

MODEMS

HAYS SMART MODEM	\$199
SMARTMODEM 1200	\$485
SMARTMODEM 1200 B	\$429
MICROMODEM II E	\$240
U.S. ROBOTICS PASSWORD	\$349

1st PLACE

COMPUTER SYSTEMS
13422 N. CAVECREEK RD.

PHOENIX, AZ. 85022

OTHER INFORMATION: 602-867-9897



Free shipping is on UPS ground only.



Send cashiers check or money order all other checks will delay shipping two weeks.

Prices & availability subject to change without notice.

Listing 3 continued:

```

320 I = 0
330 IF EOF(2) THEN 350
340 I = I + ONE: LINE INPUT #2, X$(I): GOTO 330
350 CLOSE #2
360 N = I
370 :
380 REM SEND FILE TO APPLE
390 PRINT
400 PRINT "SENDING";N;"LINES TO APPLE . . ."
410 CL = CSRLIN
420 IC = 0
430 :
440 FOR I = 1 TO N
450   LOCATE CL + 1,1: PRINT "LINE BEING SENT:"; I: REM LINE COUNT TO SCREEN
460   L = LEN(X$(I)): IC = IC + L : REM SUM NO. OF CHARACTERS
470   FOR J = 1 TO DLY : NEXT J: REM DELAY BETWEEN LINES
480   FOR K = 1 TO L STEP 40: REM 40 CHARACTERS AT A BURST MAXIMUM
490   FOR J = 1 TO SHDLY: NEXT J: REM DELAY BEFORE EVERY 40 CHAR. BURST
500     PRINT #1, MID$(X$(I),K,40);
510   NEXT K
520   PRINT #1,: REM CARRIAGE RETURN TO END LINE
530 NEXT I
540 :
550 REM SEND END OF FILE FLAG
560 FOR J = 1 TO DLY: NEXT J
570 PRINT #1, "XX"
580 :
590 REM SEND CHECKSUM TO APPLE
600 FOR J = 1 TO DLY:NEXT J
610 PRINT #1,IC
620 :
630 REM ANOTHER FILE
640 INPUT #1, MORE$
650 IF MORE$ < "Y" THEN GOTO 680
660 GOSUB 760 : GOTO 240 : REM GET NEXT FILE NAME
670 :
680 PRINT : PRINT "NORMAL COMPLETION" : PRINT
690 :
700 REM FINISH UP
710 CLOSE #1
720 ON ERROR GOTO 0: REM TURN THE ERROR TRAPPING OFF
730 END
740 :
750 REM SUBROUTINE FOR HEADING
760 CLS:LOCATE 1,13: PRINT "IBM TO APPLE" : PRINT : PRINT
770 PRINT "WAITING FOR FILE NAME FROM APPLE . . ."
780 RETURN
790 :
800 REM ERROR HANDLER
810 IF ERR = 24 THEN RESUME : REM TIME-OUT ON COM1:
820 IF ERR = 53 THEN PRINT #1,"NF" : RESUME 240 : REM FILE NOT FOUND
830 :
840 REM OTHER ERRORS
850 PRINT "ERROR ";ERR;" IN LINE ";ERL
860 PRINT #1, "ERROR ";ERR : REM LET APPLE KNOW
870 GOTO 710
    
```

Listing 4: The IBM to Apple receiver program.

```

100 REM   IBMTOAP  APPLE RECEIVING PROGRAM -- LISTING #4
110 REM   BY ROBERT JONES  AUGUST 3, 1983
120 :
130 REM   SOME DEFINITIONS
140 DIM X$(2000)
150 SLOT = 5: REM SERIAL PORT SLOT
160 D$ = CHR$(4)
170 EF$ = "XX": REM END-FILE FLAG
180 DE = 1
190 :
200 LI = 768: REM LINE INPUT ROUTINE
210 FOR I = 768 TO 812: READ X: POKE I,X: NEXT I
220 :
230 HOME : PRINT "IBM TO APPLE RECEIVING PROGRAM": PRINT
240 :
250 REM SEND FILE NAME TO I.B.M.
260 PRINT "NAME OF I.B.M. FILE >";
270 CALL LI,FI$
280 IF FI$ = "" THEN 330
290 PRINT "APPLE FILE NAME ";
300 CALL LI,FA$
310 IF FA$ = "" THEN FA$ = FI$
320 PRINT
330 PRINT D$;"PR#";SLOT: PRINT FI$
340 IF FI$ = "" THEN PRINT FI$: PRINT D$;"PR#0": GOTO 780
350 PRINT D$;"PR#0"
360 :
370 REM GET RESPONSE FROM IBM
380 PRINT D$;"IN#";SLOT
390 INPUT ER$: IF ER$ = "FOUND" THEN 470
400 PRINT D$;"IN#0"
410 PRINT
420 IF ER$ = "NF" THEN PRINT "FILE NOT FOUND.": GOTO 260
    
```

Listing 4 continued on page 338

YOU NEED MORE THAN MAIL ORDER PRICES

MICROCHARGE

MICROHOUSE will finance your purchases. Buy your computers, peripherals, or software now—and PAY LATER.

CORPORATE PLAN

Volume purchasers need SPECIAL ATTENTION. We offer research, technical support, and special pricing. Call for your account representative.

SELECTION

We have one of the largest selections in the industry. We carry peripherals, software, and supplies for all major computers.

SALESMAN

Don't be shocked when you call and hear a friendly voice. Our salesmen enjoy working with you. They also answer compatibility and information requests.

TECHNICAL SUPPORT

We support all products we sell. During our 4 years we have developed one of the best staffs in the industry.
(215) 868-4133.

INSTANT SOFTWARE

We can immediately send in-stock software to you over the phone.

MICROLINE

The first dedicated computer shopping center. Use your modem to look at descriptions, prices, order or see what's available.
(215) 868-1230

PAYMENT

Talk about flexible. We accept VISA, MasterCard, American Express, cash, COD's and purchase orders. And, of course MICROCHARGE.

FORMAT CONVERSION

We have the capability to copy files and programs between many of the most popular computers.

LANGUAGES

FORTRAN	\$289
C Compiler	329
BASIC Compiler	285
BASIC Interpreter	249
COBOL	539
muLISP/muSTAR	144
muMATH/muSIMP	189
PASCAL	249
CBASIC	95
CBASIC Compiler	329
PLI-80	489
DR-LOGO	89
Access Manager	199
Display Manager	269

DATA/GRAPHICS

PFS: File	\$95
PFS: Report	79
PFS: Graph	95
dBase II	429
Visifile	179
Quickcode	179
Infostar	279

FINANCIAL

Home Acct.	\$94
Visicalc	164
Visitrend/Plot	199
TR Solver!	205

MISCELLANEOUS

Crosstalk	\$109
Word & Mouse	339
Norton Utilities	59
Password 1200	379
Apple Cat II	279
D-Cat Modem	159
Maxell MD-1	29
Maxell MD-2	40
Quadboard 64K	279
CCS 132 col for IBM	599
Visiword	259
CDEX Training	59
BMC 12" green	89
Cables	Call

(800)
523-9511

MICROHOUSE

215 • 868 • 8219

BOX 499, DEPT. 100
BETHLEHEM, PA 18016

Prices subject to change without notice

Listing 4 continued:

```

430 PRINT "CHECK IBM FOR ERROR MESSAGE."
440 STOP
450 :
460 REM READ FILE INTO X$( ) UNTIL END FLAG
470 PRINT
480 I = 0
490 I = I + 0E: CALL LI,X$(I): IF X$(I) < > EF$ THEN 490
500 INPUT IC: REM CHECKSUM FROM IBM
510 PRINT D$;"IN#0"
520 N = I - 1: REM ELIMINATE END OF FILE FLAG
530 PRINT
540 :
550 AC = 0
560 REM COMPUTE NUMBER OF CHARACTERS RECEIVED
570 FOR I = 1 TO N:AC = AC + LEN (X$(I)): NEXT I
580 PRINT "IBM CHECKSUM = ";IC
590 PRINT "APPLE CHECKSUM = ";AC
600 PRINT
610 IF IC = AC THEN 680
620 :
630 PRINT "CHECKSUMS DO NOT MATCH."
640 INPUT "CONTINUE ANYWAY ?";CA$
650 IF CA$ = > "Y" THEN 670
660 PRINT : GOTO 720
670 REM SAVE FILE TO APPLE DISK
680 PRINT D$;"OPEN ";FA$
690 PRINT D$;"WRITE ";FA$
700 FOR I = 1 TO N: PRINT X$(I): NEXT I
710 PRINT D$;"CLOSE"
720 PRINT "ANOTHER FILE ";
730 INPUT ANS$
740 PRINT D$;"PR#";SLOT: PRINT ANS$: PRINT D$;"PR#0"
750 IF ANS$ = > "Y" THEN 230
760 :
770 PRINT
780 PRINT "NORMAL COMPLETION"
790 END
800 :
810 REM LINE INPUT AT 768 - 812 (CALL 768, ANY$)
820 DATA 32,190,222,32,227,223,162,0,32,117,253,134,253,32,57,213,165
830 DATA 253,32,82,228,162,0,160,2,32,226,229,160,0,165,253,145
840 DATA 131,200,165,111,145,131,200,165,112,145,131,96

```

Text continued from page 332:

sending files in the opposite direction (outlined previously) except that the transmission time is about one-third as fast because of the delays Applesoft needs to process each string before receiving the next one. In fact, if a line contains more than 40 characters, a slight delay is needed while the Apple's cursor returns to the left side of its 40-column screen. Delay loops (e.g., FOR J = 1 TO DLY: NEXT J) are inserted in the appropriate places in the IBM sending program.

I have tried to keep these programs short and straightforward so that you can easily tailor them to your own needs. Presumably, similar programs could be written to transmit files between different microcomputers with similar serial connections.

Notes on Using the Programs

1. Sending an Applesoft program to the IBM PC requires that the program first be converted into a text file. The following is a one-line routine, entered as line number 0 (zero), to save the Applesoft program in memory as a text file suitable for transmitting to the IBM PC. Type it in, then type RUN. You will be asked to

name the text file for your Applesoft program.

```

0 D$ = CHR$(4): INPUT
"TEXTFILE NAME ";F$:
POKE 33,33: PRINT D$;"OPEN";
F$:PRINT D$;"WRITE";F$:
LIST 1 - :PRINT D$;"CLOSE":
POKE 33,40: END

```

Similarly, an IBM PC BASIC program can be saved with the "A" option so that it is stored in ASCII format instead of the tokenized form, e.g., use SAVE "MYFILE",A.

2. If you are transmitting the Visicalc file from the Apple to the IBM PC, the direction indicator needed for the Apple II Plus version of Visicalc will cause a problem (i.e., horizontal or vertical movement on the arrow keys). This information is stored near the end of the Visicalc file as either "/X!" or "/X-". It must be deleted before you attempt to load it into the IBM version of Visicalc. Failure to delete this command could cause a loss of data in the cell in which the cursor is positioned when the file is loaded by IBM PC Visicalc.

3. To transfer a random-access file,

I suggest first converting the data in the random-access file to a sequential file, transmitting the sequential file, then converting the data back into random-access form.

4. The monitor routine used by the Apple II Plus converts lowercase letters to uppercase letters. This conversion presents a problem if maintaining lowercase is desired. One way around this is to write your own input routine in machine language. A simpler way, if you have a language card, is to move the monitor (and Applesoft) to the RAM (random-access read/write memory) card, eliminate the conversion switching, then run the program. On an Apple II Plus with a 16K-byte RAM card in slot 0, these changes are accomplished as follows:

CALL -151	to enter the monitor
C081 C081	read ROM (read-only memory) and write to RAM
D000[D000.	
FFFFM	copy Applesoft and monitor to RAM card
C083 C083	select the RAM card
FD82: EA	
EA	delete the lowercase conversion
3DOG	warmstart DOS

Users who are familiar with EXEC files may want to create one with these commands in it. If you press Reset on the Apple, then ROM Applesoft (with the lowercase to uppercase conversion reinstalled) again takes over. To return to the modified RAM monitor, just type PRINT PEEK (-16256).

5. Interested persons may want to add routines to handle other errors or long files. A large file, for example, could be read and transmitted in blocks of 1000 lines, with appropriate delays for loading and saving to disk between blocks.

6. More memory for holding a file can be obtained on the Apple by using one of the DOS moving programs to relocate DOS to the RAM card (as long as you are not using the

Want to hook IBM?

Terminals. Personal Computers. ASCII devices. Hook them all into the IBM world with the new AVATAR™ PA1000 Protocol Converter.

The PA1000 provides low-cost IBM 3278/2 terminal emulation and coaxial connection to an IBM 3274/3276 cluster controller. Then, a single keystroke switches you back into the asynchronous world through an auxiliary RS-232-C port to access other computer systems, public information services or copy a screen to a printer.

Our microprocessor-based unit provides user-selectable rates up to 9600 baud, terminal keyboard configura-



tions, screen management and local or remote print functions. And, you can hook the PA1000 to a modem for remote dial-in access.

Simple, economical access to the world of IBM, just when you thought there was no answer. At \$995, getting hooked has never been so affordable. For more information on our AVATAR PA1000 Protocol Converter, contact Avatar Technologies Inc. 99 South Street Hopkinton, MA 01748 Or call us at (617) 435-6872.

AVATAR™

Making IBM smarter since 1983.

IBM is a registered trademark of International Business Machines Corp.

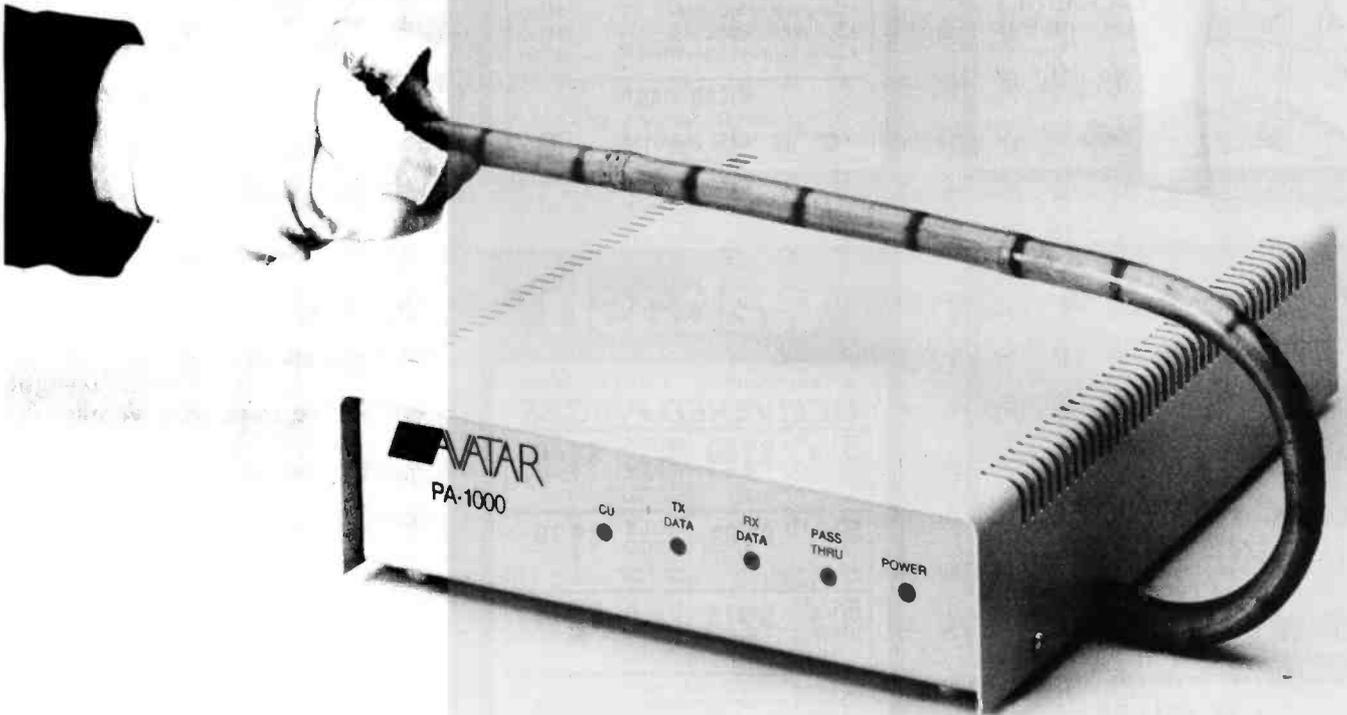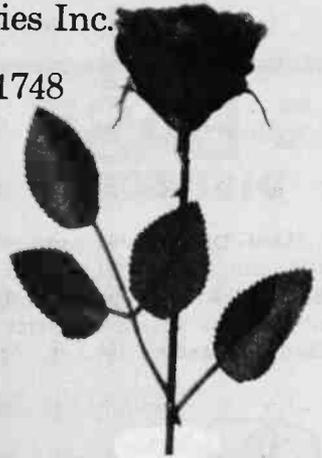

Future Shock!

age **65**
 years worked **40**
 retirement benefits **0**

The U.S. Department of Labor has a free booklet that will help you answer these questions and a lot more. Send for it today.

Write: Pensions, Consumer Information Center, Pueblo, Colorado 81009

U.S. Department of Labor

PA MICRO-PROLOG

The Fifth Generation language for your IBM PC

Micro-PROLOG, the first PROLOG System for microcomputers, is now available for the 8088 micros under PC DOS/MS DOS or CP/M86 as well as Z80 micros under CP/M80.

PROLOG is the Artificial Intelligence language chosen by Japan as the core language for their Fifth Generation computers.

Micro-PROLOG is currently being used for desk top expert systems intelligent databases. It is a fully tried and tested system, being the most developed and complete implementation of PROLOG available for microcomputers.

Single computer license — Dirs 275.00




Logic Programming Associates Ltd.
 10 Burntwood Close,
 London SW18 3JU.
 England. 01-874 0350 (24 hours)
micro-PROLOG™ IN LPA Ltd

Circle 389 on Inquiry card.

BASF DISKETTES

BASF Diskettes at competitive price. Call TOLL FREE (800) 235-4137 for prices and information. Visa and Master Card accepted.



PACIFIC EXCHANGES
 100 Foothill Blvd
 San Luis Obispo, CA
 93401 (In Cal call
 (805) 543-1037)

Circle 284 on Inquiry card.

Daisy Wheel Printer



- 12/14 CPS
- 10/12/15 Pitch
- Parallel Interface

\$395

- Dynax DX-15 Daisy Wheel 13 cps ... \$CALL
- Silver Reed EXP 550 Daisy Wheel ... \$595
- Brother HR-1 Daisy Wheel 16 cps ... \$645
- Daisywriter 2000 w/48K ... \$1095
- C. Itoh F-10 40 cps ... \$1195
- Qume Sprint 11 Daisy Wheel 40 cps ... \$1395

MICRO MART

8764 Complex Dr., San Diego, CA 92123
 (619) 268-0169

Circle 241 on Inquiry card.

wabash

Flexible Diskettes

6 Year Warranty - 100% Certified
DELIVERED PRICES

5 1/4" \$160 each SINGLE SIDE SINGLE DENSITY 48 TP: WH/UB RING Packed 10 per Soft Pack	BULK SSSD \$140 each 100/CASE White Envelope WH/UB RING
5 1/4" \$189 each SINGLE SIDE DOUBLE DENSITY 48 TP: WH/UB RING Packed 10 per Soft Pack	BULK SSDD \$170 each 100/CASE White Envelope WH/UB RING
5 1/4" \$275 each DOUBLE SIDE DOUBLE DENSITY 48 TP: WH/UB RING Packed 10 per Soft Pack	BULK DSSD \$244 each 100/CASE White Envelope WH/UB RING

Free shipping in continental USA. Call for quantity discounts. We accept money orders, certified checks, VISA and MasterCard. Personal checks accepted, but take two weeks to clear bank N.D. add 4%.



Software Services™

1326 - 25th St. S., Suite H
 Fargo, ND 58103
1-800-634-2248

Circle 336 on Inquiry card.

RAM card for the monitor modification mentioned in #4). A file as long as 35K bytes may be transmitted in this manner. Ordinarily, 50K bytes of memory are available to IBM PC BASIC with this program in memory if 96K bytes or more are installed in the IBM. So the Apple's memory size is the limiting factor on the maximum file (or segment) size that can be transmitted. Remember that a 35K-byte Apple file shows up as a 142-sector file on a catalog of an Apple disk.

7. Although a bps rate of 4800 is used in the programs listed here, the Apple-to-IBM transfer could run at 9600. The 4800 limit is imposed by the rate at which the Apple II can receive data using these programs. If the few minutes of speed gain from the Apple to the IBM is worth the time spent setting up the Apple serial card for the faster bps rate, then the IBM receiving program could use a 9600 (instead of a 4800) bps rate in the OPEN statement. However, you would have to reset the Apple serial card to 4800 again if you were going to pass programs from the IBM to the Apple. The constant switching of bps rates is probably not worth the effort unless it can be done within the Apple programs themselves. The manual for the serial card that I use does not explain how to do this on the Apple.

8. Because Applesoft does not have a LINE INPUT statement (which allows commas and semicolons to be included in a string being read), both Applesoft programs use a short machine-language routine (located at 768 decimal) to simulate LINE INPUT. The routine used here is slightly modified from "The Penultimate Input Anything Routine" by Peter Meyer, published in *Call—A.P.P.L.E. In Depth 1: All About Applesoft*, a publication of Apple Puget Sound Library Exchange, 21246 68th Ave. S., Kent, WA 98032. ■

Robert Jones (7 Lexington Rd., Saratoga Springs, NY) has been using an Apple II Plus since 1979 and an IBM PC since early 1983 for statistical analysis, financial modeling, and development of simulation models of economic and social systems in BASIC and FORTRAN.

LC NETWORK LINE FILTER

Model C-519-L1 EMI/RFI filter protects against high energy transients...varistor clamps higher voltages to safe levels...Max Rating: 15 A, 125 VAC, 1875 Watts continuous duty...\$97.50.

J. W. MILLER
DIVISION/Bell Industries
 19070 Reyes Ave., Rancho Dominguez, CA 90224
 (213) 537-5200


Circle 255 on Inquiry card.

COMPUTER HUT™

COMPARE
OUR
SERVICE & PRICE!

SPECIAL OF THE MONTH

IBM-PC & XT
CALL FOR
PRICE



HARDWARE FOR IBM-PC DISK DRIVES

Tandon

TM100-2 DS/DD	\$229
PANASONIC JA 551	\$199
SHUGART SA-455 half-high	\$219
TEAC FD-55B Slimline	\$229

MAYNARD ELECTRONICS

Floppy Disk Controller	\$169
FDC w/Par. Port	\$219
FDC w/Ser Port	\$239

SANDSTAR SERIES CALL

QUADRAM

Quadboard-PP,SP,C/C,Mem + s/w	
64K	\$279
384K	\$549
0K	\$235
Quad 512 + SP,Mem with s/w	
64K	\$249
512K	\$639
Quadboard II-2SP, C/C, Mem + s/w	
64K	\$279
256K	\$429
Quadcolor	CALL

AST RESEARCH

MegaPlus II 4-Funct 64K + s/w	\$279
6-Pack 5-Funct 64K + s/w	\$279
I/O Plus	\$135

TECMAR

Graphics 720 x 400 16 colors	CALL
------------------------------	------

HERCULES

Hi Res Graphics 720 x 384, PP, + s/w	\$359
---	-------

FREDRICKS ELECTRONICS

COLORPLUS 640 x 200, 16-Color + s/w	\$399
--	-------

AMDEK

MAI Graphics 640 x 400	\$479
------------------------	-------

MICROLOG

Baby Blue	CALL
Baby Talk	CALL

USI

Multidisplay	\$395
--------------	-------

HARD DISK - IBM-PC & XT

MOUNTAIN — External Syst.			
5MB	... \$1539	10MB	... \$1839
15MB	... \$2309	20MB	... \$2549
MAYNARD CALL			
TALLGRASS CALL			

PRINTERS

EPSON	
FX80	... CALL
FX100	... CALL

brother®	
HR1 A Par	... \$599 Ser
HR-15 Par	... \$489 Ser
HR-25	... CALL

DYNAX	
DX-15 Par	... \$469 Ser

C-ITOH

STARWRITER A-10	CALL
STARWRITER F-10 P or S	\$1149
PROWRITER 8510 P	\$399
PROWRITER 8510 SP 180 CPS	\$649
PROWRITER2 1550 P	\$690

star MICRONICS

Gemini 10X	... \$299	15X	... \$399
Delta 10	... \$499		

OKIDATA

82A	... CALL	83A	... CALL
84P		84S	
92P		92S	
93P		93S	

NEC

3510	... \$1485	7710	... \$1995
3515	... \$1479	7715	... \$2039
3530	... \$1575	7720	... \$2495
3550	... \$1799	7730	... \$1995
2000 Series CALL			


TOSHIBA

P1350	... \$1549
-------	------------

IDS, DAISYWRITER CALL

SILVER-REED

EXP 500 Par	... \$429 Ser	... \$459
EXP 550 Par	... \$639 Ser	... \$679
EXP 770 CALL		



MODEMS

HAYES	
Smartmodem 1200	\$499
Smartmodem 1200B w/Smartcom II	\$439
NOVATION , CALL	

COMPUTERS

IBM Compatible

EAGLE	CALL
--------------	------

COLUMBIA DATA PRODUCTS, INC.	CALL
--	------

CORONA	CALL
---------------	------

TAVA PC	CALL
----------------	------

DEC RAINBOW CALL

MONITORS

AMDEK	
Video 300G	... \$139
300A	... \$149
Video 310A	\$179
Color II	... \$429
Color II +	CALL

PGS	
HX12 Hi Res RGB monitor	... \$499



SOFTWARE FOR IBM-PC

LOTUS 123	... \$339
Word Perfect	\$329
WordStar	CALL
DBase II	... \$399
VisCalc	... \$189
Multiplan	... \$195
Multimate	... \$329
MICROSOFT WORD	... \$279

AND MORE

ACCESSORIES CALL

COMPUTER HUT

CANADIAN
AUTHORIZED DEALER

MICROCONTEXT INC.

5253 AVE DU PARC
MONTREAL
QUE H2V4P2.

(514) 279-5114

ANY PRODUCT NOT LISTED? CALL

COMPUTER HUT

OF NEW ENGLAND INC.
101 Elm St., Nashua, NH 03060

ORDERS & INFORMATION
(603) 889-0666

ORDER-LINE ONLY
PLEASE
(800) 525-5012

All products usually in stock for immediate shipment and carry full manufacturers' warranty. Price subject to change — this ad prepared two months in advance. You get the lowest price. We honor personal checks — allow 10 days to clear. COD up to \$200 add 3%. Visa, MasterCard add 3%. For shipping & insurance add 3% or \$5.00 min. for small items and \$8 min for monitors, printers, etc. APO & FPO orders add 12%. Include phone number. Call (603) 889-0666 for a return authorization number prior to returning any material.

Apple is a trademark of Apple Computers Inc. IBM is a trademark of IBM Corp.

Circle 74 on Inquiry card.

A Low-Cost, Low Write-Voltage EEPROM

Seeq Technology's \$10 EEPROM can be programmed in your computer with simple and inexpensive circuitry

by Joe D. Blagg

If you need nonvolatile memory, a PROM (programmable read-only memory) gives you what you need at low cost. Unfortunately, you can program a PROM chip only once. It is possible to reprogram EPROMs (erasable PROMs), but first they need to be erased with expensive ultraviolet-light devices. EEPROMs (electrically erasable PROMs) do not need ultraviolet light. Instead, they are erased and reprogrammed with high voltages (usually between 20 and 30 volts). But another problem arises here—if you want to reprogram the EEPROM, you have to remove it from your circuit and put it in a special EEPROM “burner” that has the proper voltages. This happens because most personal computers don't have power supplies with 20- to 30-volt (V) ranges. You can, of course, build a burner into your computer, as Louis Wheeler did in “The Practical EEPROM” (July 1983 BYTE, page 460).

But what a chore. It would be much easier if you could program the EEPROM without such high write-voltages and without taking the EEPROM out of your computer. With that capability, you could easily store programs or data in your computer indefinitely.

Fortunately, Seeq Technology of San Jose, California, has created such an EEPROM—the 52B13, part of the 52BXX family of EEPROMs (or EPROMs, as Seeq calls them). The 52B13 is programmed with a TTL-level voltage and, on top of that, costs only about \$10. I paid \$6 for a preproduction sample chip, which is

a tenth of the cost of the Intel 2817 EEPROM.

Simple Interfacing

The 52B13 is a 2K by 8-bit EEPROM that is pin for pin compatible with the popular 2716 EPROM as well as the 6116 static RAM (random-access read/write memory).

Since my Z80-based personal computer uses 6116 static memory, I was able to plug the 52B13 into one of the 24-pin memory sockets. I needed to make only one small circuit change to create a 10-millisecond (ms) write-enable (\overline{WE}) input to the 52B13. To create the \overline{WE} signal, I “stretched out” the write signal from the processor with a monostable multivibrator or “one-shot,” as it is commonly called.

The read cycle of the 52B13 does not require any special circuitry. Even with a 4-MHz clock rate, the 52B13 needs no wait states, because it boasts a 250-nanosecond (ns) maximum read access time (some versions are rated for 350 ns). The number of read cycles is unlimited, but the number of write cycles is limited to 10,000 per byte. As you might expect, a write cycle is much slower than a read cycle. The limitations for writing to the 52B13 are a small price to pay, though, for the advantage of nonvolatile memory.

The Circuit

The 52B13 needs proper address decoding, as any memory chip does. My computer decodes addresses with a 74LS138 decoder/demultiplexer, as figure 1 shows. Each of the

eight output lines of the decoder goes to the different chip-enable inputs of the separate 2K memory devices.

The 74LS123 one-shot stretches out the \overline{WR} signal from the Z80 microprocessor to 10 ms because the \overline{WE} input of the 52B13 must remain low during the 10-ms write cycle. (By the way, the 10-ms time is a nominal period that may actually be anywhere from 9 ms to as long as 70 ms. If you need a faster write time, Seeq has a higher-performance version, the 52B13H, that can be programmed in 1 ms.) The resistor-capacitor combination causes the one-shot to stay on for 10 ms. The entire chip could be cleared in a single step, but with the 52B13 this requires a +15- to +22-V pulse. I did not experiment with this feature of the device.

Switch SW1 lets you protect the EEPROM from accidental writing. The switch should be closed when you're programming the device and open after you have finished writing to it.

Programming the 52B13

Programming the 52B13 is simple. After constructing the circuit shown in figure 1, I used BASIC commands to put data into the 52B13 and then checked to see if I was successful. It was a pleasure to see the EEPROM and its support circuitry work the first time. But why not, since the interface is so simple? Turning the power on and off did not change the contents of the EEPROM. All seemed to be well.

Then I tried to change one of the memory locations that I had previ-

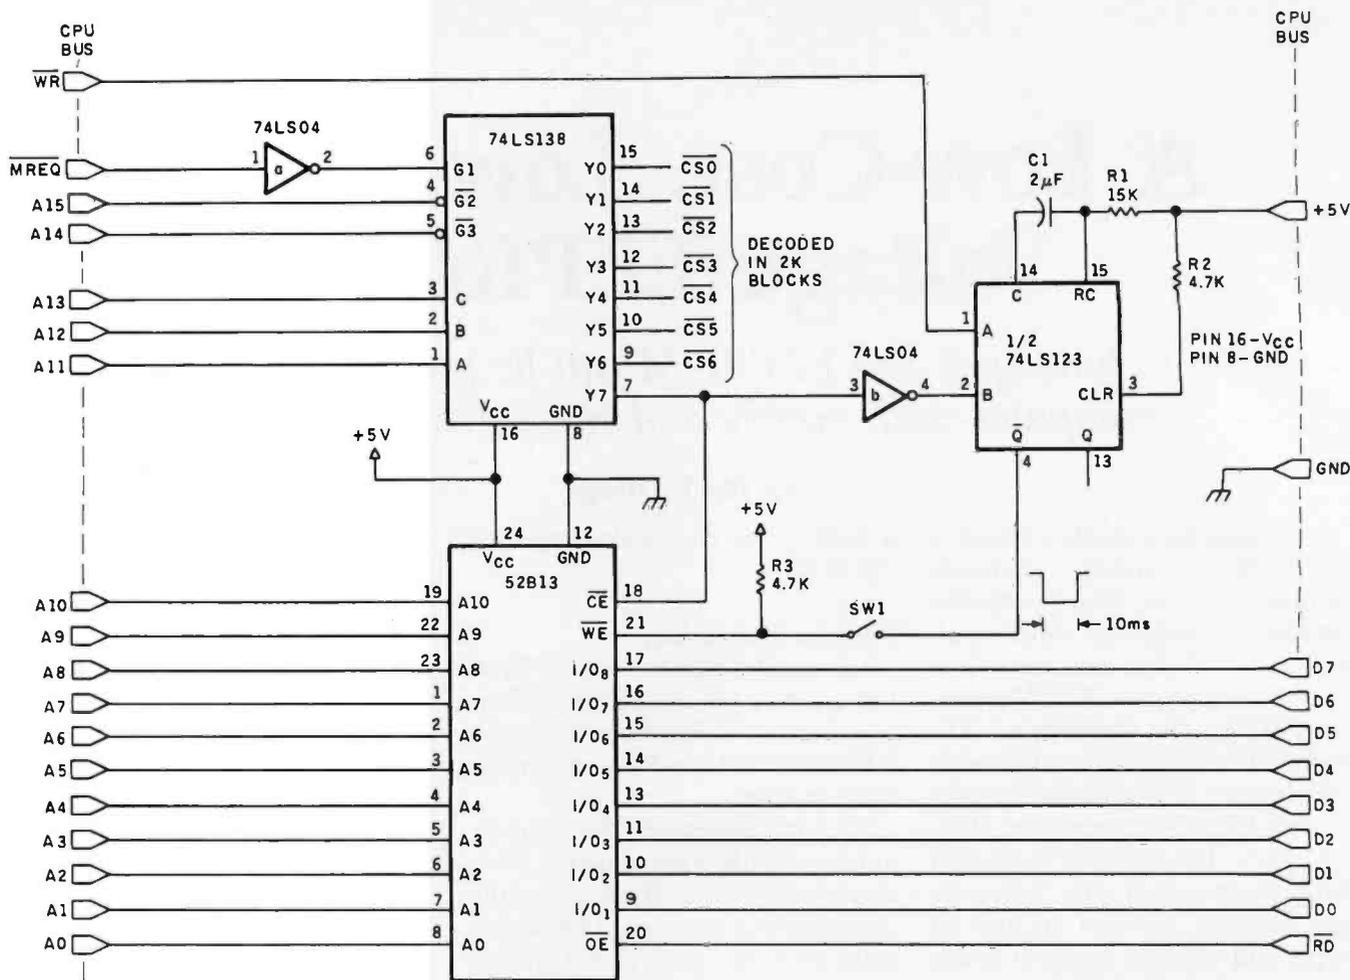


Figure 1: A schematic of the 52B13 EEPROM circuit. The EEPROM is decoded the same as the other 2K by 8-bit memory blocks. A one-shot provides the 10-ms write-enable pulse needed for the EEPROM to be programmed.

Listing 1: This BASIC routine moves data from RAM to the EEPROM.

```

100 REM ** E2ROM PROGRAMMER **
110 REM
120 REM D = STARTING ADDRESS OF
130 REM DATA TO PROGRAM.
140 REM N = NUMBER OF BYTES - 1.
150 REM P = E2ROM STARTING ADDR.
160 REM
170 LET D = 0
180 LET N = 2047
190 LET P = 14336
200 REM
210 FOR I = D TO D+N
220 IF PEEK (P) = 255 THEN GO TO 260
230 POKE P, 255
240 FOR J = 1 TO 2
250 NEXT J
260 POKE P, PEEK (I)
270 NEXT I
280 REM
290 PRINT "DONE"
300 STOP

```

memory address in the 52B13 until it is first erased, which you do by writing all logical highs to the address. When you first get the 52B13, you'll notice that all bits have already been set to a logical high state.

I wanted to try programming the full 2K bytes, so I wrote the program in listing 1. The routine first checks to see if the byte is cleared before attempting to write the data. The FOR...NEXT loop at lines 240 and 250 provides a time delay before the next POKE statement is executed; this delay permits the WE signal to time out before another byte is written. The entire 2K-byte transfer takes about 150 seconds to execute.

Conclusion

My original reason for using the 52B13 was to store a text-editing routine in my personal computer as a resident program. Now that I have some experience with the 52B13, I am

looking forward to adding a host of resident utility programs to my system.

The age of the EEPROM seems to be upon us. Major advances in the last year have made them a cost-effective alternative to EPROMs in many areas. We can expect to see more and more of them in the future. ■

References

1. Wheeler, Louis. "The Practical EEPROM." BYTE, July 1983, page 460.
2. 52B13—Electrically Erasable ROM (preliminary data sheet). San Jose, CA: Seeq Technology Inc., March 1983.

Joe Blagg has been an instrument engineer at Union Carbide for six years. Before that, he was an electronics field engineer for the Federal Aviation Administration. He is a 1974 graduate of the University of Kentucky, where he earned his B.S.E.E. degree. His special interest is personal computer hardware and software. You can contact him at RR 13, Box 556, Paducah, KY 42001.

People are going for Friday!™ like there's no tomorrow.

Friday! is the new electronic file handling system that has become an instant best-seller because it's so revolutionary.

Within two weeks, it broke into the Top 20 on the sales chart of Softsel, one of the country's leading computer software distributors.

And it's now well on its way to the top.

The Friday! phenomenon is simple.

Friday! uses simple menus and talks to you in plain English, so almost anybody can use it.

It's great for sales and commissions, clients and portfolios, mailing lists and labels, invoices, inventories, paychecks, reports and more. And it works with other microcomputer software like 1-2-3™ and dBASE II® (our own advanced database management system).

It comes with a complete, step-by-step tutorial, but you can set up an "electronic file" without even looking at the manual, then use it at the touch of a few keys.

Friday! finds any filed information in seconds. Computes totals, subtotals, commissions, etc. Prints form letters and mailing labels. Gives you quick reports from all or part of a file with a few key-strokes. Or if you need a special report for



your bank or board of directors, just "paint" the format on your screen, then have Friday! do all the work.

And while Friday! does more than file handling systems selling for as much as \$495, it's yours for just \$295 (suggested retail price)!

For more information, contact Ashton-Tate, 10150 West Jefferson Boulevard, Culver City, CA 90230. (800) 437-4329 ext. 202. In Colorado, (303) 799-4900. In the U.K., call (0908) 568866.

Or for the name of your nearest dealer, just call 1-800-4-FRIDAY, ext. 202.

ASHTON · TATE

© Ashton-Tate 1983. Friday! is a trademark and dBASE II is a registered trademark of Ashton-Tate. 1-2-3 is a trademark of Lotus Development Corp.

Foot Control

Adding a foot-operated Control key to your keyboard simplifies control sequences

by Dennis M. Pfister

Wordstar is a nice piece of software, but its nifty editing features are hampered because you must use too many simultaneous key strokes or control characters to implement the features. You generate them either by simultaneously pressing the Control key and a particular alphabetic character, by selecting from a group of additional keys with dedicated editing functions, or by using a mouse.

These methods work, but they all have one serious deficiency: they require you to move your hands from the standard typing position. This is inefficient and provides you with more opportunity for error.

I thought that there must be a better way. I had done a considerable amount of commercial sewing, where a foot switch is used to free the operator's hands, so I decided that this approach might be just the

thing. This idea developed into what I have termed Foot Control, which is an inexpensive (less than \$40) solution for relief from all those control characters.

What Does It Do?

Foot Control gives you an additional Control key that is located on the floor and operated by foot. This allows your hands to remain in the standard typing position. You generate a control character by pressing the foot switch and then typing the desired character key. It can also be used as a duplicate ESCape key for software requiring large numbers of ESC sequences.

What You Need

The only parts required are a reasonable quality foot switch with a set of normally open contacts, a phone jack and plug, and a length of two-conductor wire. The length of wire is determined by where you intend to locate the foot switch. The plug and jack are necessary only if you want to be able to remove the foot switch.

I have used many types of foot switches and found that the heavier commercial-grade units tend to stay in place on the floor better than the cheaper ones. Second-hand switches from old office equipment work especially well. They also provide a better feel and will allow you to rest your foot on them without accidental

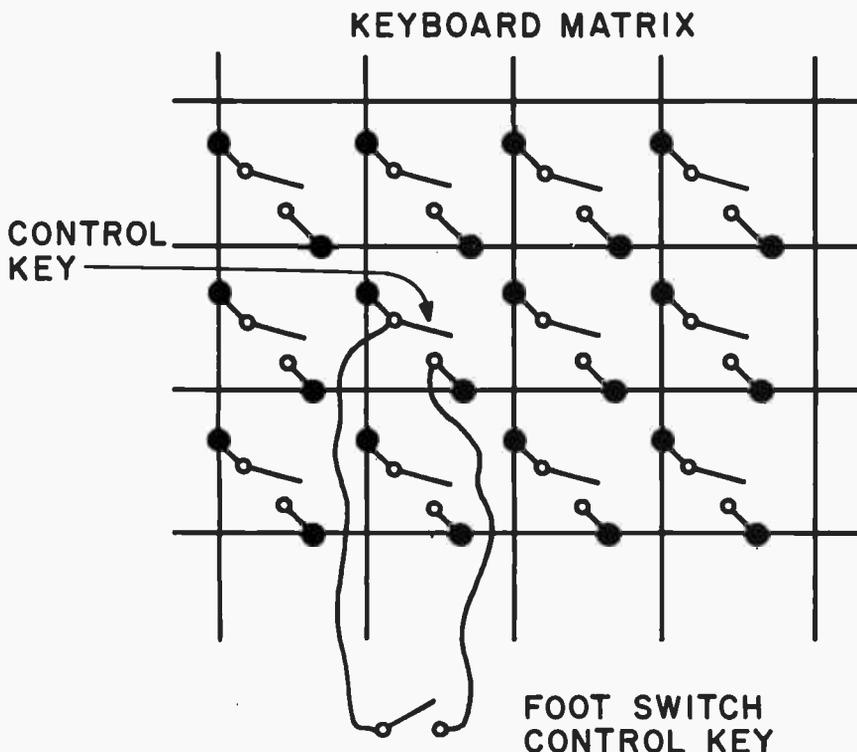


Figure 1: A schematic of a typical keyboard matrix showing a foot switch Control key addition.

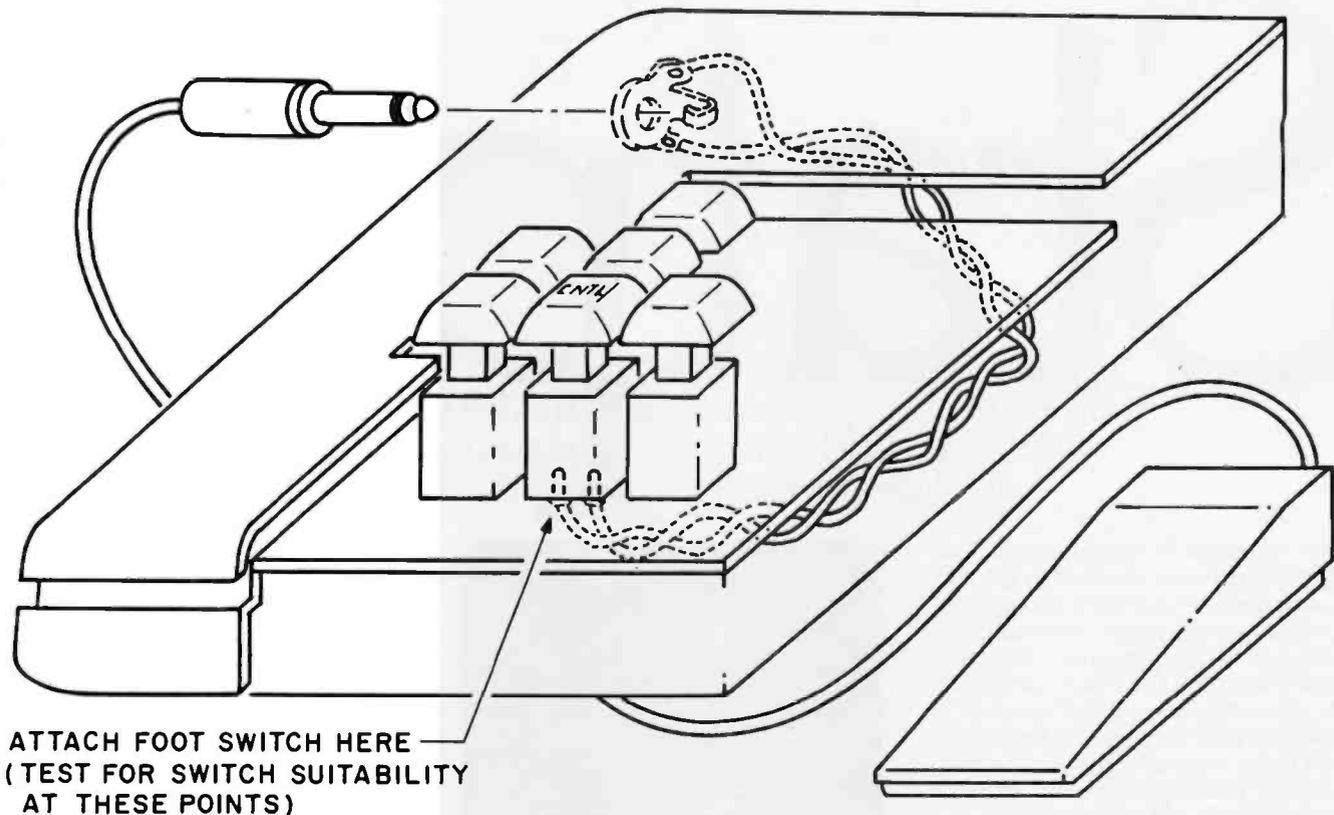


Figure 2: A diagram of a foot switch Control key.

closure. I think that the ability to rest your foot on the switch is a must for anyone engaged in long word-processing sessions.

Wire can be anywhere between 18 and 24 gauge and should be stranded to ensure flexibility when routing the cable underneath your workstation. Stranded wire also provides greater resistance to breakage due to flexing.

If you decide that you want to have the capability of plugging and unplugging your foot switch from the keyboard, choosing the right plug and jack is almost purely a matter of aesthetics. Voltage and current levels associated with keyboards generally are so low that they can be discounted in the selection criteria. Just choose the plug and jack combination that provides the easiest mechanical installation.

The Installation

Keyboards are usually nothing more than switches grouped in matrix fashion (see figure 1). Your installation goal is to provide yourself with a duplicate Control-key switch wired in parallel with the existing keyboard Control-key switch. This

allows you to use either the normal keyboard Control key or the foot switch as the Control key. Adding "pedal power" to your system requires only that your keyboard be of the mechanical-contact type and not, for instance, the capacitance type. There are ways to add the foot-control feature to capacitance-type keyboards, but the solutions are system-dependent. You will find that most systems are of the mechanical type. Write me if you have a capacitance or other type; I'll try to help.

The easiest way to check whether your system or terminal is suitable for conversion is to turn off the power, open the keyboard enclosure, and find where the Control-key terminals are soldered into the keyboard printed-circuit board (see figure 2). Using an ohmmeter, connect the probes across the two contacts associated with the Control-key switch, press the Control key, and see if there is a meter deflection with each pressing of the key. If so, your keyboard is suitable.

The only thing that remains to be done is the soldering of a wire from each contact of the Control key to the

jack contacts. If you decide not to use a plug and jack, wire directly from the keyboard Control-key switch contacts to the foot switch. Be careful not to apply too much heat to your keyboard because it is easy to damage the keyboard printed-circuit board. Mount the jack on the keyboard case and reassemble the keyboard enclosure if required. Wire up the foot switch to the plug and insert the plug in the jack.

Plug in your foot switch, invoke Wordstar or whatever word processor you are using, and get ready for a new adventure in word processing. Now, whenever you need a Control key, just press the foot switch and the appropriate key. If you are like me, you will never go back to hunting for that keyboard Control key again. I also can guarantee that the addition of this foot switch will generate considerable comment and speculation from the uninitiated. ■

Dennis M. Pfister (POB 1248, San Luis Obispo, CA 93406) is MIS manager at TRW Inc. He holds a B.S. degree in mathematics/computer science and is interested in motion control, electronics, computers, and music.

Statpro™

Now available for the IBM PC/XT

The most comprehensive statistics and graphics ever developed for and sophisticated database workstation the personal computer.

Years of research, development, and field testing have resulted in the most extensive statistics and graphics database program specifically designed for the personal computing environment. STATPRO™ provides the data analysis capabilities and flexibility previously available only on a large computer. Researchers, business professionals, and other data analysts will welcome the breadth yet simplicity of this program! STATPRO requires no previous computer experience, no special command language. Single keystrokes access all of the data manipulation, statistics, and graphics power of STATPRO.

STATPRO allows easy access to its extensive numerical data capabilities.

The strength of STATPRO is found in the functions of its user friendly, menu-driven database. You can easily learn to enter and edit, manipulate, transform, and print out data. STATPRO's searching capabilities allow these functions to be performed on all your data or a user defined subset of your data.


Statistics Modules Menu

- A) DESCRIPTION
- B) REGRESSION
- C) ANOVA
- D) TIME SERIES
- E) MULTIVAR

(ESC) Exit to Master Menu

Choice—{ }

Transformations and over 400 conversions are available. You can place the results of these transformations into the same field or any other field in STATPRO's database.

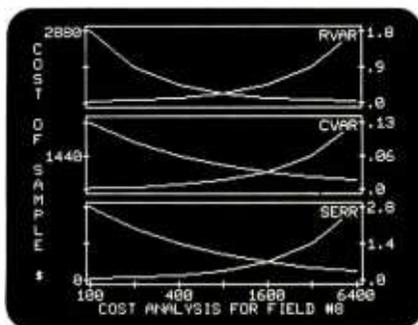

STATPRO offers a comprehensive collection of statistical procedures.

The statistics component of STATPRO contains a multitude of procedures, grouped into the following modules:

Descriptive: Contingency analysis, cross tabulation, normality tests; descriptive, comparative, range and non-parametric statistics.

Regression: Linear, non-linear, stepwise, and multiple regressions; residual analysis and statistical matrices.

Analysis of Variance: Single and nested classifications, two and three way equal and unequal sample size and non-parametric ANOVA.

Time Series: Moving averages, multi-stage least squares, fitted polynomials and trig functions, additive and multiply forecasting.

Multivariate: Principal components, factor, orthogonal factor, oblique factor, pair-weighted cluster, discriminant function, multiple contingency, and canonical correlation analysis.

STATPRO provides graphic representation of your data in minutes.

STATPRO graphics plot all the results of your STATPRO statistical analyses including scatter, triangle regression, and box plots; pie-

charts, histograms, and dendograms. Further, with STATPRO you can custom edit with any of four character sets from the keyboard. You can also edit using paddles, joystick or special graphics commands. Mix text with data fields. Place multiple plots on each screen. Define your axis limits.

You can save your graphics on a disk for a multiple color "slide show" presentation, or print them out through a variety of compatible printers.

STATPRO documentation wraps up the package.

Although STATPRO software is essentially self-documenting, complete print documentation is provided. This includes a walk-through Introductory Tutorial, a Menu Chart, and a comprehensive User's Guide for each STATPRO component.

STATPRO currently runs on all versions of the Apple® II, Apple III, and IBM® Personal Computers.

To find out more about **Statpro: The Statistics and Graphics Database Workstation**, contact your local dealer, or

Call us toll-free at

800-322-2208

In Massachusetts call (617) 423-0420.

You can also call us toll-free for information on corporate purchase through our National Account Program.



Wadsworth Electronic Publishing Company

Statler Office Building
20 Park Plaza, Boston, MA 02116

Inside a Compiler

Notes on Optimization and Code Generation

A look at Pascal/MT+86 and Pascal-86 shows you how to evaluate these and other compilers

by Kaare Christian

As compilers for microcomputers proliferate, an understanding of how those programs work can prove valuable to high-level-language programmers. Examining compiled code, for example, can help you pinpoint subtle programming errors, and it opens the door to speed improvements in time-critical program sections. An examination of two compilers—Digital Research's Pascal/MT+86 and Intel's Pascal-86—illustrates how compiler optimization and code-generation schemes affect compiler performance, but first let's consider compilers in general.

Compilers are relatively new to microcomputers. Early microprocessors, such as the 6502, were programmed mostly in assembly language or BASIC. The advantage of assembly language is performance—assembly-language mavens have managed to make even rudimentary processors such as the 6502 perform impressive tasks. Of course, the disadvantage is that it is very difficult to write new assembly-language programs, and it's even more difficult to

rewrite or reuse existing programs.

Programming in BASIC is the other extreme. BASIC is easy to learn and easy to use for simple tasks because it is interactive. However, interactive languages are very slow because each statement in the language must be evaluated and interpreted on the fly as the program runs.

Programs written in compiled languages are easier to understand and modify than those in assembly language.

More and more people are using compiled languages for programming microcomputers because such languages avoid the difficulties of assembly and interpretive languages. Numerous compilers are available for microcomputers. There are compiled versions of BASIC and Pascal for microcomputers as well as compilers for languages such as C, FORTRAN,

COBOL, and PL/I, which originated on larger computers.

Compilers

First, let's note some of the strengths of compiled languages. Compiled languages are easier to learn and more universal than are assembly languages. These features are important because there are too few programmers today. Programmers should learn generally useful tools, such as compiled languages, rather than special-case tools, such as machine-dependent assembly languages. In addition, programs written in the better compiled languages are easier to understand and modify than are programs written in assembly language. These factors are important because many programs are maintained by a number of people over a long period of time.

Another compiler advantage is that programs written in compiled languages execute much faster than do those written in interpretive languages, and speed is one of the major factors that determine what problems

a computer can solve. Numerous problems cannot be solved effectively in interpretive BASIC because it is hundreds of times slower than are the better compiled languages (reference 2).

If compilers offer so many advantages over assemblers and interpreters, then why aren't compiled languages more common in the microcomputer world? Unfortunately, many of the early microprocessors, such as the 6502, are unsuitable for use with compiled languages. In particular, the limited stack and lack of 16-bit arithmetic on the 6502 make it hard to write a good compiler for that machine. Just five distinct high-level languages for the Apple II—Pascal, FORTH, BASIC, Sweet 16, and FORTRAN—are available, according to a BYTE article by Jim Gilbreath and Gary Gilbreath (reference 2). It is not known how many of these languages are compiled, but from the fact that these languages are between 10 and 200 times slower than 6502 assembly language, it is apparent that the 6502 is not the machine of choice for high-level languages.

On machines such as the Z80, it is possible but difficult to write compilers. A dozen high-level languages for the Z80 were cataloged in the Gilbreath article: Coral, FORTRAN, PL/I, C, BASIC, ZSPL, Pascal, PLMX, Ada, FORTH, APL, and COBOL. The fastest of these are just twice as slow as Z80 assembly language, and an astonishing 35 high-level-language implementations on the Z80 are within a factor of 10 of Z80 assembly-language speed. The newer microprocessors are much more *promising*. The 8086, the 68000, and the NSC16032 all offer features that make compilers relatively easy to write.

Compilers on the 8080 produce code that is, at best, about twice as slow as code written in assembly language. In articles by Jim and Gary Gilbreath, BYTE recently benchmarked a wide variety of systems and languages by comparing their performances in the Sieve of Eratosthenes, a method for finding prime numbers (see references 1 and 2). The advan-

tage of the Sieve of Eratosthenes method over more obvious approaches is that the Sieve can find prime numbers without using multiplication or division. The results of the Gilbreath benchmarks indicated that the assembly-language version of the Sieve running on the Z80 was twice as fast as the fastest compiled language and about four to eight times as fast as the more typical compilers. The bottom line for compiled languages on the rudimentary microprocessors is that they are much easier to use than assembly language, but they produce code that is significantly slower than handwritten assembly code.

On machines that more efficiently support compiled languages, there is a much smaller performance penalty for using a compiled language instead of assembly language. But just how much of a penalty? Several methods exist for discovering just how much performance is sacrificed

Compilers avoid the difficulties of assembly and interpretive languages.

when you use a compiler rather than an assembler. One technique is the benchmark.

Benchmarks

The Gilbreath benchmark measured the speed of a large assortment of high-level programming languages running on a variety of machines, from microcomputers to mainframes. The results of this and other benchmarks provide useful information for people who are evaluating compilers. Many of the more popular languages, such as Pascal, are available from several different companies, and the Gilbreath benchmark results provide a direct comparison of competing products.

Most benchmark authors are very careful to point out that the results of a single benchmark, or of benchmarks in general, should not be overstated. Numerous factors should be


considered when choosing a programming language and implementation. Among them are the features of the language, the documentation for the language, and the availability of programmers already skilled in the language. Add to that the available tools for the language, the availability of the language for the target computer system, and any extensions to the language that might be useful in your application.

In the Gilbreath benchmark results, the enormous range of performance of the various languages and computers is striking. One might expect that a version of the Sieve written in assembly language for the IBM 3033 would be 400,000 times faster than a version written in BASIC for the PET. But why is an assembly-language version on the Z80 twice as fast as a CB80 version on the Z80, which in turn is twice as fast as an Aztec C version on the Z80, which in turn is twice as fast as Whitesmiths' Pascal on the Z80?


Benchmarks tell us which languages are fast and which are slow at performing the benchmark task. From a pragmatic point of view, a user cares only about performance, not about how that performance is attained. But from an inquisitive point of view, it's interesting to see what compilers do to achieve their level of performance.

Examining Code

Most compilers provide a feature that enables programmers to examine the code they are producing. Typically, these compilers enable you to create a listing file that contains the original source code interspersed with the assembly-language code that the compiler produced. On systems that lack an explicit code-examination feature, you can examine the code by using a program debugger or a separate disassembler program, but in that case even more sleuthing is necessary. If you plan to rely upon a compiler, it is certainly best to use one that shows you its code so that you can tune performance when necessary, verify correct operation, etc. Convenient access to generated code is one of the most im-

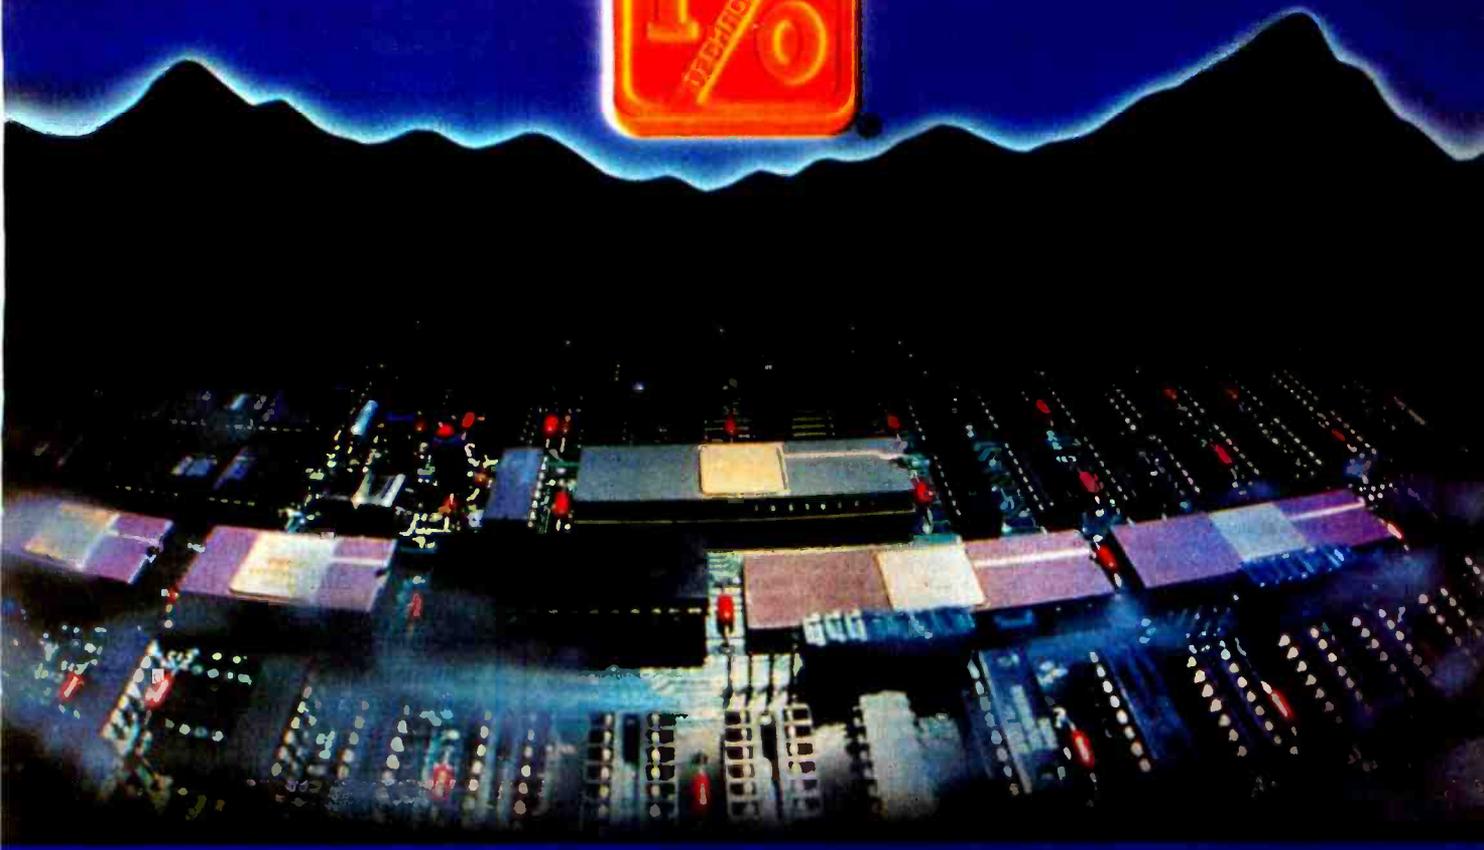


Uncompromising Additions to your S-100/IEEE-696 BUS

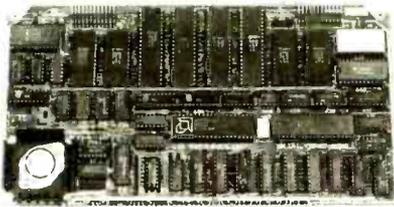

DUAL GPIB-488 INTERFACE BOARD

A Stand-Alone, Independently Controlled Dual Channel IEEE-488 I/O Processor. Interface Activity Modes for Controller-In-Charge, Controller Assigned or Terminal Bus Slave, and all Interface Functions are handled transparent to Host System CPU through an on-board CPU and DMA controller. User Friendly operation.

A&T, P/N 52748-800-102 \$795.00

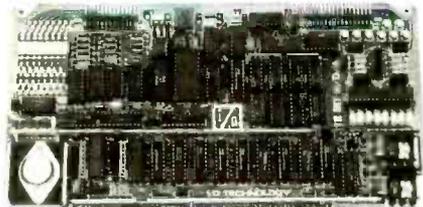

12-BIT A-D-A CONVERTER BOARD

8 Channel A-D: 12 microsec. Conversion, 50KHz Sample Rate, Programmable Gains, Offset and Diff./Single Modes.

8 Channel D-A: 2 microsec. Settling, Bipolar V or Unipolar I Output. Programmable Reference levels, Dual-Ported Channel Refresh RAM. **16/8-Bit Data Transfers** via I/O or Memory Mapped
A&T, P/N 52748-900-101 \$455.00

MULTI-FUNCTION I/O BOARD

A&T, P/N 52748-100-101 \$325.00

SMART PROTOTYPING KIT


P/N 52748-400 \$60.00

128K x 8/64K x 16 CMOS STATIC RAM MODULE

A&T, P/N 52748-650-128 \$825.00

California residents add 6% sales tax.
U.S. Domestic Price, FOB Factory.
Prices and Specifications subject to change without notice.


**I/O TECHNOLOGY
POST OFFICE BOX 2119
CANYON COUNTRY
CA 91351
(805) 252-7666**

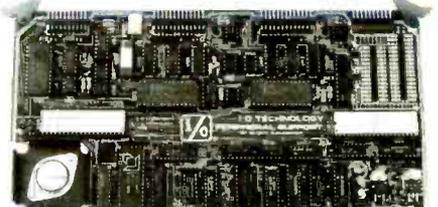

PERIPHERAL SUPPORT BOARD

Two Serial SYNC/ASYNCR Ports with RS-232, TTL or Current Loop Outputs, three 8-Bit Parallel Ports, three Timers, Real Time Clock/Calendar and Response Programmable Interrupt Controller. Small Proto Area with +5 and $\pm 12v$.


A&T, P/N 52748-150-101 \$395.00

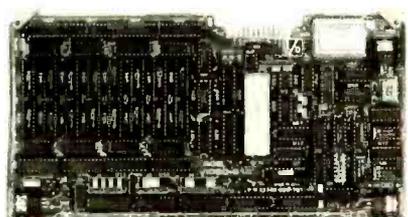

RGB VIDEO-512 COLOR GRAPHICS BOARD

Programmable resolution up to 512 x 512 pixels with 4 local video planes and on-board graphics processor. Color mapper allows 16 colors from a palette of 4096. Light pen input. Plus more ...

A&T, P/N 52748-300-101 \$885.00

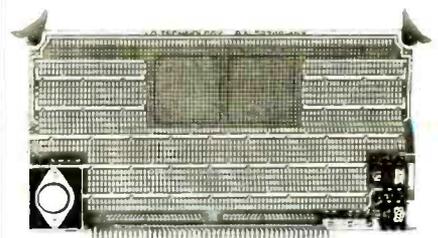

MULTI-PURPOSE PROTOTYPING KIT

Industrial Quality with Plated-Thru holes for Wire-Wrap or Solder projects. Complete with +5, $\pm 12v$ Regulators, Bus Bar, Filter Capacitors, and Manual.

A&T, P/N 52748-450 \$72.00



SWITCHING TERMINALS A PROBLEM?

WTI has a lineup of low cost solutions... RS232 Switching Devices!



AB MiniSwitch \$89

End the hassle of plugging and unplugging data cables. MiniSwitch lets you manually switch between two RS232 devices and a common device such as a Modem and a Printer sharing a Minicomputer.

TM-41 4 Port Push Button Switch \$295

Switch ports electronically from the Terminal by pressing a button instead of flipping switches on a common AB Switch box. Selectable operating modes include—equal priority lockout, multiple and single port select.

CAS-41 4 Port ASCII Code Activated Switch \$395

Your Computer may select one or any combination of up to 4 RS232 ports by a user selectable code sequence.

CAS-161 16 to 64 Port Code Activated Switch \$795

Your Computer may select between any one of 16 ports by a two character ASCII code sequence. The unit is field expandable to 32, 48, or 64 ports.

SMRT-1 8 Port "Smart Switch" \$895

This flexible microprocessor controlled 8 port switch allows a user on any port to communicate with an RS232 device on any other port. Up to 4 pairs of users can communicate simultaneously. "User Friendly" commands aid in port selection, port status and sign off. The unit's so smart, it even signals you when the port you wanted is no longer busy! Each port can be configured for DTE or DCE by pressing a button.

PSU-41 Printer Port Sharing Unit \$395

Allows up to 4 CRTs to share one Printer automatically without software changes! The PSU-41 scans each CRT and locks on until the screen has been sent to the Printer, then resumes scanning.



2435 S. Anne St., Santa Ana, CA 92704 • (714) 979-0363
Outside California call toll free (800) 854-7226

portant features of any compiler.

Compilation usually consists of two separate parts: analysis (often called syntax analysis) and code generation. The analysis section deciphers (understands) your original program; the code-generation section actually creates the machine-language output. Syntax analysis is one of the better-understood techniques in computer science, whereas code generation remains a black art. Because each computer has a unique instruction set, it is necessary to rework (and rethink) the code-generation part of a compiler each time the compiler is transported from one machine to another. Why does one compiler produce faster code than another? Although there are no simple answers, two basic reasons emerge: (1) compilers use different schemata for code generation, and (2) compilers perform varying amounts of optimization on their code.

A compiler's schema is its basic philosophy of code generation. The schema dictates what code is generated for each feature in the high-level languages.

Assembly-language programs are usually faster than high-level-language programs because the assembly-language programmer can adjust the code to fit the circumstances more flexibly than can a compiler. Human coders can *understand* programs, whereas compilers merely translate programs. Experienced programmers usually can tell what's important in a program, which often enables them to apply shortcuts that improve performance at the expense of generality.

To improve their code, compilers usually perform optimizations. By optimizing, compilers can produce code that approaches the speed of code produced by an assembly-language programmer.

In order to actually examine these two aspects of code generation (schemas and optimization), I wrote the Sieve of Eratosthenes algorithm in "pure" Pascal. I chose Pascal because several Pascal compilers are available in the Rockefeller University laboratory, where I work, and because it is one of the most popular

THE SYSTEM

JOIN NOW AND SAVE!

dBase II™

\$359

(For SYSTEM members only)

WORDSTAR™

\$259

(For SYSTEM members only)

"THE SYSTEM" HAS THE NEW IBM PC JR. SOFTWARE NOW! CALL FOR OUR LOW PRICE

DO YOU QUALIFY to be a member of "the SYSTEM"?

CALL TOLL FREE NOW!...

800-421-4003

In California call 1-800-252-4092

CAN YOU NAME THE WORLD'S THIRD LARGEST SUPPLIER OF PERSONAL COMPUTERS?



Naming the two largest suppliers of personal computers is easy.

The third one is a little harder. It's NEC.

That's right. NEC is the world's third largest PC supplier.*

We're not talking about video game players that double as computers.

We're talking about serious business computers that cost between \$1,000 and \$5,000. Like our APC Advanced Personal Computer.



THERE ARE HUNDREDS OF SOFTWARE PACKAGES THAT RUN ON NEC'S ADVANCED PERSONAL COMPUTER.

Our Advanced Personal Computer is graphically better.

The main reason we sell so many personal computers is that we offer so much.

Take, for example, our APC.

The APC is faster than both the IBM PC and Apple.

It has more storage capacity. And it offers the sharpest color graphics of any PC at any price.

The APC also has advanced communications capabilities that let it work with all major mainframes.


All in all, the APC is simply your best buy.

Every NEC APC personal computer comes with a \$6.1 billion company.

Buying an APC means you'll get the full support of a \$6.1 billion company. NEC.

And that means you get the service, technology and reliability that NEC is famous for.

decision, call NEC Information Systems at 1-800-343-4419.**

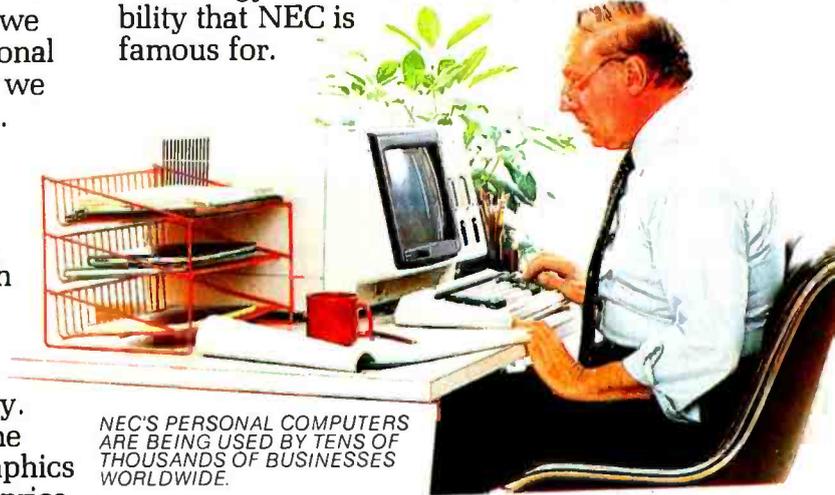

NEC'S PERSONAL COMPUTERS ARE BEING USED BY TENS OF THOUSANDS OF BUSINESSES WORLDWIDE.

The kind of service and support that's made our Spinwriter family the world's best selling letter quality printers for personal computers.

Is NEC on your bid list?


If we're not on your bid list, we should be.

But ask your Data Processing Manager to be sure. If you'd like more information to make your

You'll find out why more and more personal computer users are saying "NEC and me."

NEC AND ME

NEC Information Systems, Inc.
1414 Massachusetts Ave.
Boxborough, MA 01719

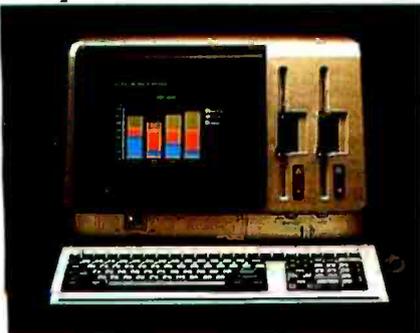

NEC'S ADVANCED PERSONAL COMPUTERS HAVE THE SHARPEST COLOR GRAPHICS IN THE INDUSTRY.

*Source: Dataquest
**In Massachusetts, 617-264-8635

© The Apple Logo is a registered trademark of Apple Computer, Inc.

Circle 265 on inquiry card.

Listing 1: The Sieve of Eratosthenes in Pascal.

microcomputer languages.

A Tale of Two Compilers

Listing 1 shows my version of the Sieve in Pascal. It is an almost direct copy from the Gilbreath benchmark. I compiled my version on two compilers for the Intel 8086 microprocessor. The first compiler is Digital Research's Pascal/MT+86 version 3.1 running under the CP/M-86 operating system, also from Digital Research. The second compiler is Intel's Pascal-86 version 2.0 running under the Intel iRMX/86 operating system. Both compilers accepted the listing 1 version of the Sieve without complaint, and both compilers produced working programs. I have used both compilers in the past and I have found that both are trustworthy products.

All of the measurements were performed on an Intel SBC 86/14 single-board computer running the iRMX operating system. The board is configured to run at 8 MHz. Where necessary, assembly-language code produced by Pascal/MT+86 was trans-

ported to the 86/14 and assembled using Intel's ASM86. Reference data for the 8086 microprocessor was taken from *The 8086 Family User's Manual* (reference 6).

All of the timings presented in this article were produced by running the code and measuring the time for a certain number of iterations. The times are slightly slower than "book" times for two reasons: (1) the 8086 I used was suffering wait states due to slow memory-access times, and (2) the repetition loop introduced some overhead. (Executing the code a large number of times made it possible to measure the time with a stopwatch rather than with a logic analyzer or scope.)

It would be impossible to detail the code for all the features of Pascal in a single article. Instead, I have chosen to focus on two examples of code generation: one that illustrates the effect of optimizations and one that shows the different FOR loop schemata used by the two compilers. You should perform your own investigation if you are interested in

```
program sieve (input,output);
(* the sieve in pascal *)

const size = 8190;

var flags : array[0..size] of boolean;
    i,prime,k : integer;
    count: integer;

begin
count := 0;
(* init flags array *)
for i := 0 to size do
    flags[i] := true;
(* look for primes *)
for i := 0 to size do
    if flags[i] then begin
        (* found one! *)
        prime := i + i + 3;
        k := i + prime;
        while k <= size do begin
            (* rule out multiples *)
            flags[k] := false;
            k := k + prime
        end;
        count := count + 1
    end;
end.
```

"COMPUTER CLASSIFIEDS"

The National Used Computer Bulletin Board

This semi-monthly classified ad publication has been designed for computer users—so they can communicate with each other in a timely and economical manner.

As a classified advertiser in Computer Classifieds, you can reach the national used equipment market in clubs, homes, offices and schools.

As a subscriber you'll know what's available to meet your needs.

GET RESULTS! SUBSCRIBE TODAY!

Subscription rates are only \$22 for 24 months (48 issues) or \$12 for 12 months (24 issues).

GET RESULTS! ADVERTISE TODAY!

Place your system in one ad, software in another ad and components in others.

Your first ad has a per issue minimum of \$5 (at 25 cents per word). Additional ads may then be placed (at 25 cents per word) with no minimum per ad. Each ad must appear in at least two issues, for a total minimum of \$10 per order. Payment is due with your order.

Computer Classifieds
P.O. Box 1547B
Paramus, NJ 07652-1547
(201) 967-9713

WOW!

P-R-O-P-O-R-T-I-O-N-A-L Spacing on WordStar

You are reading text printed by WordStar in proportional spacing, providing a professional, easy to read, typeset appearance.

Complete details for printing in proportional spacing directly from WordStar, setting two or more fully justified columns on a page, and underlining spaces


between words, are provided. The techniques will work on all versions of WordStar, and will drive Diablo, Xerox, Qume, NEC, and other daisy-wheel printers.

Above text printed on a daisywheel printer direct from WordStar.

Now you can have the professional appearance of typeset text. Using PS is as easy as turning on bold or underline and is done right in your document, then printed by WordStar automatically! No technical knowledge needed.

PS on WordStar—\$20 (plus \$2.50 shipping)
Please send me _____ copies. Enclosed is my check (or Visa/MC# and exp. date) for \$_____, made out to: (NYS residents add 7% sales tax)

WRITING CONSULTANTS
Suite 167 / 11 Creek Bend Drive
Fairport, New York 14450
Visa/MC orders only 1-800-227-3800 Ext. 7018
Dealer inquiries invited.

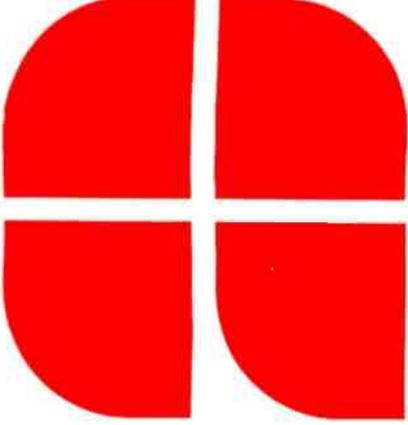

GenTech

THIS MONTH'S SPECIALS

LOTUS 1-2-3	\$359
MICROSOFT Multiplan (Apple II)	\$169
EPSON FX-80 Printer	\$535
C-ITOH Prowriter 1 8510AP	\$369
C-ITOH Prowriter 2 1550P	\$659
NEC Spinwriter 2030 (Centronics)	\$869
U.S. ROBOTICS Password Modem (1200 Baud)	\$359
64K RAM set for IBM-PC	\$55
CABLES Parallel to Parallel Serial to Serial	\$35 \$40
OTRONA Attaché	\$2495
BASIS 108 (128K, 2 Drives, CP/M 3.0)	\$1795
TANDON Drive (IBM Compatible, 320K)	\$239
FOURTH DIMENSION Super Drive (Apple)	\$219
RANA ELITE I (Apple Compatible, 163K)	\$245
RANA ELITE II (Apple Compatible, 326K)	\$380
RANA 1000 (For ATARI)	\$319
HERCULES Graphics Board For IBM-PC	\$369
MICROLOG Baby Blue (CP/M For IBM)	\$489
TECMAR	
1st Mate Board For IBM (No RAM)	\$239
1st Mate Board For IBM (w/256K)	\$439
2nd Mate Board (2 Serial/2 Parallel)	\$229
CALIFORNIA COMPUTER SYSTEMS Super Vision (132 Column For IBM)	\$Call
ORANGE MICRO Buffered Grappler+ 16K	\$179 64K \$239

CUSTOMER SERVICE & TECH. SUPPORT


401-273-2420

ORDERS ONLY

800-843-4302

150 Broadway, Suite 2212, N.Y. NY 10038

Money Order, Cashier's Ck, Personal Ck (2 Weeks To Clear), Add 3% MC/VISA, 5% AMEX Charge. Add 2% On COD Orders. APO Orders Add 10%. Add 3% For Net Terms. All Returned Non-Defective Merchandise Are Subject To 20% Restocking Charge. GenTech Reserves the Right to Change Advertised Prices.



Circle 150 on inquiry card.

COMPUTERS

FRANKLIN	
ACE 1000 w/Color	\$799
ACE PRO PLUS System (ACE 1000 w/color, ACE 10 Drive, 80-Column Card, 12" Monitor, ACE Writer II, ACE Calc, Data Perfect, Personal Financer)	\$Call
ACE FAMILY PAK (ACE 1000, ACE 10 Drive, Time is Money, Snack Attack, Checkers, Window, Welcome, BASIC Manual, Joystick)	\$Call
ACE 1200 (6502/Z80B, 128K, ACE 10 Drive, 80 Column Card, CBASIC, CP/M 2.2)	\$Call
ACE Office Management System (ACE 1200 w/2 ACE 10 Drives, Parallel/Serial Card, WordStar, MailMerge, ACE Calc)	\$Call
COLUMBIA	
Fully IBM Compatible, 128K, Parallel/Serial Ports, Color Board, Super Pak (Over \$2000 Software)	
w/2 DSDD Drives	\$Call
w/10 MB Hard Disk & 1 DSDD Drive	\$Call
Portable VP w/Super Pak	\$Call



MORROW DESIGNS	
MD2 (64K, 2 SSDD Drives, WordStar, Correct-It, LogiCalc, Personal Pearl, MBASIC, BaZic)	\$Call
MD3 (Same as Above except w/2 DSDD Drives & QUEST Accounting Software)	\$Call
MD11 (128K, 1 1/2 MB Hard Disk & 1 DSDD Drive, Same Software as MD3)	\$2050
MD11 w/Zenith Terminal	\$2395
Multi-User DECISION Series	\$Call
IBM-Compatible Expansion Board	\$Call
CORONA	
PC-1, PC-2, PC-HD	\$Call
Portable PC-1 & PC-2	\$Call
EAGLE	
PC-2 (128K RAM, 2 Drives (640K))	\$Call
PC-XL (128K, 10 MB Hard, 1 Floppy)	\$Call
Spirit XL (Portable Version of PC-XL)	\$Call

SANYO	
MBC 550 (IBM-Compatible, 8088, 128K, 1 SSDD Drive, WordStar, CalcStar, EasyWriter)	\$899
MBC 555 (550 Plus 1 Add. Drive, MailMerge, SpellStar, InfoStar)	\$1199

TOSHIBA	
T300 (8088, 192K, 1 DSDD 640K Drive)	\$Call

SWP Micro Computer Products For Kaypro	
Co-Power-88 Board For Kaypro II & IV (8088 w/128K OR 256K, MS-DOS & CP/M 86)	\$Call

FOR IBM PC

AST RESEARCH INC.	
MEGA PLUS II (64K, Serial & Clock/Cal)	\$295
MEGA PLUS II (64K, Serial/Par, Clock)	\$340
MEGAPAK 256K Module	\$299
SIX PACK PLUS (64K, Serial/Par, Clock)	\$295
COMBO PLUS (64K, Serial/Par, Clock)	\$295
1/0 PLUS II (Serial Port, Clock/Cal)	\$129

**** OPTIONS ****
Each 64K Increment For Expandable AST Boards Are \$65. (Price Includes Installation)
Serial \$45 Parallel \$45
Game \$45

QUADRAM	
QUARBOARD (Serial/Parallel, Clock/Cal)	
64K	\$279 256K \$419
QUAD 512+ (Serial Port, Upgradable to 512K)	
64K	\$239 128K \$299
256K	\$399 512K \$619
QUADCOLOR I (Video Board)	\$239
QUADLINK (6502 w/64K)	\$489
MICROFAZER	
Parallel/Parallel	
8K	\$125 16K \$139 64K \$199
128K	\$289 256K \$589 512K \$899
Serial/Serial, Serial/Parl, Parl/Serial	
8K	\$145 16K \$159 64K \$219
** SPECIAL PRICES ON HERCULES, **	
** TECMAR & MICROLOG (BABY BLUE) **	
PRODUCTS	

FOR APPLE II/IIe, Franklin Ace


ALS CP/M Card	\$299
Smarterm II (80 Column Card)	\$145
Printer Mate (Printer Card)	\$59
EPD Surge Protectors	\$Call
FOURTH DIMENSION 16K RAM Card	\$49
80 Column Card w/64K (Ile Only)	\$189
INTERACT. STRU. PKASD Universal	\$125
KOALA TECH. Koala Pad	\$95
MICROTEK Dumping-16	\$159
ORANGE MICRO Grappler+	\$119
PROMETHEUS Graphitti	\$89

HARD DISK

COMREX ComFiler (FOR QX-10, 10MB)	\$1995
CORVUS	
6 MB	\$1695 10 MB \$1645
11 MB	\$2350 15 MB \$2095
20 MB	\$3150 21 MB \$2495
PEGASUS	
10 MB Internal For IBM	\$1075
23 MB External (w/Controller)	\$1845

CALL FOR PRICES ON QCS, TALLGRASS & XCOMP

DOT MATRIX PRINTERS



EPSON	
RX-80	\$269
FX-80	\$535
MX-100	\$559
RX-80 F/T	\$399
FX-100	\$725
LQ-1500 (NEW!)	\$Call

OKIDATA	
ML 92	\$449
ML 84(P)	\$979
ML 93	\$729
ML 84(S)	\$1079

MANNESMANN TALLY	
MT 160L	\$599
Spirit-80	\$339
MT 180L	\$845
	\$602 \$Call

STAR MICRONICS	
Gemini-10X	\$309
Radex 10 (NEW!)	\$659
Gemini-15X	\$399
240 CPS	\$659

INFO RUNNER Riteman	\$349
TOSHIBA P1350	\$1579
TRANSTAR T315 Color Printer	\$469

LETTER-QUALITY PRINTERS

COMREX	
ComRiter I (17 CPS)	\$649
ComRiter II (12 CPS, 5K Buffer, P)	\$479
ComRiter II (Same As Above, Serial)	\$509
ComRiter III	\$Call
DAISYWRITER	
2000 EXP (25 CPS, 48K Buffer)	\$1019

DIABLO 630 ECS/IBM	\$Call
JUKI 6100 (17 CPS, Diablo Compat.)	\$525
NEC Spinwriter 2050 (IBM)	\$Call
QUME Sprint 1140	\$1345
Sprint 1155	\$1495
SILVER-REED	
EXP 550(P)	\$639
EXP 550(S)	\$679
EXP 500(P)	\$439
EXP 500(S)	\$469
TRANSTAR T120, T130 & T140	\$Call

PLOTTERS

AMDEK DXY-100, Amplot II	\$Call
COMREX ComScriber	\$Call
ENTER COMPUTERS Sweet-P	\$Call
HOUSTON INSTRUMENTS (Bausch & Lomb)	
DMP 40	\$831
DMP 29 (8 COLOR 11x17 PAPER)	\$1945
DMP 41 (SINGLE PEN 22x17 INCH)	\$2495
MANNESMANN TALLY Pixy-3	\$645
STROBE	\$Call

MONITORS



AMDEK	
Video 300	\$149
Color I+	\$Call
Video 300A	\$159
Color II+	\$449
COMREX Color, Green, Amber	\$Call
PRINCETON GRAPHICS HX-12	\$509
RGB Interface For Apple Ile	\$159
QUADRAM Quadscreen (17", 968x512)	\$1595
TAXAN	
KG-12N/UY (12" Amber)	\$135
RGBvision-I (380 Horiz)	\$275
RGB Interface For Apple Ile	\$140
RGBvision-III (630 Horiz)	\$519

TERMINALS

LIBERTY Freedom 100	\$499
QUME 102/102A	\$559/\$579
103/103A	\$879/\$899
108/108A	\$729/\$749
VISUAL All Models	\$Call
WYSE All Models (inc. Color)	\$Call

MODEMS

ANCHOR	
MARK VI (IBM)	\$199
Mark XII	\$Call
HAYES	
Micromodem IIe (w/SmartCom I)	\$249
Smartmodem 300	\$Call
Smartmodem 1200	\$519
Smartmodem 1200B (IBM)	\$439
NOVATION	
Access 1-2-3	\$Call
Cat (Acoustic Coupler)	\$144
J-Cat (Auto Orig/Answer, 300 Baud)	\$109
Apple Cat II (300 Baud)	\$269
212 Apple Cat II (1200 Baud)	\$575
103 Smart Cat (300 Baud)	\$179
103/212 Smart Cat (1200 Baud)	\$419
TRANSEND (Formerly SSM)	
Modemcard w/Source (For Apple)	\$239
PC Modem Card 300 (For IBM)	\$289
PC Modem Card 1200 (For IBM)	\$Call
U.S. ROBOTICS Password (1200 Baud)	\$359
VEN-TEL MD212-2E (1200 Baud)	\$399

SOFTWARE

LIFETREE Volkswriter Deluxe	\$Call
LOTUS 1-2-3	\$359
MICROPRO WordStar (IBM, CP/M)	\$309
WordStar Pro-Pack	\$459
WordStar w/Applicard (For Apple)	\$349
MICROSOFT Word	\$Call
SOFTWARE SYSTEMS Multimate	\$329
VISICORP Visi On Series	\$Call

some other feature of code generation.

An Example of Optimizing

The primary responsibility of a compiler is to produce correct code. This doesn't mean that the program is correct, merely that the operations written in the high-level version of the program are correctly performed in the machine-language version produced by the compiler. The program may be wrong, but it isn't the compiler's fault.

Most compilers strive for more than correct codes; they want to produce fast code. Fast code usually requires optimizations. I envision optimizations as modifications to a compiler's basic code-generation schema. For instance, the following 8086 assembly code would initialize the variable named TFLAG to the value 0:

```
MOV TFLAG,0
```

On the 8086 this instruction is 6 bytes long and takes 16 basic clock cycles to execute. This code could serve as a compiler's schema for initializing variables. How could we improve upon this schema? Suppose that the operation occurring just before the MOV TFLAG,0 operation left the value 0 in the accumulator. Given that the AX (accumulator) register already contains a 0, the following 8086 assembly-language instruction can initialize the variable named TFLAG:

```
MOV TFLAG,AX
```

Although this instruction doesn't look very different from MOV TFLAG,0, the improvement is dramatic. The 8086 MOV TFLAG,AX instruction is just 3 bytes long and takes only 10 basic clock cycles to execute, yielding nearly a 50 percent improvement. This second version could *not* serve as a basic schema for initializing variables because it relies upon the previous contents of the accumulator. However, if a compiler recognized those cases where the accumulator contained the required value, then it could perform this optimization.

Listing 2: The 8086 assembly-language code generated by the Pascal/MT+86 and Pascal-86 compilers for the following two statements from the listing 1 program:

```
prime := i + i + 3;
k := i + prime
```

Pascal/MT+86 Code

```
;PRIME := I + I + 3
1 MOV AX,I ;Place the value of I into AX register
2 ADD AX,I ;Add the value of I to AX register
3 ADD AX,3 ;Add 3 to the AX register
4 MOV PRIME,AX ;Store the AX register in PRIME
;K := I + PRIME
5 MOV AX,I ;Place the value of I into AX register
6 ADD AX,PRIME ;Add the value of Prime to AX register
7 MOV K,AX ;Store the AX register in K
```

Pascal-86 Code

```
;PRIME := I + I + 3
8 ADD AX,AX ;Add AX register to itself yielding I + I
9 ADD AX,3 ;Add 3 to the AX register
10 MOV PRIME,AX ;Store the AX register in PRIME
;K := I + PRIME
11 ADD AX,SI ;Add AX register to SI register yielding I + PRIME
12 MOV K,AX ;Store the AX register in K
```

Pascal/MT+86		Pascal-86		
Statement Number	AX Register	Statement Number	AX Register	SI Register
1	—	8	I	I
2	I	9	I+I	I
3	I+I	10	PRIME	I
4	PRIME			
5	PRIME	11	PRIME	I
6	I	12	K	I
7	K			

Table 1: Register contents during execution of the listing 2 code. Note that the value indicated in this table exists in the register at the start of the instruction cycle.

I examined the assembly-language code produced by the Pascal/MT+86 and Pascal-86 compilers for the Sieve program in order to find a good example of optimizations. I chose the following example because it is relatively simple and because it clearly illustrates how optimization can improve performance.

Whenever a new prime is located, the listing 1 Sieve program computes two values, PRIME and K. Two Pascal statements compute PRIME and K:

```
prime := i + i + 3;
k := i + prime;
```

The Pascal/MT+86 code and the Pascal-86 code produced by these two statements are shown in listing 2. The assembly-language code in all the figures in this article uses the mnemonics and assembly-language directives supported by the ASM86 assembly language. Note that listing 2 is an excerpt from listing 3, which shows the complete code generated by both compilers for the Sieve.

The Pascal/MT+86 code can be understood simply by reading through it and noting the sequence of operations. The Pascal-86 code is much harder to understand because it is heavily optimized. In order to

Text continued on page 360

\$\$\$ "LOWEST PRICES" \$\$\$




SMITH CORONA LETTER QUALITY PRINTERS

SMITH CORONA TPII	\$ 444
TPI STOCK SALE	246
TELETEX TTX-1014 S & P	506
STARWRITER 40 cps S or P	1112
PRINTMASTER 55 cps S or P	1436
NEC 3510 33 cps SERIAL	1409

DOT MATRIX PRINTERS

GORILLA BANANA Graphics	221
PANASONIC KX-P1090 Fr&Tr	
Emulates FX-80	321
STAR MICROHICS GEMINI	
10X 120cps dot graphics	307
15X 120 cps like MX-100	484
OKIDATA	
82x Serial & Parallel 120cps	CALL
84 Parallel 15" Fr&Tr 200cps	CALL
92 Parallel 10" Fr&Pin 160cps	CALL
C. 1T0H	
PROWRITER 8510 10"Par 120cps	404
8600 Near Letter Quality Par	1031
IDS MICROPRISM	510
EPSON FX-80	595



SUPERBRAIN

SUPERBRAIN II

DOUBLE DENSITY	\$1970
QUAD DENSITY	2376
SUPER DENSITY	2684
COMPUTARS for NETWORKING	CALL
Prices too low to advertise	

SYSTEMS GROUP Multi-User	
SYSTEM 2966 w/17Mb Tape Backup	
8" Floppy+19Mb Hard Disk	\$7434

RADIO SHACK TRS-80 SAVE! CALL

AMERICAN SQUARE COMPUTERS is organizing a World Wide Association of Computer Dealers. Open a Store or Start Work Out of Your Home! We Charge NO FRANCHISE FEE! (Our Competitors charge a FRANCHISE FEE of \$15,000.00 to \$45,000.00.) Be a Winner! Let US help YOU get started MAKING MONEY by HELPING PEOPLE to put COMPUTERS to WORK. Write or Phone Today.

Which Computers are Best FREE

Insured Shipping at Low Rates.

ADVANCED DIGITAL

ADVANCED DIGITAL 6MHz COMPUTER
SINGLE BOARD Z80B RS232 S-100 128K
with DISK CONTROLLER for 5" or 8"
SUPER SIX (Includes PSNET/I) \$ 555
SUPER SLAVE=Z80B+PSNET/I+128K 491
SUPER STAR has 5Mb removable HD 4460
CPM 3 350
TURBODOS MULTI USER 518

ALTOS COMPUTERS

ALTOS S-100 COMPUTERS	
580-2 3-User 2 5 1/4"	\$2111
580-10 3-User Hard Disk	3806
580-20 3-User 20Mb	4562
8000-14 with 208K RAM	8340
586-10 16-bit 12Mb Hard Disk	5807
586-30 16-bit 30Mb Hard Disk	7176

TRAXX 5 1/4" ADD ON DRIVES

TRAXX 5 1/4" ADD ON DRIVES	
Bare drive SSDD	\$ 222
SSDD w/cabinet & power supply	322



TELEVIDEO

TERMINALS

TELEVIDEO 910 Emulates	\$ 419
TELEVIDEO 910+ Smart	538
TELEVIDEO 914 NEW Detach Kbd	506
TELEVIDEO 924 NEW Non-volatile	614
TELEVIDEO 925 Detach keybrd	674
TELEVIDEO 950 Prog funct keys	863
TELEVIDEO 970 VT-100 compat	935
ADDS Viewpoint 3A+ Emulates	442
ADDS Viewpoint G Graphics	1371
ADDS Viewpoint 60G Graphics	1511
ADDS Color Terminal NEW!	998
Zenith Z-29 Z19&VT100 compat	655
Zenith ZT-1 Terminal+modem	483
Visual 50 Ergonomic	653
Visual 55 New! Enhanced #50	734
Visual 102 80/132 columns	890
V102 Graphics option for 102	653
Visual 300 ANSI&VT100 compat.	842
Visual 330 VT52&Haz1500 comp.	842
Visual 500 Graphics 14" screen	1970
Visual 550 Graphics,Buffered	2138

MONITORS

ZENITH	
ZVM-122 Amber Phosphor	\$ 117
ZVM-123 Green Phosphor	134
ZVM-131 Composite Color	322
ZVM-RGB-135 Color Monitor	491
USI 12" Amber 20 Mhz	\$ 149

NEC	
JBI205M 12" Amber Phosphor	\$ 190
JCI215 12" Color w/Audio	312

AMDEK	
AMDEK 13" COLOR I Demo, 1 left	257

GRAPHICS & COLOR GRAPHICS

VECTRIX

VX 128 8 colors 322x560 Pix.	\$1795
VX 384 16.8 million colors	3595
VXM Hi Res. 13" RGB Monitor	1221

MICROANGELO

MA 512 512x480 Monochrome	\$ 674
MA 520 512x480 + Screen Pak2	890

COMPUTERS

COMPUPRO

Compupro computers come as main-frame, boards, and drives, and you must set the switches.

816A Computer 8085/8088 128K	\$4106
816B Computer 8085/8088 256K	5180
816C 8085/8088 512K 3 users	6613
816D 10 MHz 8086 512K	10194
816-08 CPUZ 208K Oasis	CALL
816-016 10 MHz 8086 512K	CALL
816-68K 8 Mhz 68000 256K	6471

SEATTLE Pure 16 bit computer is the fastest microcomputer by actual test!

S-100, 128K Static Ram, 8 MHz
8086 18-slot Mainframe, 3 serial & 1 parallel ports.
Gazelle II Avail. Nov/Dec
Hard Disk Gazelle II

TARBELL with 2-8" disk drives

TARBELL REBEL S-100 64K Z80B 6MHz	
REBEL 2 2 5 1/4" Flyp=800K	\$2479
REBEL 5 1/4" Floppy + 5Mb HD	3009
REBEL 5 1/4" Floppy +10Mb HD	3139
REBEL 5 1/4" Floppy +16Mb HD	3268
TARBELL EMPIRE S-100 64K 2 8" Drvs	
EMPIRE I Single sided	\$3304
EMPIRE II Double sided	3775

MEDICAL SOFTWARE

MICROMED or MICRODENT	\$1656
STARDOC for OASIS SYSTEMS	350



NORTH STAR ADVANTAGE

NORTH STAR ADVANTAGE 8 BIT	8/16
Work Station	\$1996 \$2329
2 Floppies 360K ea.	2298 2631
5 Mb Hard + 360K Floppy	3432 3765
15 Mb Hard+ 360K Floppy	4566 4899

NORTH STAR HORIZON

	1 User	Multi
2 Floppies 360K ea	\$2775	N/A
5 Mb Hard & Floppy	3833	\$6948
15 Mb Hard +Floppy	4595	7147
18 Mb Hard +Floppy	6101	8647
CALIFORNIA COMPUTER SYSTEMS		
CALSTAR 2 8" Drvs 2.5Mb 128K	\$2295	
2210-01 ONLY 4 LEFT IN STOCK	615	



Morrow
Terminal

Micro Decision II MICRO DECISION

"A DEAL YOU CAN'T REFUSE"

64K RAM Z80 4MHz 2 serial ports
1 parallel port 2 5 1/4" drives.
Free Software: CPM 2.2, MicroSoft Basic, BaZic, WordStar, LogiCalc spreadsheet, Correct-it spelling checker, Personal Pearl data base:
ONLY
MD2 2 Single sided drives \$ 938
MD2 + MDT50 Terminal 1272
MD2 + MDT50 + MP100 Printer 1705
MD3 Business Computer: Featuring Free Software above + Free QUEST BOOKKEEPER SYSTEM FANTASTIC BUY!
MD3 2 Double sided drives \$1165
MD3 + MDT50 Terminal 1499
MD3 + MDT50 + MP100 Printer 1932
MD11 has 10Mb HARD DISK+DSDD flyp and 128K RAM and CPM 3 + MDT 80 \$2388
ABOVE PACKAGES INCLUDE ALL CABLES

DECISION I

SingleUser=FREE CPM, MicroSoft Basic. S-100, IEEE 696, 14-slot, 4 MHz Z80 Realtime clock, Interrupts, 3 Serial & 1 parallel port, 64K RAM expandable to 1 Megabyte
D100 \$1712
D120 = D100 + DSDD 5 1/4" + 10Mb HD +Wordstar, Correct-It, LogiCalc, BaZic, Personal Pearl, and Quest Bookkeeper Software 3538
MultiUser = Hardware & Software as D120 w/256K RAM & Memory Protect + Micronix Operating System runs 16 programs simultaneously!
D200 w/10 Mb DMA Hard Disk 3889
D210 w/16 Mb DMA Hard Disk 4240
D220 = D210 w/512K RAM & 6 Serial & 2 Parallel ports. A 6-user system, can be upgraded for 15 users. 5293

MORROW DISK DRIVES

Complete systems include S-100 controller, power supply, cabinet, & fan. CPM & Basic 80.
Add Drives include power supply, cabinet & fan.

	System	Add Drive
5 1/4" Win.	10Mb \$1572	\$1081
5 1/4" Win.	15Mb 1713	1362
8" Winchester	10Mb 2625	2134
8" Winchester	20Mb 3187	2766
MORROW 8" FLOPPY DISK DRIVES w/DMA		
One 1 sided	\$ 870	\$ 576
One 2 sided	1081	800
Two 1 sided	1418	1011
Two 2 sided	1839	1432

APPLE, IBM OR MORROW, WHICH IS BEST? FREE BROCHURE!

Call for latest prices & availability

Factory Guarantees

We Beat Prices

AMERICAN



COMPUTERS

919-889-4577

4167 Kivett Dr.

Jamestown N.C. 27282

919-883-1105

Circle 21 on inquiry card.

BYTE February 1984

357

Listing 3: The complete code produced by two compilers for the listing 1 program.

Pascal	Pascal/MT+86	Pascal-86
count := 0;	MOV COUNT,0	MOV COUNT,0
for i := 0 to size do	M4: MOV I,OFFFH MOV DS:WORD PTR 202CH,1FFFH INC I DEC DS:WORD PTR 202CH JGE M2 JMP M3	P5: MOV CX,0 MOV I,CX
flags[i] := true;	M2: NOP MOV AX,OFFSET FLAGS ADD AX,I XCHG AX,DI MOV BYTE PTR [DI],01 JMP M4	MOV SI,CX MOV FLAGS[SI],1 INC CX CMP CX,1FFEH JLE P5
for i := 0 to size do	M3: MOV I,OFFFH MOV DS:WORD PTR 202EH,1FFFH M12: INC I DEC DS:WORD PTR 202EH JGE M5 JMP M6	P6: MOV AX,0 MOV I,AX
if flags[i] then begin	M5: NOP MOV AX,OFFSET FLAGS ADD AX,I XCHG AX,DI TEST BYTE PTR [DI],01 JNZ M7 JMP M8	MOV SI,AX TEST FLAGS[SI],1H JE P7
prime := i + i + 3;	M7: MOV AX,I ADD AX,I ADD AX,3 MOV PRIME,AX	ADD AX,AX ADD AX,3 MOV PRIME,AX
k := i + prime;	MOV AX,I ADD AX,PRIME MOV K,AX	ADD AX,SI MOV K,AX
while k <= size do begin	M11: CMP K,1FFEH JLE M9 JMP M10	P8: CMP K,1FFEH JNLE P9
flags[k] := false;	M9: NOP MOV AX,OFFSET FLAGS ADD AX,K XCHG AX,DI MOV BYTE PTR [DI],0	MOV SI,K MOV FLAGS[SI],0
k := k + prime	MOV AX,K ADD AX,PRIME MOV K,AX	MOV AX,PRIME ADD AX,SI MOV K,AX
end;	JMP M11	JMP P8
count := count + 1	M10: MOV AX,COUNT INC AX MOV COUNT,AX	P9: INC COUNT
end;	M8: JMP M12	P7: MOV AX,I INC I CMP AX,1FFEH JLE P6

PRO-MODEM 1200



It's about time.

Time for your computer to make the telephone connection – with an intelligent, full 212A 300/1200 baud modem – with a real time clock/calendar – and with the capability to expand into a complete telecommunications system. It's time for PRO-MODEM 1200. Much more than just a phone modem.

When you're on-line, time is money. PRO-MODEM telecommunication systems help you save. By monitoring the duration and cost of your phone calls. And by sending and receiving messages, unattended, at preset times when the rates are lower. . . with or without your computer.


Compare the \$495 PRO-MODEM 1200 with any other modem on the market. For example, you'd have to buy both the Hayes Smartmodem 1200 plus their Chronograph for about \$950 to get a modem with time base.

PRO-MODEM 1200 is easy to use. A convenient "Help" command displays the Menu of operating command choices for quick reference whenever there's a question about what to do next. Extensive internal and remote self-diagnostics assure that the system is operating properly. Some of the other standard features include Auto Answer, Touch Tone and Pulse Dialing, and Programmable Intelligent Dialing.

PRO-MODEM does more. It lets you build a full telecommunications system with features like Auto Dialer, Incoming and Outgoing Message Buffering, Business/Personal Phone Directory, Programmable Operating Instructions, a 12-Character Alpha-Numeric Time and Message Display, and versatile PRO-COM Software. PRO-MODEM commands are Hayes compatible so you can use most existing telecommunications software without modification.

There's much more to the PRO-MODEM story. See your local dealer for complete details. He'll show you how to save time. And money.

Prometheus Products, Inc., 45277 Fremont Blvd., Fremont CA 94538, (415) 490-2370

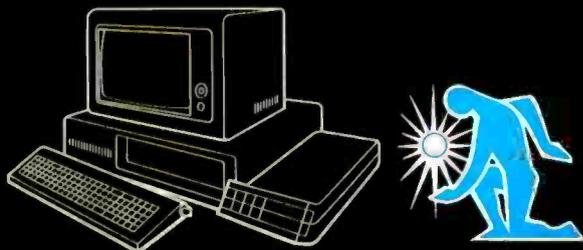

PROMETHEUS

Compiler	Time (microseconds)	Size (bytes)
Pascal/MT + 86	31	23
Pascal-86	18	13

Table 2: Summary of results of the listing 2 code.

Text continued from page 356:

understand the Pascal-86 code, examine table 1, which details the register usage. I deduced the first line in table 1 by backtracking through the code. Given that the accumulator contains the value of I, it makes perfect sense to compute I+I by adding the accumulator to itself. This step is an optimization because doubling the accumulator won't normally double I; this particular optimization can therefore take place only when the accumulator contains I. This optimization gives the Pascal-86 code a one-instruction advantage over Pascal/MT+86 code.

Similarly, the code for computing K was optimized in Pascal-86 by tak-

ing advantage of the fact that registers happened to contain all of the necessary values. As the Pascal-86 instruction 11 in listing 2 starts to execute, the SI register contains the value of PRIME. Pascal-86 simply adds the two registers together to form K and then stores the result in K, saving one instruction over the more obvious approach taken by Pascal/MT+86. The total code size and execution times for Pascal/MT+86 and Pascal-86 are shown in table 2.

Could these examples be improved by an assembly-language programmer? A programmer might be able to produce a Sieve program that was faster overall than the Pascal-86 code, but it would certainly be impossible to improve on the code that Pascal-86 generated for the computations of K and PRIME. The Pascal/MT+86 computation of K could easily be improved. As Pascal/MT+86 starts to compute K, the value of PRIME is already in the AX register. All that is required is to add in the value of I and store the result in K as shown below:

```

;k := i + prime
ADD AX,I ;AX already
;contains
;PRIME, just
;add in I
MOV K,AX ;Store result in
;K

```

This code saves one instruction and would make the Pascal/MT+86 code more competitive with the Pascal-86 code.

The Pascal-86 code for computing K and PRIME is devious. It uses an approach that is not recommended for human programmers because the code is hard to understand and hard to modify. Pascal-86 uses results of many previous steps as a starting point for computing K and PRIME. However, I believe that devious (but correct) code generated by an automaton (the Pascal-86 compiler) is acceptable. Programmers strive to create readable programs because programs that can be easily read can be used and maintained by others. In this case, the goal is to create readable

Computer problems? DON'T BLAME THE SOFTWARE!

Isolators prevent:

- CPU/printer/disk interaction
- Lightning or spike damage
- AC power line disturbances
- RFI-EMI interference



Pat. # 4,259,705

Commercial Grade Isolators

- ISO-1 3 Isolated Sockets \$ 81.95
- ISO-2 2 Isolated Socket Banks, 6 Sockets \$ 81.95

Industrial Grade Isolators

- ISO-3 3 Double Isolated Sockets \$122.95
- ISO-11 2 Double Isolated Banks, 6 Sockets \$122.95

Laboratory Grade Isolators

- ISO-17 4 Quad Isolated Sockets \$213.95
- ISO-18 2 Quad Isolated Banks, 6 Sockets \$180.95

- Circuit Breaker, any model (Add-CB) Add \$ 11.00
- Remote Switch, any model (Add-RS) Add \$ 20.00

ESP Electronic Specialists, Inc.

171 S. Main St., Box 389, Natick, Mass. 01760 (617) 655-1532

Toll Free Order Desk 1-800-225-4876
MasterCard, VISA, American Express

PERSONAL ROBOTS

Peripherals and Software for Personal Robots

VOICE COMMAND SYSTEM FOR HERO

MICROMATION proudly presents a new peripheral for HEATHKIT'S HERO robot which elevates the robot to a new level of sophistication. We call this peripheral a Voice Command System (or VCS) because it not only consists of a voice recognizer, but also an advanced level machine language program for the robot which actually allows you to program robot movements by voice. We call the voice recognizer VOREC and the voice driven program VOCOL (Voice Command Language). Highlights of these two important parts of the VCS are described below.

VOREC

- Recognition accuracy about 98%
- Vocabulary of up to 256 words (stored as 16 word groups with 16 words in each group for greater recognition accuracy)
- 16K of onboard static RAM of which 16K is battery backed to retain recognized word parameters during power down
- RS232 port for receiving commands from, and reporting status and words recognized to the host (HERO)
- Highly sensitive audio input circuitry requires only an external speaker for audio input rather than a microphone (This allows robot to receive commands from up to 15 feet away)
- Utilizes state-of-the-art high speed (HC) CMOS chips and the new CMOS 6502 microprocessor for ultra low power consumption. Complete board consumes an incredibly low 45 ma while active and 1 ma when inactive.
- Speech recognition is accomplished by a software algorithm contained in a 2K EPROM. (Future product updates will require only replacement of this EPROM)

VOCOL

- This software is even more amazing than the voice recognition hardware. VOCOL is like a high level language for the robot (such as BASIC) which supports both deferred and immediate execution modes. The only difference is in BASIC you "write it" and in VOCOL you "speak it". The software is provided on an EPROM which plugs into a memory socket on our HERO MEMCOM BOARD. VOCOL has the following principal features:
 - When first run, the robot talks to you through a voice training session in which you are asked to repeat words in his command vocabulary three (3) times.
 - Following this training session, you can literally talk in a program of movements for later execution, or command immediate movement by voice.
 - The robot prompts you for a command and when received, repeats it back to you for verification. If verified and if in immediate execution mode, the robot will execute the movement. If in deferred execution mode, the robot proceeds to write a machine language program in his memory for later execution. When your program of movements is complete, you signify this with a "STOP" command. A "GO" command will then cause the robot to execute the program it wrote in memory. After execution, the robot returns to the command mode.
 - Complete instructions and installation manual.

The Voice Command manual contains a complete description of how to use the VOREC board under program control from HERO. The 6800 Source Code for VOCOL is available on an APPLE DOS 3.3 disk at additional cost. This source code is compatible with the SC 6800 CROSS ASSEMBLER.

VOCOL Source Code \$55.00 (not sold separately)

TOTAL SYSTEM PRICE \$595.00

NEW

POET

This is an Artificial Intelligence program similar in concept to STORYTELLER, but more advanced. The program uses an advanced self-programming technique which allows the robot to speak self-generated, random three line Haiku poems on an endless list of subjects. After HERO speaks a poem and likes it enough, he will make a comment about it or do some meaningful body movement.

PRICE: TAPE (machine code) \$20.00

PRICE: DISK (source code) \$30.00

HERO MEMCOM BOARD

- This product provides a means to develop programs for the robot using a personal computer, and expands the robot's memory with an additional 32K of RAM. This product includes:
 - Two 8 bit bi-directional parallel ports with handshaking lines for superfast data transfers between the robot and a computer (connects directly to our APPLE-HERO COMMUNICATOR board) plus two 16 bit timers
 - An RS232 serial port for two-way communications between the robot and any computer having an RS232 serial port
 - Serial communications software in an onboard EPROM which allows uploading/downloading of programs via the serial port.
 - Complete instruction manual and schematic.


PRICE \$295.00

APPLE-HERO COMMUNICATOR

- This product provides the hardware and software necessary to implement two-way high speed parallel communication between an APPLE computer and a HERO robot equipped with our HERO MEMCOM BOARD. It includes:
 - A peripheral card for an APPLE that contains two 8 bit parallel ports with handshaking lines, and two 16 bit timers
 - Data transfer software for the APPLE board and for the HERO MEMCOM BOARD burned into two 27A EPROMS. These programs provide ultra fast two-way communications
 - A disk containing heavily commented 6800 and 6502 source code for the communications software. These source codes are compatible with the SC MACRO ASSEMBLER and the SC 6800 CROSS ASSEMBLER available for the APPLE from the SC SOFTWARE CORPORATION.

PRICE \$159.00

Send check or money order to:
MICROMATION INC.
9104 Red Branch Rd.
Columbia, MD 21045



For information call:
(301) 730-1237
9 am-5pm Monday through Friday
MasterCard & Visa welcome

Add \$3.00 for shipping

4

It's Fast In Any Language.

When it comes to software development, the difference between a Sage IV computer and other micros is like day and night.

With the Sage Computer it'll take you fewer days and nights to finish your program.

Speed is the reason. Speed resulting from the fast MC68000 microprocessor, fast architecture, fast operating systems, and blinding transfer rates.

The fact is, even we are surprised by the amount of software that's developed on Sage Computers.

So if you're a programmer, maybe you should spend some time learning how much time you could save using a Sage IV.

The Hottest Languages And Operating Systems.

Programs in nearly all of the important languages can be written on the Sage computer.

Included in the price is the **p-SYSTEM** operating system which supports **Pascal, BASIC, and FORTRAN.**

Other operating systems are optional. For **UNIX** fans there's **IDRIS**, which runs up to twice as fast (even without a Sage computer). **IDRIS** conforms to **Usr/Group Standards Committee**

standards and programs written under it are highly portable to other micros.

CP/M advocates please note that Digital Research has developed **CP/M-68K** for Sage hardware, providing a truly complete software development environment. Versions of **Pascal, BASIC, C-BASIC, C,** and **FORTRAN 77**, as well as a very fast **APL**, may be used under this operating system.

The Sage IV is also blindingly fast when

If you found your language here, you just found your computer. The 16-bit, 2-million operation/sec Sage IV micro with up to one MByte RAM and 18-MByte internal hard disk.

For more information and the name of your nearest SAGE dealer, call us today. And be sure to ask about our new software catalog describing over 200 application programs for Sage computers.

Sage Computer Corporate Office,
4905 Energy Way, Reno, Nevada
89502. Phone (702) 322-6868
TWX: 910-395-6073/SAGE RNO

Eastern United States
Sage Computer
15 New England
Executive Park
Suite 120, Burlington, MA
01803 (617) 229-6868



running **hyperFORTH** with its extended programmer and user interfaces.

Besides **IDRIS**, other **Multi-User** operating systems that run on the Sage Computer are **PDOS, MBOS,** and **MIRAGE.**

A lot of excitement has been brewing in the Pascal World over Niklaus Wirth's new **MODULA 2**—and it's available for Sage computers. So is **ADA**, for the record.

© 1983 Sage Computer Technology all rights reserved Sage & Sage IV are trademarks of Sage Computer Technology



Listing 4: The 8086 assembly code generated by the Pascal/MT+86 and Pascal-86 compilers for the following listing 1 FOR loop:

```
for i := 0 to size do
  flags[i] := true;
```

The code has been reformatted to make it more legible, and it has been slightly revised to conform to Intel op-code standards. Both routines have been assembled and tested.

Pascal/MT+86

```

1      MOV    I,0FFFFH           ;Initialize I to -1
2      MOV    DS:WORD PTR 202CH, ;Initialize anonymous
      1FFFH
      ; loop counter to 8191
3 M4:  INC    I                   ;Increment I
4      DEC    DS:WORD PTR 202CH ;Decrement anonymous loop counter
5      JGE    M2                  ;Jump to M2 if loop should continue
6      JMP    M3                  ;Jump out of loop
7 M2:  NOP                        ;Do nothing
8      MOV    AX,OFFSET FLAGS     ;Place base address of FLAGS
      ; array into AX register
9      ADD    AX,I                ;Add I to the base address
      ; in AX register
10     XCHG   AX,DI               ;Put address of an element of
      ; FLAGS array into DI register
11     MOV    BYTE PTR [DI],01H   ;Put a 1 (true) into element
      ; of FLAGS array
12     JMP    M4                  ;Jump back to loop increment
      ; section
M3:
```

Pascal-86

```

13     MOV    CX,0H               ;Put a zero into CX register
14 P5:  MOV    DS:I,CX            ;Place value in CX register into I
15     MOV    SI,CX               ;Copy CX register into
      ; SI index register
16     MOV    DS:FLAGS[SI],1H    ;Put a 1 (true) into an
      ; element of FLAGS array
17     INC    CX                  ;Increment CX register
18     CMP    CX,1FFEH           ;Compare value in CX register
      ; with Terminal Value
19     JLE    P5                  ;Jump back to P5 if loop should continue
```

Coding Method	Time (milliseconds)	Size (bytes)
Pascal/MT + 86	265	39
Pascal-86	155	21
Author's Assembly Loop	120	15
Author's Assembly String	17	13

Table 3: Summary of the performance of four routines used to initialize the FLAGS array.

and maintainable Pascal source code. The object code generated by the compiler doesn't need to be readable—it should be correct and efficient.

The FOR Loop Schemata

The Sieve benchmark program includes two FOR loops: one loop to

initialize the array of flags that form the basis of the Eratosthenes method and one loop to actually search for primes. The FOR loop is obviously a very important part of Pascal and it also happens to be one of the areas where the two compilers in this study use very different strategies.

We will examine the initialization

FOR loop because it is the simplest FOR loop in the Sieve. Another reason for studying the initialization FOR loop is more subtle—this particular loop can be dramatically optimized. Listing 4 shows the code for the initialization FOR loop produced by the two compilers.

The coding schema for a FOR loop can be separated into three logical sections: the initialization of the loop, the test-and-increment section, and the body of the loop. A glance at listing 4 reveals that Pascal/MT+86 and Pascal-86 use different FOR loop structures.


In Pascal/MT+86 the initialization section is at the top of the code (lines 1 and 2), the test-and-increment section is in the middle (lines 3 through 6), and the body of the loop is at the end of the code. The Pascal/MT+86 FOR loop is completely coded in twelve 8086 assembly-language statements containing 39 bytes of code. The execution time of the initialization FOR loop (8191 iterations) is 265 milliseconds (see table 3).

The Pascal/MT+86 FOR loop schema uses two loop counters, the visible loop counter named I and an anonymous loop counter created by the compiler. In the listing 4 code the anonymous loop counter is stored at location 202C hexadecimal and is referenced only twice, once in line 2 and once in line 4. The visible loop counter is incremented once each pass through the loop, whereas the anonymous loop counter is decremented each time through. The visible loop counter is initialized (in line 1) to be 1 less than the starting value, while the anonymous loop counter is initialized (in line 2) to be the number of passes through the loop plus 1. During each execution of the loop the anonymous loop counter actually determines whether the loop should continue. The visible loop counter (I) is just along for the ride and for use in the body of the loop.

Dual loop counters are the most striking feature of the Pascal/MT+86 FOR loop schema. What is to be gained from dual loop counters? Actually there is an advantage. Pascal is intended to be a very "safe" language. Pascal uses strong type check-

A TIMELY ANNOUNCEMENT FOR PRODOS™ USERS:

Congratulations! You not only have a powerful new operating system in Apple's* ProDOS, you can now get an incredibly versatile Clock/Calendar card to use with it. PROCLOCK™.

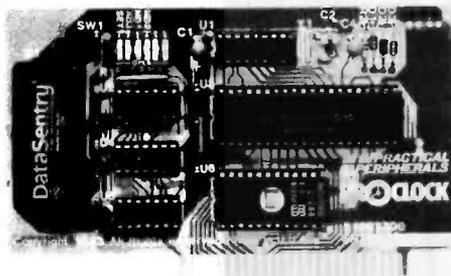

PROCLOCK is the first Clock/Calendar designed for ProDOS-based systems as well as other Apples running DOS 3.3, CP/M**, Pascal, Applesoft*, and BASIC.

What's more, PROCLOCK fully emulates Superclock II, Thunderclock Plus and Apple Clock*. So programs written for these products can be used without any modification.

Of course, PROCLOCK will time- and date-code files. And consider how much money you could save by timing your modem to transmit when the phone rates are cheapest. You can even use PROCLOCK as part of an automatic appliance control system.

Plus, PROCLOCK's powerful interrupt capabilities are invaluable to programmers working with time-sensitive routines and multi-tasking. It can generate interrupts at intervals of 1 millisecond, 1 second, 1

minute, 1 hour, or any combination of those. And all interrupts are software-controlled and handled through PROCLOCK's on-board PIA.

Speaking of software, you also get a diskette full of sample programs, utilities and applications like our Time-Clock II job/time logging program.

PROCLOCK even includes one feature we don't expect anyone to take advantage of—a 10-year lithium battery that keeps the clock running even if your computer is left off for long periods of time.

But just try to keep away from your Apple long enough to put that to the test! With PROCLOCK, you'll have a whole new world of applications to explore. And plenty of time to explore it. Because PROCLOCK is a reliable, well-built piece of hardware. So well-built, it's backed by a five-year warranty.

Ask your dealer about PROCLOCK. It's perfect timing for ProDOS users!

Another practical product from Practical Peripherals—makers of MICROBUFFER™, PRINTERFACE™ and GRAPHICARD™.

**PRACTICAL
PERIPHERALS**

31245 La Baya Drive, Westlake Village, CA 91362
(213) 991-8200 • TWX 910-336-5431

*ProDOS, Apple, Applesoft and Apple Clock are registered trademarks of Apple Computers, Inc. **CP/M is a registered trademark of Digital Research, Inc.

ing, strict syntax, explicit declarations, etc., to safeguard against programmers' mistakes or laziness. One of the safeguards built into Pascal is the inviolability of the FOR loop. It is supposed to be impossible to prematurely exit from a FOR loop in Pascal. The initial conditions of the loop are evaluated once (when you enter the loop), and the loop counter itself should not be modified during the course of the loop. The dual loop counters of Pascal/MT+86 make it impossible for a programmer to prematurely exit the loop since the actual loop counter is inaccessible to a Pascal programmer. We will come back to this point shortly.

The next striking feature of the Pascal/MT+86 FOR loop schema is the presence of a pair of Jump statements on lines 5 and 6 of listing 4. One statement clearly would have been adequate. The conditional jump on line 5 is a "jump if result is greater than or equal" around the second jump. It would have been simpler and shorter to simply insert a "jump if result is less than" to M3. Another

interesting feature is line 7, the "no-operation" line. Occasionally a compiler is forced to insert NOP codes in a program in order to fill reserved space. However, why should a NOP be the target of a Jump instruction? With miniscule effort the jump on line 5 could have used line 8 as the target instead of line 7.

One final comment must be made regarding the Pascal/MT+86 listing 4 code. The 8086 microprocessor has addressing modes specifically designed for accessing arrays of bytes or words. These addressing modes are ignored in the Pascal/MT+86 code shown in listing 4, and the address calculations are done explicitly in statements 8 through 11.

The FOR loop schema used by Pascal-86 is much leaner than the Pascal/MT+86 schema. The basic organization of the Pascal-86 FOR loop is different. In Pascal-86 the loop initialization is at the top (line 13), the body of the loop is in the middle (lines 14 through 16), and the test-and-increment portion is at the end. The Pascal-86 version doesn't

use dual loop counters; it effectively uses the array addressing mode of the 8086 microprocessor, and it avoids back-to-back Jump statements.

The advantage of the Pascal-86 loop schema over the Pascal/MT+86 schema is obvious. The Pascal-86 code is 18 bytes shorter and executes 110 milliseconds faster. (The results are summarized in table 3.)

Could an assembly-language programmer produce a better initialization FOR loop than Pascal-86? Although I'm not a veteran 8086 assembly-language coder, I decided to attempt to improve on the Pascal-86 code. The easiest way to program in assembly language is to use a high-level language (Pascal, perhaps) as a crutch. Write the problem initially in the high-level language. Once the high-level language version is working, it is relatively easy to examine the compiler's code and then write an optimized version.

I was able to improve the Pascal-86 initialization loop very slightly (see listing 5). Pascal-86 used the CX register as the loop counter and the

SUPPLIES FORMS & STATIONERY

for Apple, IBM PC, TRS-80 & other Desk-Top Computers

- Continuous checks, statements, or invoices... 500 for \$49.95 or less.
- Compatible with 350 software publishers.
- Diskettes, printer ribbons, Micro-perTM letterheads, labels, work station aids.
- High quality, low prices, small quantities.
- Money-Back Guarantee.
- Next day shipment of supplies ordered by TOLL FREE phone.
- Send today for your FREE CATALOG

Call today for your FREE CATALOG

Phone TOLL FREE 1 + 800-325-1117
(MA, 1 + 800-448-4688).

G7A 84.3

NEBS

A division of
New England
Business
Service, Inc.

CODE 11007

**Nebes
Computer Forms**

12 South Street, Townsend, Massachusetts 01469

WHY PAY RETAIL ?

SANYO MONITORS		ZENITH	
DM-5109CX GREEN 9"	\$ 74	ZVM-135 RGB IBM	\$489
DM-2212 AMBER 12"	\$ 99	ZVM-123 GREEN 12"	\$ 88
AVM-255 RGB 25"	\$699	ZVM-122 AMBER 12"	\$113
TAXAN		STAR MICRONICS PRINTERS	
415 RGB VISION III	\$435	GEMINI 10X	\$275
105 AMBER 12"	\$127	GEMINI 15X	\$428
PANASONIC		ZOOM MODEMS FOR APPLE	
KX-P1090 PRINTER	\$329	NETWORKER	\$115
DTD-1300G RGB 13"	\$344	NETWORK/NETMASTER	\$149
NEC		SILVER REED PRINTERS	
2010, 2030 PRINTER	\$835	500P/500S	\$432/\$467
2050 PRINTER	\$968	550P/550S	\$648/\$675
3550 PRINTER	\$1835	TOSHIBA	
NOVATION		P-1350 PRINTER	
ACCESS 1-2-3	\$421	\$1466	
TERMS: COD - FREIGHT COLLECT - CHARGE CARD		CALL FOR \$ ON AMDEK, ETC.	
CUSTOMERS ADD 4% - \$1 PHONE CALL REBATE W/ORDER.			

(301) 662-1317

COMPUTER WHOLESALEERS of FREDERICK

A DIVISION OF TESCO CORP.
1030 W. Patrick Street Frederick, MD 21701

Listing 5: Two routines written by the author in 8086 assembly language. The first version is essentially an optimization of the Pascal-86 FOR loop; the second version uses 8086 string operations to achieve an enormous speed advantage. (Compilers cannot easily detect loops that could be recoded using string operations; programmers have a definite advantage in such situations.) Both routines were coded and tested using an Intel development system.

8086 Assembly-Language Loop

```

;Initialize FLAGS array so that each element = 1
;Use SI to index FLAGS array and also as a loop counter

1      MOV     SI,0H           ;Put a zero into SI index register
2  L1:  MOV     FLAGS[SI],1H   ;Put a 1 (true) into an element
                               ; of FLAGS array
3      INC     SI             ;Increment SI register
4      CMP     SI,1FFEH       ;Compare SI register with final value
5      JLE     L1             ;Jump back to L1 to continue

```

8086 Assembly-Language String Operation

```

;Initialize FLAGS array using string operations

6      PUSH    DS             ;Move contents of DS segment register
7      POP     ES             ; into ES segment register
8      CLD                     ;Clear the direction flag
9      MOV     CX,1FFFH       ;Place iteration count into CX register
10     MOV     DI,OFFSET FLAGS ;Place address of FLAGS array
                               ; into DI index register
11     MOV     AL,01           ;Place a 1 in the AX byte register
12     REP     STOSB          ;Repeat the string operation

```

SI register as the array index. I combined these two functions in the SI register and saved one instruction. I also saved an instruction by keeping the loop count in the SI register; the Pascal-86 version copied the value to memory once per iteration. (I could have saved one more instruction by looping from 8190 down to 0 instead of looping from 0 up to 8190.)

This first assembly-language tweaking produced a modest improvement—the code shrank from 21 to 15 bytes and the time shrank from 155 to 120 milliseconds. The 35-millisecond improvement represented approximately a 20 percent increase in speed.

Can the initialization FOR loop be tuned even more? The 8086 microprocessor includes string instructions for performing operations on arrays or bytes or words. My second assembly-language coding effort produced a much faster version by using the 8086 string instructions. Notice that the string version in listing 5 doesn't even use an explicit loop; the actual iterations occur in statement 12

where the "store byte string" operation is repeated 8191 times. The assembly-language string version is 2 bytes shorter than the assembly-language loop version, and it is over six times faster.

Many observers have cautioned that tweaking code produces only modest improvements; dramatic improvements require changing the whole approach. In this example, tweaking produced a 20 percent improvement, whereas changing the whole approach by using the string instructions produced a sixfold improvement.

You should also note that the initialization code using the 8086 string instructions shown in listing 5 is not a general substitute for a FOR loop schema. The particularly simple FOR loop studied in this article happens to be expressible as a string operation—most FOR loops cannot.

Ramifications of the FOR Loop Schemata

The biggest difference between the FOR loop schema of Pascal/MT+86

Listing 6: A program that investigates premature exits from a FOR loop.

```

program premature(input,output);
var i,count : integer;

begin
count := 0;
for i := 1 to 10 do begin
count := count + 1;
i := 10;
end;
writeln(count,' iterations')
end.

```

Listing 7: Pascal code containing a subroutine (named "shortcircuit") designed to circumvent Pascal-86 compilation safeguards.

```

program premature(input,output);
var i,count : integer;

procedure shortcircuit;
begin
i := 10;
end;

begin
count := 0;
for i := 1 to 10 do begin
count := count + 1;
shortcircuit
end;
writeln(count,' iterations')
end.

```

and of Pascal-86 is MT+86's anonymous loop counter. We saw previously that the Pascal/MT+86 approach was used to make it impossible to exit a FOR loop prematurely by modifying the control variable. I decided to investigate how the Pascal-86 compiler protected the FOR loop because safe programming is so important to Pascal.

I coded the test shown in listing 6 in order to investigate the safety of the two Pascal compilers' FOR loops. The program attempts to short-circuit the loop by setting the loop counter variable I to 10 each time through the loop. The variable COUNT actually keeps track of how many times the loop operates. When I compiled the program in listing 6 using Pascal/MT+86, it compiled without complaint; when I executed the program I saw the message "10 iterations." When I compiled the program using Pascal-86, I received an error message informing me that it was not accept-

able to change the value of I in mid-loop. Pascal-86 protects FOR loops during compilation by detecting assignments to the control variable, while Pascal/MT+86 protects FOR loops during execution by using dual loop counters.

Could either technique be fooled? After several false starts, I produced the program shown in listing 7. The coding techniques shown in the listing are definitely not recommended, although they appear to be legal in Pascal. Since I couldn't explicitly alter the loop index variable (I), I decided to use a subroutine to do the dirty work. The subroutine named Short-circuit is designed to circumvent the compilation safeguards of Pascal-86. The program in listing 7 compiled without complaint using Pascal/MT+86 and Pascal-86. The loop executed 10 times in the MT+86 version and only once in the Pascal-86 version.

The Pascal-86 compiler does its best to protect the FOR loop at compile time, but the compiler can be fooled. The Pascal/MT+86 compiler protects its FOR loop during execution by using an inaccessible loop counter. I wasn't able to short-circuit the MT+86 method, but I was dismayed by the lack of warnings when I compiled the program in listing 6. It's up to you to decide which compiler's operation you prefer.

Conclusions

I hope that you don't decide to forgo the FOR loop in Pascal because of its overhead. In the great majority of FOR loops, calculations in the

body of the loop dominate the execution time. Fine-tuning your programs for today's language implementations may allow marginal improvements, but your program will be harder to understand and possibly harder to transport.

Similarly, I hope that all of you avoid the FOR loop short-circuit technique shown above. Clever programming can occasionally add a new feature to a language, such as the ability to prematurely exit a FOR loop. However, such programming is nonportable and hard to understand, and it may not even work when the next version of your compiler is released. Code generation enables us to understand why the Pascal/MT+86 loop is inviolable while the Pascal-86 loop is not, but if you program in Pascal, you should use FOR loops only when you really know in advance how many times you want to iterate.

For the most part you should strive for correct, clear programs. Speed is a secondary concern. People who write programs with a compiler's quirks in mind are trying to serve two masters. Programming is hard enough when you are serving a single master—correctness.

When is it appropriate to examine your compiler's code? Sometimes a program that appears to be correct is not working as you think it should. Examining the relevant code might reveal a bug in the compiler, although it is more likely to reveal a subtle error in your programming. Simply examining the code in a different form—assembly language—often re-

veals errors in your high-level-language programming.

Another reason to examine code is to speed up the time-critical section of a program. We've all heard that 10 percent of the code executes 90 percent of the time. If a small section of code must be rewritten by hand in assembly language, it is easiest if the code is programmed first in the high-level language and then optimized based upon the generated code. An added benefit of this technique is that the high-level version can serve as documentation, a much better form of explanation than the usual assembly-language documentation.

A final excuse for examining code is curiosity. Compilers perform a vital service, but we don't normally get to see the results. Poking around in the compiler's attic can be good clean fun. ■


References

1. Gilbreath, Jim. "A High-Level Language Benchmark." *BYTE*, September 1981, page 180.
2. Gilbreath, Jim and Gary Gilbreath. "Eratosthenes Revisited: Once More through the Sieve." *BYTE*, January 1983, page 283.
3. *Pascal/MT+86 Language Reference Manual*. Pacific Grove, CA: Digital Research, 1982.
4. *Pascal-86 User's Guide*. Santa Clara, CA: Intel Corporation, 1981.
5. *ASM86 Language Reference Manual*. Santa Clara, CA: Intel Corporation, 1981.
6. *The 8086 Family User's Manual*. Santa Clara, CA: Intel Corporation, 1979.

Kaare Christian (5517 Fieldston Rd., Bronx, NY 10471) is a research associate with Rockefeller University and holds a B.S. in applied physics from Cornell University.

DATA TRANSFER PROBLEMS?

Your Simple Solution is **REFORMATTER®** Diskette Conversion Software

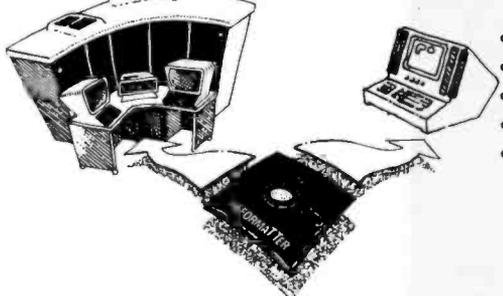

- Avoids serial communication protocols.
- Needs only one system to transfer data.
- Converts source code and data files.
- Allows 2-way transfer.
- Quick, reliable, and inexpensive.



VERSIONS

Runs On	Reads/Writes
CP/M	↔ IBM 3740
CP/M	↔ DEC RT-11
CP/M-86	↔ IBM 3740
CROMIX	↔ DEC RT-11
DEC RT-11	↔ CP/M
MS-DOS	↔ IBM 3740
TRSDOS II*	↔ CP/M
TRSDOS II	↔ DEC RT-11
PRICE:	\$350 *\$249

Requires 8" floppy drive.


(415) 324-9114 TWX: 910-370-7457

467 Hamilton Avenue, Suite 2, Palo Alto, Calif. 94301

THE WY-50.

PRETTY SMALL

A NEW GENERATION OF LOW-COST TERMINALS FROM WYSE.

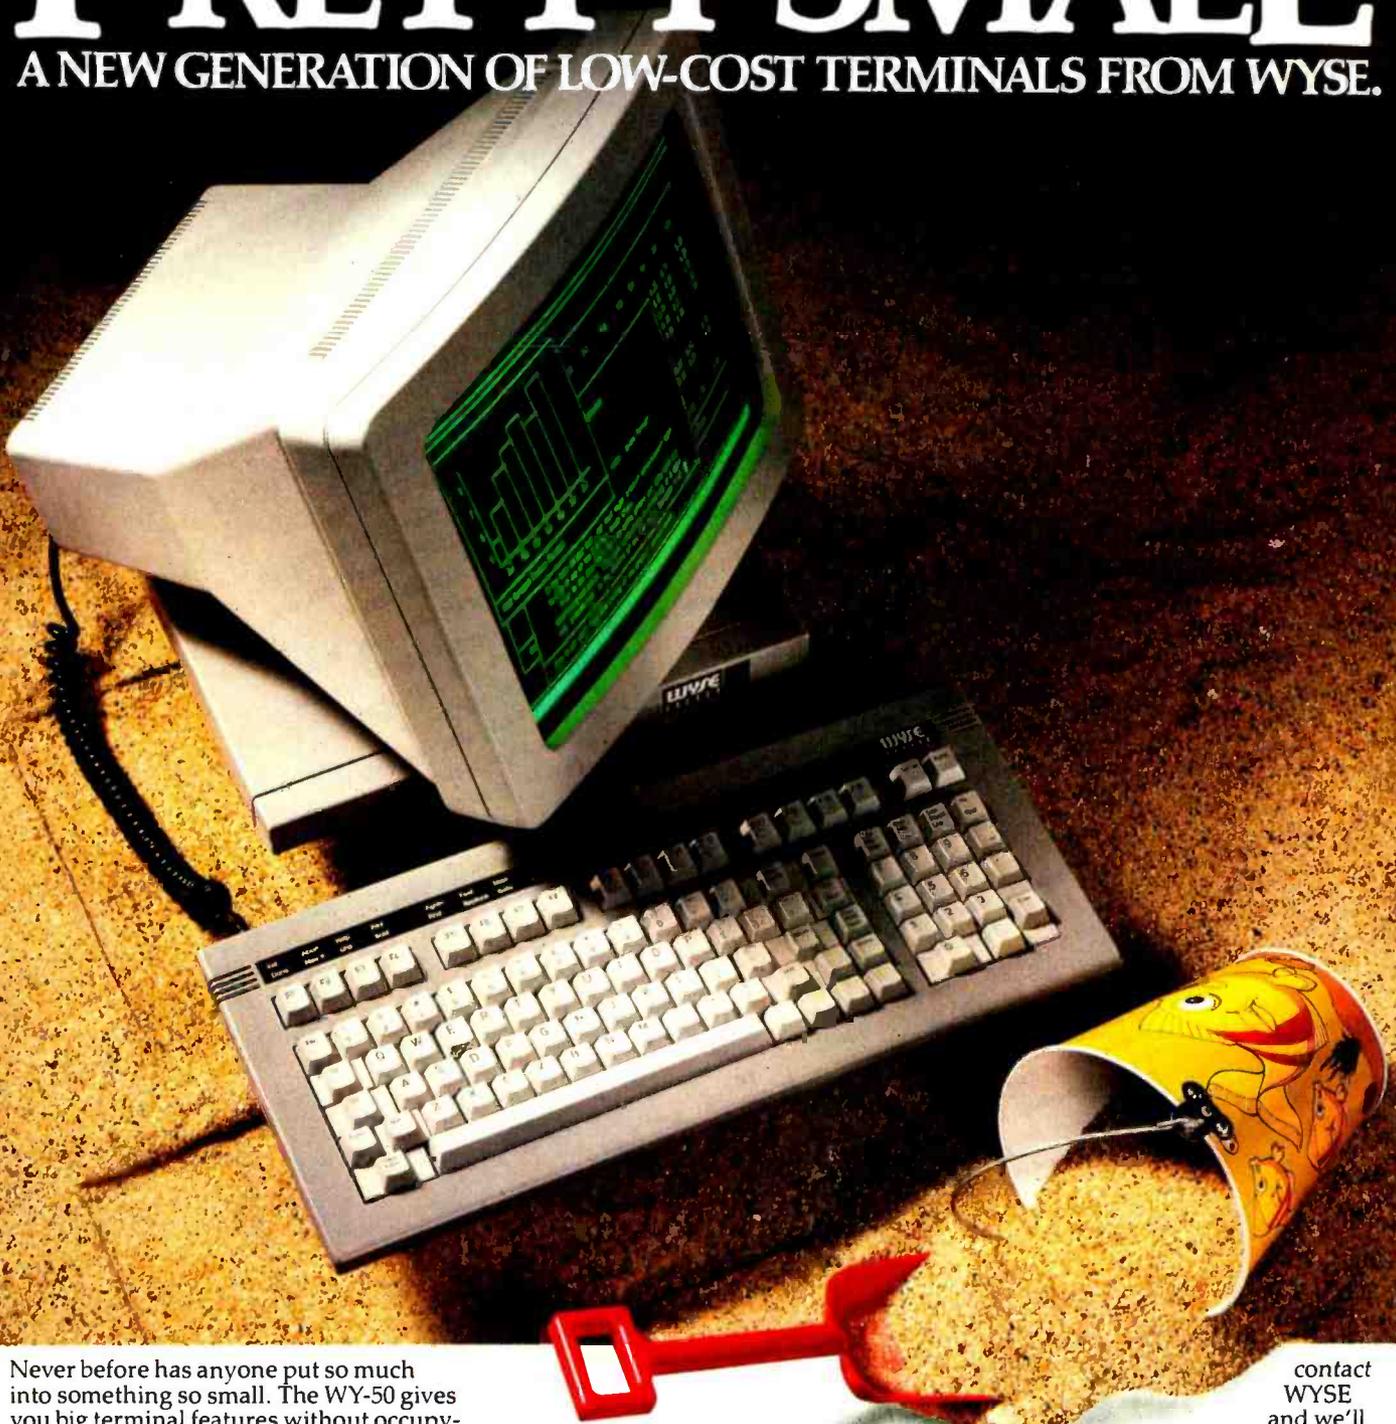

Never before has anyone put so much into something so small. The WY-50 gives you big terminal features without occupying your entire work-space. This took revolutionary design. Design a lot of people couldn't accomplish for the price. But we did.

In fact, the WY-50 introduces a new standard for low-cost terminals. You get a compact, full-featured design that meets the most advanced European ergonomic standards. 30% more viewing area than standard screens. And a price tag as small as they come.

The WY-50 sells for only \$695.00.

FEATURES:

- 14" screen.
- 80/132 column format.
- Soft-set up mode.
- High resolution characters.
- Low-profile keyboard.
- Industry compatible.
- Only \$695.00.

For more information on the revolutionary design, outstanding features and unique good looks of the new WY-50,

contact
WYSE
and we'll
send you a

brochure filled with everything
you need to know. The WY-50. The full-
featured terminal with the small price.

WYSE

Circle 393 on inquiry card.

Make the Wyse Decision.

WYSE TECHNOLOGY 3040 N. First St., San Jose,
CA 95134, 408/946-3075, TLX 910-338-2251, Outside
CA call toll-free, 800/421-1058, in So. CA 213/340-2013.

Reader Service

Inquiry No. **Page No.**

1 4th Sullivan 421
 2 6th Sullivan 125
 3 10th Sullivan 126
 4 14th Sullivan 214
 5 18th Sullivan 512
 6 22nd Sullivan 212
 7 26th Sullivan 614
 8 30th Sullivan 111
 9 34th Sullivan 111
 10 38th Sullivan 111
 11 42nd Sullivan 111
 12 46th Sullivan 111
 13 50th Sullivan 111
 14 54th Sullivan 111
 15 58th Sullivan 111
 16 62nd Sullivan 111
 17 66th Sullivan 111
 18 70th Sullivan 111
 19 74th Sullivan 111
 20 78th Sullivan 111
 21 82nd Sullivan 111
 22 86th Sullivan 111
 23 90th Sullivan 111
 24 94th Sullivan 111
 25 98th Sullivan 111
 26 102nd Sullivan 111
 27 106th Sullivan 111
 28 110th Sullivan 111
 29 114th Sullivan 111
 30 118th Sullivan 111
 31 122nd Sullivan 111
 32 126th Sullivan 111
 33 130th Sullivan 111
 34 134th Sullivan 111
 35 138th Sullivan 111
 36 142nd Sullivan 111
 37 146th Sullivan 111
 38 150th Sullivan 111
 39 154th Sullivan 111
 40 158th Sullivan 111
 41 162nd Sullivan 111
 42 166th Sullivan 111
 43 170th Sullivan 111
 44 174th Sullivan 111
 45 178th Sullivan 111
 46 182nd Sullivan 111
 47 186th Sullivan 111
 48 190th Sullivan 111
 49 194th Sullivan 111
 50 198th Sullivan 111
 51 202nd Sullivan 111
 52 206th Sullivan 111
 53 210th Sullivan 111
 54 214th Sullivan 111
 55 218th Sullivan 111
 56 222nd Sullivan 111
 57 226th Sullivan 111
 58 230th Sullivan 111
 59 234th Sullivan 111
 60 238th Sullivan 111
 61 242nd Sullivan 111
 62 246th Sullivan 111
 63 250th Sullivan 111
 64 254th Sullivan 111
 65 258th Sullivan 111
 66 262nd Sullivan 111
 67 266th Sullivan 111
 68 270th Sullivan 111
 69 274th Sullivan 111
 70 278th Sullivan 111
 71 282nd Sullivan 111
 72 286th Sullivan 111
 73 290th Sullivan 111
 74 294th Sullivan 111
 75 298th Sullivan 111
 76 302nd Sullivan 111
 77 306th Sullivan 111
 78 310th Sullivan 111
 79 314th Sullivan 111
 80 318th Sullivan 111
 81 322nd Sullivan 111
 82 326th Sullivan 111
 83 330th Sullivan 111
 84 334th Sullivan 111
 85 338th Sullivan 111
 86 342nd Sullivan 111
 87 346th Sullivan 111
 88 350th Sullivan 111
 89 354th Sullivan 111
 90 358th Sullivan 111
 91 362nd Sullivan 111
 92 366th Sullivan 111
 93 370th Sullivan 111
 94 374th Sullivan 111
 95 378th Sullivan 111
 96 382nd Sullivan 111
 97 386th Sullivan 111
 98 390th Sullivan 111
 99 394th Sullivan 111
 100 398th Sullivan 111
 101 402nd Sullivan 111
 102 406th Sullivan 111
 103 410th Sullivan 111
 104 414th Sullivan 111
 105 418th Sullivan 111
 106 422nd Sullivan 111
 107 426th Sullivan 111
 108 430th Sullivan 111
 109 434th Sullivan 111
 110 438th Sullivan 111
 111 442nd Sullivan 111
 112 446th Sullivan 111
 113 450th Sullivan 111
 114 454th Sullivan 111
 115 458th Sullivan 111
 116 462nd Sullivan 111
 117 466th Sullivan 111
 118 470th Sullivan 111
 119 474th Sullivan 111
 120 478th Sullivan 111
 121 482nd Sullivan 111
 122 486th Sullivan 111
 123 490th Sullivan 111
 124 494th Sullivan 111
 125 498th Sullivan 111
 126 502nd Sullivan 111
 127 506th Sullivan 111
 128 510th Sullivan 111
 129 514th Sullivan 111
 130 518th Sullivan 111
 131 522nd Sullivan 111
 132 526th Sullivan 111
 133 530th Sullivan 111
 134 534th Sullivan 111
 135 538th Sullivan 111
 136 542nd Sullivan 111
 137 546th Sullivan 111
 138 550th Sullivan 111
 139 554th Sullivan 111
 140 558th Sullivan 111
 141 562nd Sullivan 111
 142 566th Sullivan 111
 143 570th Sullivan 111
 144 574th Sullivan 111
 145 578th Sullivan 111
 146 582nd Sullivan 111
 147 586th Sullivan 111
 148 590th Sullivan 111
 149 594th Sullivan 111
 150 598th Sullivan 111
 151 602nd Sullivan 111
 152 606th Sullivan 111
 153 610th Sullivan 111
 154 614th Sullivan 111
 155 618th Sullivan 111
 156 622nd Sullivan 111
 157 626th Sullivan 111
 158 630th Sullivan 111
 159 634th Sullivan 111
 160 638th Sullivan 111
 161 642nd Sullivan 111
 162 646th Sullivan 111
 163 650th Sullivan 111
 164 654th Sullivan 111
 165 658th Sullivan 111
 166 662nd Sullivan 111
 167 666th Sullivan 111
 168 670th Sullivan 111
 169 674th Sullivan 111
 170 678th Sullivan 111
 171 682nd Sullivan 111
 172 686th Sullivan 111
 173 690th Sullivan 111
 174 694th Sullivan 111
 175 698th Sullivan 111
 176 702nd Sullivan 111
 177 706th Sullivan 111
 178 710th Sullivan 111
 179 714th Sullivan 111
 180 718th Sullivan 111
 181 722nd Sullivan 111
 182 726th Sullivan 111
 183 730th Sullivan 111
 184 734th Sullivan 111
 185 738th Sullivan 111
 186 742nd Sullivan 111
 187 746th Sullivan 111
 188 750th Sullivan 111
 189 754th Sullivan 111
 190 758th Sullivan 111
 191 762nd Sullivan 111
 192 766th Sullivan 111
 193 770th Sullivan 111
 194 774th Sullivan 111
 195 778th Sullivan 111
 196 782nd Sullivan 111
 197 786th Sullivan 111
 198 790th Sullivan 111
 199 794th Sullivan 111
 200 798th Sullivan 111

Inquiry No. **Page No.**

88 Computers 482
 89 Comp. Serv. 105
 90 Computers 110, 111
 91 Computers 110, 111
 92 Computers 110, 111
 93 Computers 110, 111
 94 Computers 110, 111
 95 Computers 110, 111
 96 Computers 110, 111
 97 Computers 110, 111
 98 Computers 110, 111
 99 Computers 110, 111
 100 Computers 110, 111
 101 Computers 110, 111
 102 Computers 110, 111
 103 Computers 110, 111
 104 Computers 110, 111
 105 Computers 110, 111
 106 Computers 110, 111
 107 Computers 110, 111
 108 Computers 110, 111
 109 Computers 110, 111
 110 Computers 110, 111
 111 Computers 110, 111
 112 Computers 110, 111
 113 Computers 110, 111
 114 Computers 110, 111
 115 Computers 110, 111
 116 Computers 110, 111
 117 Computers 110, 111
 118 Computers 110, 111
 119 Computers 110, 111
 120 Computers 110, 111
 121 Computers 110, 111
 122 Computers 110, 111
 123 Computers 110, 111
 124 Computers 110, 111
 125 Computers 110, 111
 126 Computers 110, 111
 127 Computers 110, 111
 128 Computers 110, 111
 129 Computers 110, 111
 130 Computers 110, 111
 131 Computers 110, 111
 132 Computers 110, 111
 133 Computers 110, 111
 134 Computers 110, 111
 135 Computers 110, 111
 136 Computers 110, 111
 137 Computers 110, 111
 138 Computers 110, 111
 139 Computers 110, 111
 140 Computers 110, 111
 141 Computers 110, 111
 142 Computers 110, 111
 143 Computers 110, 111
 144 Computers 110, 111
 145 Computers 110, 111
 146 Computers 110, 111
 147 Computers 110, 111
 148 Computers 110, 111
 149 Computers 110, 111
 150 Computers 110, 111
 151 Computers 110, 111
 152 Computers 110, 111
 153 Computers 110, 111
 154 Computers 110, 111
 155 Computers 110, 111
 156 Computers 110, 111
 157 Computers 110, 111
 158 Computers 110, 111
 159 Computers 110, 111
 160 Computers 110, 111
 161 Computers 110, 111
 162 Computers 110, 111
 163 Computers 110, 111
 164 Computers 110, 111
 165 Computers 110, 111
 166 Computers 110, 111
 167 Computers 110, 111
 168 Computers 110, 111
 169 Computers 110, 111
 170 Computers 110, 111
 171 Computers 110, 111
 172 Computers 110, 111
 173 Computers 110, 111
 174 Computers 110, 111
 175 Computers 110, 111
 176 Computers 110, 111
 177 Computers 110, 111
 178 Computers 110, 111
 179 Computers 110, 111
 180 Computers 110, 111
 181 Computers 110, 111
 182 Computers 110, 111
 183 Computers 110, 111
 184 Computers 110, 111
 185 Computers 110, 111
 186 Computers 110, 111
 187 Computers 110, 111
 188 Computers 110, 111
 189 Computers 110, 111
 190 Computers 110, 111
 191 Computers 110, 111
 192 Computers 110, 111
 193 Computers 110, 111
 194 Computers 110, 111
 195 Computers 110, 111
 196 Computers 110, 111
 197 Computers 110, 111
 198 Computers 110, 111
 199 Computers 110, 111
 200 Computers 110, 111

Inquiry No. **Page No.**

175 Faxing Systems 266
 176 Fax in Systems 267
 177 Fax in Systems 267
 178 Fax in Systems 267
 179 Fax in Systems 267
 180 Fax in Systems 267
 181 Fax in Systems 267
 182 Fax in Systems 267
 183 Fax in Systems 267
 184 Fax in Systems 267
 185 Fax in Systems 267
 186 Fax in Systems 267
 187 Fax in Systems 267
 188 Fax in Systems 267
 189 Fax in Systems 267
 190 Fax in Systems 267
 191 Fax in Systems 267
 192 Fax in Systems 267
 193 Fax in Systems 267
 194 Fax in Systems 267
 195 Fax in Systems 267
 196 Fax in Systems 267
 197 Fax in Systems 267
 198 Fax in Systems 267
 199 Fax in Systems 267
 200 Fax in Systems 267

Inquiry No. **Page No.**

263 Microfilm 175, 175
 264 Microfilm 175, 175
 265 Microfilm 175, 175
 266 Microfilm 175, 175
 267 Microfilm 175, 175
 268 Microfilm 175, 175
 269 Microfilm 175, 175
 270 Microfilm 175, 175
 271 Microfilm 175, 175
 272 Microfilm 175, 175
 273 Microfilm 175, 175
 274 Microfilm 175, 175
 275 Microfilm 175, 175
 276 Microfilm 175, 175
 277 Microfilm 175, 175
 278 Microfilm 175, 175
 279 Microfilm 175, 175
 280 Microfilm 175, 175
 281 Microfilm 175, 175
 282 Microfilm 175, 175
 283 Microfilm 175, 175
 284 Microfilm 175, 175
 285 Microfilm 175, 175
 286 Microfilm 175, 175
 287 Microfilm 175, 175
 288 Microfilm 175, 175
 289 Microfilm 175, 175
 290 Microfilm 175, 175
 291 Microfilm 175, 175
 292 Microfilm 175, 175
 293 Microfilm 175, 175
 294 Microfilm 175, 175
 295 Microfilm 175, 175
 296 Microfilm 175, 175
 297 Microfilm 175, 175
 298 Microfilm 175, 175
 299 Microfilm 175, 175
 300 Microfilm 175, 175

Why are there so many ads in BYTE?

BYTE carries more pages of advertising than any other computer magazine in the world, because:

1. BYTE is the **only** high-tech magazine serving the entire microcomputer field. Our editorial covers all hardware, all software, all peripherals. Therefore, every computer-related product **belongs** in BYTE.

2. Do you know any sophisticated computer user who **doesn't** know BYTE? Over 400,000 pay to read BYTE every month because it is **the** authority, the international standard by which all other computer magazines are measured. Including pass-along, BYTE's high-tech readership totals nearly 850,000. It's an audience **every** advertiser wants.

3. Do BYTE readers **like** all those ads? They'll send over **6 million** "more-information" inquiries to our advertisers this year. No other magazine comes close. Whether in the front, middle or back of the magazine, ad pages in BYTE average over 1,000 inquiries. Some back-of-book advertisers have pulled over 2,000 with a single ad!

That's why there are so many ads in BYTE.

If you're an advertiser, or are thinking about becoming one, talk to us—we're the people who wrote the book on microcomputer marketing. Just call Pete Huestis, Advertising Sales Manager, at (603) 924-9281.

BYTE

THE INTERNATIONAL STANDARD



BYTE is published monthly by McGraw-Hill, Inc., with offices at 70 Main St., Peterborough, N.H. 03458

www.americanradiohistory.com

Writing Device Drivers for MS-DOS 2.0

Using Tandon TM100-4 Drives

The increase in flexibility can be worth the added effort

by J. Eric Roskos

One of the many new features of MS-DOS 2.0 is its ability to allow you to write your own device drivers to be included in the operating system at start-up time. This feature lets you add new peripherals, such as disk drives, that are not supported by the standard software.

The IBM PC will support, without hardware modification, the Tandon TM100-4 disk drive. This drive looks exactly like a standard IBM double-sided drive except for the IBM insignia on the newer drive. In fact, Tandon is one of two IBM suppliers. The TM100-4, however, will hold twice as much data as the standard IBM double-sided disk. Unfortunately, MS-DOS 2.0, as configured for the IBM PC, cannot recognize this drive without some modification. Thus, MS-DOS 2.0 is a natural candidate for a user-written device driver. Though it is possible to patch DOS to make it work with this drive using existing device drivers, writing a new routine allows you to make optimal use of the TM100-4's features, such as the faster head-stepping rate that is possible with this drive.

In this article, I will describe the development of a device driver for the TM100-4, explain device drivers in general, and look in some detail at problems I encountered in developing this particular driver. These problems reflect some pitfalls that are characteristic of the IBM PC and DOS

2.0, so they are useful when writing other kinds of drivers as well.

Device Drivers

An MS-DOS 2.0 device driver consists of two separate procedures, called at separate times by DOS. These procedures are patterned closely after the device drivers in the Unix operating system produced by Bell Laboratories, although the DOS drivers' structure reflects an orientation toward assembly-language programming, whereas this part of Unix is written entirely in the C language.

The first of the two procedures that make up a device driver is the "strategy" procedure. It is called by DOS to request an operation from the device, such as a read or a write. The procedure stores the request and then returns to the caller.

The strategy procedure does *not* perform the requested operation; that is done by the second procedure, the "interrupt" procedure. It is important to understand the reason for this. In a well-designed operating system, I/O (input/output) operations should occur *asynchronously*. It may be possible to make the peripheral function more efficiently if you are allowed to make requests to it and it is then allowed to process them, without an unreasonably tight connection between the two events. For instance, it may help to let the device handler sort a set of requests in some

strategic order that minimizes the amount of movement required by the disk heads. Likewise, it may help to allow the device driver to anticipate a future I/O request based on past ones and to prepare for it before the user requests it. Such advanced reasons are usually found only in multi-user (or multiprocess) operating systems and, in fact, DOS 2.0 does not make much use of them; but we can design better device drivers if we realize this underlying principle.

The interrupt procedure, the second of the two making up the device driver, is responsible for performing the operation requested by the strategy procedure. The interrupt procedure is called when the device is ready to handle another request. It looks for a request stored by the strategy procedure, and if it finds one, it executes the requested operation and signals DOS that it has done so by turning on a "DONE" indicator associated with the request.

In large operating systems, the interrupt procedure is called by the peripheral, which sends a hardware signal, or interrupt, to the microprocessor when it has finished a previously requested operation. This signal causes the processor to issue a subroutine call to the interrupt procedure, which starts the peripheral working on another request. In DOS 2.0, the interrupt procedure is instead always called by DOS immediately

after the strategy procedure is called, probably because this is an early version of the operating system that does not seem to use the fully asynchronous structure just described. In fact, the sample driver given in the DOS manual assumes that DOS will *always* call the interrupt procedure immediately after the strategy procedure, which would be incorrect in a truly asynchronous system. But even when asynchronous interrupts are used, the first time a device is used after it has been sitting idle, DOS will have to call the interrupt procedure to get things going, because an interrupt is generated only when a device first finishes an operation.

This means we don't have to worry about setting up the processor to produce interrupts (or about asking DOS to do it for us), but we can still program a device handler that has a structure much like those used in sophisticated operating systems. Thus, we can learn a lot about how device drivers work by constructing this relatively simple driver.

Disk Drivers

The kinds of requests that can be given to a device driver by DOS are listed in Chapter 14 of the DOS 2.0 manual. For a disk driver, the possible requests are as follows:

INIT—Initialize the disk hardware when the system is first started up. This procedure is always called exactly once, when DOS is started at power on or by pressing Ctrl/Alt/Del. **MEDIA CHECK**—Check whether the user has changed disks since the last time the disk drive was used. For my device driver, I always tell DOS I "don't know" whether it was changed because for a floppy disk this is probably more efficient than reading the disk to see if it has been changed. An interesting alternative to this approach might be to tell DOS the disk hasn't changed if the disk motor is still on and tell it it has changed if the motor is off. The motor is turned off by the clock-handling routine in the ROM BIOS (the portion of the basic input/output system that is permanently stored in read-only mem-

ory) if the disk is not used for a few seconds; this provides a good guess as to whether the user might have changed the disk. If the user has changed the disk, the motor will be off (unless he is incredibly fast). Thus, if the motor is on, you can assume the user hasn't changed disks; in such a case, DOS would not reread the disk if the block being accessed was in memory, speeding up multiple accesses to the same block. The DOS manual doesn't tell exactly what the three alternatives (has changed, hasn't changed, don't know) do, so you are probably safer with the "don't know" alternative. **BUILD BPB**—Tell DOS where in memory you have stored a table, called the BPB, describing the size of the directory and the number of blocks on the disk. **INPUT**—Read from the disk into memory. DOS gives you the starting block number on the disk, the starting address in memory where you are to put the data, and how many blocks you are supposed to read in. **OUTPUT**—Write from memory to disk. DOS gives you the same information as for the INPUT function. **OUTPUT WITH VERIFY**—Write from memory to disk, then verify that the data was written correctly. For our disk driver, we treat this request the same as a plain OUTPUT, although it would be fairly easy to add a function to check that the data was written correctly, since the ROM BIOS provides a VERIFY function.

The exact form in which a request is given to the driver is explained in Chapter 14 of the DOS manual. This data is called a "request header" and tells exactly what DOS wants the device driver to do. It always contains a "command code," a number identifying the functions to be performed; a "status word," in which we store information telling DOS whether we successfully performed the operation it asked for; and some other information that I won't go into here, telling the size of the request area in memory and the unit number when more than one device is to be handled by the same driver. The request header usually has other information follow-

ing it in memory, such as the address and block numbers to be used for an INPUT or OUTPUT operation.

The two main things that a device driver for a disk must accomplish are the INPUT and OUTPUT operations. The other functions are fairly simple and may be based, with appropriate modifications, on the listing supplied in the DOS manual. I'll concentrate on the INPUT and OUTPUT operations in the remainder of this article.

Accessing the Disk

When DOS asks the driver to perform either an INPUT or OUTPUT function, it supplies three numbers that tell exactly what is to be done. The first is the "transfer address," consisting of two words. These words are the address in memory where the disk transfer is to take place. For an INPUT, this is where the data from the disk is to be stored as it is read from the disk. For an OUTPUT, this is where the data to be written onto the disk is found in memory.

To understand this, let's consider how a user's program would access the disk; for simplicity, let's say you want to read an integer from the disk in a BASIC program. You can't read just an integer, which is 2 bytes long, from the disk; the disk is read in blocks of 512-bytes. One of the functions of DOS (and the BASIC interpreter) is to figure out where on the disk the integer is stored; it will be in some 512-byte block of the disk, and this whole block has to be read into memory all at once, because that's how the disk works. So DOS sets aside an area in memory, called a *buffer*, into which the block is to be read. This area is entirely separate from your basic program and is invisible to you. It then asks the driver to read the block into the buffer, and after the driver has done so, it extracts the integer from the block and puts it into your BASIC variable.

It is the address of this buffer in memory that is the first of the numbers given to the driver with an INPUT or OUTPUT request. The driver does not have to set up the buffer or determine where data is on the disk; that is done by the higher-level parts of DOS. It only has to read one or

more 512-byte blocks from the disk into *memory* when requested. The second number given to the driver is the number of these 512-byte blocks that are to be read in. Often, only one block will be read at a time; but when a lot of data is to be transferred at once, such as when copying a file or saving the text from a word processor, many blocks may be read or written at the same time. The third number given to the driver is the "starting-block number" telling where on the disk this data is to be read or written. Because disks always work in terms of 512-byte blocks, the disk is divided up into a series of these consecutively numbered blocks; the block number is a "disk address" analogous to the memory address of a variable in memory, but the size of the object being addressed is much greater (512 bytes versus 1 byte).

Operating the Hardware

I've just explained that when DOS asks the driver to perform an INPUT or OUTPUT, you'll be given information on where in memory and on disk the data is to be found or put. But you have to make the disk drive actually read or write the data. Fortunately, the program in the IBM PC's ROM (read-only memory), called the ROM BIOS, makes this easier. This program has subroutines for almost every hardware device available for the machine, including, fortunately, the TM100-4 disk, which is just another floppy-disk drive to the IBM PC. To use this subroutine, move information concerning what you want done into the 8088's registers and then call the subroutine via the 8088's INT instruction. However, there are two problems. First, the ROM BIOS doesn't know about DOS's block numbers; second, in any one call to the ROM BIOS subroutine, you can't transfer more than nine sectors at a time. (Depending on where the starting sector is on the disk, you may only be able to transfer less than nine.) The information you have to give DOS is listed in table 1.

Of the available functions, a DOS disk drive needs to use only functions 0, 2, and 3; these are the RESET,

AH = Function to be performed:
 0 = RESET the disk drive
 1 = get status information
 2 = READ from disk into memory
 3 = WRITE from memory to disk
 4 = VERIFY a write operation
 5 = FORMAT a track of the disk

AL = Number of sectors to transfer
 CH = Track on disk to be used
 CL = Sector within track to use
 DH = Head on disk drive to use
 DL = Disk drive to use

ES:BX = Address of buffer in memory

Table 1: Before calling the ROM BIOS subroutine, you must load the appropriate information (shown above) into the BIOS registers.

READ, and WRITE functions. Notice that locations on the disk are given in terms of the track, head, and sector. The track number identifies which of the concentric rings of data on the disk is to be used; the TM100-4 can store twice as much data as a standard double-sided drive because it has 80 tracks instead of 40. The head number on a double-sided disk drive such as the TM100-4 identifies the side of the disk you should use. And finally, the sector number tells which of the nine available sectors on a given track and side is to be used. (This sector number can be anything between 0 and 255; although Microsoft and I use numbers 1 through 9, any numbers can be used. This is how most copy-protection schemes work.)

To compute the track, head, and sector number from the DOS block number, we use the following formulas:

$$\begin{aligned} \text{track} &= \text{block} / 18 \\ \text{TS} &= \text{block} \bmod 18 \\ \text{head} &= \text{TS} / 9 \\ \text{sector} &= \text{TS} - (\text{head} \times 9) + 1 \end{aligned}$$

Because each track holds 18 blocks (9 blocks per side, 2 sides), the track number is the block number divided by 18 (using integer division). The value TS is the sector number within the track, a number between 0 and 17. If this number is less than 9, use head 0 and sector TS + 1 (because sector numbers start at 1, not 0). If it's 9 or greater, subtract 9 from TS + 1

and use head 1. In other words, the first 9 sectors are on head 0; the second 9 are on head 1. This is also how head, sector, and track numbers are calculated by the DOS disk drivers. For an introductory description of the ideas of head, sector, and track, see pages 1-10 of the DOS 2.0 manual; it provides more information on the basic concepts involved.

After you've translated the block number to the numbers required by the ROM BIOS, you have to break up requests for transfers bigger than can be handled at one time into consecutive requests to the ROM BIOS. The reason you have to do this is that the ROM BIOS doesn't know how DOS numbers sectors. It doesn't assume after it has transferred the last sector on track *n* that it can go to some other track and sector, say track *n* + 1 sector 1. You have to tell it explicitly. So whenever the track or side (head) numbers change, you have to give the ROM BIOS another request.

Although this is somewhat complicated, if you sit down with pencil and paper you can probably write out a simple procedure, in the programming language of your choice, to solve the problems just described. This is not too difficult and is a good practice whenever you are programming a complicated procedure in assembly language. Unfortunately, there are some interesting and frustrating aspects of this problem that aren't documented in any manual—and this made my project much harder.

Unexpected Problems

When I wrote the original device driver, I used the example in the DOS manual as a guide. Within a reasonable amount of time, I had what should have been a working driver. But it wasn't that simple.

First, I had put some calls to DOS into my driver to display information so I could trace the activity of the driver for debugging. But the driver didn't work at all. It hung the system.

I tried using the debugger supplied with DOS. I traced the execution of the driver, using breakpoints at appropriate places. Strangely, the requests to the driver seemed to be get-

ting destroyed; and more strangely, no matter where I put the breakpoint, this would always happen sometime *after* the first breakpoint was hit. Finally, by more tracing, I discovered the first difficulty with writing device drivers for DOS 2.0: you can't use the debugger because the debugger uses DOS's I/O routines rather than having its own, as is desirable in a good debugger (a debugger should generally be as independent of anything else in the system as possible); and DOS's I/O routines are not "reentrant," meaning you can't call them from within a previous call on the I/O routines, or the former's data will be destroyed.

This was a disappointing setback. You can't use the debugger to debug the operating system because the debugger tampers with the data you're trying to examine. It's hard to understand why Microsoft designed it this way. It would be helpful if someone would develop a debugger independent of anything (except perhaps the ROM BIOS) to plug into the extra socket on the 5150 central processor (there's not a free socket on the 5160, so it wouldn't work there).

The second problem I had concerned the DOS I/O routines. They aren't reentrant. This is mostly because DOS seems to have been written in assembly language. Many of the idiosyncrasies of DOS could have been avoided if, when making a Unix-like single-user operating system, they had also followed the lead of Unix and written it in C, which uses a stack for local variables, thus tending to minimize problems such as those that occurred with the debugger and I/O routines.

After filling out one of the complaint forms in the back of the DOS manual to send to Microsoft, I proceeded to write my own routines to use the ROM BIOS to display debugging information on the screen. They are illustrated in listing 1. After replacing the original calls to DOS with calls on my new routines, I tested it again. A third problem emerged. No matter what I did, DOS would give the message *Sector size too large in file Tm4.com*. This message

Listing 1: *The ROM BIOS debugging routines.*

```

;
; debugging macros
;
;
; prtreg - print contents of register rg in hex, followed by message
;          string in msg, e.g.,  prtreg ax,"=ax register"
;
prtreg macro    rg,msg
    push    ax
    mov     ax,rg
    call   prtax
    wto    msg
    pop     ax
endm

;
; wto - write msg to display.  E.g.,  wto "I/O Error"
;
wto macro    msg
    local   msgstr,around

    ifdef   debug
    push    ax
    push    bx
    push    si
    mov     si,offset msgstr
    call   putc
    pop     si
    pop     bx
    pop     ax
    jmp     around

msgstr:
    db      msg
    db      0DH,0AH,'$'

around:
    endif
endm

;
; Local Procedures for debugging macros
;
;
; putc - equivalent of DOS function 9
;
putc proc      near
    mov     bl,7
    mov     bh,0

putc1:
    mov     al,[si]
    cmp     al,'$'
    je      putc2
    mov     ah,14
    int     10H
    inc     si
    jmp     putc1

putc2:
    ret

putc      endp

;
; prtnum - print low-order 4 bits of al register in hex
;
prtnum proc      near
    push    ds
    push    cs
    pop     ds
    push    bx
    mov     bx,offset xlatb
    xlatb
    mov     ah,14
    mov     bh,0
    int     10h
    pop     bx

```

Listing 1 continued on page 374

Listing 1 continued:

```

        .pop    ds
        ret
x1tab  db      '0123456789ABCDEF'
prtnum endp

;
; prtax - print ax register's contents in hex
;

prtax  proc    near
        push   cx
        push   ax
        mov    al,ah
        mov    cl,4
        shr   al,cl
        call  prtnum
        pop    ax
        push   ax
        mov    al,ah
        and   al,0Fh
        call  prtnum
        pop    ax
        push   ax
        mov    cl,4
        shr   al,cl
        call  prtnum
        pop    ax
        push   ax
        and   al,0Fh
        call  prtnum
        pop    ax
        pop    cx
        ret
prtax  endp

```

Listing 2: The device driver local stack routine.

```

;
; Code used to set up a private stack for the device driver
;
;
; *** The following is in the code segment for the driver: because
; *** the code, stack, and data segments are set up to all start at
; *** the same address.
;
; Private stack - because DOS doesn't provide enough
; room for us to do our debugging I/O
;
stkbot  db      102 dup ("TM4 Stack "); 1020 bytes stack area
        equ    $
        dw    ?           ; a little extra space just to be safe
        dw    ?

;
; Stack pointer save area
;
spsav   dw    ?           ; DOS's stack pointer is saved here
sssav   dw    ?           ; DOS's stack segment is saved here

;
; entry to / exit from device strategy: example of stack switching
;
dev_strategy:
        : switch to private stack

        mov    spsav,sp      ; save DOS's stack pointer
        mov    sssav,ss     ; and its stack segment
        mov    ax,cs        ; stack is in the code segment, so we
        mov    ss,ax        ; set stack segment = code segment
        mov    sp,offset stkbot ; and point stack pointer to bottom
                                ; of the stack

;
; *** Code for strategy routine goes here
;

        : switch back to DOS's stack

        mov    ss,sssav     ; restore DOS's stack seg we saved
        mov    sp,spsav     ; likewise its stack pointer
        ret                ; and return to DOS, who called us.


```

meant that my driver was telling DOS that the disk's sector size was something other than the intended 512 bytes. After careful examination, I found that this was false—the sector size was correct. At this point, only guessing and intuition led to a solution. I guessed that what was happening was that the system stack, a small stack local to DOS that is used in place of the user's stack whenever a DOS function is called, was overflowing and destroying some of DOS's data. This seemed possible because my debugging I/O routines saved all the system's registers, using a lot of space on the stack, and called ROM BIOS procedures, using even more. So I resorted to the unorthodox method of having the device driver set up and use its own local stack (this method remains in the finished driver). This eliminated the error message, although I have no concrete evidence that this was the cause of the error. This is not a satisfactory solution, because it means the driver takes up more space than it should and the method used to switch stacks is complicated, much like a context-switching operation used in a multitasking operating system to switch between several programs running at the same time. But this solution does assure that the driver will have a known amount of stack space, and it eliminates the error message. The method used to switch to a local stack is illustrated in listing 2.

Hardware Limitations

Following this improvement and the addition of some macros to print the contents of the registers on the screen, debugging proceeded about as expected for a while. The driver seemed to be working at last. But then, while copying a large file, an I/O error occurred. The error code returned by the BIOS was code "09"; according to the ROM BIOS listing in the Technical Reference manual, this means "attempt to DMA across 64K boundary." This was the first reference I had seen to what turned out to be a difficult, and largely undocumented, hardware restriction on the IBM PC. When doing I/O to the disk

new
**The CONCEPT AVT+
In a word: capability.**

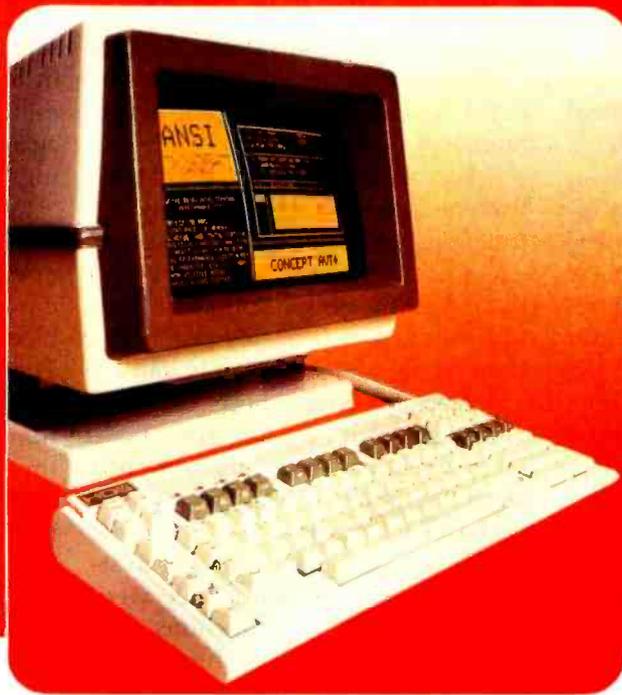

THE CONCEPT AVT+ DISPLAY TERMINAL

ANSI standard conformance, DEC VT100 software compatibility, eight pages of memory, 80/132 columns, windowing, multiple computer connections...and a full range of practical ergonomic features. Capabilities which enable all terminal users to maximize their productivity and explore their creativity. Only from Human Designed Systems.

Introducing the new *concept* AVT+ display terminal from Human Designed Systems. Simply the smartest interactive display terminal available today. And at a very competitive price.

It starts with ANSI standard (X3.64-1979) conformance and DEC VT100 software compatibility, and incorporates superior human design features, advanced functionality and highest quality construction. A commitment to quality that is reflected in each of the individual components.

The *concept* AVT+ keyboard is ergonomically designed for optimum operator comfort, incorporating a VT100-style numeric pad for DEC software compatibility. And it builds on those human design features with a range of capabilities that make the *concept* AVT+ an ideal choice for smart terminal users.

The *concept* AVT+ offers up to eight pages of display memory that eliminates unnecessary

*Quantity one. DEC and VT are trademarks of Digital Equipment Corporation

\$1295*

hardcopy printouts and provides a powerful tool for applications requiring multiple formats and storage of large volumes of text; non-volatile memory that enables users to permanently configure a terminal for their needs or applications; windowing that allows

users to create individual displays within display memory; programmable function keys which transmit data and/or execute terminal commands; up to three additional communications ports for connection to other peripherals and computers;

flexible user networking and functionality for use in a wide range of different applications, including multiple computer connections; and much more.

The new *concept* AVT+. More to offer at its price for terminal users than any other terminal available today.

human designed systems, inc.

3440 Market Street, Philadelphia, PA 19104
215-382-5000

Circle 414 on Inquiry card.

Human Designed Systems. We're redefining terminal performance.

Atlanta — (404) 391-9763; Boston — (617) 329-3510; Chicago — (312) 825-2960; Dallas — (214) 437-1888; Delaware — Infocon: (302) 239-2942; Denver — (303) 469-1953; Hawaii — Gray Associates: (808) 261-3751; Houston — (713) 952-1403; Los Angeles — (213) 410-9454; Northern New Jersey — Infocon: (201) 624-1372; New York City Area — Infocon: (212) 689-8833; New York State — Naco Electronics: Rochester: (716) 223-4490; Syracuse: (315) 699-2651; San Francisco — (415) 692-4184; Washington, DC — International Systems Marketing: (301) 279-5775; Argentina — Iron SA: (01) 774-9369; Australia — Computer Clarity Pty. Ltd.: (02) 241 3385; I. O. Peripheres Pty. Limited: (02) 427 3555; Belgium — BELCOMP: 091/25 22 88; Canada — CALL Systems: Toronto: (416) 362-1063; Denmark — ADCOM Data Aps: 1-19 44 66; Finland — Modulsystem OY: 0-6926511; France — Walton: (1) 226.06.90; Singapore — DTS Singapore: (65) 33-88-566; Switzerland — Mitek ag: 01/461 22 52; United Kingdom — Shandell Systems Ltd.: 02407-2027; Venezuela — H. Blohm SA: 2 541.21.22; West Germany — COMKO Computersysteme: mbH: 0221-48 30 51.
INTERNATIONAL DISTRIBUTORSHIP INQUIRIES INVITED.

using the conventional hardware approaches (those used by the ROM BIOS), you can't read or write a block that lies across a 64K-byte boundary. This has nothing to do with the segmentation registers, which are the usual cause of 64K-byte restrictions. Instead, it has to do with the way the circuit is built (as seen on sheet 4 of the 64/256K-byte System Board diagrams). Although it isn't documented clearly, memory on the IBM PC is partitioned into 64K-byte blocks for purposes of DMA (direct-memory access) I/O. Chip U19 on the central processor board is a "DMA page register" that must be given the upper 4 bits of the address of the buffer to be read or written before the I/O operation starts. This will determine the upper 4 bits of the address in memory at which the I/O will occur. Since this can't be changed while the I/O is going on, you can't do I/O to a buffer lying on a 64K-byte boundary. For instance, you can't have a buffer that starts at hexadecimal address 0FF00 and goes through address 10100, because that lies on a

page boundary; note that the upper 4 bits of the starting and ending address differ.

This wouldn't be so bad except that DOS regularly tries to do I/O operations using buffers that lie on page boundaries. This happens, for instance, when the COPY command is used to copy a large file if your machine has more than 64K bytes of RAM (random-access read/write memory).

Again, it's hard to understand why this was done. Certainly the new I/O functions provided in DOS 2.0 that use a pool of buffers maintained by the operating system shouldn't have to do this, and probably don't; the buffer pool almost certainly can be allocated to avoid these 64K-byte boundaries. It would also have seemed reasonable for functions such as COPY to check and not attempt such I/O. It's true that user programs would have to be restricted not to attempt such I/O either, if they were using the "raw" I/O functions provided by DOS. Perhaps this was an attempt to allow DOS to smooth over

irregularities in the hardware, as a good operating system should. As such, it was not a bad design decision, but it does make writing device drivers more difficult, especially since documentation of this restriction is so sparse. The only case in which such a restriction is necessary, raw I/O by the user, is not desirable in any operating system because it minimizes protection by the system against the user accidentally destroying valuable data in memory.

I solved this problem in my driver by checking whether a requested I/O operation crossed a 64K-byte boundary. If it did, I transferred up to the block that crosses the boundary. Then, I copied the offending block to a local buffer within the driver and transferred it; then I transferred all the data following the boundary-violating block. This requires three transfers where one would have sufficed, but it solves the problem. This may not be the best method—there may be some hardware trick to solve the problem, but if there is, it's not documented. The method I used

DISK DRIVES

WINCHESTERS

MiniScribe 1006	\$295.00
(5 1/4" Full Height, 6 Megabyte (unformatted))	
MiniScribe 2012	\$755.00
(5 1/4" Full Height, 12 Megabyte (unformatted))	
MiniScribe 3012	\$755.00
(5 1/4" Half Height, 12 Megabyte (unformatted))	
MiniScribe 4020	\$905.00
(5 1/4" Full Height, 20 Megabyte (unformatted))	

FLOPPIES (Used)

CDC 9406	\$285.00
(8" Double Sided, Double Density)	
SHUGART 801R	\$150.00
(8" Single Sided, Double Density)	

WARRANTY ON ALL DRIVES
QUANTITY DISCOUNTS AVAILABLE
VISA & MASTER CHARGE ACCEPTED
 (Add 3% for Credit Card Charges)
 Shipping & Handling, Additional Charge



WESTERN AUTOMATION LABORATORIES, INC.

Call toll free: (800) 227-4637
 Inside Colorado (303) 449-6400
 5595 Arapahoe Road, Suite C, Boulder, Colorado 80303

FLOPPY DISK DRIVES SALES & SERVICE

SPECIALIZING IN FDD'S

H & M Disk Drive Services is a leader in the repair/refurbishment of 8-inch flexible disk drives. We service and repair 5 1/4 inch flexible disk drives from all manufacturers. Work is guaranteed!

- all 8 inch single-sided = \$45 plus parts
 - all 8 inch dual-sided = \$55 plus parts
 - all 5 1/4 inch single-sided = \$30 plus parts
 - all 5 1/4 inch dual-sided = \$40 plus parts
- (prices include bench and system tests plus alignments; all testing performed with state-of-the-art equipment)

NEW FDD'S FOR SALE

- 5 1/4 inch—Apple™ compatible 1/2-height. Enclosure & cable included. Controller not provided. High-performance, direct-drive motor MTBF in excess of 50K hrs. **\$229**
- 5 1/4 inch—Panasonic™ 1/2-height D/S D/D Direct Drive. Compatible with Shugart™ SA-455 **\$219**
- 5 1/4 inch—HiTech™ 1/2-height, 8" emulator. This 5 1/4" half-height drive replaces STD 8" drive. Software compatible. Will operate from existing hardware. Requires only +5v and +12v DC power. No AC. D/S D/D (1.6 M byte) **\$335**
- 8 inch Seimens FDD100-8 S/S D/D _____ **\$179**
 Seimens FDD200-8 D/S D/D _____ **\$229**
- Other FDD's available. Call for prices & availability. All drives include 90-day warranty; extended, 2-year warranty at a nominal fee.



Disk Drive Services

Mall Order
 Add \$7 Shipping
 California residents
 add 6% sales tax

689 L South State College Blvd.
 Fullerton, CA 92631
 (714) 526-1992



WITH THE PASSWORD™ MODEM AND TELPAC™ PAUL REVERE COULD HAVE WARNED 14 VILLAGES IN 40 WINKS.

The Password™ modem and Telpac™ software can distribute an urgent message to 14 points—automatically. By saving time, work, and money, they are just as valuable for longer, less urgent messages. Another revolutionary example: They can transmit a text the length of the Declaration of Independence in a little more than a minute, while you sleep, when long distance rates are lowest.



And when you work with Telpac, you will find it typically USR friendly.

To do all this, team Telpac with your computer and with Password, the USR modem so advanced you just turn it on. Auto dial/answer, 300/1200 baud, and a two-year limited warranty for \$449.* Write or call for complete descriptions—both Telpac and Password do far more than this!

U.S. ROBOTICS INC.

1123 WEST WASHINGTON • CHICAGO, ILLINOIS 60607
(312) 733-0497

Circle 365 on inquiry card.

www.americanradiohistory.com

*Suggested list for Password complete with power adapter, phone cable, RS232 interface. Telpac software, \$79.

Password, Telpac, and USR logo are trademarks of U.S. Robotics Inc.

FLOPPY DISK-DRIVE REPAIR

Command Services
exclusively repairs
Tandon and Shugart
disk drives. We are
affordable, fast and experienced.

For service, call toll free:
M-F, 9 a.m.-5 p.m., 7-9 p.m.
1-800-782-5500
In New York State call:
1-800-328-1800


Command Services Corporation
7143 Henry Clay Blvd.
Liverpool, New York 13088
315-457-1432



Circle 404 on Inquiry card.

MEMOREX FLEXIBLE DISCS

**WE WILL NOT BE UNDER-
SOLD!!** Call Free (800)235-4137
for prices and information. Dealer
inquiries invited and C.O.D.'s
accepted.



**PACIFIC
EXCHANGES**
100 Foothill Blvd.
San Luis Obispo, CA
93401. In Cal. call
(800)592-5935 or
(805)543-1037

Circle 284 on inquiry card.

dBASE II in ENGLISH I

NEW BOOK SENSATION

SIMPLE · LOGICAL · EASY TO UNDERSTAND

PERHAPS THE FINEST COMPUTER BOOK
EVER WRITTEN. WILL TEACH ANY NOVICE
TO PROGRAM IN dBASE II.

238 pages full of great examples which are easy
to follow on your computer.

Written by a Father and Son team who have
bridged the generation gap in dBASE literacy.

ORDER YOUR COPY TODAY.
Send \$29.95 or MC/VISA to:

ENGLISH I COMPUTER TUTORIALS
1817 N Troy St.
Chicago, IL 60647
(312) 489-1588 Dealers Inquiry Invited

Circle 405 on Inquiry card.

complicates the code (and, in fact, my solution does an unnecessary copy in the case of an INPUT operation because of the way the program is structured), but it works, and there is no visible degradation in performance.

The Finished Program

The finished device driver is a fully functioning driver for a TM100-4 disk configured as device 1 (the drive normally called B: by DOS). It assumes that the device 0 (or A:) drive is a standard IBM disk drive compatible with either the TM100-1 (single-sided) or TM100-2 (double-sided) disk drive. This is probably the best approach to use, unless you have an expansion chassis supporting more than two disk drives, because IBM and the other software suppliers all distribute their programs on the standard 40-track disks, and these do not appear to be readable on the TM100-4 with IBM's disk controller.

A major feature of this disk driver is that it changes the head-stepping rates for both the standard TM100-2 drive and the TM100-4 to rates that seem to work much better. Specifically, the TM100-2 is operated at 4 ms (milliseconds) per step and the TM100-4 is operated at 2 ms per step. This is slightly faster than the specified optimal stepping rate for the drives (the optimal rates are not possible because the fast clock rate on the IBM PC causes the controller's stepping rate to be settable only in increments of 2 ms, and the optimal rates are 5 and 3 ms, respectively). Using these rates causes the heads to move smoothly and quietly, eliminating the loud and irritating buzzing noise usually produced by the drives. If you find that your drives will not work at these rates, you can change them to slower values, but it is important not to operate the TM100-4 at a 4-ms step rate, because it is claimed by at least one vendor (Network Consulting, Inc.; see the warning on page 3 of chapter CONFIG.IBM(Utl) in the UCSD p-System programmer's guide dated 16 March 1983) that a "serious vibration problem" exists that can damage the drive if a 4-ms stepping rate is used. I have used my

disk drives at the rates set by this driver for the past eight months with no adverse effects or increased I/O error rate; in fact, it would seem that the reduced vibration levels produced by operating the heads close to their specified optimal rates would reduce wear on the head supports and other parts in the drive.

Future Enhancements

One advantage of having your own disk driver is that you can devise ways to further increase the storage capacity of your drives. One of the easiest ways to do this is to go to 10 sectors/track instead of 9. This feature is currently available under some implementations of the UCSD p-System, where it appears successful. However, it requires changing various timing parameters provided to the disk controller, and thus it is not as easy as going from 8 to 9 sectors per track.

Retrospective

In looking back on this project, several things are apparent. The first and most important is that, if I were writing the driver over, I would do it in C. I used assembly language primarily because I did not have a C compiler. I have subsequently purchased a C compiler that would be well suited for this application; I have used it to write several stand-alone device-handling programs. I would guess that it would have taken me a third of the time it took me to implement the program in assembly language if I had used C, because the majority of bugs, other than the problems described in this article, were related to register and addressing complications and structural flaws in the code that would have been avoided or easily detected if a block-structured language had been used.

I favor C for this project because it is not strongly typed but has powerful control structures, unlike either Pascal, which is strongly typed and has weaker control structures, or systems-programming languages such as BLISS, which essentially has no typing at all and relatively weak control structures.

It is also apparent that DOS 2.0

computers wholesale

315-472-3055

Box 150 Brewerton, N.Y. 13029

Circle 83 on inquiry card.

We pay UPS shipping charges on prepaid orders.

-TERMINALS-

ESPRIT	
Esprit	\$489
Esprit II	499
Esprit III	649
LEAR SEIGLER	
ADM 3A	\$529
ADM II	539
ADM 36	979

New!
Televideo Personal Terminal

Personal Terminal	\$399
Personal Terminal w/300 band modem	529
Personal Terminal w/1200 band modem	849

TELEVIDEO

910	\$439
914	579
924	695
925	699
950	865
970	929

TEXAS INSTRUMENTS

TI 703 Printing Terminal	Call
TI 707 Print Term. w/modem	Call

WYSE

50	Call
300 (Color)	Call

ZENITH

Z-29	\$659
ZTX-10	319
ZTX-11	389

-MODEMS-

HAYES

Micro Modem 100	\$269
Micro Modem II	249
Smartmodem 300	199
Smartmodem 1200	498
Smartmodem 1200B	Call

NOVATION

D-Cat	\$149
J-Cat	99
Apple Cat II	269
103 Smart Cat	179
103/212 Smart Cat	399
212 Auto Cat	549
Access 1-2-3	449

SIGNALMAN

Mk I	\$79	Mk VII	\$109
Mk III	99	Mk II	79
Mk V	89	Mk VI	Call

U.S. ROBOTICS

Auto Dial 212A	\$439
Password	339

Advertised prices reflect a cash discount on prepaid orders only. Most items are in stock for immediate delivery in factory sealed cartons with full factory warranties.

IBM PC BOARDS

Amdele MAI Graphics Board	\$479
AST Sixpak plus 64k	299
AST Megaplus 256k	569
CCS 132 Column Board	589
Microsoft 256k RAM Board	399
Plantronics Color + Board	399
Quadram New Quadboard	Call
Quadram Quadlink Board	Call
Tecmar 1st MATE Board	229
Tecmar Graphics Master Board	569

-SYSTEMS-

COLUMBIA

VP Portable	Call
MPC	Call
MPC w/Hard Disk	Call

CROMEMCO

C-10 Super Pak	\$1429
C-10MP w/MicroPro software	1819
CS-1	3195
CS-2	3755
CS-3	5595
64 FDC	475
TUART	255

EAGLE

IIE Series				PC Series	
IIE-1	IIE-2	PC-E	PC-1		
IIE-3	IIE-4	PC-2	PC-XL		
1600 Series			SPIRIT		
1620	1630	Portable			

- Call us today for the best prices -

INTERTEC Call

MORROW

New Portable w/2 Drives & Software	Call
------------------------------------	------

NEC

PC-8201	Call
PC-8801 A Computer	Call
PC-8831A Dual 514-disk drive	Call

NORTHSTAR

New! Dimension	Call
----------------	------

SANYO

MBC 1100	\$1399
MBC 1200	1599
MBC 4000	Call
MBC 550	Call

TELEVIDEO

TS-803	\$1989
Portable	Call

ZENITH

ZF-100-21	\$2319
ZF-120-22	2869
ZF-120-32	4479

-PRINTERS-

ANADEx

DP-9501	\$1099
DP-9620	1199
DP-9625	1299
DP-6500	2399
WP-6000	2159

CENTRONICS

730-1 Parallel	\$199
739-3 Serial	449

COEX 80 FT parallel . . . \$239

CITOH

Prowriter 8510A Par.	\$369
Prowriter 8510A Ser.	569
Prowriter II Par.	669
Prowriter II Ser.	739

DIABLO

620 RO 25 CPS	\$919
630 RO 40 CPS	1769

EPSON

RX-80	Call
RX-80FT	Call
FX-80	Call
FX-100	Call

GEMINI

10X	\$295
15X	435

MANNESMAN TALLEY

MT-1601	\$529
MT-160 L	579
MT-180 L	859
SPIRIT	Call

NEC NEW NEC 2050 Call

3510	\$1399	3530	\$1490
3550	1849	7710	1899
7715	1949	8023	399

OKIDATA

ML-82A	\$299
ML-83A	569
ML-92 Par.	449
ML-92 Ser.	529
ML-93 Par.	709
Pacemark 2350	Call
Pacemark 2410	Call

PANASONIC

KX-P1090	\$319
----------	-------

QUME

Sprint 11/40	\$1299
Sprint 11/55	1499

SILVER REED

EXP 500 Par.	\$459
EXP 550 Par.	659
EXP 550 Ser.	689

TEXAS INSTRUMENTS

TI 810 Basic	\$1199
TI 810 LQ	1919
TI 850 Par.	499
TI 855	Call

-MONITORS-

AMDEK

Color I	\$275
Color I +	319
Color II (RGB)	399
Color III (RGB)	349
300 G (12" green)	135
300 A (12" amber)	145
310 A (IBM PC)	169

BMC

15 MHZ (12" green)	\$79
--------------------	------

NEC

JB-1260 (12" amber)	\$109
JB-1201 (12" green)	135
JC-1212 (12" color)	339
JC-1203 (12" RGB)	549

PANASONIC

12" Green Monochrome	\$169
12" Amber Monochrome	179
13" RGB	389

TAXAN

KG 12N (12" green)	\$129
RGB Vision I (12" color)	299

ZENITH

Z-122 (12" amber)	\$139
Z-123 (12" green)	109

-HARD DISKS-

CORVUS

Model 6	\$1869
Model 11	2549
Model 20	3399
Omninet 6	1695
Omninet 11	2375
Omninet 20	3225
Mirror Back-up	670

-DISKETTES-

Maxell

5 1/4" MD1	\$22.95
5 1/4" MD2	32.95
3M/Scotch	
5 1/4" SSDD	\$21.95
5 1/4" DSDD	30.95
Educator	
Lifetime Warranty	
5 1/4" SSDD	\$17.50
5 1/4" DSDD	23.50
Flip 'n' File/holds 50 Disks	17.95

N.Y. residents, add appropriate sales tax. We accept VISA and Master Card. Personal and company checks, allow 2 weeks to clear. C.O.D.'s require a 25% deposit. All prices and offers may be withdrawn without notice.

would have benefited from the use of C. This version of DOS is obviously patterned after Unix; even the names of the system calls are the same as in Unix (more exactly, it is a subset of Xenix, which was patterned after Unix). Unix began as an assembly-language system but was quickly revised to be written in C. Some of the benefits of this approach would have been a more uniform calling sequence for the DOS system calls (presently they tend to be irregular) and a much greater likelihood that the operating system's routines would be reentrant, because C and similar programming languages store most variables on the stack. If all "static" variables are properly used, implementation of multitasking is much simpler and does not involve the previously described problems.

Finally, debugging this device driver was enormously difficult because of the absence of adequate debugging facilities. A large software house probably would have an Intel Development System or a similar

facility to provide hardware tracing for debugging, but the average user does not have such equipment. Anyone attempting to implement a device driver for this system would do well to first obtain or write a good stand-alone debugger. Unless you have considerable patience, experience, and intuition, locating bugs in such a program is difficult.

Conclusions

It is feasible to write device drivers for MS-DOS 2.0, although debugging can be difficult. This is a good feature of the operating system, as is its structure. Some problems, as explained previously, exist; with luck these can be ironed out.

A project such as this can give you a better feel for what goes on within a given operating system than does user-level programming. At present, MS-DOS is rather complicated. The original system, developed outside Microsoft, was written quickly and lacked many necessary features. Considerably more expertise (as well

as an understanding of Unix) was involved in developing version 2.

Yet MS-DOS still seems to be subject to two opposing forces. One steers it toward a fairly good structure, perhaps because of the upward-compatibility with Xenix that it is supposed to have. The opposing force, fostered largely by the continued use of assembly-language coding, is steering it towards the old-fashioned disarray and patchwork familiar to anyone who has done systems programming for one of the older operating systems on mainframe machines. Hopefully, with new features such as the ones discussed in this article, the former will prevail in the end. ■

J. Eric Roskos (Box 120562, Nashville, TN 37212) is a graduate student at Vanderbilt University whose dissertation is on a new architecture for multiprocessor shared-memory systems and related theories of communication and synchronization.

For more information on the source code used to construct this device driver, please contact the author.

Easy to install P.C. Kit
All you do is assemble
Kit Includes:

- Attractive Sturdy Case
- H.D. Power Supply with Built In Fan
- Detachable Low Profile Keyboard
- Mother Board fully wave soldered, stuffed & tested
- With Disc Drive Controller Card
- 5 Expansion Slots
- 128 K
- Teac 55B (DSDD-48 TPI)
- Complete instructions & documentation

IBM Products

1-714-953-7411

- Color Graphics Card with Printer Port
 - Disc Drive Controller Card
- ***NOTE: Static & Dynamic Ram in Stock

NEW

Dealer Inquiries Invited




3 1/4 "
Tabor
Drive

Just Plug In!



5 1/4 "
NEW!
Teac
FD55B
48TPI

Just Plug In!




Laser 1/2 High
SSDD 48TPI
163 KB
40 Track
with Patch

Apple Products



2 in
1 Apple
Acts As
2 Drives

48TPI Drive
Double Sided Drive By LASER
Costs much less than 2 Drives DSDD-48TPI
Disc Drive Controll Card
in stock also!



LASER FULL HIGH
143 KB SSDD-48TPI
35 Track



THE DOUBLE
2-1/2 Hi. Drives
in one case.

Disc Drives for Commodore 64

CANADA
Pacific Rim Electronics
13439 111th
Edmonton Canada T5E4ZY
403-475-0555

LASER MICRO SYSTEMS

USA 1-714-953-7411
1701 E. Edinger (Suite J-4)
Santa Ana, CA 92705
TLX: 181281 LASER SNA

TAIWAN
P.O. Box 26-264
Taipei, Taiwan ROC
TLX: 12318 EOINTCOL

*Eagle, IBM, Apple, Apple IIe, and Commodore are all registered trade marks of Eagle, IBM, Apple and Commodore corporations.

ORDER DESK ONLY
(800) 292-3360
 TOLL FREE IN CALIFORNIA

ORDER DESK ONLY
(800) 292-3360
 TOLL FREE OUTSIDE CALIF.

"WHY PAY MORE" COMPARE THESE PRICES MC-P APPLICATIONS BRINGS SOFTWARE & HARDWARE AT UNBEATABLE PRICES

SOFTWARE

	LIST	OUR
APPLIED SOFTWARE TECHNOLOGY		
VersaForm	\$389	\$269
ASHTON TATE		
Financial Planner	700	452
Friday	295	199
BPI ACCOUNTING SYSTEMS		
GL/AP/AR (Each)	395	285
CONTINENTAL		
Property Management	495	327
FOX & GELER Quick Code	295	174
FUNK SOFTWARE Sideways	60	45
HOWARD SOFT		
Real Estate Analyzer II Apple	199	135
Tax Preparer Apple	199	135
Apple	199	135
IBM	250	165
HUMAN SOFT DB Plus		89
LATTICE C Compiler	700	285
LIFETREE Volkswriter	195	129
METASOFT Benchmark	499	375
MICROSTUFF Crosstalk	195	129
MICROPRO Spell Star	250	162
Word Star w/Applicard	495	349
Mail Merge	250	162
Super Sort	250	149
Calc Star	145	86
Info Star	495	320
Report Star	350	221
MICROSOFT		
Flight Simulator (IBM)	50	35
Flight Simulator (Apple)		29
Multitool Word W/Mouse	475	339
Multitool Financial	100	69
Multitool Budget	150	99
Pascal Compiler	350	245
C Compiler	500	345
PBL CORPORATION		
Personal Investor	145	98
PETER NORTON		
Peter Norton Utility	80	57
PEACHTREE		
Peach Pack (AR, AP, GL)	595	239
Peach Text 5000	395	245
ROESOFT Prokey	75	57
SOFTWARE ARTS T.K Solver	299	219
SOFTWARE DIMENSIONS		
Accounting Plus		
GL, AR, AP, PR, INV	495	295
SOFTWARE PUBLISHING		
Pfs:File	140	79
Pfs:Report	125	79
SATELLITE SOFTWARE		
Word Perfect	495	325
SOFTWARE PUBLISHING		
Pfs: File		
Apple	125	85
IBM	140	95
Pfs: Report	125	85
SOFTWARE SYSTEM		
Multimate	495	315
SORCIM SuperCalc II	295	185
SuperCalc III	395	275
SYNPSE File Manager	150	97

NO MAIL ORDERS FOR: Lotus 1-2-3

LOTUS 1-2-3
 \$299⁰⁰

WORD STAR
 \$275⁰⁰

DBASE II
 \$379⁰⁰

EDIX/WORDIX
 \$129⁰⁰

MULTIPLAN
 \$168⁰⁰

HOME ACCOUNTANT
 \$ 52⁰⁰

BANK STREET WRITER
 \$ 46⁰⁰

TANDON TM1000-2
 \$219⁰⁰

OKIDATA 92
 \$479⁰⁰

AMDEK COLOR II
 HI RES RGB
 \$435⁰⁰

AST MEGA PLUS 64K
 \$275⁰⁰

NOVATION J-CAT
 \$105⁰⁰

EPSON FX 100
 \$735⁰⁰

HERCULES GRAPHICS CD
 \$369⁰⁰

KOALA TOUCH PAD
 \$ 95⁰⁰

WOLF Move-It	199	125
VISICORP		
Visicalc IV	250	175
Visifile (Apple)	250	187
Visifile (IBM)	300	195
VisiSchedule	300	195
VisiWord w/free VisiSpell	375	285
Visitrend/Plot	300	195

HARDWARE

	LIST	OUR
HAYES MICROCOMPUTER PRODUCTS		
Hayes Stack Chronograph (RS-232)	\$249	185
Hayes Stack Smart Modem (RS-232) 300 Baud	289	199
Smart Modem 1200B		
Smart Modem 1200	699	495
ADVANCED LOGIC SYSTEM (Apple II)		
Z-Card	169	115
Printer Mate (Parallel)	99	55
CP/M Card (W/ CP/M 3.0)	399	315
MICROSOFT		
Softcard (Apple)	345	259
Ram Card (Apple)	100	75
64K Ram Card (IBM)	350	249
MPC PERIPHERALS (Apple)		
Parallel Interface Card (w/Cable)	90	68
MOUSE SYSTEMS		
PC Mouse w/Software	295	218
NOVATION		
Apple - Cat II	389	275
212 Auto Cat	695	595
Smart-Cat 103/121	595	445
Smart-Cat 103	2429	187
PEGASUS		
Hard Disk 10 mgb		1439
PERSONAL COMPUTER PRODUCTS		
Applicard 6 Mhz	375	280
KRAFT & TG Joystick		
IBM	70	49
Apple	65	45
CDC DISK DRIVE		265
VERBATIM DISC		
S/S D/D 10 Pk.	49	24
AMDEK MAI BOARD	599	495
ELECTRONICS PROTECTION DEVICES		
Orange	140	99
Peach	98	69
QUADRAM		
Quadboard 64K	395	295
Quadlink	680	525
MEMORY CHIP SET		
(64K/9 chips)	95	55
PRINTERS		
Mennesman Tally MT 160L	798	669
NEC 7730 RO Parallel	2595	2295
Daisey Writer 2000	1395	1185
Qume 1140	1685	1525
MONITORS		
Amdek 12" 310A	230	185
Quadchrome 17"	695	525
Princeton Graphics RGB Hi Res	795	495

**CALL FOR SOFTWARE
 & HARDWARE PRICES
 NOT LISTED HERE**

**"INTERNATIONAL DEALER
 ENQUIRIES WELCOMED"**

MC-P APPLICATIONS, INC.

111 W. St. John St., Suite 307
 San Jose, CA 95113 Phone (408) 293-3360

Telex: 294207 MCPA UR

HOURS: 8 a.m. to 5:30 p.m. — Mon. - Sat.

Call for prices in AUSTRALIA
 at 02-929-8468

TERMS: All prices subject to change. Cashier's check/MO/Bank Transfer. Allow time for company or personal checks to clear. Prices reflect cash prepaid discount. VISA/MASTER CARD/COD/PO's =3%. California residents add sales tax.
SHIPPING: \$4 per item for UPS surface (\$8 for Blue Label); Monitors \$20, Printers \$25, within continental USA.

It's True — We Did It!

WE STILL MEET OR BEAT MOST ADVERTISED PRICES.
Don't be foolish. Buy Direct!

NEW XL SPIRIT



EAGLE

OUR PC FLYS

IBM Compatible
Simply a better PC. All models available for immediate delivery

Call **Lowest \$**



Mannesmann Tally

- Standard — 7 x 9 160 CPS
- NLO — 40 x 18 40 CPS
- 2K Buffer and Tractor Standard

160 L 80 col. Call **Best Seller**
180 L 132 col. Call **Best Seller**
SPIRIT Call **Best Seller**



IDS

- Proportional Spacing
- 8 Character Styles
- 200 CPS Bi Directional
- Color Optional
- Sheet Feed • Graphics
- 3.4K Buffer

Prism 80
Prism 132 and Micro Prism **\$ Call**




Red Hot Special!

Novation J-CAT

- 300 BPS Modem
- Originate/Auto Answer

Sizzling \$ Call

NEW NEW NEW III

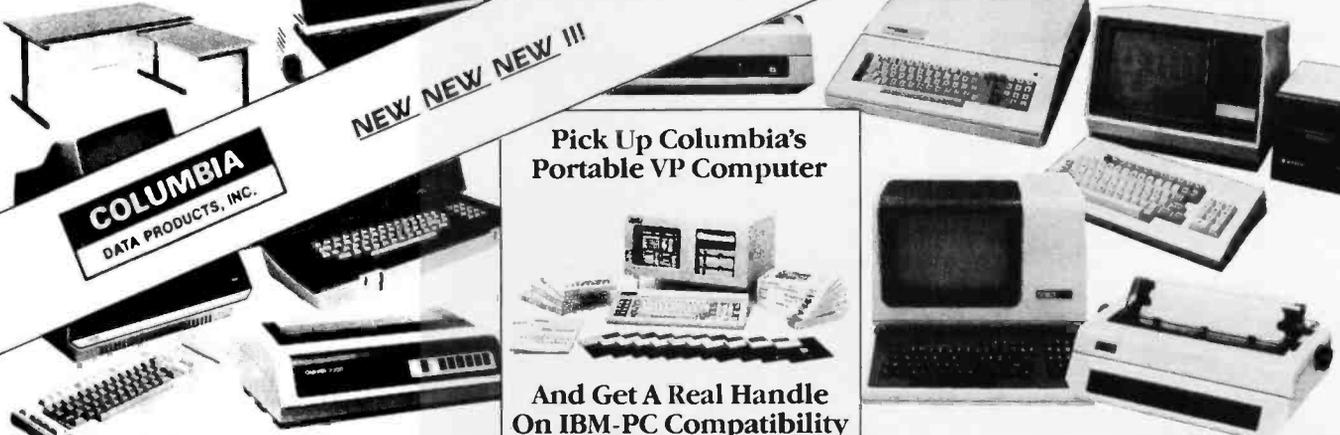

COLUMBIA DATA PRODUCTS, INC.

Pick Up Columbia's Portable VP Computer

And Get A Real Handle On IBM-PC Compatibility

ALTOS	FRANKLIN	OMNITEC	TAXAN	OKIDATA	GTC
ZENITH	HAYES	VENTEL	DIABLO	OSBORNE	ADDS
TELEVIDEO	NOVATION	AMDEK	NEC	COMREX	DEC
SANYO	VDS	BMC	EPSON	DAISYWRITER	C. ITOH
USI	EAGLE	MICOM	U.S. ROBOTICS	JUKI	SILVER-REED
TRANSTAR	RITEMAN	DATASOUTH	PRINTEK	STAR	MANY OTHERS

For Price Quotes and Ordering Call:
1-800-328-8905

For Technical Information and Arizona Orders, Call:
602-949-8218

For Shipping and Order Status Information, Call: **602-990-7556**



LIBERTY GROUP, Inc.

4221 Winfield Scott Plaza • Scottsdale, Az 85251

- Everything in computer related products:**
- Computers
 - Modems
 - Printers
 - Software
 - Monitors
 - Terminals
 - Accessories
 - Paper
 - Ribbons
 - Diskettes
 - Office Furniture

Prices listed reflect a cash discount and are subject to change without notice. We welcome Certified and Cashiers Checks, Bank Wires and Money Orders. C.O.D.s are shipped with a minimum C.O.D. charge. Allow 3-7 days for personal checks to clear. Product is subject to availability. Equipment is in factory sealed boxes with manufacturer's warranty. There will be a re-stocking charge for returned merchandise. Call first for an RMA number. Software not warranted for suitability. No return of Software which has been opened. Add 2% for shipping & handling charges (minimum \$2.50). All equipment shipped F.O.B. Scottsdale, Az 85251.

Circle 211 on inquiry card.

Deciphering Word Games

Two BASIC programs that will help you solve cryptograms and anagrams

by Mark C. Worley

Puzzles fascinate me. As a youngster, I loved encrypted codes, secret languages, decoder rings, and similar puzzles. I still enjoy decoding word puzzles; all the more so when they're as close at hand as cryptograms or anagrams in the local newspaper.

The cryptograms in newspapers are short messages, often only a few sentences long, in which each letter of the original text has been replaced by some other letter of the alphabet. Usually the substitutions are random choices without a pattern. For example, the letter *a* may replace all the *ts*, while *b* replaces all the *os*. One particular letter is never used for more than one coded letter. Sometimes a few letters will not be encoded at all; they remain the same in the encoded message as in the decoded plain text.

Anagrams are words whose letters have been rearranged into a meaningless jumble. The trick is to put them back into their proper order to spell a word. For example, SIBAC is an anagram for BASIC. The longer a word, the more possible combinations it has. For instance, a three-letter word has six possible combinations: $1 \times 2 \times 3 = 6$. A four-letter word has 24 possible combinations: $1 \times 2 \times 3 \times 4 = 24$. A five-letter word has 120 combinations, six letters have 720 combinations, and so on. You can spend a lot of time trying to find the hidden word in a six-letter

anagram unless, of course, you are inherently intuitive or prone to logical analysis. (Some people just go on to the comics page.)

Cryptograms are a particular challenge to decode because of the continuing search for the correct letter substitutions, or keys, to the cryptogram. Prior to computers, this search would consume a lot of paper, pencil lead, erasers, and patience as each new key was tried out in the text. With computers, the monitor provides a constantly fresh worksheet and the keyboard becomes a pencil that never dulls with an eraser that always wipes cleanly. Perhaps you will be interested by the following programs written in Microsoft Extended BASIC that can help you enjoy solving word games.

To Solve a Cryptogram

Crypto.bas is a program ideally suited for solving the short- to medium-length cryptograms frequently found in the corners of newspaper pages. Using a 24-line by 80-character display monitor, Crypto.bas displays almost 400 workspace characters. This means that five lines of code and workspace, 79 characters long, can be displayed. Those of you with smaller screens will have less available workspace, but the program can be modified for your screen size by changing the 79 in line 50 to 1 less than your screen width. For instance, if your

screen is limited to 40 characters, then change the 79 to a 39.

To decode a cryptogram, load and run Crypto.bas (see listing 1). The screen will clear and the command

TYPE THE CRYPTOGRAM:

will appear on the screen, along with an on-screen ruler showing 79 dashes. The input command LINE INPUT allows punctuation to be included in the string. The ruler is printed to help eliminate entering an 80-character line, which usually results in an automatic carriage return and line feed (CR LF) on the screen. These unexpected CR LFs use up extra space in the display and generally make the display unmanageable. If the cryptogram occupies more than one displayable line, type what you can, then enter new lines by hitting the Enter or Return keys. When you have finished entering the entire cryptogram, hit Enter or Return on a blank line.

Line 80 in listing 1 checks for a 0-length line. When a 0-length line is encountered, variable A is set to equal the number of lines entered, then a subroutine counts the frequency of each character. The MID\$ and ASC commands count the characters quickly.

The next subroutine, beginning on line 480, starts with ASCII character 65 (capital *a*) and continues through

ASCII character 90 (capital z), searching for the largest value of AMT(X). AMT(X) is the variable that contains the frequency of occurrence of the letter whose decimal ASCII value is the X in AMT(X). Line 500 searches and compares each value of AMT(X) to find the highest value (or last-found highest value) if more than one character has an equal number of occurrences in the text. To ease decoding and the character-frequency count, you should enter the anagram in capital letters. The program can be modified to include in the character-frequency count coded messages that use numbers and other printable characters for letter substitutions.

After the five most frequent characters are found, the subroutine returns to line 110 where the cryptogram and workspace lines are printed. A line of the encoded text is printed, then a workspace line below that, followed by a blank line. This continues until the entire message is displayed. Below the text, the five most frequently used letters in the English language—*e, t, o, a, n*—are shown. Immediately below those letters the five most commonly used letters in the message are displayed. This provides an easy way for you to choose the first few letters for possible substitution into the encoded text. Also shown is a count of the total number of characters in the text, which is helpful to know. (There is some argument about what the most commonly used letters really are. According to various sources, they include the following combinations: *etlan, ethsi, etaoi, or etona*. The most commonly used character is actually not *e*, but the space between words. The frequency of spaces is important to recognize in many encoded texts and in text-compression storage methods.)

After the code is entered and displayed, you are prompted to begin substituting letters. Choose a letter in the coded text to be changed and enter it. Then choose a letter that should substitute for that letter and enter that. The program will now search for every occurrence of the first letter in the coded text and substitute the corresponding letter in the

Listing 1: *Crypto.bas* is a program in BASIC used to solve and create your own cryptograms.

```

10 REM CRYPTO.BAS PGM TO EASILY WORK CRYPTOGRAMS 12/31/82
20 PRINT CHR$(12) 'CLEAR THE SCREEN (CLS)
30 DIM GN(95),AMT(95)
40 PRINT"TYPE THE CRYPTOGRAM: Terminate with a blank line <CR>"
50 PRINT STRING$(79,95)
60 LINE INPUT Z$(A) 'LINE INPUT ALLOWS PUNCTUATIONS
70 LET LL(A)=LEN(Z$(A)) 'LL(A)=LINE LENGTH
80 IF LL(A)<>0 THEN A=A+1:GOTO 50 'BLANK LINE TERMINATES INPUT
90 A=A-1 'A=# OF LINES IN CRYPTOGRAM
100 GOSUB 390 'COUNT LETTER FREQUENCY
110 FOR X=0 TO A:X*(X)=Z$(X):NEXT X 'MAKES CRYPTO & WORKSPACE EQUAL
120 PRINT CHR$(12) 'CLEAR SCREEN (CLS)
130 FOR Y=0 TO A 'A=# OF LINES IN CRYPTOGRAM
140 PRINT Z$(Y):PRINT X$(Y) 'PRINT CRYPTO & WORKSPACE
150 IF PF=1 THEN LPRINT Z$(Y):LPRINT X$(Y)
160 PRINT:IF PF=1 THEN LPRINT 'AND A SPACE BEFORE NEXT LINES
170 NEXT Y 'PRINT NEXT CRYPTO/WORKSPACE LINES
180 PF=0 'CLEAR PRINT FLAG
190 ' *** PRINT THE FIVE MOST FREQUENTLY USED CHARACTERS ***
200 PRINT "CRYPTOGRAM: ";
210 FOR Y=1 TO 5
220 IF G(Y)<>0 THEN PRINT CHR$(GN(Y));" ";
230 NEXT Y
240 PRINT " TEXT LENGTH:";TEXT
250 PRINT "PLAIN TEXT: E T L A N"
260 PRINT:INPUT"ENTER THE LETTER TO BE CHANGED (or QUIT or PRINT) ";A$
270 IF A$="PRINT" THEN PF=1:GOTO 120 'PF=PRINT FLAG
280 IF A$="QUIT" THEN END
290 INPUT"ENTER THE LETTER IT IS TO BE CHANGED TO";B$
300 ' *** SEARCH FOR A$ IN Z$, THEN REPLACE IT IN X$ WITH B$ ***
310 ' *** Z$ IS THE CRYPTOGRAM, X$ IS THE WORKSPACE ***
320 FOR Y=0 TO A 'A=# OF LINES OF TEXT
330 FOR I=1 TO LL(Y) 'LL(Y)=LENGTH OF THAT LINE
340 IF MID$(Z$(Y),I,1)=A$ THEN MID$(X$(Y),I,1)=B$
350 NEXT I
360 NEXT Y
370 GOTO 120 'PRINT CRYPTO & WORKSPACE W/CHANGES
380 ' *** SUB-ROUTINE TO COUNT FREQUENCY OF EACH LETTER ***
390 PRINT CHR$(12)STRING$(12,10) TAB(25)"COUNTING LETTERS"
400 FOR Y=0 TO A 'A=# OF LINES OF TEXT
410 FOR X=1 TO LL(Y) 'LL(Y)=LENGTH OF THAT LINE
420 Q$=MID$(Z$(Y),X,1):Q=ASC(Q$):AMT(Q)=AMT(Q)+1
430 NEXT X
440 NEXT Y
450 FOR X=0 TO A:TEXT=TEXT+LEN(Z$(X)):NEXT X 'TOTAL-UP TEXT LENGTH,
460 TEXT=TEXT-AMT(32) ' & SUBTRACT SPACES FROM COUNT
470 ' *** SELECT THE FIVE MOST FREQUENT LETTERS ***
480 FOR Y=1 TO 5
490 FOR X=65 TO 90
500 IF AMT(X)>=Q(Y) THEN G(Y)=AMT(X):GN(Y)=X 'FIND HIGHEST COUNT,
510 NEXT X ' & STORE IT AS GN(Y)
520 AMT(GN(Y))=0 'IGNORE THIS ONE NEXT TIME AROUND &
530 NEXT Y 'LOOK FOR NEXT MOST FREQUENT LETTER.
540 RETURN

```

workspace with the second letter. The alternating lines of coded text and workspace will be reprinted on the screen with the coded text remaining unchanged and the workspace showing the substitutions. Now, a ready comparison can be made between the two versions to see if the substitution choice was a good one, and to see which is the best letter to try next. If the choice was a bad one, you can change the letters in the workspace back to the original or to some other letter. The top line of each pair of lines (the original cryptogram) always remains unchanged. Only the bottom line of the pair (the workspace) changes.

The program won't save the cryptogram on disk. However, if you've decoded it or are interrupted and want to save your work, enter PRINT

in answer to the prompt from program line 260. PRINT will save the cryptogram and workspace on paper via your printer, then it will return to the program and reprompt you for an input. When you enter QUIT as an answer to the prompt, the program will exit.

Crypto.bas is not intended for rigorous code-breaking other than simple letter substitution, but it can be used to create cryptograms. By following the instructions on decoding a cryptogram, you enter the plain text in place of the coded text, then use the letter-substitution capabilities of this program to generate the desired cryptogram. (Use the program to decode your cryptogram and check that you haven't assigned the same letter for two letters or made some other error.)

WELCOME TO THE DISTRICT OF COLUMBIA.

It could be Wall Street tracking the ten most traded... Detroit forecasting automotive sales trends... the boardroom analyzing cash flow requirements.

The District of Columbia could be anywhere from the production line to the bottom line, because Columbia is the personal computer designed for results.

In business and professional applications, compatibility is critical. That's why Columbia computers are the most compatible on the market today. Truly compatible with the software designed by IBM or for IBM. Compatible with IBM PC's and compatible with each other. And Columbia uses both the MS-DOS[®] and CP/M-86[®] operating systems to give you access to the widest possible range of applications software.

Business needs flexibility. That's why Columbia offers three models: the VP Portable for when you're on the move, or the MPC Desktops for when you're not, in your choice of dual floppy disk or hard disk drive.

Business appreciates value. That's why Columbia personal computers are aggressively priced, and every one comes complete with an extensive library of software. No extra cost.

The District of Columbia. It's the place to be if your place is in business. See the Authorized Columbia Dealer who's right in your district or write us at 9150 Rumsey Road, Columbia, MD 21045.

COLUMBIA

DATA PRODUCTS, INC.



IBM and IBM PC are registered trademarks of International Business Machines. CP/M-86 is a registered trademark of Digital Research, Inc. MS-DOS is a registered trademark of Microsoft.

Circle 59 on inquiry card.

To Solve an Anagram

Anagram.bas (listing 2) will accept a word that is three- to six-letters long, display all the possible combinations on the screen, or print them at your command. A two-letter word has two combinations that are easily visualized without the aid of a computer. But a seven-letter word has 5040 possible combinations, far too many to scan on paper or on your monitor. Thus, the SWAP command is used extensively to simplify the program and increase its speed. Without SWAP, the process of swapping A\$ and B\$ requires these three steps:

1. T\$ = A\$
2. A\$ = B\$
3. B\$ = T\$

SWAP requires only one command

SWAP A\$,B\$

to accomplish the same thing.

It works like this: when a word is entered, its length is checked and each letter is assigned to the string variables A through F. If the entered word is less than three characters or more than six, you're reprompted to make another input.

A three-letter input will generate six combinations. A three-count FOR . . . NEXT loop with two internal swaps provides the six possible "words."

A four-letter input has 24 possible combinations. By running through the three-letter swap four times, you produce 24 combinations. This is accomplished by the routine beginning on line 300. It runs through the three-letter routine once, swaps A\$ and D\$, runs through again, does another swap, and repeats the process until we have all the combinations printed on the screen.

A five-letter combination produces five times the combinations that a four-letter combination does, so we run through the four-letter swap five times. A repeated swap of B\$ and E\$ each time produces the proper circular shifting of each letter in the group.

As you might have guessed, a six-letter combination can be accom-

Listing 2: Anagram.bas is a BASIC program to decipher and create anagrams.

```

10 'ANAGRAM6.BAS          *** ACCEPTS 3,4,5,& 6 CHARACTER GROUPS
20 '                      *** & PRINTS ALL POSSIBLE COMBINATIONS.
30 PRINT:PRINT:PF=0      'PF=PRINT FLAG
40 INPUT"ENTER A WORD (X to exit program) ";W$
50 IF W$="X" THEN END    'X' EXITS FROM PROGRAM
60 INPUT"PRINTED COPY (Y/N)";P$
70 IF P$="Y" THEN PF=1:LPRINT W$
80 IF LEN(W$)<3 THEN 30   'ANYTHING BUT 'Y'=NO
90 IF LEN(W$)>6 THEN 30   'LESS THAN 3 IS TOO FEW
                            'MORE THAN 6 IS TOO MANY
100 ' *** ASSIGN A$-F$ FOR THE UP-TO-SIX CHARACTERS OF W$ ***
110 A$=MID$(W$,1,1);B$=MID$(W$,2,1);C$=MID$(W$,3,1)
120 D$=MID$(W$,4,1);E$=MID$(W$,5,1);F$=MID$(W$,6,1)
130 IF LEN(W$)=3 THEN GOSUB 400:GOTO 30 'FIGURE LENGTH OF W$,
140 IF LEN(W$)=4 THEN GOSUB 300:GOTO 30 'THEN GOSUB AND SWAP.
150 IF LEN(W$)=5 THEN GOSUB 200:GOTO 30
160 GOSUB 500:GOTO 30     'LEN(W$)=6
200 FOR J=1 TO 5         '5-VARIABLE SWAP
210 SWAP B$,E$:GOSUB 300
220 NEXT J
230 RETURN
300 GOSUB 400           '4-VARIABLE SWAP
310 SWAP A$,D$:GOSUB 400
320 SWAP B$,E$:GOSUB 400
330 SWAP C$,F$:GOSUB 400
340 RETURN
400 FOR X=1 TO 3        '3-VARIABLE SWAP
410 SWAP B$,C$:PRINT A$;B$;C$;D$;E$;F$;" ";
420 IF PF=1 THEN LPRINT A$;B$;C$;D$;E$;F$;" ";
430 SWAP A$,C$:PRINT A$;B$;C$;D$;E$;F$;" ";
440 IF PF=1 THEN LPRINT A$;B$;C$;D$;E$;F$;" ";
450 NEXT X
460 IF PF=1 THEN LPRINT
470 PRINT:RETURN
500 GOSUB 200:GOSUB 620 '6-VARIABLE SWAP
510 SWAP A$,F$:GOSUB 200:GOSUB 620
520 SWAP B$,E$:GOSUB 200:GOSUB 620
530 SWAP C$,D$:GOSUB 200:GOSUB 620
540 SWAP D$,F$:GOSUB 200:GOSUB 620
550 SWAP E$,A$:GOSUB 200:GOSUB 620
560 RETURN
600 ' *** FREEZE DISPLAY FOR 6-LETTER COMBINATION. ***
610 ' *** DISPLAYS 120 COMBINATIONS AT A TIME. ***
620 PRINT:PRINT"PRESS <SP> TO CONTINUE." '<SP>=SPACE BAR.
630 IN$=INKEY$ 'LOOKS FOR A PRESSED
640 IF IN$=CHR$(32) THEN PRINT CHR$(12):RETURN 'SPACE BAR BEFORE
650 GOTO 630 'CLS AND RETURN.

```

plished by going through the five-letter swap six times, with the necessary swap between each run-through of the subroutines. Since 720 six-letter words cannot be displayed simultaneously, they are printed in six groups of 120 words each. After each group of 120 words is printed, the subroutine starting on line 620 freezes the display. This gives you the time to scan the screen for the desired word(s), and only by pressing the space bar can you go on to the next 120 combinations. The program lets you print the letter combinations on your printer by answering the prompt

PRINTED COPY (Y/N):

with a Y. Any other response is accepted as a no. And as with Crypto.bas, Anagram.bas can also be used to create encoded words.

With these two programs, Anagram.bas and Crypto.bas, I hope you'll find that your decoding tasks

are easier. Understandably, there will be a few purists who dislike using a computer to decipher anagrams, and I won't argue with them. It depends on your purposes for attempting to solve puzzles. Using a computer to solve a cryptogram, however, doesn't prevent the human intellect from participating in the process; it only removes the drudgery.

As a final word, I'll leave you with a cryptogram to test both the program and your decoding skills.

YJMQ CJDYANQR AS ZJJEAYW SJ
HJRK SWQYQ TIOOEQY, HWAEQ
JSWQRY TRQZQR BDBGRBMY
BDN CRJYYHJRNY. A EAKQ SWQM
BEE BDN WJTQ SWBS PJI WBN
YJMQ ZID HASW SWAY QBYP JDQ.
(Answer on page 468). ■

Mark C. Worley (POB 7225, Dallas, TX 75209) is an electronics-design engineer of meteorological equipment and its interfaces at Texas Electronics Inc. in Dallas, Texas. He has published several articles on a variety of analog and digital projects.

NOW AVAILABLE ON THE IBM XT.



Powerbase for the powerhouse

At last: a completely new relational data base management system that fully utilizes and enhances the power of the best micro on the market today. And makes it available to those whose expertise is business, not computers.

We call it POWERBASE.™ Software clever enough to meet your information needs, easy enough to be mastered in half an hour. No fancy programming. No unnecessary computer jargon. You simply point your screens and define the information you need. PowerBase does the rest. Pleasurably.

PowerBase introduces DATAZOOM™ and the exclusive Zoom Key which, at the touch of your fingertip, explodes data to deeper and deeper levels of revealing detail. Other features include ultra-fast b-tree access, multiple files, powerful editing and table look-up functions, flexible report writer, the ability to search, sort, and scan other files... and many more.

Master data without having to master computers. The power of the micro is now *fully* yours with PowerBase, the new breed of software that makes data management basically simple.

power-base™
with datazoom™



Call or write for our free informative brochure.



gms systems inc.

12 W. 37th Street N.Y., N.Y. 10018

(212) 947-3590

Dealer inquiries invited.

POWERBASE and DATAZOOM are trademarks of G.M.S. Systems, Inc.

Circle 154 on inquiry card.

www.americanradiohistory.com


Five Original Graphics

Improving on the Spirograph

by Robert Sussman and Ted Sussman



Aesthetically pleasing graphic designs can be produced using mathematical curves—specifically, those called hypocycloid and epicycloid. One way to construct them is to use (by hand) physical templates to form combinations of these curves. This approach formed the basis for the popular toy Spirograph. A second method is to plot them, point by point, and, using a ruler, connect adjacent points to approach the true mathematical shape. We used a third method—computer graphics. This ar-

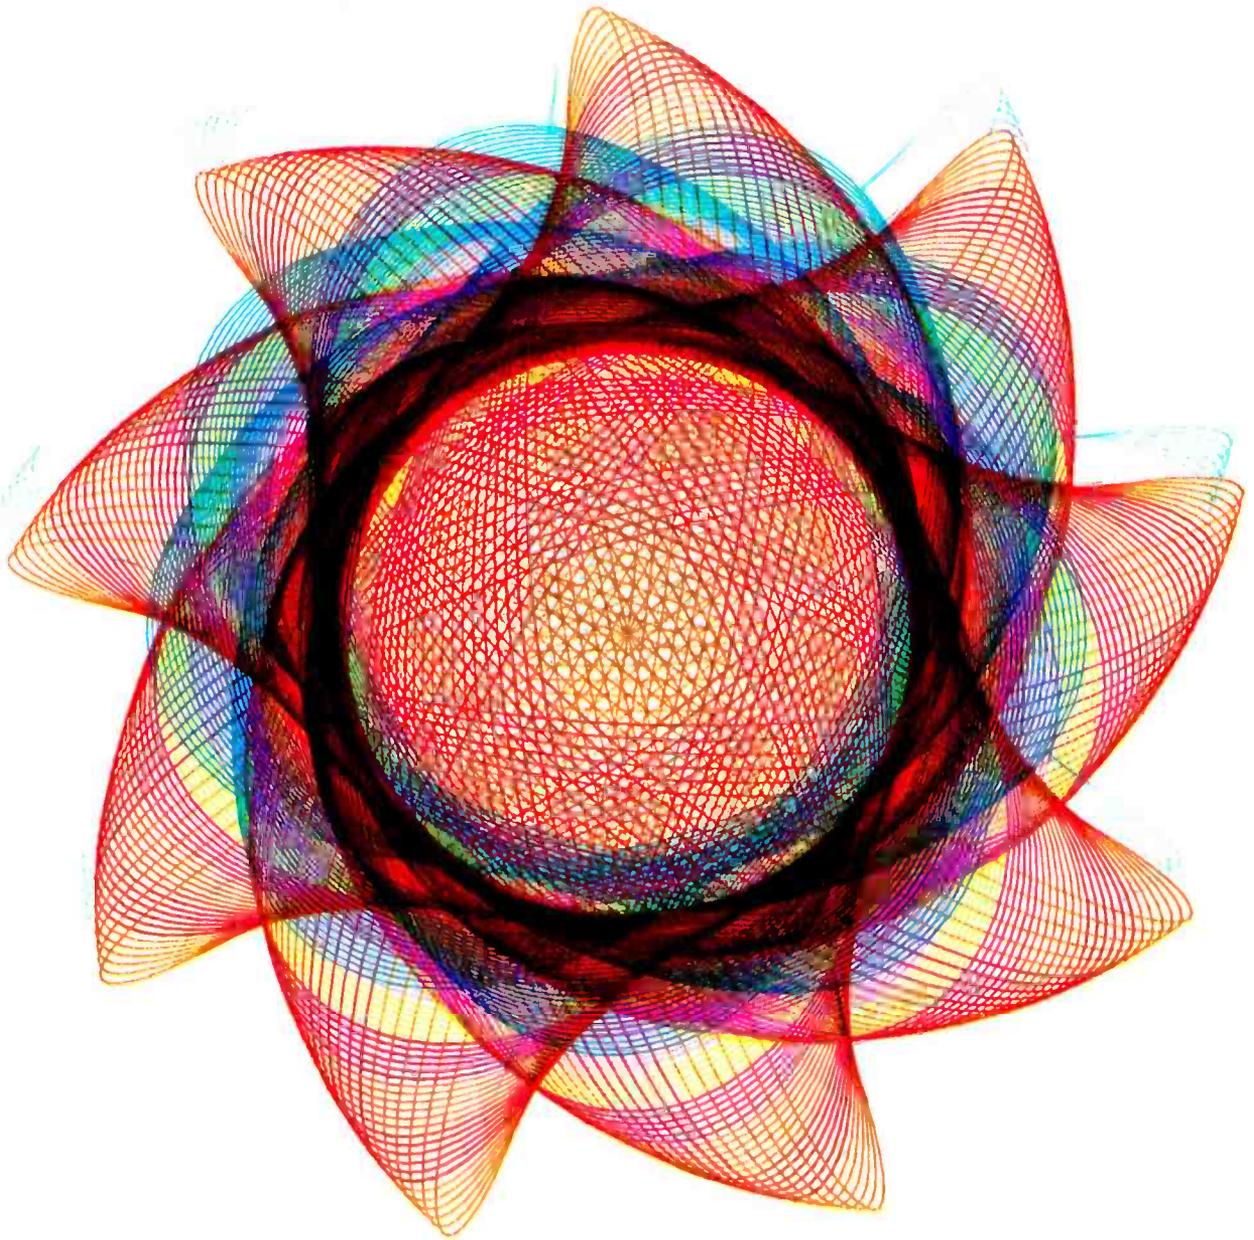

ticle outlines the computer-graphics method and illustrates some of its results.

The epicycloid is a curve described by a point on the circumference of a circle as the circle rolls, without slipping, on the outside of a fixed circle. The hypocycloid is a curve described by a point on the circumference of a circle as the circle rolls, without slipping, on the inside of a fixed circle. Their equations are given in parametric form in the text box on page 390. They are abstracted from Mur-

ray R. Spiegel's *Mathematical Handbook of Formulas and Tables*, McGraw-Hill Schaum's Outline Series, 1968, page 42.

To best appreciate and understand the computer method, it is instructive to simulate it by hand using the second method. The independent parameter— θ —is assigned successively larger values, at a fixed step size, and the x and y coordinates of the cycloid are calculated and plotted. The adjacent points are then connected by straight lines, thereby ob-

taining an approximation to the true mathematical curve.

As an example, figure 1 shows the construction of a hypocycloid using circles in the ratio of 5 to 14. Because this figure was drawn by hand, a large parametric step size of 10 degrees was used in the construction. The points on this figure are numbered to show the development of the curve.

Notice that if θ is allowed to increase past a certain value, denoted by θ_{\max} , the cusps will coincide. For

Parametric Equations

Epicycloid

$$x = (a+b)\cos(\theta) - b \cos(g\theta)$$

$$y = (a+b)\sin(\theta) - b \sin(g\theta)$$

Hypocycloid

$$x = (a-b)\cos(\theta) + b \cos(h\theta)$$

$$y = (a-b)\sin(\theta) - b \sin(h\theta)$$

$$g = (a+b)/b$$


$$h = (a-b)/b$$

θ = parameter

= angle between the x axis and the
line connecting the two circles'
centers

a = radius of fixed circle

b = radius of rolling circle

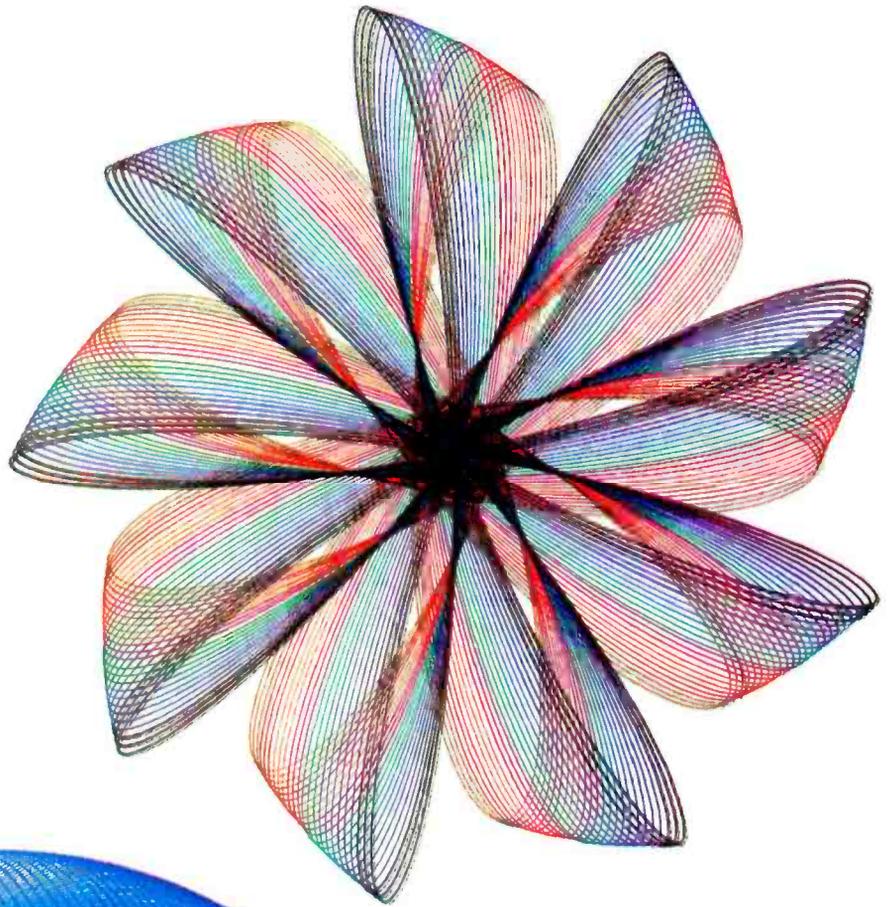

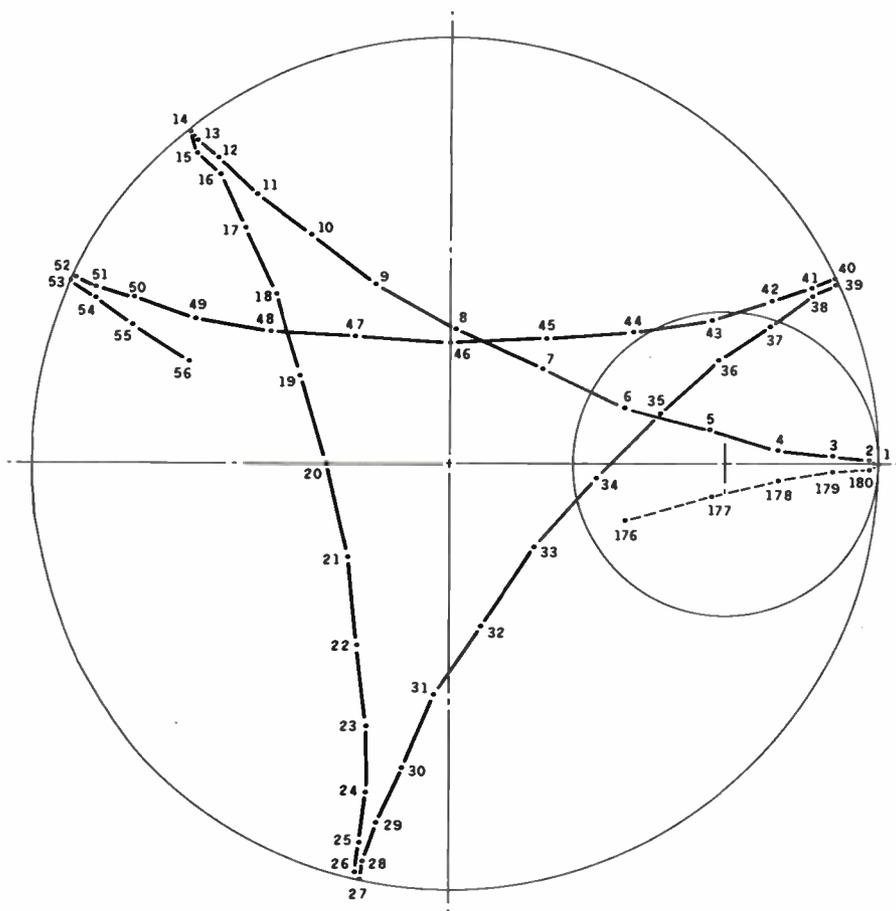


Figure 1: An example of a handmade hypocycloid using the point-to-point technique described in the text.

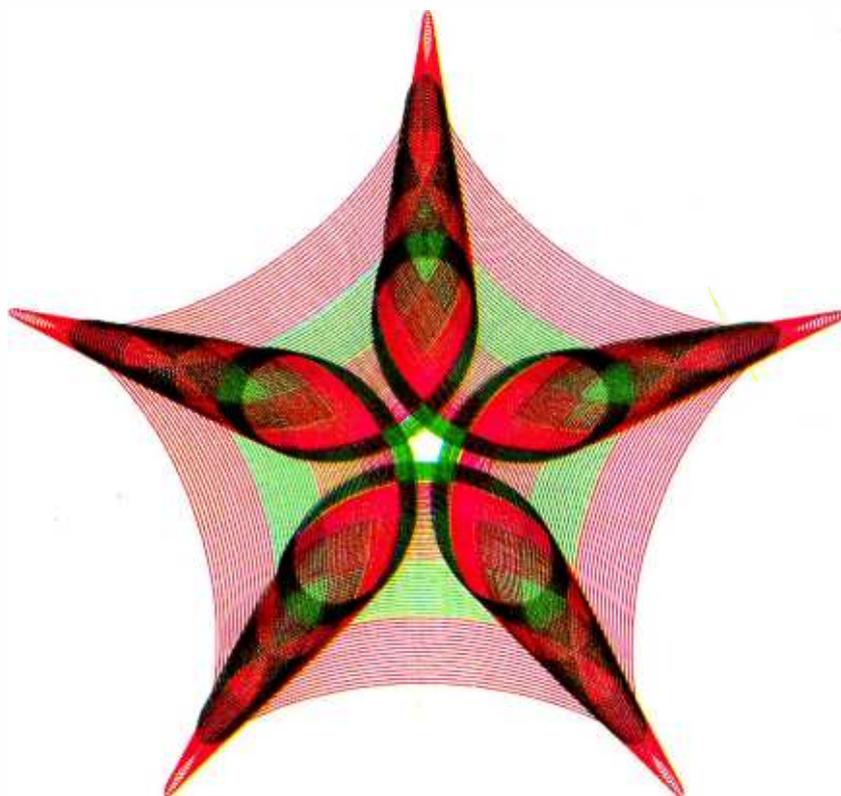


figure 1, θ_{\max} equals 1,800 degrees. In general, θ_{\max} is easily calculated given the radii of the circles; this permits you to predict the total number of points needed to draw the hypocycloid.

Additional properties of these curves can be developed to aid the designer in the choice of the values of the radii.

The computer permits the use of extremely small parametric step sizes resulting in points on the cycloids that are very close together. The computer connects these points by straight lines, but the illusion of a fully developed mathematical curve is created. In addition, many curves can be drawn quickly, giving the user many options for new designs.

But the most interesting aspects of using a computer to create these curves are those that extend the concept beyond what is possible with the first two methods. These extensions of the concept can be realized only using a computer. In general, these designs are sets of overlapping patterns. An example of this is shown in the first illustration on page 388. The program creates an initial pattern with and from initial parameters and linearly changes these parameters for successive patterns:

1. The location of the point on the rolling circle moves toward the circle's center as a function of the pattern number.
2. Each successive pattern is rotated a fixed number of degrees from the preceding one.
3. Each successive pattern is scaled to produce a zoom effect.

The five designs shown here are a small subset of all those possible using this technique. It requires your creative ability and artistic insight to use the computer to reveal them. ■

Robert Sussman is a fourth-year student in the school of engineering and applied science at the University of Virginia. Ted Sussman is a graduate student at the Massachusetts Institute of Technology. They can be reached at 11022 Saffold Way, Reston, VA 22090.

BEAT THIS DEAL!



1 ONE

Order Part Number
BBPDBSY01150LQ1

PRIORITY ONE ELECTRONICS


9161 Deering Ave., Chatsworth, CA 91311-5887

Terms: This sale price is for prepaid orders only (VISA, MC, BAC, Check or Money Order — U.S. Funds). CA residents add 6½% Sales Tax and include \$15.00 for shipping. Credit card orders will be charged appropriate freight. Please include your phone number, just in case.


www.americanradiohistory.com

CP/M® COMPUTER SYSTEM COMPLETE WITH LETTER QUALITY PRINTER

\$1795

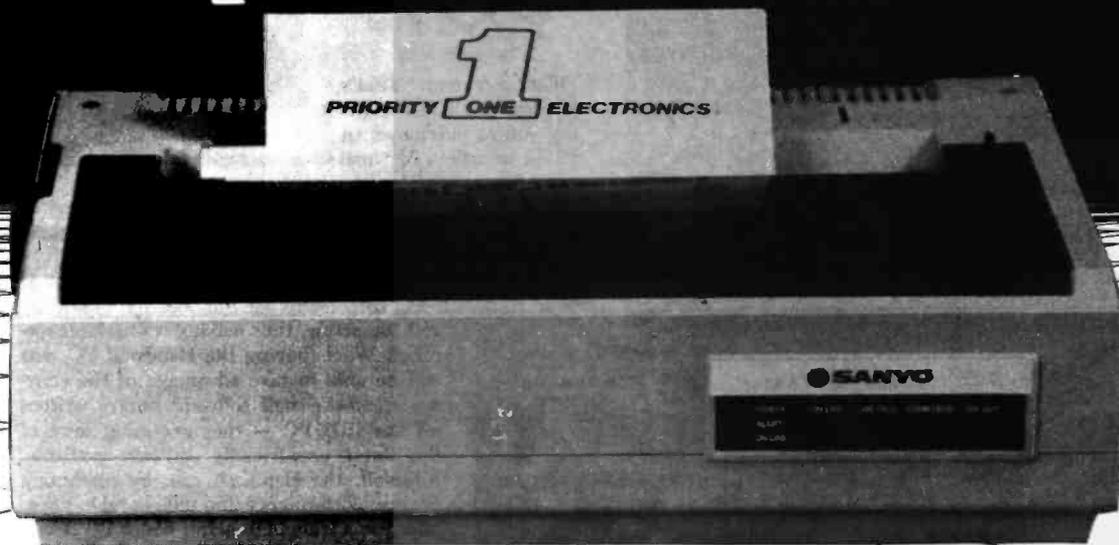

- Sanyo PR5000 12 cps Letter Quality Printer With Cable
- Sanyo MBC1150 Creative Computer
- Z-80A CPU with 64K Memory
- Two Double-Sided/Double-Density 5¼" Disk Drives (620KBytes Total Formatted Capacity)
- 12" Green Screen Display (80 characters by 25 lines)
- Detachable Keyboard
- One Centronics Printer Port ● One RS-232C Serial Port
- CP/M 2.2® Operating System (Complete with Interpreter, editor and all utilities)
- Exclusive Priority One Software Enhancements To Make Getting Started Even Easier!
- 6 MicroPro Software Programs
 - WordStar ● MailMerge ● SpellStar
 - CalcStar ● DataStar ● ReportStar
- Sanyo Enhanced BASIC with Graphics and CP/M®

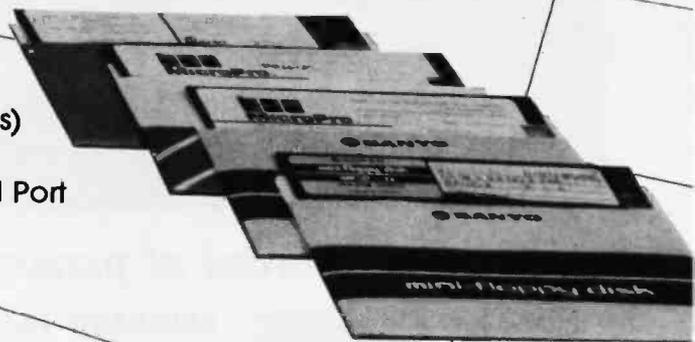

DON'T DELAY! — ACT TODAY! AND SAVE OVER \$900.00!!

Sound too good to be true? Believe it! Only Priority One Electronics, with our unequalled purchasing power could acquire a "boat-load" of product from Sanyo, and pass along the savings. This deal is so good we even surprised ourselves! Don't be left out — these won't last long!

Circle 175 on inquiry card.


ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (818) 709-5111

How Sweet it is!




only
\$1995⁰⁰

"What a feeling!" That's just how you'll feel knowing you've purchased an IBM-compatible Personal Computer with full color graphics capability at a price far, far below anyone else. Not only does the Handwell PC outperform everyone in price, but it comes loaded with standard features that some competitors don't even offer as options. Due to its eight expansion slots, you'll be able to upgrade your Handwell PC with many add-ons and options today and tomorrow, thus making it obsolescence-proof. When buying the Handwell PC, you will be able to take advantage of the enormous, off-the-shelf software library written for the IBM PC — thus accessing some of the finest user-friendly software available. All-in-all, the Handwell can, by combining quality, performance and unbelievable price, offer you a truly high-performance PC at substantial savings. So, stop and smell the roses along the way and see how sweet it is!

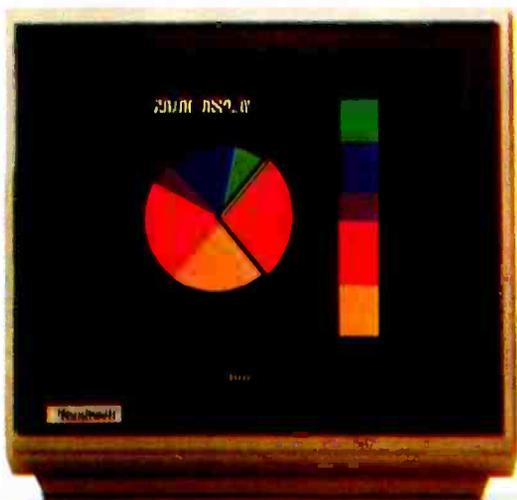

Monitor not included in price shown

Simulated Display

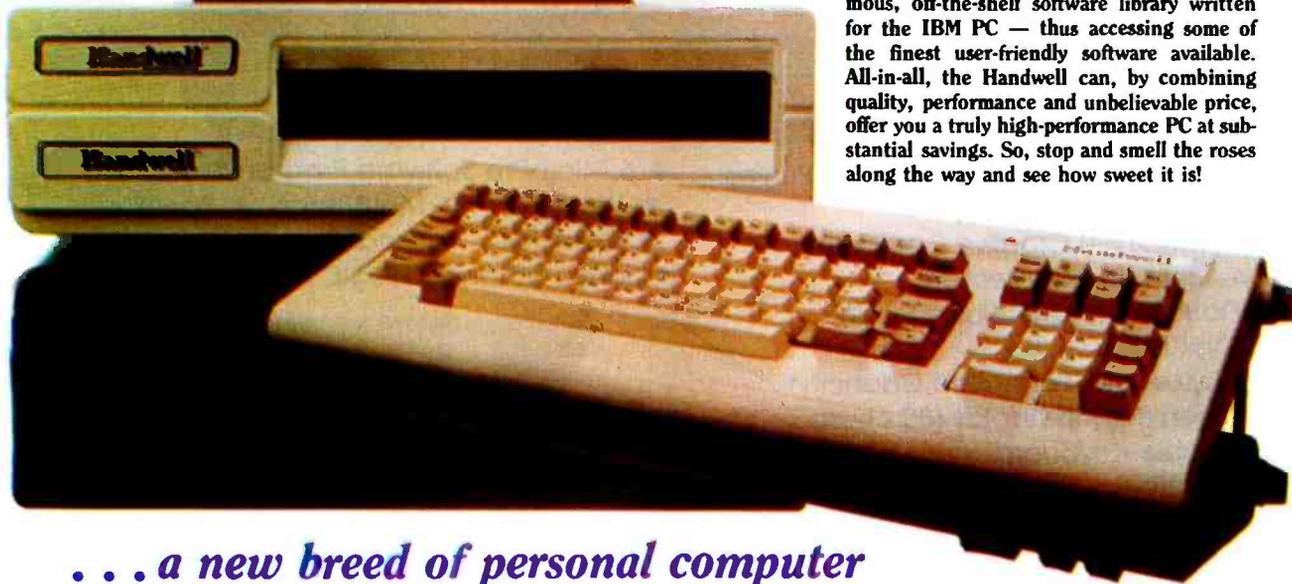

... a new breed of personal computer



STANDARD FEATURES: • Full Graphics capabilities (640 dots x 200 lines) • 128K Ram (expandable to 256K) • Two RS232 Serial Ports • One parallel printer port • Color Display Card • Fully detachable, IBM-compatible Keyboard • 8 Expansion Slots • One 5¼-inch Floppy Drive (327Kb-formatted) • MS-DOS Operating System (MS-DOS 2.0 and CP/M compatible) • 8088 Processor • Spooler (part of system memory, can be used as a printer buffer) • Real Time Clock and Calendar



Handwellcorp.

4962 El Camino Real
Los Altos, CA 94022
415 962-9265

*IBM is a registered trademark of International Business Machines
*CP/M is a registered trademark of Digital Research, Inc.
*MS-DOS is a registered trademark of MicroSoft, Inc.

Dealer and OEM inquiries invited
For further information call
800-821-3628

Bubbles on the S-100 Bus

Part 2: The Software

Making Micropolis MDOS and CP/M work with last month's project

by Louis Wheeler

Author's Note: Since this article was completed, Intel has revised the BPK 72 Bubble Memory Prototype Kit discussed in the Editor's Note at the end of part 1 of this article (BYTE, January 1984, page 380). As mentioned there, Intel is now offering the revised for for \$199 as a promotional item. The new kit is completely assembled and tested at the factory and incorporates the latest version of the 7110 bubble-memory chip, which has been re-packaged. The new chip is thinner, leaded, soldered directly to the printed-circuit board (permitting standard board spacing), requires a smaller board area, and is more reliable. Because the BPK 72 is already assembled and tested, those portions of part 1 relating to its testing can be skipped unless problems occur. The new kit is also equipped with an on-board clock oscillator that eliminates the need for the clock circuit, IC1, IC3, the 8-MHz crystal, and associated components, shown in the schematic diagram (figure 2). The BPK 72 Bubble Memory Prototype Kit User's Manual also has been revised to incorporate the information previously found in application note AP-119. A new application note, AP-150, containing a set of subroutines written in 8085 assembly language that demonstrates the basics of bubble-memory software design, is supplied with the kit. Although no longer needed, the much revised user's manual has eight pages of assembly instructions similar to those that come with a Heathkit. The new manual is a great improvement over the earlier documentation.

Last month, we built and completed preliminary testing on the bubble-memory board. In this concluding part, we'll dive into the software and discuss the details of making the magnetic bubbles act like a floppy-disk drive or cache memory.

Before you proceed with the upcoming software, be sure all previous tests have been successful. Then discard the BASIC test routines.

Bubble-Memory-Driver Package

The application note supplied with the kit contains a set of subroutines to drive the BPK 72 bubble memory. These subroutines demonstrate the basics of bubble-memory software design. The bubble-memory-driver package (see listing 1) is based on the principles derived from this set of subroutines and the user's manual. I have been using it for some time now without any problems.

Before I get into the details of the driver package, I will give a brief description of the environment for which it was written. My system consists of an IMSAI (S-100 type) computer with a Z80 microprocessor, 56K bytes of RAM (random-access read/write memory), 2K bytes of EEPROM (electrically erasable programmable read-only memory), a Micropolis Mod II dual-disk-drive system (77 tracks, 16 sectors per track, 256 bytes per sector), a Z-19 terminal, and a printer. I have two operating systems: the Micropolis disk operating system

(MDOS), which came with the floppy-disk system, and a recently acquired CP/M system.

Most of my applications software is written in Micropolis BASIC, which uses the MDOS resident I/O (input/output) package called Res. Res is something like CP/M BDOS (basic disk operating system) and BIOS (basic input/output system) combined. MDOS is a more sophisticated operating system than CP/M, but it cannot be modified as easily as the CP/M system with its BIOS module. The bubble-memory-driver package I am about to discuss functions with either of these operating systems. Given the proper linkage routine, it can probably be used with any operating system running an 8080, 8085, or Z80. Linkage routines and installation procedures for both MDOS and CP/M will be covered later.

The bubble-memory-driver package in listing 1 can be located anywhere in memory. Since it is only 220 bytes long, I placed it in EEPROM along with my system monitor and other peripheral drivers. The package provides six bubble-memory functions: (1) initialization, (2) general control operations, (3) reading of data, (4) writing of data, (5) reading the FIFO (first-in/first-out) buffer, and (6) writing 42 bytes to the FIFO buffer. Functions 2, 5, and 6 are normally not required and can be deleted if you are short of space. (They were included for use in an as yet unwritten

diagnostic program; they might also prove useful for special applications.)

All functions (except number 2) use the same calling sequence. The control function requires the additional step of loading the C register with a 7220 Bubble-Memory-Controller (BMC) command code (see table 1). Normally, you just have to load the HL-register pair with the address of the parameter block (discussed below) and then call the desired function. On return, if an error has occurred, the Carry flag will be set. If needed, the BMC status code can always be found in the Status byte of the parameter block. I have yet to encounter an error during normal operation. For testing purposes, errors can easily be forced by first writing data without the automatic error-detection/correction bit being set and then reading the same data back with the bit set. The error-detection/correction option is selected with bit 6 in the Enable byte.

The parameter block includes the data necessary to set up the parametric registers in the 7220 BMC, the address of a user buffer long enough to store the data to be transferred to/from the bubble memory, and 1 byte to store the BMC status. This is a total of 10 bytes. The parameter block can be located anywhere in RAM. Also, because its address is provided with every call to the bubble-memory-driver package, it can be moved about. You can even have more than one block if circumstances dictate. For example, if two separate files are being accessed at the same time, it might be desirable to set up two parameter blocks, one for each file. In any case, once a parameter block has been initialized, only two of the parameters are normally updated: the starting page number, BEGADR, and the user buffer address, BUFADR.

The number of FSA (formatter/sense amplifier) channels, CANALS, will always be 1 (indicating two FSA channels); 0 specifies one FSA channel and is used only for testing. The bank-select parameter, MBMSEL, should always be 0 (anything else would indicate a multibank system). BLKLEN specifies the number of 64-

Text continued on page 402

Listing 1: *The bubble-memory-driver package contains 8080/8085 assembly-language sub-routines that can be set in ROM and linked with a disk operating system to enable the bubble memory to function as a disk-emulator or cache-memory system. The package requires 220 bytes of storage and can be located anywhere in memory.*



```

ADDR B1 B2 B3 E LINE LABEL          OPCODE OPERAND
-----
0000 1000 * *****
0000 1010 * INTEL BPK72 BUBBLE MEMORY DRIVER PACKAGE *
0000 1020 *
0000 1030 * Copyright (C) 1983 Louis E. Wheeler *
0000 1040 * *****
0000 1060 * The subroutines contained in this package provide the user with
0000 1070 * the basic functions needed to communicate with the INTEL BPK-72
0000 1080 * bubble memory system. Before calling any of these functions
0000 1090 * the user must establish a PARAMETER BLOCK with the following
0000 1100 * parameters stored in the order shown:
0000 1120 * Name (Bytes) Function
0000 1130 *
0000 1140 * BLKLEN (0-1) = Block length. The number of 64 or 68 byte pages
0000 1150 * to be transferred. 0 implies a 2048 page transfer.
0000 1160 * CANALS (2) = The number of FSA channels. 0 or 1. Normally
0000 1170 * 1, indicating 2 FSA channels.
0000 1180 * ENABLE (3) = Defines various modes of operation for the
0000 1190 * 7220 controller.
0000 1200 * BEGADR (4-5) = Starting page number (address) for a transfer
0000 1210 * block.
0000 1220 * MBMSEL (6) = Bank number of multibank systems. Always 0
0000 1230 * for single bank systems.
0000 1240 * BUFADR (7-8) = Address of user defined buffer. Minimum size
0000 1250 * 64 bytes (depends on BLKLEN and ENABLE).
0000 1260 * STATUS (9) = Status byte returned after all calls.
0000 1270 *
0000 1280 * The first five parameters are defined in the INTEL documentation.
0000 1290 * BUFADR points to a user supplied buffer with a minimum size of 64
0000 1300 * bytes. The actual size depends on the block length in pages and
0000 1310 * whether or not automatic error correction has been selected in the
0000 1320 * ENABLE byte. On return, the STATUS byte will contain the last
0000 1330 * BM status input from the BMC. If an error condition existed,
0000 1340 * the C-flag will be set.
0000 1350 *
0000 1360 * FUNCTIONS PROVIDED:
0000 1370 *
0000 1380 * BMINIT - Initializes the bubble memory system
0000 1390 * BMCNTL - Performs non-data transfer control operations
0000 1400 * BMREAD - Reads one block (record) from bubble memory
0000 1410 * BMWRIT - Writes one block (record) to bubble memory
0000 1420 * RDFIFO - Reads content of FIFO buffer
0000 1430 * WRFIFO - Writes 42-bytes of data into FIFO buffer
0000 1440 *
0000 1450 * CALLING SEQUENCE:
0000 1460 *
0000 1470 * MVI C,[command] Required for non-data transfer
0000 1480 * control operations only.
0000 1490 * LXI H,PARAMBLK HL = FWA of the above PARAMETER BLOCK
0000 1500 * CALL [function] Any of the above functions
0000 1510 * JC ERROR Transfer to user defined error routine
0000 1520 *
0000 1530 * *****
0000 1540 *
0000 1550 * ORG 0F623H ; A place to put it.
0000 1560 *
0000 1570 * *****
0000 1580 *
0000 1590 * COMMAND CODES
0000 1600 *
0000 1610 * CIZ EQU 11H ; INITIALIZE
0000 1620 * CRD EQU 12H ; READ
0000 1630 * CMR EQU 13H ; WRITE
0000 1640 * CAB EQU 19H ; ABORT
0000 1650 * CFR EQU 1DH ; FIFO RESET
0000 1660 * CPURG EQU 1EH ; MBM PURGE COMMAND
0000 1670 *
0000 1680 * STATUS WORD BITS
0000 1690 *
0000 1700 * FIFOB EQU 01H ; FIFO STATUS
0000 1710 * OPDONE EQU 40H ; OPERATION COMPLETE
0000 1720 * BUSYBT EQU 80H ; BUSY BIT
0000 1730 *
0000 1740 * OTHER EQUATES
0000 1750 *
0000 1760 * REGB EQU 00H ; FIRST BMC REG TO SET (BLKLEN)
0000 1770 * PTVMASK EQU 0FDH ; MASK FOR PARITY BIT
0000 1780 * STATER EQU 3CH ; STATUS WRD·ERR MSK IGNORE PTY
0000 1790 *
0000 1800 * I/O PORT ADDRESS ASSIGNMENTS
0000 1810 *
0000 1820 * BMSTAT EQU 0E1H ; STATUS PORT
0000 1830 * BMCOMD EQU 0E1H ; COMMAND PORT
0000 1840 * BMDATA EQU 0E0H ; DATA PORT
0000 1850 *
0000 1860 * *****
0000 1870 *
0000 1880 * BMINIT - Initializes the MBM system for operation as specified
0000 1890 * in the PARAMETER BLOCK supplied by the user.

```

Listing 1 continued on page 398

Your Apple's telephone. Hayes™

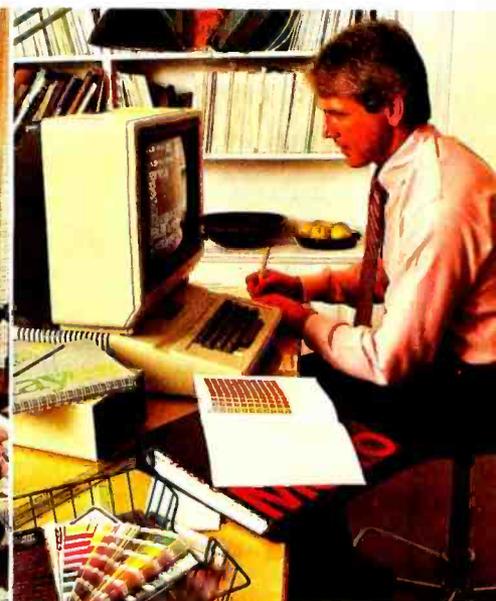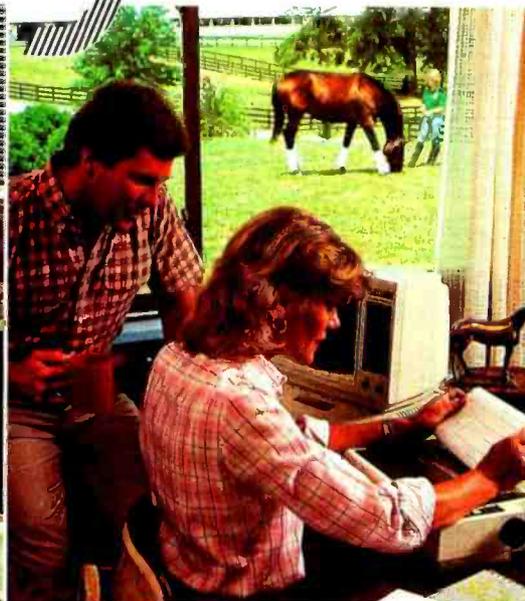

"Thanks for the prompt reply. Sure was a lot faster than waiting for the mail!"

"Gary: The pedigrees for next week's auction are as follows..."

"Attn. Prod., Sales, Purch.: Recommend 50% blue, 30% red screen for closest match!"

A complete plug-in communications system for Apple® computers. From Hayes, the established telecomputing leader: the simple but sophisticated Micromodem II® plug-in board modem and its companion software, Smartcom I™. Everything you need to expand the world of your Apple II, IIe, II Plus and Apple III. In one, convenient communications package.

With Micromodem IIe and Smartcom I, you can access data bases, bulletin boards, and the varied resources of information services. Plan your travel itinerary via computer, including flight numbers, hotel and rental car reservations. Retrieve and analyze daily stock and options prices. Work at home and send reports to your office. You can even do your gift shopping by computer!

Micromodem IIe. Think of it as your Apple's telephone. It allows your computer to communicate with any Bell-103 type modem over ordinary telephone lines, at 110 or 300 bits per second. Micromodem IIe installs easily in an expansion slot, and requires no outside power source. It connects directly to either a single or multiline modular phone jack, to perform both Touch-Tone® and pulse dialing.

Micromodem IIe dials, answers and disconnects calls automatically. And, unlike some modems, it operates in full or half duplex, for compatibility with most time-sharing systems.

A built-in speaker lets you monitor your



calls when dialing. That way, you'll know if a line is busy. With Smartcom I, Micromodem IIe automatically redials your last number.

Discover how Micromodem IIe can help maximize the capabilities of your Apple. While Smartcom I software will minimize your efforts.

Smartcom I companion software. For effortless communications. Whether you're a newcomer to personal computing or a seasoned professional, you'll appreciate the ease and speed with which you can perform any communications function. Thanks to Smartcom I!

Let Smartcom I guide you through a few easy-to-answer questions to tailor the program to your particular needs. Then you're ready to go!

Make a selection from the Smartcom I menu to manage your communications, files or printer. Program prompts guide you along the way. And menu selections let

you easily make a call, end a call, or answer a call. When you're on the receiving end, your Micromodem IIe answers automatically, even if you're not there!

Convenient! And so is the Smartcom I memory for phone numbers. Smartcom I stores three of your most frequently called telephone numbers and one prefix. Plus, it also remembers the last number dialed.

Smartcom I also provides a directory of the files stored on your disk. And lets you create, list, name, send, receive, print or erase files right from its menu.

Smartcom I is as versatile as you need it to be. It accepts DOS 3.3, Pascal, CP/M™ 3.0 or CP/M Plus™ operating systems. And accommodates up to six disk drives and several printer interface cards.

Like all our products, Smartcom I and Micromodem IIe are backed by excellent documentation and full support. Including a two-year limited warranty on Micromodem IIe and a 90-day warranty on Smartcom I!

See your dealer today. Then plug into the exciting world of telecomputing.

Hayes Microcomputer Products, Inc.,
5923 Peachtree Industrial Blvd., Norcross,
Georgia 30092. 404/441-1617.




FCC approved in U.S.A. Micromodem IIe is a registered trademark of Hayes Microcomputer Products, Inc. Smartcom I is a trademark of Hayes Microcomputer Products, Inc. Apple is a registered trademark of Apple Computer, Inc. Touch-Tone is a registered service mark of American Telephone and Telegraph. CP/M is a trademark of Digital Research, Inc. CP/M Plus is a trademark of Advanced Logic Systems ©1983 Hayes Microcomputer Products, Inc.

YOURS FREE!

The essential new catalog of the business computer forms and supplies you need most!

It's quick • convenient • easy-to-use.

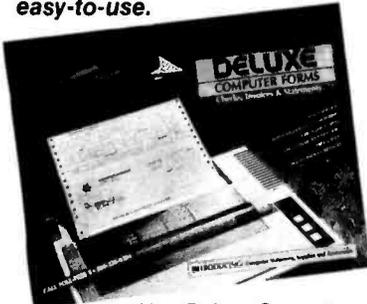

Now Deluxe Computer Forms, a division of Deluxe Check Printers, gives you the software-compatible checks, invoices, statements and word processing stationery you've been searching for. And accessories too.

And we can ship them all to you in as few as 3 working days!

Deluxe delivers your order in record time because we know how much you depend on it to make your office run smoothly. And we deliver it to your precise specifications. That means customization for your unique program needs, or personalization of any of our 200 standard forms for popular software programs. And you order only what you need—as few as 500 forms.

See what we've got to offer your business. Then see just how fast we can deliver it.

Send for your FREE catalog today!

DELUXE 530 N. WHEELER ST.
P.O. BOX 43046
A DIVISION OF DELUXE CHECK PRINTERS, INC. ST. PAUL, MINNESOTA 55184-0046

YES. Rush me your complete, new catalog of computer forms and essentials.

My Name _____ Title _____

Company Name _____

Address _____

City _____ State _____ Zip _____

Phone _____

Clip out and mail or call TOLL FREE:

1-800-328-5727 Dept. #86

(In Minnesota, call 1-800-742-5685 Dept. #86.)

7309

Listing 1 continued:

F623	1908 *				
F623	1910 *	CALLS:	SENDREG, BMEXIT		
F623	1920 *				
F623	1930 *				
F623	CD 2D F6	1940	BMINIT:	CALL	SENDREG ; LOAD BMC REGISTERS
F626	3E 11	1950		MVI	A,CIZ ; GET INITIALIZE COMMAND
F628	D3 E1	1960		OUT	BMCOMD ; SEND IT.
F62A	C3 58 F6	1970		JMP	BMBXIT ; WAIT FOR COMPLETION
F62D	1980 *				
F62D	1990 *				
F62D	2000 *				
F62D	2010 *				
F62D	2020 *				
F62D	2030 *				
F62D	2040 *	CALLS:	None		
F62D	2050 *				
F62D	2060 *				
F62D	3E 0B	2070	SENDREG:	MVI	A,REG ; GET 1ST REG ADDRESS
F62F	D3 E1	2080		OUT	BMCOMD ; AND SEND IT.
F631	2090 *				
F631	2100 *				
F631	2110 *				
F631	7E	2120		MOV	A,M ; GET BLKLEN (LSB)
F632	D3 E0	2130		OUT	BMDATA ; SEND IT. (BMC B-REG)
F634	23	2140		INX	H ; BUMP ADDR
F635	46	2150		MOV	B,M ; B=BLKLEN (MSB)
F636	23	2160		INX	H
F637	7E	2170		MOV	A,M ; A=NUM OF FSA CHANNELS
F638	17	2180		RAL	
F639	17	2190		RAL	
F63A	17	2200		RAL	
F63B	17	2210		RAL	
F63C	B0	2220		ORA	B ; MELD WITH BLKLEN (MSB)
F63D	D3 E0	2230		OUT	BMDATA ; SEND IT. (BMC C-REG)
F63F	2240 *				
F63F	2250 *				
F63F	2260 *				
F63F	23	2270		INX	H ; BUMP ADDR
F640	7E	2280		MOV	A,M ; GET ENABLE BYTE
F641	D3 E0	2290		OUT	BMDATA ; SEND IT. (BMC D-REG)
F643	2300 *				
F643	2310 *				
F643	2320 *				
F643	23	2330		INX	H ; BUMP ADDR
F644	7E	2340		MOV	A,M ; A=ADDR REG (LSB)
F645	D3 E0	2350		OUT	BMDATA ; SEND IT. (BMC E-REG)
F647	23	2360		INX	H
F648	46	2370		MOV	B,M ; B=ADDR REG (MSB)
F649	23	2380		INX	H
F64A	7E	2390		MOV	A,M ; A=BUBBLE NUMBER
F64B	17	2400		RAL	
F64C	17	2410		RAL	
F64D	17	2420		RAL	
F64E	B0	2430		ORA	B ; MELD WITH PAGE NUMBER (MSB)
F64F	D3 E0	2440		OUT	BMDATA ; SEND IT. (BMC F-REG)
F651	23	2450		INX	H ; BUMP ADDR
F652	2460 *				
F652	5E	2470	SWAPREG:	MOV	E,M ; GET USER BUFFER ADDR
F653	23	2480		INX	H ; TO DE-REG
F654	56	2490		MOV	D,M ; FOR LATER USE.
F655	23	2500		INX	H ; BUMP PNTR TO STATUS ADDR.
F656	EB	2510		XCHG	
F657	2520 *				
F657	C9	2530		RET	
F658	2540 *				
F658	2550 *				
F658	2560 *				
F658	2570 *				
F658	2580 *				
F658	2590 *				
F658	2600 *				
F658	2610 *				
F658	2620 *				
F658	2630 *				
F658	2640 *				
F658	2650 *	CALLS:	None		
F658	2660 *				
F658	2670 *				
F658	01 FF FF	2680	BMEXIT:	LXI	B,0FFFFH ; SET UP TIMER.
F658	2690 *				
F658	0B E1	2700	BMEX1:	IN	BNSTAT ; GET STATUS
F65D	E6 FD	2710		ANI	PTVMSK ; MASK OUT PTV ERR
F65F	12	2720		STAX	D ; SAVE IT.
F660	F2 6C F6	2730		JP	BMEX2 ; NO, GO OK FOR ERRORS.
F663	0B	2740		DCX	B ; ELSE, FOR JUST
F664	78	2750		MOV	A,B ; SO MANY
F665	B1	2760		ORA	C ; TIMES
F666	C2 5B F6	2770		JNZ	BMEX1 ; LOOP AND TRY AGAIN.
F669	C3 73 F6	2780		JMP	BMERRX ; TOOK TOO LONG IF BC=0
F66C	2790 *				
F66C	E6 3C	2800	BMEX2:	ANI	STATER ; WAS THERE AN ERROR?
F66E	C2 73 F6	2810		JNZ	BMERRX ; YES, TAKE ERROR EXIT.
F671	AF	2820		XRA	A ; NO, CLEAR FLAG
F672	C9	2830		RET	
F673	2840 *				
F673	3E 19	2850	BMERRX:	MVI	A,CAB ; CLEAR THE RECKAGE
F675	D3 E1	2860		OUT	BMCOMD ; BY ABORTING

Listing 1 continued on page 400

Gifford has a lock on multiuser CP/M[®] 8-16.

It's 11:00 P.M. Do you know where your files are?

It's great when multiple local and off site users can run any 8- or 16-bit CP/M or MP/M™ program. It's even better when they can share expensive resources like printers, hard disks, and tape drives. Best of all is when they can share your most precious resource— data. Gifford has been delivering systems with all these features for over two years.

But sometimes data is sensitive. How do you keep people from taking more than their fair share?

Gifford adds a new dimension to CP/M security.

With our new security features, you can control what resources and data are shared.

Gifford's proprietary security enhancements include user login with encrypted passwords, control over access rights of modem users, secure electronic mail, and the ability to restrict users to specified terminals, programs, and directory areas. Plus, an audit log utility that keeps a permanent record of system activity. And you also get all the standard security features of Digital Research's MP/M-86™

You select the level of security needed to get the best balance between file sharing and file safety.

Unleash productivity with Gifford's Virtual Terminals.

With our Virtual Terminals, each terminal on your system can monitor up to four different programs running concurrently. And at the touch of a key you can switch screens instantly from one program to another.

You could look up an address in dBASE II™, jump over to SuperCalc™ to make some projections, then switch instantly to WordStar® to use this information to update a letter. If you forget what's on a screen, just touch a key to refresh your memory. You won't need to go through the distracting process of loading and unloading programs.

And since your Virtual Terminal can run any 8- or 16-bit CP/M or MP/M program, you can choose the best programs for your job from the biggest software library in the world. It's easier than 1, 2, 3!

The Gifford Security Blanket: Total Solutions.

Gifford delivers solutions. This means professional pre-sale consultation, expert system integration with 200 hour system burn-in, complete training, and full after sale support.

For example, our three user CompuPro® based system with a 21-megabyte hard disk costs just \$9,990, and can be easily expanded for \$500 per

user. This includes MP/M 8-16, SuperCalc, and dBASE II.

Other Gifford solutions include systems with hard disks that range from 5 to 300 megabytes, 4 and 9 track tape backup, printers, plotters, and modems. Single- and multiuser 8086, 68000, and Z-80 based systems are available for immediate delivery, with 80286 and 16032 systems on the way.

Two year warranty protection.

In the unlikely event that you encounter a hardware related problem, we'll replace any defective S-100 part within 24 hours FREE for two full years. But chances are, it can be solved on the Gifford service hotline or diagnosed via modem. All at no cost to you.

Lock in on Gifford Security today.

If total support, training, on site service, obsolescence-proof upgradeable S-100 bus architecture, and complete system security sound appealing, cut the coupon or give us a call. We'll send you a free brochure that tells the whole story. Once you get it you'll see why Gifford has a lock on multiuser CP/M 8-16.

Gifford Computer Systems is a Full Service CompuPro® Systems Center.



The powerful Gifford System 321 shown with optional GCS-80 Virtual Terminals.

GIFFORD
COMPUTER SYSTEMS

2446 Verna Court, San Leandro, CA 94577
(415) 895-0798 A division of G&G Engineering
I'D LIKE THE WHOLE STORY.
Please send me your brochure.

Name _____ Title _____
Organization _____ M/S _____
Address _____
City _____ State _____ Zip _____
Phone _____
 Please have a representative call me. **BY-S**

GIFFORD COMPUTER SYSTEMS □ San Leandro, CA (415) 895-0798 □ Los Angeles, CA (213) 477-3921 □ Houston, TX (713) 680-1944
Amherst, NY (716) 833-4758 □ Telex: 704521



ANADEx	\$1295
CITOH	\$ 595
DAISYWRITERS	\$1495
DIABLO	\$1195
DYNAX	\$ 599
EPSON	\$ 499
GEMINI	\$ 399
GE	\$1930
IDS	\$ 799
NEC	\$1915
QANTEX	\$1495
QUME	\$1995
SILVER REED	\$ 599
TALLY	\$ 399
TOSHIBA	\$2195

PRICES SO LOW— WE CAN'T LIST THEM

ADDS	\$ 650
AMPEX	\$ 679
COMREX	\$ 149
ESPRIT	\$ 595
LEAR SIEGLER	\$ 595

All equipment is in factory cartons with manufacturers' warranty. Prices subject to change without notice. Most items in stock or shipped as receiver

1 NATIONWIDE SERVICE. MOST PRODUCTS SUPER WAREHOUSE

P.O. BOX 373 WALLINGFORD, CONNECTICUT 06492
 ORDER LINE ORDER HOURS
203-265-1223 9:00 AM - 5:00 PM EST
 MONDAY-FRIDAY

PHONE ORDERS FREE
 (ONE DOLLAR CREDIT FOR PHONE ORDERS)

Listing 1 continued:

F677 3E 1E	2870	MVI	A.CPURG	; AND PURGING
F679 D3 E1	2880	OUT	BMCOMD	; EVERYTHING.
F678 37	2890	STC		; SET CARRY FLAG
F67C C9	2900	RET		; AND EXIT.
F67D	2910 *			
F67D	2920 *			
F67D	2930 *			
F67D	2940 *	BMCNTL		- Facilitates direct user control of the BM system through command operations. No data is transferred. The routine expects to find the COMMAND CODE in the C register.
F67D	2950 *			
F67D	2960 *			
F67D	2970 *			
F67D	2980 *	CALLS:	SNDREG, BMEXIT	
F67D	2990 *			
F67D CD 2D F6	3000	BMCNTL:	CALL	SNDREG ; LOAD BMC REGISTERS
F680 79	3010	MOV	A.C	; GET COMMAND
F681 D3 E1	3020	OUT	BMCOMD	; INITIATE IT.
F683 C3 58 F6	3030	JMP	BMEXIT	; WAIT TILL DONE
F686	3040 *			
F686	3050 *			
F686	3060 *			
F686	3070 *	BMREAD		- Reads one record as specified in the PARAMETER BLOCK. Note: Failure to provide sufficient buffer area can prove disastrous.
F686	3080 *			
F686	3090 *			
F686	3100 *	CALLS:	SNDREG, BMEXIT	
F686	3110 *			
F686	3120 *			
F686	3130 *			
F686 3E 1D	3140	BMREAD:	MVI	A.CFR ; RESET FIFO
F688 D3 E1	3150	OUT	BMCOMD	
F68A CD 2D F6	3160	CALL	SNDREG	; SEND REG'S TO BMC
F68D 3E 12	3170	MVI	A.CRD	; INITIATE READ
F68F D3 E1	3180	OUT	BMCOMD	; OPERATION.
F691	3190 *			
F691 DB E1	3200	BMRD1:	IN	BMSTAT ; GET STATUS
F693 B7	3210	ORA	A	; WAIT FOR BUSY
F694 F2 91 F6	3220	JP	BMRD1	; LOOP UNTIL SET.
F697	3230 *			
F697 DB E1	3240	BMRD2:	IN	BMSTAT ; GET STATUS
F699 B7	3250	ORA	A	; BUSY ?
F69A F2 58 F6	3260	JP	BMEXIT	; NOPE, ALL DONE.
F69D E6 01	3270	ANI	FIF0BT	; FIFO EMPTY?
F69F CA 97 F6	3280	JZ	BMRD2	; YEP, GO CK BUSY
F6A2 DB E0	3290	IN	BMDATA	; NOPE, GET THE DATA
F6A4 77	3300	MOV	M.A	; STORE IT
F6A5 23	3310	INX	H	; BUMP STORE ADDR.
F6A6 C3 97 F6	3320	JMP	BMRD2	; AND LOOP FOR MORE.
F6A9	3330 *			
F6A9	3340 *			
F6A9	3350 *			
F6A9	3360 *	BMWRIT		- Writes one record to the BM. Note: records shorter than the block size specified in the PARAMETER BLOCK should be padded with a suitable character, else the record will be filled out with what ever is available.
F6A9	3370 *			
F6A9	3380 *			
F6A9	3390 *			
F6A9	3400 *			
F6A9	3410 *	CALLS:	SNDREG, BMEXIT, BMERRX	
F6A9	3420 *			
F6A9	3430 *			
F6A9 3E 1D	3440	BMWRIT:	MVI	A.CFR ; GET FIFO RESET
F6AB D3 E1	3450	OUT	BMCOMD	; SEND IT.
F6AD CD 2D F6	3460	CALL	SNDREG	; SEND REG'S
F6B0 3E 13	3470	MVI	A.CWR	; GET WRITE COMMAND
F6B2 D3 E1	3480	OUT	BMCOMD	; SEND IT.
F6B4	3490 *			
F6B4 DB E1	3500	BMWR1:	IN	BMSTAT ; GET STATUS
F6B6 E6 81	3510	ANI	BUSYBT+FIF0BT	; WAIT FOR BUSY
F6B8 FE 81	3520	CPI	BUSYBT+FIF0BT	; AND FIFO BITS.
F6BA C2 84 F6	3530	JNZ	BMWR1	; LOOP UNTIL...
F6BD	3540 *			
F6BD DB E1	3550	BMWR2:	IN	BMSTAT ; GET STATUS
F6BF E6 FD	3560	ANI	PTYMSK	; MASK OUT PTY ERR
F6C1 12	3570	STAX	D	; SAVE IN E-REG
F6C2 F2 D1 F6	3580	JP	BMWR3	; OP COMPLETE/FAILED?
F6C5 E6 01	3590	ANI	FIF0BT	; FIFO REHDY?
F6C7 CA BD F6	3600	JZ	BMWR2	; NOPE, LOOP TRY AGN.
F6CA 7E	3610	MOV	A.M	; YES LOAD SOME DATA
F6CB D3 E0	3620	OUT	BMDATA	; GIVE IT TO BMC
F6CD 23	3630	INX	H	; BUMP ADDR
F6CE C3 BD F6	3640	JMP	BMWR2	; AND LOOP FOR MORE.
F6D1	3650 *			
F6D1 1A	3660	BMWR3:	LDAX	D ; GET STATUS
F6D2 FE 41	3670	CPI	OPDONE+FIF0BT	; ALL DONE AND GOOD?
F6D4 CA 58 F6	3680	JZ	BMEXIT	; NORMAL EXIT.
F6D7 C3 73 F6	3690	JMP	BMERRX	; ERROR EXIT
F6DA	3700 *			
F6DA	3710 *			
F6DA	3720 *			
F6DA	3730 *	RDFIFU		- Reads the contents of the FIFO buffer.
F6DA	3740 *			
F6DA	3750 *	CALLS:	SWAPREG, BMEXIT	
F6DA	3760 *			
F6DA	3770 *			
F6DA 11 07 00	3780	RDFIFU:	LXI	D,0007H ; POSITION PARAMBLK PTRN
F6DD 19	3790	DAD	D	; TO USER BUFFER ADDR.
F6DE CD 52 F6	3800	CALL	SWAPREG	; SET UP HL/DE POINTERS.
F6E1	3810 *			
F6E1 DB E1	3820	RDFIFU2:	IN	BMSTAT ; GET STATUS
F6E3 E6 01	3830	ANI	FIF0BT	; ANY DATA THERE?

PIECE OF MIND

CompuPro's System 816. The fastest, most cooperative computer you can buy.

OEMs and systems integrators are busy people. Too busy to waste time with an uncooperative computer system. That's why every System 816 from CompuPro is built to work long and hard without a whine or a whimper.

More Dependable.

With ten years of pioneering successes built into it, the System 816 is backed by the industry's longest warranty coverage. Depending on your needs, our warranties range from 12 to 36 months. Most other computer manufacturers expect you to be satisfied with 90 days, which typically covers parts only.

You can also depend on complete hardware and software support, flexible configurations and upgrades, and system training.

More Powerful.

The System 816 squeezes more performance out of the IEEE-696/S-100 bus than any other system you can buy. A choice of CPUs—and up to 4 Mbytes of our exclusive M-Drive/H™ RAM disk—give multiple workstations all the speed and power they can ask for. Standard RAM memory is expandable to one megabyte or more.

Disk storage capacity ranges up to 4.8 Mbytes on floppy drives and as much as 320 Mbytes per controller on hard disk.

CompuPro®

A GODBOUT COMPANY

3506 Breakwater Court, Hayward, CA 94545

CP/M and CP/M-86 are registered trademarks and CP/M-68K, MP/M-86, Concurrent CP/M-86 and FORTRAN 77 are trademarks of Digital Research Inc. CP/M 8-16 and MP/M 8-16 are compound trademarks of Digital Research Inc. and CompuPro.

For dealer locations, see page 439.

More Versatile.

All family members share a common modular architecture. So it's a simple matter to upgrade or reconfigure any of them to keep up with your needs. All the while maintaining complete software compatibility up and down the line.

And the S-100 bus allows you the flexibility to plug in any compatible board to add graphics capabilities or boards for your own unique applications.

You also get your choice of operating environments, including CP/M®, CP/M-86®, Concurrent CP/M-86™, MP/M-86™ and CP/M-68K™, and our own CP/M®8-16™ and MP/M™8-16™.

At the programming level, the System 816 family supports Pascal, C, FORTH, BASIC, COBOL, PL/1, FORTRAN 77™ and more.

More Information.

Your customer's satisfaction is important to both of us, so don't get stuck with a system that's more of a hindrance than a help. Send in the coupon and find out what peace of mind is all about.

For business, scientific and industrial computing solutions, call (415) 786-0909 ext. 506 for the location of our dealers worldwide, or the Full Service CompuPro System Center nearest you.

- Send me your free System 816 brochure.
 Send me the name of my nearest Full Service CompuPro System Center or dealer.

NAME _____
TITLE _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____

Mail to: CompuPro, Attn: Sales Dept.
3506 Breakwater Court, Hayward, CA 94545

Prices and specifications subject to change without notice.
System 816 front panel design shown is available from Full Service CompuPro System Centers only. ©1983 COMPUPRO

Circle 67 on inquiry card.

BYTE February 1984 401

byte blocks to be transferred in one operation. For the 128-byte records used by CP/M, BLKLEN is set to 2. For MDOS, which uses 256-byte records, BLKLEN is set to 4. A BLKLEN of 0 implies a block length of 2048. The Status byte need not be initialized.

Using the driver package with an assembly-language program is not difficult. Just set up the parameter block, load the address of the parameter block into the HL-register pair, and call the desired function. Although linking the bubble-memory-driver package with an operating system is also fairly straightforward, it does require some knowledge of the interworkings of the operating system involved.

MDOS Linkage

Linking the driver package to the Micropolis operating system was somewhat simpler than it was with CP/M. This is partly true because the MDOS linkage (see listing 2) is not a complete disk emulation; it functions more like a cache memory than a disk. Although it lets you access the bubble memory with BASIC disk commands (OPEN, CLOSE, GET, PUT, etc.), it has no directory, and, if more than one file is to be maintained, it is your responsibility to keep track of where the files are located. I chose this approach for two reasons: (1) MDOS does not readily lend itself to this type of modification, and (2) it is more in keeping with my intended application—to provide my text editor with a large, fast, yet nonvolatile storage medium. The editor uses the bubble memory as though it were disk 3 with a capacity of more than 30 typewritten pages. It treats the bubble memory like a temporary working file, using a floppy-disk file for permanent storage. I intend to use it for other large files where rapid access is a factor, such as a checkbook file.

The preceding approach simplifies the modification of MDOS and still produces the desired results. There is room in the Res module to accommodate the added code. The only patch necessary is at the point where Res determines if the disk number is

Text continued on page 406

Listing 1 continued:

```

F6E5 CA 58 F6 3840          JZ   BMEXIT      ; NO. EXIT.
F6E8 DB E8 3850          IN   BMDATH      ; YES, GET DATH
F6E9 77 3860           MOU  M.A         ; STURE IT
F6EB 23 3870          INX  H           ; BUMP STURE ADDR
F6EC C3 E1 F6 3880      JMP  RDFIF02     ; LOOP FOR MORE.
F6EF 3890 *          *****
F6EF 3910 *          *****
F6EF 3920 *          WRFIF0 - Sends 42 bytes to the FIFO buffer.
F6EF 3930 *          *****
F6EF 3940 *          CALLS: SNDREG, BMEXIT
F6EF 3950 *          *****
F6EF 3960 *          *****
F6EF CD 2D F6 3970      WRFIF0:    CALL  SNDREG      ; SEND REG'S
F6F2 0E 2A 3980      MUI  C.42       ; SET CNT FOR 42 BYTES
F6F4 7E 3990      WRFIF02:   MOU  A.M         ; GET SOME DATH
F6F5 D3 E0 4000      OUT  BMDATH     ; SEND IT
F6F7 23 4010          INX  H           ; BUMP LOAD ADDR
F6F8 0D 4020          DCR  C           ; COUNT IT AND
F6F9 C2 F4 F6 4030      JNZ  WRFIF02   ; LOOP IF NOT DONE.
F6FC C3 58 F6 4040      JMP  BMEXIT     ; EXIT.
F6FF 4050 *          *****
    
```

ERRORS THIS ASSEMBLY 0000

Command Code (hexadecimal)	Command/Explanation
10	WRITE BOOT LOOP REGISTER MASKED. Can be used in place of the WRITE BOOT LOOP REGISTER command. Masks out any trailing 1s.
11	INITIALIZE. Reads and decodes the boot loop from the MBM and stores the result in the FSA's boot-loop register. Does not alter any data stored in the MBM.
12	READ BUBBLE DATA. Causes data to be read from the MBM into the BMC FIFO buffer. All parametric registers must be set up prior to issuing this command.
13	WRITE BUBBLE DATA. Causes data to be transferred from the BMC FIFO buffer to the MBM. All parametric registers must be set up prior to issuing this command.
14	READ SEEK. Rotates the MBM to an address designated in the parametric register. Can be used to reduce access time. After this command, the parametric registers must be reset.
15	READ BOOT LOOP REGISTER. Causes the BMC to read the boot-loop register of the selected FSA channels into the BMC FIFO buffer.
16	WRITE BOOT LOOP REGISTER. Causes the BMC to write the contents of the BMC FIFO buffer into the selected FSA channels. The data must have been previously written into the FIFO buffer.
17	WRITE BOOT LOOP. Causes the existing contents of the MBM's boot loop to be replaced with 40 bytes taken from the BMC FIFO buffer. <i>Caution—execution of this command destroys the boot loop written into the MBM at the factory.</i> This command cannot be executed until the Write Boot Loop Enable bit has been set in the Enable register.
18	READ FSA STATUS. Causes the BMC to read the 8-bit status register of all FSAs and stores it in the BMC FIFO buffer.
19	ABORT. Terminates any command currently being executed. If the BMC is busy when executed, this command must be followed by an INITIALIZE or MBM PURGE command.
1A	WRITE SEEK. Rotates the MBM to a designated address location. After a WRITE SEEK command is executed, the parametric registers must be reset. Can be used to reduce access time.
1B	READ BOOT LOOP. Causes the BMC to read the boot loop from the MBM into the BMC FIFO buffer. Must be preceded by a FIFO RESET command.
1C	READ CORRECTED DATA. Causes the BMC to read into the FIFO buffer a 64-byte block of data after the FSA has attempted to correct the data. The FSA informs the BMC whether the error was correctable or not. The command is used only when the system is in the error-correction mode enabled in the Enable register.
1D	RESET FIFO. Clears the BMC FIFO buffer and all I/O latches.
1E	MBM PURGE. Clears all BMC registers, counters, and the MBM address. Does not clear the block-length register, FSA counter, or the 4 high-level bits of the address register.
1F	SOFTWARE RESET. Clears the BMC FIFO and all registers except parameters. No INITIALIZATION command is required after this command.

Table 1: A list of 7220 Bubble-Memory-Controller command codes. Each code is further explained in the BPK 72 Bubble Memory Prototype Kit User's Manual supplied with the kit.

APPLE

Compatible

IBM-PC

Compatible

S-100

Compatible

• DOT MATRIX PRINTERS •

Okidata		Epson	
ML-80	\$279	RX-80	Call
ML-82A	319	RX-80F/T	Call
ML-83A	619	MX-100	Call
ML-84 Par.	1039	FX-80	Call
ML-92 Par.	469	FX-100	Call
ML-93 Par.	749		
Star Micronics			
NEW! Riteman		Gemini 10X	\$299
Inforunner	\$319	Gemini 15X	499
NEW! Panasonic			
KX-P1090	\$339	Radix 10	Call
Anadex		Mannesman Tally	
DP9620B	\$1195	1601	\$579
DP9625B	1295	160L	639
WP6000	2195	180L	849
DP6500	2495	Spirit	339
CITOH		IDS	
8510AP	\$399	Prism 80	\$999
1550P	719	Prism 80 (color)	1439
CX-4800 (color)	579	Prism 132	1239

• DAISYWHEEL PRINTERS •

NEC		Diablo	
2010 (Ser.)	\$879	620	\$998
2030 (Par.)	879	630 R-155	1899
2050 (IBM-PC)	999	630 ECS/IBM	2195
3510 (Ser.)	1499	Gume	
3550 (IBM-PC)	1899	11/40	\$1399
7710 (Ser.)	2159	11/55	1599
C ITOH		Silver Reed	
Starwriter	\$1219	Exp 500	\$669
Printmaster	1569	Exp 550	439

We have cables, printwheels, ribbons, paper surge protectors, and other accessories for your printer in stock at outstanding prices.

• MONITORS •

Amdek		Zenith	
300G 12" Gr.	\$139	123 12" Gr.	\$118
300A 12" Amber	159	122 12" Amber	145
310A 12" Amber	169	131 Med. Res. RGB	319
Color I	299	135 High Res. RGB	549
Color II+	449	BMC	
Color III	385	12AU 12" Gr.	\$85
Panasonic		Nec	
12" Green	\$169	JB1201	\$159
12" Amber	189	JB1205	169
13" RGB	399	JC1216	469
Taxan		Sanyo	
KG12" Green	\$169	CRT-3612" Green	169
RGBvision 1 Color	315	CRT-7 RGB Color	Call

• MODEMS •

D.C. Hayes		Novation	
Smartmodems			
300 Baud	\$219	D-Cat	\$155
1200 Baud	529	J-Cat	110.00
1200B (IBM-PC)	499	Apple Cat II	279
Micromoden II	269	212 Smartcat	429
		Access 1-2-3	Call
Signalman		U.S. Robotics	
MK VII	Call	Password	\$359
Volkmodem	59.95	AutoLink 212A	465

• TERMINALS •

TeleVideo		Esprit Systems	
910	\$499	Esprit	\$499
914	619	Esprit II	549
924	739	Esprit III	669
925	749	Esprit III (color)	Call
950	945	Exec 10/102	Call
970	1099	Exec 10/25	Call
TeleVideo Personal Terminal			
Personal Terminal			\$439
Personal Terminal w/300 baud Modem			559
Personal Terminal w/1200 baud Modem			899
Zenith			
Z-29			\$699
ZTX-10	\$339	ZTX-11	\$399
Lear Seagler		Wyse	
ADM3A	\$535	WY-50	\$579
ADM11	589	WY-100	845
ADM12	Call	WY-200	1095
ADM36	999	WY-300	Call

• CROMEMCO •

Introducing the C-10MP Package. This new system couples the popular C-10 hardware and software developed by Cromemco with the most popular software offered by MicroPro.

Word Star - Info Star - Calc Star - Mail Merge

List Price \$2195 Our Low Price \$1975

— Other Cromemco Systems from Mini Micro Mart —

C-10 Super Pack	\$1599
CS-1 with Z-80A, 64KZ, 2DS/DD 5 1/4 Drives	3389
CS-1 with DPU, 256KZ, 2DS/DD 5 1/4 Drives	4239
CS-1HD with DPU, 256KZ, 21MB hard disc	6789

We also carry the entire Cromemco line of S-100 board level products and software

Cromix	\$499	CDOS	\$79
--------	-------	------	------

• EAGLE PC •

Simply, a better PC! 128k RAM (expandable to 512 on the main CPU board), DS/DD 320k disc drives, serial ports, 1 parallel port, MS-DOS, Eagle Calc and Eagle writer included.

The EAGLE SPIRIT portable w/10 MB hard disc is now available.

• COLUMBIA VP PORTABLE •

Featuring IBM-PC compatibility teamed with the most comprehensive software package in the industry. Includes 128k RAM, 2 5 1/4, 320k drives, and a 9 inch 80x25 display.

• SANYO MBC550 •

Not only is the Sanyo MBC550 priced less than one-third that of a comparably equipped IBM-PC. It is also less expensive than most 8 bit computer packages. Includes a 160k drive, 128k RAM, M5-DOS, Word Star and Calc Star.

• IBM-PC BOARDS •

Amdek MAI Graphics Board	\$499
AST Research Six Pak Plus 64k	299
AST Research Mega Plus II 256k	599
AST Research Extender Card	55
CCS 132 Column Super Vision Board	680
Hercules Graphics Card	369
Microsoft 256k RAM Board	445
Microsoft 64k System Board	275
Microsoft 256k System Board	429
Plantronics Color Plus	Call
Quad Ram Quadlink	Call
Quad Ram Quadboard	285
Tecmar 1st MATE Board	295
Tecmar Graphics Master	589

• S-100 BOARDS •

Advanced Digital Super 6/6mhz Board	\$759.00
Advanced Digital CP/M 3.0	350.00
CompuPro CPU-Z 6mhz 2-80	249.00
CompuPro CPU-8085/88	359.00

We also carry S-100 boards from California Computers Systems, Dual Systems, Memory Merchants, North Star, Scion, Systems Group and many more.

• DISC DRIVES •

Rana Elite I w/controller (Apple II)	\$359
Rana Elite II w/controller (Apple II)	529
Rana Elite III w/controller (Apple II)	649
Rana 1000 (for Atari)	359
Rana 2000 (internal for IBM)	249
Tandon TM-100-2 5.25 DSDD	Call
Tandon TM-55-2 1/2 Height Drives	Call

• HARD DISC SYSTEMS •

Tallgrass Technologies	
GMB Hardfile Disk for IBM-PC	\$1895
20MB Hardfile Disk for IBM-PC	2795
70MB Hardfile Disk and Tape Backup	Call

Corvus Omninet

An easy, low cost way to make personal computers part of a powerful information management network.

Corvus Omninet Disc Server	\$829
Corvus GMB Hard Disc	1695
Mirror Card Backup for IBM-PCXT	412
Corvus Print Server	839
The Bank 200MB Tape Drive	1895



All prices, F.O.B. shipping point, subject to change. All offers subject to withdrawal without notice. Advertised prices reflect a 2% cash discount (order prepaid prior to shipment). C.O.D. credit card orders 2% higher.

Mini Micro Mart

943 W. Genesee St. Box 2991 Syracuse, N.Y. 13220
(315) 422-4467 TWX-710-541-0431

Circle 256 on inquiry card.

We make C easy...



and work!

Eco-C compiler...we've got it all.

Whether you're a seasoned professional or just getting started in C, the Ecosoft C compiler has everything you'll ever need.

COMPLETENESS:

Our Eco-C compiler is a complete implementation of C and supports all operators and data types (including long, float and double).

EFFICIENCY:

The compiler generates extremely efficient Z80 code using Zilog's mnemonics. On the benchmarks tested, typically we finished either first or second using substantially less generated code.

PORTABILITY:

The Eco-C library contains over 100 functions that are UNIX V7 compatible, and includes a complete transcendental package. Programs developed with the Eco-C compiler can be moved to virtually any system with little or no change.

EASE OF USE:

The Eco-C compiler includes Microsoft's MACRO 80 assembler, linker, library manager and supporting documentation. The assembler (M80) generates industry-standard REL file output. The linker (L80) is fast and uses only the functions you request in the program. Program development is a snap.

The user's manual is clear, concise and full of useful information. For those of you just getting started with C, we also include a copy of the C Programming Guide (Que). This B. Dalton Best Seller has been adopted by a number of leading universities around the country and is included with each compiler. The book is designed to help you learn C from the ground up. We ought to know...we wrote the book.

We've made the compiler easy to work with for the professional and beginner alike. Most error messages, for example, tell you in English (not just a number) the line number and character position of the error, what was expected and a page reference to the Guide to consult for help if you need it.

PRICE:

We saved the best for last; we've cut the price by \$100.00. Now you can buy the Eco-C compiler for only \$250.00 (MACRO 80 and the book alone are worth \$218.00!). Shop around and we think you agree that the Eco-C compiler is the best value available.

The Eco-C compiler requires a Z80 CPU, CP/M, 54K of free memory and about 240K of disk space (one or two drives). An IBM-PC version will be available in the first quarter of 84. To order your Eco-C compiler, call or write.



Ecosoft Inc.
P.O. Box 68602
Indianapolis, IN 46268
(317) 255-6476



TRADEMARKS:
Eco-C (Ecosoft), MACRO 80 (Microsoft), CP/M (Digital Research)

Listing 2: The MDOS bubble-memory-driver linkage modifies the MDOS Res module to allow Micropolis BASIC to access the bubble memory as a cache memory. The modification can be installed using the MDOS LOAD command.

ADDR	B1	B2	B3	E	LINE	LABEL	OPCD	OPERAND
0000					1000	*		*****
0000					1010	*		MDOS RES - BUBBLE DRIVER LINKAGE
0000					1020	*		
0000					1030	*		Copyright (C) 1983 Louis E. Wheeler
0000					1040	*		*****
0000					1070		ORG	2B00H ; DUMMY ORG FOR LOADER
2B00	00				1080		NOP	
2B01					1090	*		
2B01					1100		ORG	0968H ; UNIT NUMBER CK PATCH
0968					1110	*		
0968	FE	02			1120		CPI	02H ; CHECK LEGAL DRIVE
096A	D2	00	07		1130		JNC	BUBRES ; NO, ITS A BUBBLE.
096D					1140	*		
096D					1150		ORG	06FEH ; FIX FOR PRINTER INIT.
06FE	AF				1160		XRA	A
06FF	C9				1170		RET	
0700					1180	*		
0700					1190	*		RESIDENT INTERFACE FOR BUBBLE MEMORY DRIVERS
0700					1200	*		
0700					1210	*		
0700					1220	*		SYSTEM EQUATES: (BM function addr's equate to EEPROM Jump table)
0700					1230	*		
0700	F018				1240		EQU	0F018H ; INITIALIZE BUBBLE MEMORY
0700	F01B				1250		EQU	0F018H ; READ BUBBLE MEMORY RECORD
0700	F01E				1260		EQU	0F01EH ; WRITE BUBBLE MEMORY RECORD
0700					1270	*		
0700	0004				1280		EQU	0004H ; BLOCK LENGTH=4 PAGES
0700	0001				1290		EQU	01H ; NUMBER OF FSA CHNLS=2
0700	0020				1300		EQU	20H ; ENABLE BYTE=RCD & HI-SPD
0700	0000				1310		EQU	0000H ; BEGIN ADDR=PAGE 0
0700	0000				1320		EQU	00H ; BUBBLE NUM SELECT=FIRST
0700					1330	*		
0700					1340	*		
0700	3A	21	12		1350		BUBRES:	LDA 1221H ; GET 1ST CODE
0703	B7				1360		ORA	A ; IF CODE =
0704	CA	14	07		1370		JZ	BINOUT ; 00 - GO CK 2ND CODE
0707	FE	04			1380		CPI	04H
0709	CA	26	07		1390		JZ	BOPEN ; 04 - IT'S AN OPEN
070C	FE	08			1400		CPI	08H
070E	CA	32	07		1410		JZ	BCLOSE ; 08 - IT'S A CLOSE
0711	C3	F4	0F		1420		JMP	0FF4H ; "PARAM ERROR" EXIT.
0714					1430	*		
0714	1E	03			1440		BINOUT:	MVI E,3 ; ERR RETRY CNT
0716	3A	22	12		1450		LDA	1222H ; GET 2ND CODE
0719	FE	06			1460		CPI	06H
071B	CA	49	07		1470		JZ	BPUT ; 06 - IT'S A PUT
071E	FE	09			1480		CPI	09H
0720	CA	39	07		1490		JZ	BGET ; 09 - IT'S A GET
0723	C3	F4	0F		1500		JMP	0FF4H ; "PARAM ERROR" EXIT.
0726					1510	*		
0726	32	38	07		1520		BOPEN:	STA OCFLAG ; SET OPEN FLAG
0729	CD	7E	06		1530		CALL	INITPB ; INITIALIZE PARAM BLOCK
072C	CD	18	F0		1540		CALL	0BMINIT ; GO INITIALIZE BUB MEM
072F	C3	FC	09		1550		JMP	09FCH ; EXIT
0732					1560	*		
0732	32	38	07		1570		BCLOSE:	STA OCFLAG ; SET CLOSE FLAG
0735	C3	FC	09		1580		JMP	09FCH ; EXIT
0738					1590	*		
0738	08				1600		OCFLAG:	DB 00H ; OPEN/CLOSE FLAG
0739					1610	*		
0739					1620	*		
0739	CD	59	07		1630		BGET:	CALL BSETUP ; GO SET UP CNTL BLK
073C	CD	1B	F0		1640		BRDRPT:	CALL 0BMREAD ; GO READ REC
073F	D2	FC	09		1650		JNC	09FCH ; GOOD REHD, EXIT.
0742	1D				1660		DCR	E ; BUMP RETRY CNT
0743	C2	3C	07		1670		JNZ	BRDRPT ; TRY ONCE AGAIN.
0746	C3	FA	0F		1680		JMP	0FF4H ; "PARAM ERROR" EXIT.
0749					1690	*		
0749	CD	59	07		1700		BPUT:	CALL BSETUP ; GO SET UP CNTL BLK
074C	CD	1E	F0		1710		BWRRT:	CALL 0BMWRIT ; GO WRITE REC
074F	D2	FC	09		1720		JNC	09FCH ; GOOD PUT, EXIT.
0752	1D				1730		DCR	E ; BUMP RETRY CNT
0753	C2	4C	07		1740		JNZ	BWRRT ; TRY ONCE AGAIN.
0756	C3	FA	0F		1750		JMP	0FF4H ; "PARAM ERROR" EXIT.
0759					1760	*		
0759					1770	*		
0759	3A	38	07		1780		BSETUP:	LDA OCFLAG ; CK FILE OPEN
075L	FE	04			1790		CPI	04H
075E	CA	65	07		1800		JZ	SETREC ; YES, GO ON.
0761	E1				1810		POP	H ; CLEAR STACK
0762	C3	00	10		1820		JMP	1000H ; "FILE NOT OPEN" EXIT.
0765	2A	27	12		1830		SETREC:	LHLD 1227H ; SET UP REC #
0768	29				1840		DAD	H ; MULTIPLY BY 4
0769	29				1850		DAD	H ; (64 X 4 = 256 BYTES)
076A	22	A0	06		1860		SHLD	BEGADR ; PLACE IN PARAM BLOCK
076D	2A	23	12		1870		LHLD	1223H ; GET BUF ADDR
0770	22	A3	06		1880		SHLD	BUFADR ; PLACE IN PARAM BLOCK
0773	21	9C	06		1890		LXI	H,PARAMBLK ; HL=PARAMETER BLOCK FWH
0776	C9				1900		RET	
0777					1910	*		

Listing 2 continued on page 406

"I just eliminated eye fatigue by replacing the CRT Display Tube on my computer on my computer"

Now you can eliminate the strobe, flicker and fatigue from your computer terminal with a new **Soft-View™** replacement CRT from Langley-St. Clair.

Now you can upgrade your monitor with a new European amber phosphor tube.

Available for the TRS-80,* TeleVideo, Kaypro, Heath, DEC, Zenith and a wide variety of other monitors, these new replacement display tubes use amber or green phosphors which exceed the European standards for persistence and color.

And the "decay" or fade-out rate of the phosphor is the same as the "refresh" or scanning rate of the computer screen, so the display glows gently, rather than flickering like a strobe light - an annoying problem with black & white or inexpensive green phosphor tubes.

Now, you can upgrade your terminal or computer to world-class performance with the installation of a Langley-St. Clair **Soft-View™ CRT I**

Call our toll-free number to determine which tube will fit your computer or monitor.

LSIS Soft View™ CRT'S

- #DK34G Amber Phosphor w/Anti-Glare \$99.95
- #H234G Amber Phosphor w/Anti-Glare \$99.95
- #K34G Amber Phosphor w/Anti-Glare \$99.95
- #GN31G Green Phosphor w/Anti-Glare \$89.95
- #GN42 Green Phosphor \$79.95
- #GN42G Green Phosphor w/Anti-Glare \$89.95
- #OR34 Amber Phosphor \$89.95
- #OR34G Amber Phosphor w/Anti-Glare \$99.95

Also available:

- #R22G Red Phosphor w/Anti-Glare \$139.95
- #B22G Blue Phosphor w/Anti-Glare \$139.95

Plus: \$7.00 for packing and UPS shipping
\$17.00 for Overseas, Parcel Post or UPS Blue Label
Add Sales Tax where applicable.

Inquire about the CRT's we have available for many other computer models.

*Soft-View™ is a Trademark of Langley-St. Clair Instrumentation Systems, Inc.

TRS-80, TeleVideo, Kaypro, Heath, DEC and Zenith are Registered Trademarks of Tandy Corp., TeleVideo Corp., Non Linear Systems, Inc., Heath Co., Digital Equipment Co. Corp. and Zenith.

Phil DeLaney,
KAYPRO user.



- Available in slow decay green or medium decay "European Amber" (the standard in Europe).
- Made with Lead/Strontium impregnated glass that stops X-ray emission.
- High-contrast face glass that also cuts U.V. radiation.
- Frosted glass with extra Anti-Glare benefits.
- Easily installed . . . comes with pre-mounted hardware.
- Warranted for one full year against manufacturing defects or tube failure.
- Ideal for word processing and programming, yet fast enough for games and graphics.



**NOW!
ALSO
FOR
IBM
PC**



To order or for more information, call:

800 221-7070

In New York call 212 989-6876

Langley-St. Clair

Instrumentation Systems, Inc.
132 W. 24th St. New York, NY 10011



Text continued from page 402:

legal. The jump-to-error routine was changed to jump to the bubble-linkage code. Thus, the Res module now assumes that a disk number greater than 2 is not an error but a bubble-memory request.

The linkage itself is straightforward. Similar to BDOS calls in CP/M, MDOS uses a code to determine the intended disk function. However, it is a 2-byte code stored in hexadecimal locations 1221 and 1222. Only the codes for OPEN, CLOSE, PUT, and GET have been decoded. Any other code is interpreted as a Parm Error, and the appropriate error exit is taken. OPEN causes the parameter block to be initialized, then calls the BMINIT driver routine to initialize the bubble memory. GET and PUT call the appropriate driver routines. If the Carry flag is set on return from either the BMREAD or BMWRITE routines, indicating that an error did occur, three attempts are made to perform the I/O function correctly before taking a Perm-Error exit.

Actual installation of the linkage is quite simple. With the bubble-memory-driver package already in PROM (programmable read-only memory) or elsewhere in memory, it is necessary only to assemble the linkage and then use the system's LOAD command to overlay the Res module. The bubble-memory exerciser program in listing 3 can then be used to test the installation and the bubble memory. Written in Micropolis BASIC, it reads and writes single records or blocks of records. It also incorporates a test routine that writes a predefined record, then reads it back and compares it with the data that was written. It also checks the bubble-memory status. Testing the whole bubble memory of 511 records takes about 114 seconds (using a Z80 with a 4-MHz clock). For comparison, I ran the same program (slightly modified) using the floppy-disk memory; it took 368 seconds, or roughly three times as long.

One other note. Because there is no directory, it is not necessary to format or initialize the bubble memory before writing to it. The BMINIT subroutine does not change any data stored in the bubble memory. It

Text continued on page 412

Listing 2 continued:

```

0777          1920 *
0777          1930
067E          1940 *
067E          1950 *
067E 21 04 00 1960 INITPB:
0681 22 9C 06 1970
0684          1980 *
0684 3E 01 1990
0686 32 9E 06 2000
0689          2010 *
0689 3E 20 2020
068E 32 9F 06 2030
068E          2040 *
068E 21 00 00 2050
0691 22 A0 06 2060
0694          2070 *
0694 AF 2080
0695 32 A2 06 2090
0698          2100 *
0698 21 9C 06 2110
069B C9 2120
069C          2130 *
069C          2140 *
069C          2150 *
069C 069C 2160 PARAMBLK:
069C          2170 *
069C 00 00 2180 BLKLEN
069E 00 2190 CANALS
069F 00 2200 ENHABLE
06A0 00 00 2210 BEGADR
06A2 00 2220 MBMSEL
06A3          2230 *
06A3 00 00 2240 BUFADR
06A5 00 2250 STATUS
06A6          2260 *
06A6          2270

ORG 067EH ; AN EMPTY AREA . . .
LXI H, SBLKLEN ; SET BLOCK LENGTH
SHLD BLKLEN
MUI A, SCANALS ; SET NUMBER FSA CHANNELS
STA CANALS
MUI A, SENHABLE ; SET ENHABLE BYTE
STA ENHABLE
LXI H, SBEGADR ; SET BEGINNING PAGE NO.
SHLD BEGADR
XRA A ; SET BM BANK SELECT
STA MBMSEL
LXI H, PARAMBLK ; SET HL=FWDH PARAMETER BLK
RET
PARAMETER BLOCK
EQU $ ;
DW 0000H ; BLOCK LENGTH (PAGES)
DB 00H ; NUMBER OF FSA CHANNELS
DB 00H ; ENHABLE/CNTRL BYTE
DW 0000H ; BEGINNING PAGE NUMBER
DB 00H ; BUBBLE BANK
DW 0000H ; USER BUFFER ADDRESS
DB 00H ; RETURN STATUS
END
ERRORS THIS ASSEMBLY 0000

```

Listing 3: A BASIC program to exercise/test the BPK 72 bubble-memory kit, software drivers, and operating system linkage. The program, written for Micropolis BASIC, must be modified for use with other BASIC interpreters.

```

1000 REM ===== BUBBLE MEMORY EXERCISER =====
1010 REM
1020 REM REV. A 830413
1030 REM
1040 DIM A$(250), B$(250), D$(250)
1050 Q$=CHAR$(34):REM 34 = Quote Mark.
1060 P=225:REM Status Port address
1070 OPEN 1 "3:BUBST" ERROR 1790
1080 REM -----
1090 PRINT:PRINT:GOSUB 1710:PRINT
1100 C$="":PRINT "Read/ Write/ Read File/ Write File/ Test file/ Quit ";
1110 INPUT C$
1120 IF C$="R" GOTO 1190
1130 IF C$="W" GOTO 1240
1140 IF C$="RF" GOTO 1300
1150 IF C$="WF" GOTO 1390
1160 IF C$="T" GOTO 1480
1170 IF C$="Q" THEN CLOSE 1:STOP:END
1180 GOTO 1090
1190 REM ----- READ A RECORD -----
1200 INPUT "RECORD # ";R
1210 GET 1 RECORD R A$
1220 PRINT A$
1230 GOTO 1090
1240 REM ----- WRITE A RECORD -----
1250 INPUT "RECORD # ";R
1260 INPUT "ENTER DATA TO WRITE ",D$
1270 D$=LEFT$(D$,248)
1280 PUT 1 RECORD R D$
1290 GOTO 1090
1300 REM ----- READ A BLOCK OF RECORDS -----
1310 INPUT "BEGINNING RECORD # ";R
1320 INPUT "ENDING RECORD # ";R9
1330 FOR R=R TO R9
1340 GET 1 RECORD R A$
1350 PRINT A$
1360 PRINT "----";R
1370 NEXT R
1380 GOTO 1090
1390 REM ----- WRITE A BLOCK OF RECORDS -----
1400 INPUT "BEGINNING RECORD # ";R
1410 INPUT "ENDING RECORD # ";R9
1420 INPUT "ENTER TEST DATA",D$
1430 D$=Q$+LEFT$(D$,248)+Q$
1440 FOR R=R TO R9
1450 PUT 1 RECORD R D$
1460 NEXT R
1470 GOTO 1090
1480 REM ----- TEST A BLOCK OF RECORDS -----
1490 INPUT "BEGINNING RECORD # ";R
1500 INPUT "ENDING RECORD # ";R9

```


Listing 3 continued on page 408



Top-Down Assembly Language Programming for Your VIC-20™ and Commodore 64™

by Ken Skier. How assembly language works and how to make it work for you — from basic concepts through useful subroutines and programming tools.

#057864-8 320 pp. \$16.95



The C Primer

by Les Hancoc and Morris Kreiger. Provides hands-on experience that enables even a complete novice to write programs in the language of UNIX. "Clear and succinct... a book that really works" — *Personal Computing*.

#025981-x 256 pp. \$14.95

Introducing the UNIX System


by Henry McGilton and Rachel Morgan. A logical guide that gets you over the initial hurdles in using this powerful tool, and gives a practical understanding of the system and its sometimes cryptic documentation.

#045001-3 480 pp. \$19.95

The Small Computer Connection: Telecommunications for the Home and Office

by Neil L. Shapiro. Full details for all micro owners. "If you're interested in learning all about the constantly growing range of information services, this is the book to read" — *Today*.


#056412-4 256 pp. \$15.95



Word Processing Buyer's Guide

by Arthur Naiman. Reviews currently available dedicated word processors, wp software, and peripherals — shows you how to evaluate the capabilities and limitations of each system.


#045869-3 320 pp. \$15.95



Office Automation & Word Processing Buyer's Guide

by Tony Webster. Direct comparisons of features and potentials, to help you choose the right system for every size business or special need — from electronic typewriters to communications networks.


#068962-8 320 pp. \$19.95



The BYTE Guide to CP/M-86

by Mark Dahmke. Explains each part of the operating system developed for the 8086 and 8088 microprocessors, and the use of its programs and utilities.

#015072-9 320 pp. \$16.95



Guide to the IBM Personal Computer

by Walter Sikonowiz. Goes beyond the manuals to help you exploit the full power of your IBM PC. Features DOS 2.0 and BASIC 2.0, and includes details on the new system architecture and expansion capabilities.


#057484-7 352 pp. \$19.95



How to Buy (and Survive) Your First Computer

by Carolee Nance Kolve. Everything you need to know before you set foot in a store! Helps you identify your requirements, compare costs and benefits, select the right computer and vendor, and more.

#035130-9 216 pp. \$14.95



The IBM PC Connection: Telecommunications for the Home and Office

by Neil L. Shapiro. Your passport to a universe of communications, convenience, and pleasure! This easy-to-follow guide helps you link up your IBM PC to today's information services.

#056419-1 224 pp. \$16.95

BYTE BOOKS

...for hands-on help when the chips are down

Using your micro for business? For pleasure? In your profession? Whatever your computer connection, get hands-on help from the most trusted name in the field — **BYTE BOOKS.**

BYTE BOOKS are designed to make the most of your computer power. How? By giving you guidance from dedicated, expert authors — with names you recognize. By providing practical, usable information written for people, not machines. By offering problem-solving techniques, not dry theory. And all in handy, high-quality formats... at prices you can afford.

Available wherever computer books and products are sold.

Or use this convenient coupon.



P.O. Box 400, Hightstown, NJ 08520

Please send me the following books for 15 days on approval.

Bill me. After 15 days I will pay for the book(s) I keep plus postage, handling, and local tax. I may return any unwanted books postpaid.

Enclosed is my check/money order (including tax). McGraw-Hill pays postage and handling. Full 15-day refund privilege.

QTY CODE # AUTHOR PRICE

Name _____

Address _____ Apt. _____

City _____ State _____ Zip _____

For dealer information, call E. Crawford 212/512-4043.

23-D226-4440-3

BYTE BOOKS

User-friendly microcomputer information

1221 Avenue of the Americas, Suite 26-1, New York, NY 10020

**Heart of TEXAS
COMPUTER SYSTEMS**

TRS-80

Model IV Portable: CALL

Model 12 & 16 at discount: CALL

TCS Model 12 with 2 drives: \$2995

Model 12/16 Accessories/disk.

TCS Model IV, 64K, 2 Drive w/RS-232

\$1499 (40 track) \$1699 (80 track)

The New TRS-2000: CALL

(IBM Compatible)

We carry the full TRS-80 line. Call for our discount prices.

DISK EXPANSION

	M-III	M-IV
1 Contoller, Pwr.Sup. Hdwr.,Instruct.	\$249	\$329
2 Kit 1, plus 1/40-trk. Tandon Dr.	\$429	\$479
3 Kit 1, plus 2/40-trk. Tandon Dr.	\$598	\$649
3a Kit 3 w/2 80 trk.drives (dual sided 40s)	\$698	\$729

Model IV needs 64K to operate. For 64K Kit, CALL.

Tandon

Quality disk drives--O.E. brand on IBM
Available bare and in cabinets.

TM50-1 SS Slimline: \$145

TM50-2 DS Slimline (IBM): \$209

TM100-1: \$159

TM100-2: CALL CALL US IF YOU FIND LOWER PRICES!

CORVUS

25% OFF LIST PRICE!

OMNINET- A high speed multi-user network that connects several computers for instant communication up to 4,000 feet away.

Save over \$1,000 on a 20 mg. Corvus Hard Disk system for IBM PC and other computers.

5mg. \$1649 10mg. \$2279 20mg. \$3049

**DAVONG
Systems, Inc.**

Single user or networking hard disk system for IBM & Apple. Lowest prices anywhere. Priced from \$1375. 10, 15, 21, 32 mg. & cartridge tape backup--CALL.

Star PRINTERS

Fast, dependable, versatile, low price.

Gemini 10X 9in., 120cps. Friction/Tractor

Gemini 15X 15in., 120cps. Friction/Tractor

Delta 10 10in., 160cps. Friction Tractor

Delta 15

PowerType Daisywheel

Call for our low, low prices!

DISKETTES \$1.50 ea.

CompuDisk, top quality mini floppy diskettes from \$1.50 complete with hub rings, protective envelopes, write protect tabs, and adhesive labels. SSDD, DSDD, boxed or in bulk. Money back guarantee. 100% Certified Error Free. CALL!

**Heart of TEXAS
COMPUTER SYSTEMS**

P.O. Box 1327 Arlington, TX 76004

Toll Free 1-800-433-5184

Texas 1-817-274-5625

VISA, MC, cashier's check, money order. No tax out of state. Texans add 5%. Prices subject to change.

Listing 3 continued:


```

1510 D$="ABCDEFGHIJKLMNPQRSTUWXYZ1234567890abcdefghijklmnopqrstuvwxyz"
1520 D$=D$+D$+D$+D$
1530 A$=0$+D$+0$
1540 FOR R=R TO R9
1550 PUT 1 RECORD R A$
1560 S=IN( P ) AND 253: IF S<>65 THEN GOSUB 1640
1570 GET 1 RECORD R B$
1580 S=IN( P ) AND 253: IF S<>64 THEN GOSUB 1640
1590 IF B$<>D$ THEN GOSUB 1640
1600 IF R/10 = INT(R/10) THEN PRINT "RECORD #";R;" COMPLETED."
1610 NEXT R
1620 PRINT: PRINT "NUMBER OF ERRORS = ";E
1630 GOTO 1090
1640 REM ---
1650 PRINT "ERROR ENCOUNTERED IN RECORD # ";R
1660 E=E+1
1670 GOSUB 1730: GOSUB 1710
1680 PRINT B$
1690 PRINT
1700 RETURN
1710 REM ----- DISPLAY STATUS IN HEX -----
1720 S=IN( P ) AND 253
1730 S1=INT(S/16)+48
1740 IF S1>57 THEN S1=S1+7
1750 S2=(S AND 15)+48
1760 IF S2>57 THEN S2=S2+7
1770 PRINT "STATUS = ";CHAR$(S1);CHAR$(S2)
1780 RETURN
1790 REM ----- ERROR PROCESSOR -----
1800 PRINT:PRINT ERR$;" ";
1810 GOSUB 1710
1820 GOTO 1090
1830 END
    
```

Listing 4: The CP/M bubble-memory-driver linkage. This program illustrates how the CP/M BIOS can be altered to use the bubble-memory-driver package. Modification specifics are dependent on the CP/M implementation in question.

ADDR	B1	B2	B3	E	LINE	LABEL	OPCD	OPERAND
0000					1000	*		*****
0000					1010	*		CP/M BIOS - BUBBLE DRIVER LINKAGE
0000					1020	*		*
0000					1030	*		Copyright (C) 1983 Louis E. Wheeler
0000					1040	*		*****
0000					1050	*		
0000					1060	*		
0000					1070	*		The modifications presented here are intended as an example only.
0000					1080	*		They demonstrate how a typical CP/M BIOS can be modified to use
0000					1090	*		the BUBBLE MEMORY DRIVER PACKAGE (separate listings).
0000					1100	*		
0000					1110	*		To incorporate these changes, the BIOS JUMP table must be
0000					1120	*		located, along with free space to store the added code. Then,
0000					1130	*		the modified BIOS should be installed in the system following
0000					1140	*		the instructions given in the appropriate CP/M manual.
0000					1150	*		
0000					1160	*		This listing is divided into two sections: (1) Patches,
0000					1170	*		(2) Added Code. All patch addresses shown are for a 32K CP/M
0000					1180	*		configured by Centa for a Micropolis disk system.
0000					1190	*		
0000					1200	*		
0000					1210	*		*****
0000					1220	*		PATCHES
0000					1230	*		*****
0000					1240	*		
0000					1250	*		This section revises the existing BIOS JUMP table to go to
0000					1260	*		the added code routines listed below. The actual location of
0000					1270	*		the JUMP table and address of the patches is dependent on
0000					1280	*		the existing BIOS. Each system is different. The ORG's
0000					1290	*		shown in this assembly are for a CP/M configured by Centa Systems
0000					1300	*		for Micropolis disk systems.
0000					1310	*		
0000	7500				1320	BIOS	EQU	7500H ; CP/M BIOS Base Address
0000					1330	*		
0000					1340	*		
0000					1350		ORG	BIOS+24 ; Location of Jump Table + 24
7518					1360	*		
7518	C3 2B 80				1370		JMP	BHOME ; Patch for HOME
7518					1380	*		
7518					1390		ORG	BIOS+36 ; Jump table + 36
7524					1400	*		
7524	C3 34 80				1410		JMP	BSETDMA ; Patch for SETDMA
7527	C3 5F 80				1420		JMP	BREAD ; Patch for READ
752A	C3 71 80				1430		JMP	BWRITE ; Patch for write
752D					1440	*		
752D					1450		ORG	BIOS+48 ; Jump table + 48
7530					1460	*		
7530	C3 3D 80				1470		JMP	BSECTRAM ; Patch for SECTRAM
7533					1480	*		
7533					1490	*		The following equates taken from existing BIOS JUMP table.
7533					1500	*		
7533	7827				1510	HOME	EQU	BIOS+327H ; *** Depends on existing BIOS ***
7533	7801				1520	SETDMA	EQU	BIOS+301H ; *** Depends on existing BIOS ***
7533	7852				1530	READ	EQU	BIOS+352H ; *** Depends on existing BIOS ***
7533	78FD				1540	WRITE	EQU	BIOS+3FDH ; *** Depends on existing BIOS ***
7533	77E9				1550	SECTRAM	EQU	BIOS+2E9H ; *** Depends on existing BIOS ***

Listing 4 continued on page 410

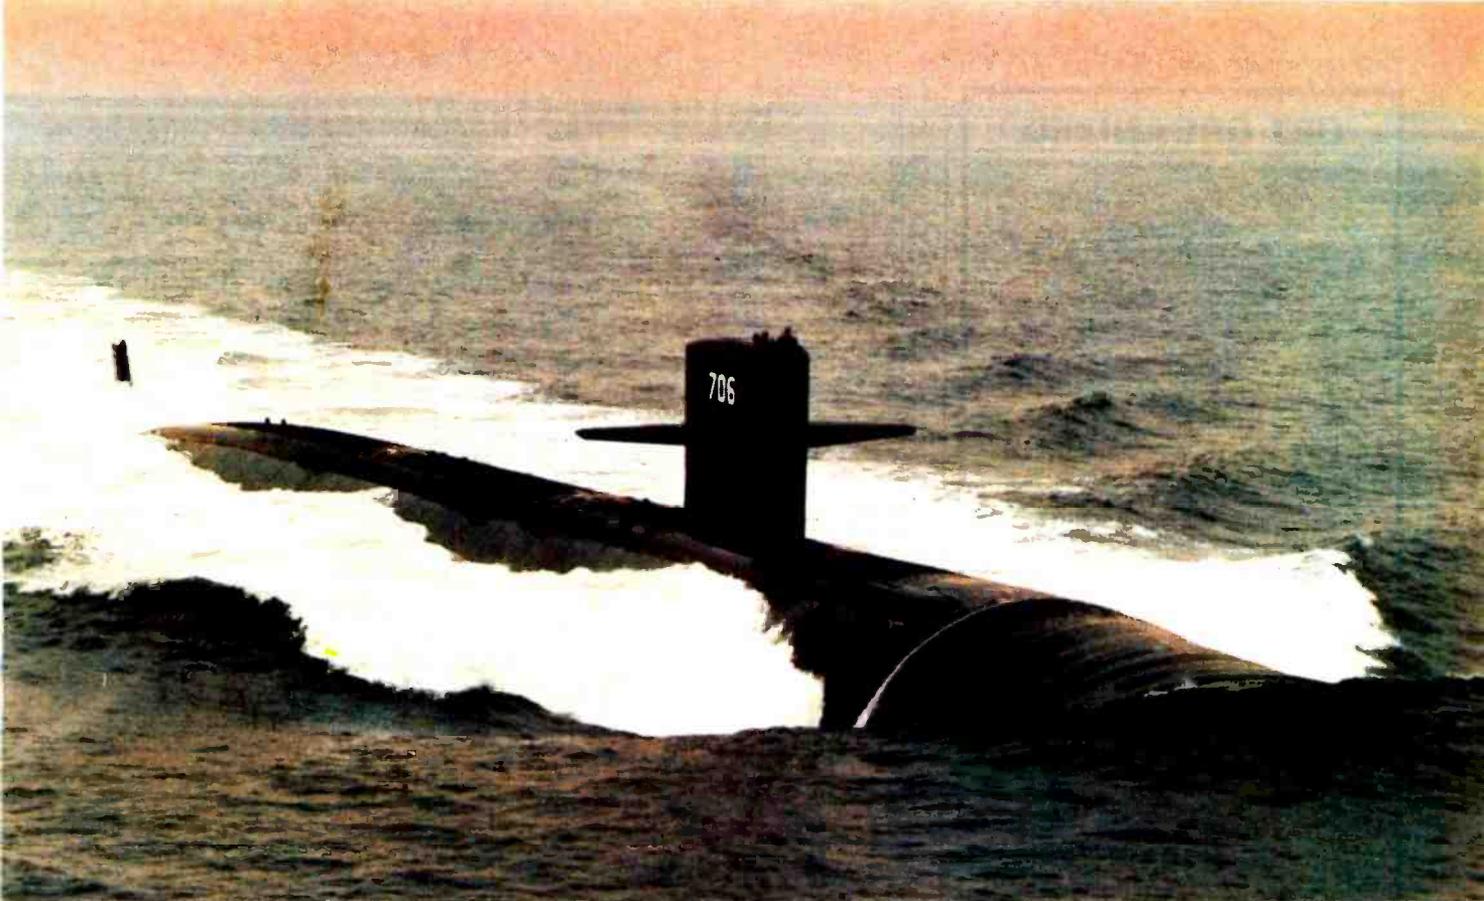

SUBMARINE ENGINEERING FOR TOMORROW'S DEFENSE

The Naval Underwater Systems Center is the Navy's principal research, development, test and evaluation center for submarine warfare and submarine weapon systems. We provide high technology vital to the Navy's tactical and strategic edge in combat systems (sonar, combat control, electromagnetics, underwater weapons and targets, weapon launch and handling), surface ship sonar and undersea ranges.

Working at major laboratories in Newport, Rhode Island and New London, Connecticut, our engineers and scientists design, develop and evaluate prototypes of these systems and interface with private industry for production of the final product.

To maintain our lead in submarine warfare and weapon systems, we must continue to develop new technological systems for the future, and at our center, the future depends on our work today.

We are looking for electronic engineers and computer scientists to join our highly talented team of professionals. Assignments will be as diverse as taking you on board submarines, to field detachments and other Navy activities. And your work may vary from desk to deck, software design to hardware test.

We seek graduating and experienced electronic and computer engineers, with degrees from accredited colleges and universities. We also need computer

scientists with degrees from colleges and universities affiliated with a school of engineering and specializing in scientific or technical applications.

We offer you challenge, freedom to be innovative and creative, and the opportunity to contribute your skills to our national defense.

And the living is good too! Newport and New London areas are popular for their excellent beaches, fishing and sailing.

We believe we have both the challenge and the opportunity for you. For further information, contact Naval Underwater Systems Center, Personnel Staffing Division, B Newport, Rhode Island 02840 or call (401) 841-3585.


An Equal Opportunity Employer
U.S. Citizenship Required

Circle 263 on inquiry card.



GET ORGANIZED

With Our New Line Of Quality Products



PR#1
pictured

PR#1 16 x 13 x 4 ... **\$29.95**

PR#2 24 x 13 x 4 ... **\$39.95**

Both made of 1/4 inch smoked acrylic, featuring a bottom feed slot and non-skid feet.

Sturdy Bronze Acrylic Copy Holder



\$19.95

Office Quality Gas Operated Ergonomic Computer Chair



Available in blue red camel brown lt grey charcoal

Retails for \$179.95

MIDAMERICA Priced At only \$99.95
add \$45.95 for arms

MIDAMERICA WHOLESALE, INC. COMPUTER ACCESSORIES

8135 215th St. Lakeville, MN 55044

MN residents add 6% sales tax. Dealer inquiries invited. Add \$2.50 shipping for each item. **CALL FOR COMPETITIVE DISKETTE PRICES.**

TO PLACE ORDERS CALL ANYTIME

1-800-328-2977

MN residents **612-469-4666**

Listing 4 continued:

7533		1560	*				
7533	7714	1570	GOCPM	EQU	BIOS+214H		; *** Depends on existing BIOS ***
7533		1580	*				
7533		1590		ORG	GOCPM		
7714		1600	*				
7714	CS 00 00	1610		JMP	BGOCPM		; GO INIT BUBBLE MEMORY
7717		1620	*				
7717		1630	*				The following changes the number of system disks from 2 to 4.
7717		1640	*				Exactly how this patch is made is dependent on the specific system.
7717		1650	*				
7717		1660		ORG	BIOS+38H		; *** Depends on existing BIOS ***
7538		1670	*				
7538	02	1680		DB	02H		; Increase DISK's to 3.
7539	03	1690		DB	03H		; Increase DISK's to 4.
753A		1700	*				
753A		1710	*				The following changes the disk size parameter in DPBLK2.
753A		1720	*				Note: This change may only be applicable to Micropolis disk systems.
753A		1730	*				The Centa Systems version of the BIOS has two DPBLK's, one each for
753A		1740	*				the two models of Micropolis disk drives (Mod I and Mod II).
753A		1750	*				
753A		1760		ORG	BIOS+0D8H		; *** Depends on existing BIOS ***
75D8		1770	*				
75D8	3C	1780		DB	3CH		; Change (DMS) disk size (DPBLK2)
75D9		1790	*				; to reflect bubble memory capacity.
75D9		1800	*				
75D9		1810	*				
75D9		1820	*				*****
75D9		1830	*		ADDED CODE		*
75D9		1840	*				*****
75D9		1850	*				
75D9		1860	*				
75D9	0003	1870	NDISKS	EQU	3		; NUMBER OF DISKS (0,1,2 & BUBBLE)
75D9	0020	1880	SECTRK	EQU	32		; CP/M 128-BYTE SECTORS/TRACK
75D9	0080	1890	SECSZE	EQU	128		; CP/M SECTOR SIZE
75D9		1900	*				
75D9	7A49	1910	DISKNO	EQU	BIOS+549H		; *** Depends on existing BIOS ***
75D9	7A4A	1920	TRACK	EQU	BIOS+54AH		; *** Depends on existing BIOS ***
75D9	7A4D	1930	DMAAD	EQU	BIOS+54DH		; *** Depends on existing BIOS ***
75D9		1940	*				
75D9	0002	1950	SBLKLEN	EQU	0002H		; BLOCK LENGTH = 2 PAGES = 128 BYTES
75D9	0001	1960	SCANALS	EQU	01H		; NUMBER OF FSA CHANNELS = 2
75D9	0020	1970	SENABLE	EQU	20H		; ENABLE BYTE = RCD & HI-SPD
75D9	0000	1980	SBEGADR	EQU	0000H		; BEGIN ADDR = PAGE 0
75D9	0000	1990	SMESEL	EQU	00H		; BUBBLE NUM SELECT = FIRST
75D9		2000	*				
75D9		2010	*				
75D9		2020	*				The following equates link these modifications to the BUBBLE
75D9		2030	*				MEMORY DRIVER routines. The addresses shown equate to a jump
75D9		2040	*				table in an EEPROM pointing to the drivers, also located in
75D9		2050	*				EEPROM. The actual location will depend on the system.
75D9		2060	*				
75D9	F018	2070	BMINIT	EQU	0F018H		; BUBBLE MEMORY INITIALIZE
75D9	F01B	2080	BMREAD	EQU	0F01BH		; BUBBLE MEMORY READ
75D9	F01E	2090	BMWRIT	EQU	0F01EH		; BUBBLE MEMORY WRITE
75D9		2100	*				
75D9		2110	*				
75D9		2120	*				The following PARAMETER BLOCK can be ORG'd to any convenient
75D9		2130	*				area in read/write memory. If the BIOS are not in PROM, the
75D9		2140	*				PARAMETER BLOCK can be located within the BIOS.
75D9		2150	*				
75D9		2160		ORG	BIOS+0E2H		; *** Depends on existing BIOS ***
75E2		2170	*				
75E2	75E2	2180	PARAMBLK	EQU	\$; BUBBLE MEMORY PARAMETER BLOCK
75E2		2190	*				
75E2	00 00	2200	BLKLEN:	DW	0000H		; BLOCK LENGTH (PAGES)
75E4	00	2210	CANALS:	DB	00H		; NUMBER OF FSA CHANNELS
75E5	00	2220	ENABLE:	DB	00H		; ENABLE/CTRL BYTE
75E6	00 00	2230	BEGADR:	DW	0000H		; BEGINNING PAGE NUMBER
75E8	00	2240	MBMSEL:	DB	00H		; BUBBLE BANK
75E9	00 00	2250	BUFADR:	DW	0000H		; USER BUFFER ADDRESS
75EB	00	2260	STATUS:	DB	00H		; RETURN STATUS
75EC		2270	*				
75EC		2280	*				*****
75EC		2290	*				The following equates determine where the below patches are
75EC		2300	*				to be stored in the BIOS area of CP/M. The actual locations
75EC		2310	*				are dependent on the specific BIOS.
75EC		2320	*				
75EC	0000	2330	AREA1	EQU	BIOS+0B00H		; Where to put GOCPM patch.
75EC	0000	2340	AREA2	EQU	0		; Where to put HOME patch.
75EC	0000	2350	AREA3	EQU	0		; Where to put SETDMA patch.
75EC	0000	2360	AREH4	EQU	0		; Where to put SELTRAN patch.
75EC	0000	2370	AREH5	EQU	0		; Where to put REHD patch.
75EC	0000	2380	AREH6	EQU	0		; Where to put WRITE patch.
75EC		2390	*				
75EC		2400	*				
75EC		2410	*				*****
75EC		2420	*				GOCPM - System hardware initialization.
75EC		2430	*				
75EC		2440		ORG	AREH1		; *** Depends on existing BIOS ***
8000		2450	*				
8000	21 02 00	2460	BGOCPM:	LXI	H.SBLKLEN		; SET BLOCK LENGTH
8003	22 E2 75	2470		SHLD	BLKLEN		
8006	3E 01	2480		MUI	H.SCANALS		; SET NUMBER FSA CHANNELS
8008	32 E4 75	2490		STA	CANALS		
8008	3E 20	2500		MUI	A.SENABLE		; SET ENABLE BYTE
8000	32 E5 75	2510		STA	ENABLE		
8010	21 00 00	2520		LXI	H.SBEGADR		; SET BEGINNING PAGE NO.

Listing 4 continued on page 412



THIS IS BOEING TOO!

Boeing Military Airplane Company offers a stimulating career in the pleasant environment of four-season recreation, good schools, fine cultural activities and moderate Midwest living costs. You can become a vital part in developing the most advanced avionics systems for military airplanes if you qualify in one of the following disciplines:

PRODUCT SYSTEMS ENGINEER - Systems analysis and development of system requirements; hardware and software functional requirements and system integration tasks; interface requirements life cycle cost analysis.

SOFTWARE/COMPUTING SYSTEMS AND ANALYSIS - Analyze system functional and performance requirements, prepare functional flow or logic diagrams, prepare system block diagrams, and perform system level analysis and trade studies to support selected design.

REAL TIME SYSTEMS AND SIMULATION SOFTWARE ENGINEER - Design, develop, integrate and test real-time software. Develop operational software requirements. Experience in ASSEMBLY and other high-order languages required.

DESIGN DEVELOPMENT - Advanced concept development using innovative design and fabrication techniques such as robotic winding, pultrusion, and roll-trusion. Develop load paths, cost and weight trade studies, and prepare drawings using Computer Aided Design. Related aerospace experience required.

FLIGHT CONTROLS ANALYSIS ENGINEER - Conduct linear analysis using root locus, frequency response, and power spectral density methods. Develop hardware and software requirements for sensors, actuators, digital filtering, and computations for microprocessor based digital autopilots. Develop real time and non-real time, flight simulations using structured fortran programming.

STRESS/DURABILITY/DAMAGE TOLERANCE - Define design load conditions, determine internal loads and accomplish stress, durability and damage tolerance analyses of primary aircraft structure. Familiarization with finite element analysis and related aerospace experience required.

RADAR SYSTEMS ANALYSIS - Conduct analysis of radar performance, prepare and coordinate specifications and develop evaluation criteria for radar subsystems.

Send resume to: Jim Snelling
Boeing Military Airplane Company
Dept. B2
P.O. Box 7730
Wichita, KS 67277-7730

"Where you design the future."



An Equal Opportunity Employer M/F

simply loads the boot-loop registers and readies the BMC for operation.

When everything checks out, all that remains is to save the modified Res module.

CP/M Linkage

The modifications required for CP/M are more extensive and complicated than those for MDOS, and the installation isn't as simple. However, the CP/M modification provides complete disk emulation (see listing 4). Programs, including transient commands, as well as data can be stored in bubble memory. It is a real pleasure to enter Stat and get an immediate response without the usual "clank, whirrr" of the floppy disk. The assembler and other programs that require disk access also run much faster and quieter. However, since no changes to the "warm-boot" sequence have been made, a Control-C still boots the CCP (console command processor) and BDOS from floppy disk. There is, of course, no reason why a warm boot or, for that matter, a cold start cannot be made directly from bubble memory if the necessary revisions are made to the boot loader. I have not done so yet, but it appears to be a simple task for the experienced assembly-language programmer.

Explaining the modification to CP/M would be much easier if the CCP or BDOS portions of the operating system were being altered. These two CP/M modules are standard for all CP/M systems. But the BIOS or CBIOS (customized BIOS) module is hardware dependent, and we must modify this module to enable CP/M to communicate with the bubble-memory-driver package.

Altering the CP/M operating system for bubble memory is quite similar to the modification described in "Building a Hard-Disk Interface for an S-100 System, Part 3: Software" in the May 1983 BYTE (page 368). The approach I have taken is slightly different. Instead of creating a new BIOS, listing 4 shows how an existing BIOS can be patched to accomplish the same end. I chose to patch rather than revise because I didn't have a complete source listing for the disk

Listing 4 continued:

```

8013 22 E6 75 2530 SHLD BEGADR
8016 AF 2540 XRA A ; SET BM BANK SELECT
8017 32 E8 75 2550 STA M0MSEL
801A 21 E2 75 2560 LXI H,PARAMBLK ; FWH PARAMBLK TO HL
801D CD 18 F0 2570 CALL BMINIT ; GO INITIALIZE BM
8020 DA 20 80 2580 ERROR: JC ERROR ; HANG OR DO SOMETHING IF ERR
8023 2590 *
8023 3E C3 2600 MUI A,0C3H ; *** Restore existing BIOS code ***
8025 32 00 00 2610 STH 0000 ; *** replaced by JMP instruction
8029 C3 17 77 2620 JMP GOCPM+3 ; RETURN TO EXISTING BIOS+3
802B 2630 *
802B 2640 * -> Continue with existing BIOS code.
802B 2650 *
802B 2660 * *****
802B 2670 * HOME - Move to track 00 position of current drive
802B 2680 *
802B 2690 *
802B 2700 * ORG $ ; AREA2 ***
802B 3A 49 7A 2710 BHOME: LDA DISKNO ; GET DISK NUMBER
802E FE 03 2720 CPI NDISKS ; CHECK FOR BUBBLE MEMORY
8030 C8 2730 RZ ; RETURN IF BUBBLE (NO ACTION)
8031 C3 27 78 2740 JMP HOME
8034 2750 *
8034 2760 * -> Continue with existing BIOS code.
8034 2770 *
8034 2780 * *****
8034 2790 * SELDSK - Select disk given by register C
8034 2800 *
8034 2810 * -> No modification required.
8034 2820 *
8034 2830 * *****
8034 2840 * SETTRK - Set track given by register C
8034 2850 *
8034 2860 * -> No modification required unless your BIOS actually
8034 2870 * -> positions the disk head to the selected track. If this
8034 2880 * -> is the case, perform the test shown for HOME.
8034 2890 *
8034 2900 * *****
8034 2910 * SETSEC - Set sector given by register C
8034 2920 *
8034 2930 * -> No modification required.
8034 2940 *
8034 2950 * *****
8034 2960 * SETDMA - Set DMA address given by registers B and C
8034 2970 *
8034 2980 * ORG $ ; AREA3 ***
8034 2990 *
8034 69 3000 BSETDMA: MOV L,C ; LOW ORDER ADDRESS
8035 60 3010 MOV H,B ; HIGH ORDER ADDRESS
8036 22 40 7H 3020 SHLD DMADR ; SAVE THE ADDRESS
8039 22 E4 75 3030 SHLD BUFADR ; FOR BUBBLE TOO.
803C 3040 *
803C 3050 * -> Include any additional code your system may require.
803C 3060 * -> probably none.
803C 3070 *
803C C9 3080 RET ; No add'l code req'd for Micropolis.
803D 3090 *
803D 3100 * *****
803D 3110 * SELTRAN - Translate the sector number given by B and C
803D 3120 *
803D 3130 * ORG $ ; AREA4 ***
803D 3140 *
803D 3A 49 7A 3150 BSELTRAN: LDA DISKNO ; GET DISK NUMBER
8040 FE 03 3160 CPI NDISKS ; CHECK FOR BUBBLE MEMORY
8042 C2 E9 77 3170 JNZ SELTRAN ; IF NOT, GO TO DISK.
8045 3180 *
8045 C5 3190 PUSH B ; SAVE SECTOR
8046 11 00 00 3200 LXI D,0000H ; CLEAR DE
8049 2A 4A 7H 3210 LHL TRACK ; TRACK # TO HL
804C 62 3220 MOV H,D ; CLEAR H, L-TRACK
804D EB 3230 XCHG
804E 3E 20 3240 MUI A,SECTRK ; GET SECTORS PER TRACK
8050 87 3250 ADD A ; MULTIPLY BY 2
8051 13 3260 BHPY: DAD D ; BEG TRK ADR =
8052 3D 3270 DCR A ; TRK * SELTRK * 2
8053 C2 51 80 3280 JNZ BHPY ; LOOP TO MULTIPLY.
8056 79 3290 MOV A,C ; GET SECTOR NUMBER
8057 87 3300 ADD A ; MPY BY 2
8058 4F 3310 MOV C,A ; PUT IT BACK
8059 09 3320 DAD B ; ADD IT TO BEG TRK ADR
805A 22 E6 75 3330 SHLD BEGADR ; SAVE IN BEGADR.
805D E1 3340 POP H ; PUT SECTOR IN HL
805E C9 3350 RET ; BUBBLE EXIT.
805F 3360 *
805F 3370 * *****
805F 3380 * REHD - REHD SELECTED CP/M SECTOR
805F 3390 *
805F 3400 * ORG $ ; AREA5 ***
805F 3410 *
805F 3A 49 7H 3420 BREHD: LDA DISKNO ; GET DISK NUMBER
8062 FE 03 3430 CPI NDISKS ; CHECK FOR BUBBLE
8064 C2 52 78 3440 JNZ REHD ; NO, GO REHD DISK
8067 3450 *
8067 F3 3460 DI ; KILL INTERRUPTS.
8068 21 E2 75 3470 LXI H,PARAMBLK ; FWH PARAMBLK TO HL
806B CD 18 F0 3480 CALL BMINIT ; GO REHD BUBBLE DATA
806E C3 80 80 3490 JMP BMINIT ; GO TAKE COMMON EXIT.
    
```



Who's sold more printers
to American business?

Epson®

Actually, we've not only sold more printers to American business, we've sold more printers to America.

Which brings up some very important reasons why Epson is the printer for *your* business.

Standard equipment.

Virtually every microcomputer made is Epson-compatible. Which means manufacturers make their computers to work with our printers, because Epson printers are not only the world leaders, they're the world standard.

The reason why.

We sell more printers, because we make better printers. Our features are consistently one step ahead of the competition. Our quality and value have never been equalled. And our reliability rates are second to none.

Another reason.


Epson printers are stocked by more computer stores in more

places than any other brand. Which means if you *ever* have a problem—and you probably won't—we'll be there.

Your next printer.

It can be very confusing buying a printer nowadays. But it needn't be. If you want the features, the reliability, the quality, the value, just remember one thing.

Epson.



*Number one.
And built like it.*

EPSON

EPSON AMERICA, INC.

3415 Kashiwa Street
Torrance, California 90505

The Epson FX-100™ can print spreadsheets in correspondence-quality type at 160 characters per second. To see it and the entire line of Epson high-performance printers, call (800) 421-5426 for the dealer in your area. In California, call (213) 539-9140.

Epson is a registered trademark and FX-100 is a trademark of Epson America, Inc.

Listing 4 continued:

```

8071      3500 *
8071      3510 *
8071      3520 * *****
2071      3530 * WRITE - WRITE SELECTED CP/M SECTOR
8071      3540 *
8071      3550 *          ORG      $          ; AREH6 ***
8071      3560 *
8071 3A 49 7H      3570 BWRITE:   LDA      DISKNU   ; GET DISK NUMBER
8074 FE 03      3580          CPI      NDISKS   ; CHECK FOR BUBBLE
8076 C2 FD 78      3590          JNZ      WRITE    ; NO, GO WRITE DISK
8079          3600 *
8079 F3          3610          DI          ; KILL INTERRUPTS.
807H 21 E2 75      3620          LXI     H,PARAMBLK ; FWA PARAMBLK TO HL
807D CD 1E F4      3630          CALL    BMMWRIT ; GO WRITE BUBBLE DATA
8080          3640 *
8080 FB          3650 BRWEX:   EI          ; OMIT THIS INSTRUCTION
8081          3660 *          ; IF YOUR SYSTEM DOES
8081          3670 *          ; NOT USE INTERRUPTS.
8081 3E 00          3680          MVI     A,0      ; CLEHR A-REG
8083 D0          3690          RNC          ; NO PROBLEM EXIT.
8084 3C          3700          INR     A
8085 C9          3710          RET
8086          3720 *
8086          3730 *

```

ERRORS THIS ASSEMBLY 0000

portion of my BIOS, which was written by Centa Systems for Micropolis.

If you are fortunate enough to have a complete listing of your BIOS, or you are using a Micropolis disk system and CP/M with BIOS written by Centa Systems, the modification should not be too difficult. If not, you will probably have to unleash your disassembler to uncover a few hidden locations. You need to know the location of the current selected disk number, the selected track, and the DMA (direct memory access) address (user buffer address). You must also find out where and how your BIOS determines whether a selected disk number is legal or not and fix it so that the number that you select for the bubble memory is acceptable.

Another thing you will need is an unused area large enough to hold the added code. About 130 locations will be required, but they need not be contiguous. The source code shown in listing 4 is designed to be segmented and scattered around memory wherever space is available. The version of CP/M that I am using is quite tight on space. Therefore, as a temporary measure for testing, I assembled the added code to start at hexadecimal location 8000, which is above my 32K-byte CP/M. This lets me use the DDT (dynamic debugging tool) to load the added code and make the rest of the patches by hand. In the future, I plan to revise the "stream I/O handler" so that the peripheral drivers I have stored in EEPROM are used instead of the I/O routines located within the BIOS

module. This will free up sufficient storage for the bubble-memory-driver linkage. The listing is intended primarily as an example. Exactly how you incorporate the added code and changes depends on the specifics of your system BIOS.

Installing a new operating system is covered in the CP/M manual and also in the May 1983 BYTE article (see figure 6 on page 378). The method I used differs only in that I used DDT to make the patches to the BIOS jump table and the jump instruction patched at the beginning of GOCPM.

After completing the installation, a BASIC program like the one shown in listing 3 can be used for testing. Some modifications to the disk instructions (OPEN, CLOSE, GET, PUT) and the INP instruction probably will be required; otherwise, the program should function as written.

Since the CP/M alteration is a true disk emulation complete with directory, initialization of the bubble memory is required before it can be used. My CP/M system came with a program called VOLPREP.COM; however, it did not work with the bubble memory. Fortunately, an assembly-language file (VOLPREP.ASM) was provided, and I quickly discovered that the program directly accessed the disk drivers rather than the BIOS jump table. Consequently, it was not getting to the bubble-memory drivers. A simple change in the address table in the beginning of the VOLPREP program plus a few other minor changes were all that was required to make it work.

I am very pleased with the performance of the bubble-memory project; with it, I no longer fear the flickering lights. I used it to write this article, which was much too long to fit in my system's RAM. Yet with the bubble-memory addition, my text editor performed as though it had adequate space.

With even larger-capacity bubble-memory chips on the way (Intel recently announced a 4-megabit version), I would not be surprised to see bubble memories beginning to replace hard disks in small or portable computer systems. Using the newer chips, it should be relatively easy to put 4 megabytes of reliable bubble storage inside the cabinet of an S-100 computer. I believe that bubble memories will replace floppy disks in some systems, particularly in the portables. ■

References

1. *A Primer on Magnetic Bubble Memory*. Santa Clara, CA: Intel Corporation, 1982.
2. *BPK 72 Bubble Memory Prototype Kit User's Manual*. Santa Clara, CA: Intel Corporation, 1981.
3. Cruce, Andrew C., and Scott A. Alexander. "Building a Hard-Disk Interface for an S-100 System, Part 3: Software." *BYTE*, May 1983, page 368.
4. *CP/M Operating System Manual*. Pacific Grove, CA: Digital Research, July 1982.
5. Halsema, A. I. "Bubble Memories: A Short Tutorial." *BYTE*, June 1979, page 166.
6. Helmers, Carl. "This Elephant Never Forgets." *BYTE*, July 1977, page 6.
7. *Magnetic Bubble Storage Data Catalog*. Santa Clara, CA: Intel Corporation. February 1981.
8. Thorp, Art. "New bubble-memory packaging cuts board space and manufacturing costs." *Electronics*, March 24, 1983, page 128.
9. Wells, Paul. *Microprocessor Interface for the BPK 72*. Santa Clara, CA: Intel Corporation, June 1981.
10. *7110 1-Megabit Bubble Memory* (data sheet). Santa Clara, CA: Intel Corporation, 1982.
11. *7220-1 Bubble Memory Controller* (data sheet). Santa Clara, CA: Intel Corporation, 1981.

Louis Wheeler is a retired federal government employee. He spent 14 years as a programmer, teacher, and manager of minicomputer systems. His special interest is data processing, in which he has an associate degree. He can be contacted at 1323 Tamera Dr., Oceano, CA 93445.

The new pacesetter in professional printers.

The economical dual-speed Radix-15 multi-function printer.

With a fast and furious work pace, a highly flexible printer is crucial. That printer is the new Radix-15. Watch it take your work and run with it.

It's dual speed! At 200 cps Radix fires out a superbly refined dot matrix printout. At 50 cps it prints professional near-letter quality. So now you can go from spreadsheets to memos at the flip of a switch or at your computer's command.

It's multi-functional! In either mode Radix-15 quickly adapts to your needs. There's serial and parallel interface. Memory storage with a 16K buffer. Responsive throughput to help you use

time more efficiently. Bi-directional performance. Friction and tractor feed. An automatic sheet feeder for letterheads and a short form tear-off for preprinted forms. Plus, the freedom to underline, set vertical and horizontal tabs and print a huge variety of type faces.

It's economical! And not only does Radix give you 2 printers in 1, it also gives you a price performance as outstanding as its working performance.

The professional Radix-15. Using the ever-changing beat of business to your advantage. And that's what being a pacesetter is all about!

starTM
MICRONICS • INC

THE POWER BEHIND THE PRINTED WORD.

Computer Peripherals Division
P.O. Box 612186, Dallas/Ft. Worth Airport, TX 75261 (214) 456-0052

Circle 342 on inquiry card.



Calculating Overhead Costs by Computer

A simple, foolproof arithmetic procedure determines the distribution of indirect costs quickly and accurately

by G. Truman Hunter

This article demonstrates how an accounting application that can be used by all types of businesses eases the distribution of indirect, or overhead, costs. Specifically, it shows how to calculate those costs using an arithmetic procedure that provides information that is more accurate than that obtainable using approximation procedures. In addition, the method described here does not require the long, tedious work the approximation approach demands. The accounting procedure can be used on a large computer as well as a small one, and it can also provide results on a hand-held calculator.

An Accounting Problem

The procedure solves a common accounting problem by permitting a computer user to calculate costs that are transferred among departments of a company. Determining such costs is known as indirect cost accounting, overhead cost distribution, burden distribution, or burden cost accounting. Cost accountants have been calculating these transfer costs for decades, relying on estimates and approximation procedures to minimize the cost of the calculations in time, money, and effort.

In fact, it's well known that solving the problem of calculating the cost of reciprocal transfers among departments requires the solution of a set of simultaneous equations. Before computers were widely available, these results took many hours to calculate by hand. And because the starting point for the procedure was often a set of estimates of dubious ac-

curacy, many people believed that precise solutions were unobtainable and therefore unimportant. Consequently, emphasis was on speedy approximations rather than exact answers.

Cost-accounting textbooks took the same approach, telling their readers that if more than four or five departments were involved, solving simultaneous equations would not be practical. Instead, they proposed using such methods as the Christmas Tree or the Waterfall approach. Their names come from the geometry of the solution, where a decreasing number of departments provides a triangular picture of data as costs flow from one level to the next. The first department examined has its costs distributed to all other departments, and no costs are returned to it. That department is then no longer involved in the calculations. The next department then has its costs distributed, with none returned to it, and the procedure thus continues. Data on the less important departments is collected first, and the final product departments are done last; the product departments cannot distribute charges among themselves.

This process did not tell the user where the indirect costs, or burdens, originated. Since the source was not known, there was no way to attack the problem of reducing specific distribution costs. Moreover, no trail showed the actual transfer of dollars from each department to every other department under this old scheme.

With the simultaneous-equation solution, on the other hand, an ex-

act number of dollars for every distribution factor is known. This method easily leads to reductions in overhead costs.

History of a Faster Solution

I was first introduced to the problem of indirect cost accounting in 1951, when a steel company asked IBM to tackle such a problem. It was taking the firm about 300 man-hours to calculate those costs by hand.

After I studied the problem and read an accounting handbook, I found a practical solution: the Gauss-Seidel iterative procedure. This procedure provides easy error detection and is simple, foolproof, and fairly fast. The nature of its equations and values guarantees a solution.

The steel-company case required a set of 51 equations for 51 departments and a possible 51×50 transfers. Only about 600 of 2550 possible transfers actually occurred, however. This ratio—about 1:4—of the number of actual to theoretical transfer relations has held for several similar business applications.

Once the procedure was worked out, the calculations took only 35 minutes on an IBM card-programmed calculator. The calculation procedure is iterative: each intermediate set of answers gets closer to the final set. When no further changes take place, the solution has been reached.

This procedure actually converged at a rate of almost one decimal column for each iteration, so that figures involving values to \$999,999 can converge to the final answer in about six

Everybody's making money selling microcomputers. Somebody's going to make money servicing them.

Now NRI Trains You At Home To Make Money Servicing, Repairing, and Programming Personal and Small Business Computers

Seems like every time you turn around, somebody comes along with a new computer for home or business use. And what's made it all possible is the amazing micro-processor, the tiny little chip that's a computer in itself.

Using this new technology, the industry is offering compact, affordable computers that handle things like payrolls, billing, inventory, and other jobs for business of every size...perform household functions including budgeting, environmental systems control, indexing recipes. And thousands of hobbyists are already owners, experimenting and developing their own programs.

Growing Demand for Computer Technicians

This is only one of the growth factors influencing the increasing opportunities for qualified computer technicians. The U.S. Department of Labor projects over a 600% increase in job openings for the decade. Most of them are *new* jobs created by the expanding world of the computer.

Learn At Home to Service Any Computer

NRI can train you for this exciting, rewarding field. Train you at home to service not only micro-computers, but word processors and data terminals, too. Train you at your convenience, with clearly written "bite-size" lessons that you do evenings or weekends, without going to classes or quitting your present job.

Your training is built around the latest model of the world's most popular computer. It's the amazing TRS-80™ Model 4, now with disk drive and the capabilities and features to perform a host of personal and business functions. No other small computer has so much software available for it, no other is used and relied on by so many people. And it's yours to keep for personal and business use.

You get plenty of practical experience. Under NRI's carefully planned training, you even install a *disk drive* verifying at each step its operation. Using the NRI Discovery Lab® that also comes as part of your course, you build and study circuits ranging from the simplest to the most



Become the Complete Computer Person

In addition to training in BASIC and advanced machine language, you gain hands-on experience in the operation and application of the latest computers for both business and personal jobs. You're trained to become the fully rounded, new breed of technician who can interface with the operational, programming, and service facets of all of today's computers. You're ready to take your place in the new electronic age.

Other Opportunities

NRI has been giving ambitious people new electronic skills since 1914. Today's offerings also include TV/Audio/Video Systems servicing with training on our exclusive Heath/Zenith computer-programmable 25" diagonal color TV... Industrial Electronics, Design Technology... and other state-of-the-art courses.

The Catalog Is Free. The Training Is Priceless.

Send the postage-paid card for our 104-page catalog showing all courses with equipment and complete lesson plans. There's no obligation other than to yourself. See how NRI can help you take advantage of the exciting job and earnings opportunities in the exploding field of micro-computers. If card has been removed, please write to us.



NRI Schools
McGraw-Hill Continuing
Education Center
3939 Wisconsin Ave.
Washington, DC 20016

We'll give you tomorrow.

advanced. You analyze and troubleshoot using the professional 4-function LCD digital multimeter you keep to use later in your work. Then you use the lab and meter to actually access the interior of your computer...build special circuits and write programs to control them. You "see" your computer at work and demonstrate its power.

Same Training Available With Color Computer

NRI offers you the opportunity to train with the TRS-80 Color Computer as an alternative to the Model 4. The same technique for getting inside is enhanced by using the new NRI-developed Computer Access Card. Only NRI offers you a choice to fit your specific training needs.

(TRS-80 is a trademark of the Radio Shack division of Tandy Corp.)



	$F(B,A) \times T(B) + F(C,A) \times T(C) + F(D,A) \times T(D) + DC(A) = T(A)$		
$F(A,B) \times T(A) +$		$F(C,B) \times T(C) + F(D,B) \times T(D) + DC(B) = T(B)$	
$F(A,C) \times T(A) + F(B,C) \times T(B) +$		$+ F(D,C) \times T(D) + DC(C) = T(C)$	
$F(A,D) \times T(A) + F(B,D) \times T(B) + F(C,D) \times T(C) +$		$+ DC(D) = T(D)$	

Figure 1: Equation layout for 4-department indirect cost calculations.

or seven iterations. In other words, the accuracy of the estimates of the final answers increases about one decimal place per iteration.

When I originally tried to convince several accountants to try this procedure, I heard many excuses as to why they thought it had no value. After one accountant had told me repeatedly that his starting data was approximate and that he therefore didn't need the precision I could provide, I told him that this procedure could give him any level of inaccuracy he desired. Needless to say, he didn't appreciate sarcasm any more than the truth.

In 1953, this procedure was used on an IBM 701 computer to solve an indirect-cost-accounting problem for 156 departments of a large New York City bank. Calculating and printing the answers took about 10 minutes, considerably less than the 1000 man-hours required for hand-calculation procedures. When the procedure was followed for a 91-department bank, an IBM 650 calculator did the job in 7.5 minutes, replacing a 300 man-hour hand calculation. Similar savings were realized for a pharmaceutical company's 45-department distribution. A state hospital then used the procedure to reduce a several-month task to a 4-day job on punched-card machines. A lot of card handling was required because the institution had no computer.

A Sample Problem

The current availability of micro-computer-spreadsheet programs makes the solution even easier. Here's a sample procedure for analyzing costs for four departments. It is not a real case and takes more iterations to solve than an actual problem would, but it uses the procedure that actual cases follow.

First, this simple four-department distribution demonstrates how to set up the necessary equations and use the procedure to obtain a solution. Then the sample is worked out using the usual spreadsheet notation of rows and columns.

The total cost of each department is made up of the charges transferred to it from all other departments, plus its own direct charges. The total cost for department A is best stated with this equation:

$$\begin{aligned} &\text{Cost (B to A)} + \text{Cost (C to A)} \\ &+ \text{Cost (D to A)} + \text{Direct cost (A)} \\ &= \text{Total cost (A)} \end{aligned}$$

To simplify subsequent calculations, the equation can be expressed as:

$$\begin{aligned} &F(B,A) \times T(B) + F(C,A) \times T(C) \\ &+ F(D,A) \times T(D) + DC(A) = T(A) \end{aligned}$$

where T represents the total cost of a department named by the letter in the parentheses following it, F represents the distribution factor between two departments (the first department mentioned is the source of the costs and the second is the receiver), and DC represents the direct charges of a specific department.

The equations in figure 1 are used to calculate indirect costs for a four-department distribution. Because no department distributes costs to itself, a gap is left in each line. Note the symmetry to the equations; they are set up to fit nicely into a spreadsheet arrangement of rows and columns, organized by departments. The calculations along a row correspond to the costs absorbed by a particular department, and those down a column correspond to transfer of costs from one department to others.

After the equations are set up, the factors for making distributions between departments are needed. Calculation of the distribution factors is done separately and is not part of the distribution-calculation procedure. The information for developing the factors for a company should be available from the firm's accounting department and, indeed, the factors themselves may already be available.

One way a department might measure its distribution of the costs for services, for example, is based on the number of persons in each department. If a department has one percent of the company's personnel, for instance, and it is assumed that all personnel share the use of the cafeteria, then one percent of cafeteria expenses would be distributed to that department. Figures then would be calculated in a similar manner for other departments. Telephone expenses, however, might best be distributed based on the number of phones rather than people in each department, although long-distance costs can be charged directly to the department that made them. The distribution factors can also be based on relative amounts of floor space or on any items that can (and must) be quantified. Each factor is a number between zero and one inclusive.

Once all the factors are known, they can be substituted in the equations. For this example, a set of factors and initial expense values is used. Note that the gaps have been filled with a zero factor, which can ease some computer procedures.

$$\begin{aligned} &.00 \times T(A) + .10 \times T(B) + .15 \times T(C) \\ &+ .15 \times T(D) + 8000 = T(A) \end{aligned}$$


$$\begin{aligned} &.15 \times T(A) + .00 \times T(B) + .20 \times T(C) \\ &+ .10 \times T(D) + 7000 = T(B) \end{aligned}$$

$$\begin{aligned} &.00 \times T(A) + .10 \times T(B) + .00 \times T(C) \\ &+ .30 \times T(D) + 9000 = T(C) \end{aligned}$$

$$\begin{aligned} &.15 \times T(A) + .15 \times T(B) + .10 \times T(C) \\ &+ .00 \times T(D) + 12000 = T(D) \end{aligned}$$

Now the only unknown quantities in these equations are the depart-

Computer's Choice.

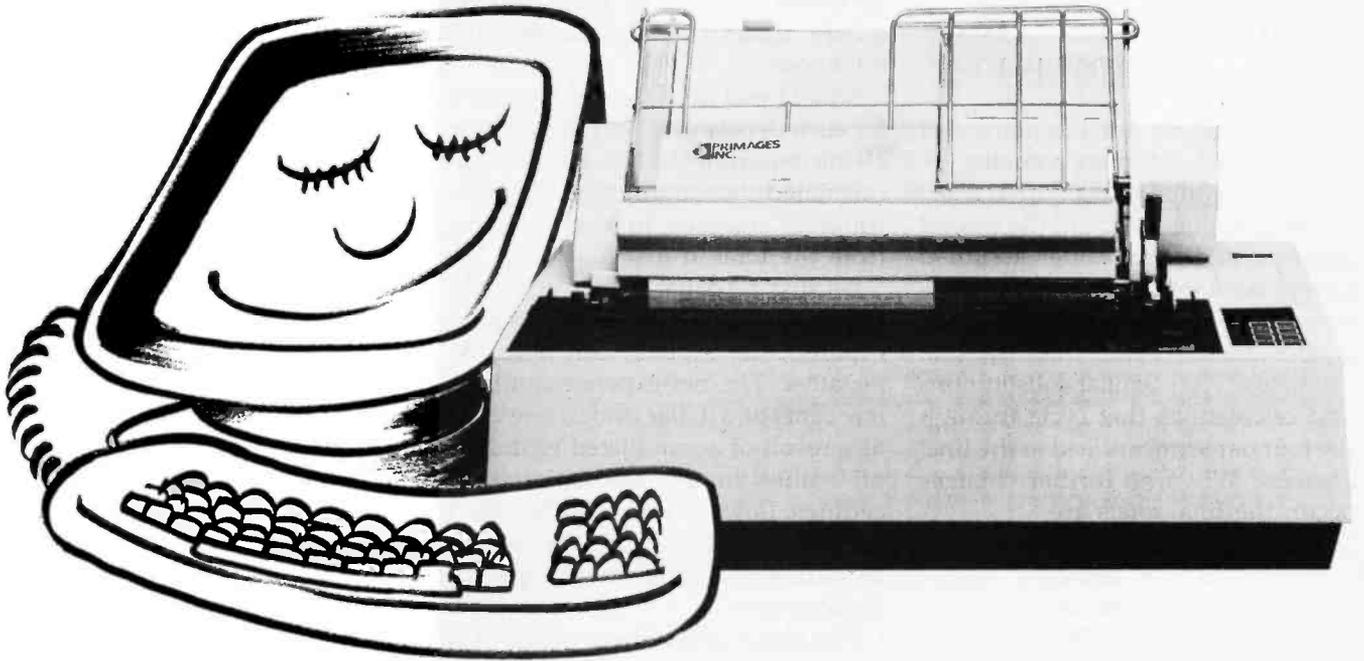

Primage I

Sooner or later, you'll probably want to use your business computer for word processing or data communications applications. And if you let your computer choose the best printer to provide letter quality printing at high production speeds, its first choice would be Primage I.

That's because when all the facts are entered, the Primage I with PageMate I sheet feeder, gives you more for your money than any other daisy system—45 cps, heavy duty, letter quality printing, with automatic sheet feeder, for hundreds of dollars less than its closest competitor.

The lower cost and higher performance are all made possible by a totally new control technology that allows simple, inherently more reliable stepping motors to run at much higher speeds. The design eliminates lots of parts that

you find in other serial printers. Parts you don't have to pay for and, just as important, parts you don't have to maintain. Primage I features simplified controls, easy paper feeding and a wide choice of fonts. It also comes with a unique 100-spoke daisy wheel that provides switch selectable multiple languages, and an easy access, easy set-up interface that connects to popular PC's without special cable fittings.

When you compare Primage I with top quality daisy printers and sheet feeders that cost up to 50% more, we're confident you'll make the same choice your computer would. So come into your computer dealer today for a first hand demonstration. Or contact us for detailed product literature. Primages Inc., 620 Johnson Ave., Bohemia, NY 11716 (516) 567-8200.

 **PRIMAGES
INC.**

ment's total expenses. The paradox, however, is that you can't calculate the total expenses unless you already know them. Here the powerful iterative procedure is useful.

For the first equation, assume that the total expenses are the direct expenses. Then the first equation becomes:

$$0 + .10 \times 7000 + .15 \times 9000 + .15 \times 12000 + 8000 = T(A)$$

$$0 + 700 + 1350 + 1800 + 8000 = T(A) = 11850$$

The estimate for total expenses of department A gets more accurate, going from a value of 8000 to 11,850.

Using that new value in the second equation and other values assumed to represent total expenses provides a new figure for T(B) of 11,775, which is considerably better than the first estimate of 7000. Similar substitutions and calculations that cycle through the four departments lead to the final answers. When no further changes occur, the final totals are

$$T(A) = 14,455$$

$$T(B) = 14,108$$

$$T(C) = 15,769$$

$$T(D) = 17,861$$

Now that the total costs for each department are known, we can calculate the net, or true, final cost by subtracting the amounts distributed from each department to others. They can be found with the same general equations, because the amount going to a department has to come from some other department. In this example, department A distributes \$2168 to department B and \$2168 to department D, leaving a net cost of \$10,118. The net costs for the other departments are calculated similarly.

When the distributions both to and from all departments are calculated, the sum of the costs must equal the initial costs of the four departments, because we can neither gain nor lose any dollars. Because the original sum was \$36,000, the sum of the net costs must also be \$36,000. (Verifying that these sums match is a way to check

the accuracy of the calculations and the procedures.)

Spreadsheet Procedures

The setup for this sample data using a typical electronic spreadsheet procedure is shown in table 1. Row 3 has spaces for the total expenses of each department and the sum of all departments. Rows 6 through 9 are designed to hold the calculations for the distributed amounts to each department as well as each department's direct (initial) charges and total costs.

Row 11 will hold the net expenses for each department and the sum for all the departments. Net amounts are calculated by subtracting the distributed amounts in each column from the total in row 3.

Because no department can distribute more than 100 percent of its total expense, net expense can never be negative. The net expense can be a few cents or a dollar under, however, as a result of accumulated rounded-off values in the calculation procedures. Rows 14 through 17 contain the factors for calculating the costs to be transferred between each pair of departments.

The usual spreadsheet program is set up to detect the type of circular relationships that exist between the department totals. It prevents the use of an analysis that incorporates such relationships by substituting the values comprising them with the word "error," thus indicating errors. Therefore, to avoid the problem of having the screen filled with error signs, the row of totals—B3 through E3—has the total for each department set to zero. Once this precaution has been taken, you can manipulate the figures on the terminal screen, but you must be sure that no circular relationships are stated when you store your data, or you will get error signals when you reload the sheet.

Before you can begin solving a particular problem, the row of totals must be copied from the column of totals at the right (G6 through G9) to row 3 (B3 through E3). Table 2 shows the resulting data at this point. The sum of the net expenses does not equal the total of the initial expenses

To find out where we're showing off the P1350 printer, call one of these Toshiba distributors:

EASTERN

R & D/CAMELOT ASSOCIATES, INC. Northampton, MA	(413) 253-7378
DIGITAL ENTRY SYSTEMS Waltham, MA	(617) 899-6111
MICROAMERICA Wellesley, MA	(800) 343-4411
CYBER/SOURCE Southfield, MI	(313) 353-8660
GENERAL BUSINESS COMPUTERS, INC. Cherry Hill, NJ	(609) 424-6500
MONROE DISTRIBUTING COMPANY Cleveland, OH	(216) 781-4600
ROBEC DISTRIBUTORS Line Lexington, PA	(215) 822-0700

SOUTHERN

MICROAMERICA Tampa, FL	(813) 623-6526
MICROAMERICA Norcross, GA	(404) 441-0515 or (800) 241-8566
MICROAMERICA Rockville, MD	(301) 468-6450 or (800) 638-6621

CENTRAL

TEK-AIDS INDUSTRIES, INC. Arlington Heights, IL	(312) 870-7400 or (800) 323-4138
KALTRONICS DISTRIBUTORS, INC. Northbrook, IL	(312) 291-1220
MICROAMERICA Schaumburg, IL	(800) 323-6827
GENERAL MICROCOMPUTER South Bend, IN	(219) 277-4972
MIDTEC ASSOCIATES dba CRYSTAL COMPUTERS Lenexa, KS	(913) 541-1711
B & W DISTRIBUTORS St. Louis, MO	(314) 569-2450
SMC INTECH SYSTEMS CORP. Carrollton, TX	(214) 446-9055
COMPU SHOP Richardson, TX	(214) 783-1252
MICROAMERICA Richardson, TX	(800) 527-3261
SYSPRINT, INC. Richardson, TX	(214) 669-3666

WESTERN

P.G.I. CORPORATION Tempe, AZ	(602) 968-3168
MICROAMERICA Carson, CA	(800) 421-1485
BYTE INDUSTRIES, INC. Hayward, CA	(415) 783-8272 or (800) 972-5948 outside CA (800) 227-2070
PREMIER SOURCE DISTRIBUTING Irvine, CA	(714) 261-2011
CYPRESS DISTRIBUTING COMPANY, INC. San Jose, CA	(408) 297-9800
PARAGON SALES, INC. San Jose, CA	(408) 263-7955
MICROWARE DISTRIBUTORS, INC. Aloha, OR	(503) 642-7679
ANACOMP, INC. Redmond, WA	(206) 881-1113 or (800) 426-6244

CANADA

PWT COMPUTER GROUP Mississauga, Ontario	(416) 624-7583
--	----------------


OR THESE TOSHIBA AMERICA, INC.

REGIONAL OFFICES:


177 Madison Avenue, Post Office Box 2331R Morristown, NJ 07960	(201) 326-9777
662 Office Parkway, The Colonnade Building St. Louis, MO 63141	(314) 991-0751
2555 Cumberland Parkway, Suite 285 Atlanta, GA 30339	(404) 434-3891
18017 Sky Park Circle, Suites P and Q Irvine, CA 92714	(714) 250-0151

TOSHIBA

Circle 358 on inquiry card.

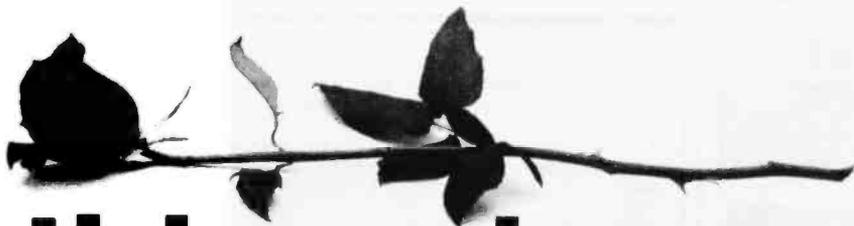

Nothing shows off your IBM PC™ like Toshiba's P1350 printer.

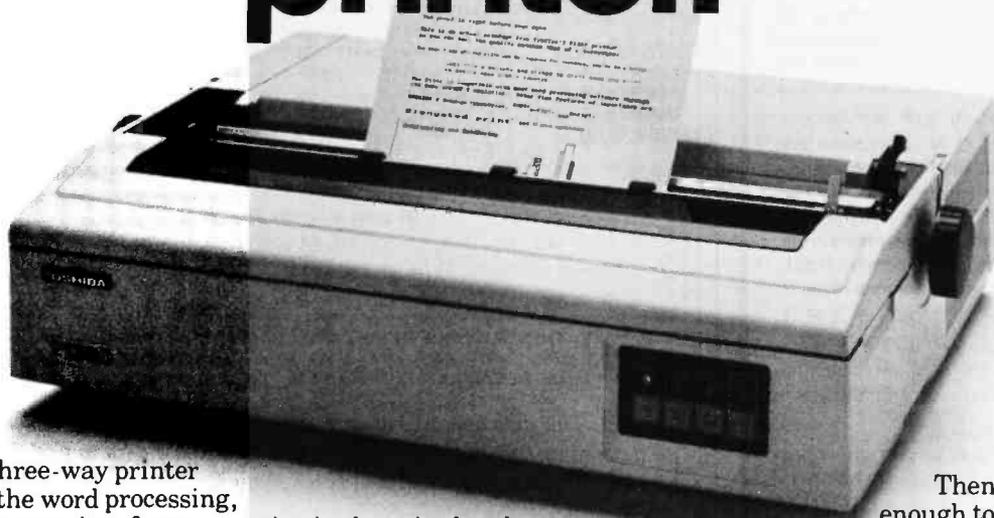

Now there's one three-way printer that fully equals the word processing, data and graphics capacity of your IBM PC: Toshiba's P1350.

But the P1350 is more than compatible with PC hardware. It will print programs like Lotus 1-2-3 data processing and graphics output with remarkable character definition.*

For even more flexibility, the Toshiba P1350 with Qume SPRINT 5 emulation handles all popular word processing programs. Under software command, the P1350 will print high-speed drafts or switch to letter-quality text and graphics.

The innovation behind this three-in-one flexibility is Toshiba's print head. Pin diameter has been reduced to just eight mils. And the number of

pins in the print head has been increased to 24.

The result is a superior 360 by 180 dot-per-inch density pattern in the text mode. Instead of spinning your wheels at 40 cps, the P1350 produces letter-quality printing at 100 cps. In its draft mode, Toshiba's P1350 can accelerate up to 192 cps.

When it comes to graphics, the P1350 really shows its stuff. Whatever your computer displays, Toshiba's P1350 prints. With astonishingly clear definition. And extra-fine reproduction that can only come from a print head capable of 200 million impressions and exclusive 180 by 180 dot-per-inch graphics density pattern.

Then, if that's not enough to pique your interest, the P1350 also

features three different fonts. Variable pitch. Subscripts, superscripts and underlining without the need of a second pass. A super-reliable, optional sheet feeder. And more.

So show off your IBM. OR ANY OTHER PERSONAL COMPUTER. With the superior quality and flexibility of Toshiba's spectacular P1350 printer.

Distributors on the adjacent list make it easy to find the P1350. Or get more information by calling, toll-free, 1-800-457-7777.

*IBM PC to P1350 graphics utilizes PaperScreen and color graphics adapter. IBM PC is a Trademark of International Business Machines. Lotus and 1-2-3 are Trademarks of Lotus Development Corporation. ©1983 Toshiba America, Inc.

In Touch with Tomorrow

TOSHIBA

EMPLOYMENT OPPORTUNITIES

MICROPROCESSOR SPECIALIST

discover our system of success

Discover Litton Data Command Systems, and find the success you've been looking for. Our continued involvement in one of the most extensive defense contracts ever awarded has created an outstanding opportunity for a:

MICROPROCESSOR SPECIALIST

This position requires 5-10 years experience in systems level firmware design and development. Will participate in ground floor design and development of microprocessor firmware for our C³ Systems. You'll review and analyze top-level system and subsystem requirements, validate design and monitor subcontractor progress relating to the development and testing of end-item products.

Requires familiarity with Air Defense Command and Control Systems and strong hands-on hardware experience. Hardware and/or software experience with INTEL 8085, 8086, RCA 1802 or Zilog Z8000 using a microcomputer development system is preferred. BSEE, BSCS or equivalent also required.

In addition to highly competitive salaries and an ideal location, we'll offer you a complete benefits program which includes stock purchase and retirement plans.

To discover how to be part of our success, send resume with salary history to:

Casey Clemence
PROFESSIONAL EMPLOYMENT
Department 615-K5, P.O. Box 5000
Agoura Hills, California 91301-0500
Equal Opportunity Employer M/F/H



DATA COMMAND SYSTEMS

Litton

For only . . .

\$712

Your recruitment ad in this 2" space will reach over 400,000 qualified readers just like yourself. To place your ad call 212-512-2556, or send your copy to the address below.

BYTE
P.O. Box 900, NY 10020

	A	B	C	D	E	F	G
1	INDIRECT COST DISTRIBUTION----ACCOUNTING PROCEDURE						
2	=====						
3		0	0	0	0	0	
4	TOTAL EXPENSES ARE ABOVE THIS LINE						
5	STO///FROM	DEPT--A	DEPT--B	DEPT--C	DEPT--D	INITIAL	TOTAL
6	DEPT--A	0	0	0	0	8000	8000
7	DEPT--B	0	0	0	0	7000	7000
8	DEPT--C	0	0	0	0	9000	9000
9	DEPT--D	0	0	0	0	12000	12000
10	NET EXPENSES ARE BELOW THIS LINE						
11		0	0	0	0	0	
12	-----						
13	DISTRIBUTION FACTORS						
14		0	.1	.15	.15		
15		.15	0	.2	.1		
16		0	.1	0	.3		
17		.15	.15	.1	0		
18	=====						
19	TO MAKE THIS EXAMPLE WORK, ENTER THE FOLLOWING:						
20	AT B3, +G6 AT C3, +G7 AT D3, +G8 AT E3, +G9						
21	THEN FORCE RECALCULATIONS UNTIL TOTALS AT F3 AND G10 ARE EQUAL.						

Table 1: The data for analysis for a hypothetical four-department company is set up here as it would be for use with an electronic spreadsheet program. Row 3 provides spaces for the total expenses of each department, and row 11 will display their net expenses.

	A	B	C	D	E	F	G
1	INDIRECT COST DISTRIBUTION----ACCOUNTING PROCEDURE						
2	=====						
3		10293	10287	9820	15535	45935	
4	TOTAL EXPENSES ARE ABOVE THIS LINE						
5	STO///FROM	DEPT--A	DEPT--B	DEPT--C	DEPT--D	INITIAL	TOTAL
6	DEPT--A	0	1029	1473	2330	8000	12832
7	DEPT--B	1544	0	1964	1554	7000	12061
8	DEPT--C	0	1029	0	4661	9000	14689
9	DEPT--D	1544	1543	982	0	12000	16069
10	NET EXPENSES ARE BELOW THIS LINE						
11		7205	6687	5401	6991	26283	
12	-----						
13	DISTRIBUTION FACTORS						
14		0	.1	.15	.15		
15		.15	0	.2	.1		
16		0	.1	0	.3		
17		.15	.15	.1	0		
18	=====						
19	TO MAKE THIS EXAMPLE WORK, ENTER THE FOLLOWING:						
20	AT B3, +G6 AT C3, +G7 AT D3, +G8 AT E3, +G9						
21	THEN FORCE RECALCULATIONS UNTIL TOTALS AT F3 AND G10 ARE EQUAL.						

Table 2: This data appeared during the calculation procedure. Note that the calculations for determining F3 are always one cycle behind those used to find G10. When the values for the two spaces are equal and cease changing, the solution has been reached.

	A	B	C	D	E	F	G
1	INDIRECT COST DISTRIBUTION----ACCOUNTING PROCEDURE						
2	=====						
3		14455	14108	15769	17861	62194	
4	TOTAL EXPENSES ARE ABOVE THIS LINE						
5	STO///FROM	DEPT--A	DEPT--B	DEPT--C	DEPT--D	INITIAL	TOTAL
6	DEPT--A	0	1411	2365	2679	8000	14455
7	DEPT--B	2168	0	3154	1786	7000	14108
8	DEPT--C	0	1411	0	5358	9000	15769
9	DEPT--D	2168	2116	1577	0	12000	17861
10	NET EXPENSES ARE BELOW THIS LINE						
11		10119	9170	8673	8038	36000	
12	-----						
13	DISTRIBUTION FACTORS						
14		0	.1	.15	.15		
15		.15	0	.2	.1		
16		0	.1	0	.3		
17		.15	.15	.1	0		
18	=====						
19	TO MAKE THIS EXAMPLE WORK, ENTER THE FOLLOWING:						
20	AT B3, +G6 AT C3, +G7 AT D3, +G8 AT E3, +G9						
21	THEN FORCE RECALCULATIONS UNTIL TOTALS AT F3 AND G10 ARE EQUAL.						

Table 3: The final results of the four-department analysis. The totals in G6 through G10 correspond respectively to those in B3 through F3.

at this time because of the lag in the computation procedure. At the end of the several iterations, however, the total net expenses and total initial expenses will be the same.

The total of all departments in F3 is always one cycle behind the total in G10. Both totals increase as each cycle is performed. Eventually, when the two totals agree and stop increasing, the solution is reached. This example takes 11 iterations to obtain a solution. To carry results to the nearest penny takes 21 iterations; the results, however, are not worth the extra effort.

The problem is now ready for the iteration procedure, which is signaled via the Recalculate key of the system that will perform the calculations. Each time the key is touched, one complete iteration takes place.

Remember that all totals must increase with each calculation. Any decrease indicates an error in values, calculations, or formulas. Table 3 presents the final result. It contains all the factors, all the initial expenses, all the dollars related to each factor, and all the dollars transferred in and out of every department. Now the total expenses of each department can be analyzed to determine what can be done to reduce expenses.

Modifying the Data

After reviewing the results of a set of calculations, you might want to change one or several factors. It is possible to make such changes and then use the Recalculate key to obtain new results. In this case, some amounts will decrease to the new values (contrary to what was said above). However, changes must keep going in the same direction and not oscillate up and down. And because the calculations are easy to make, you can also go back to the beginning with a new set of figures and complete the whole procedure again.

Using BASIC or APL

A similar program can be written to do the same calculations, loop back, and repeat them until the totals do not change. I have written such programs in BASIC and APL.

Listing 1 contains a BASIC program

for the sample problem. It will print all intermediate values to the screen and then give final answers in a format similar to that of table 3.

To bypass the printing of intermediate totals, you can delete the PRINT statements in lines 390 and 480. You can also expand with remarks to make it more understandable. Or you can shorten it by putting multiple statements on a line; however, this makes it less understandable.

To include more departments, more data statements must be added and the dimension statements (lines 10-110) must be enlarged to cover the maximum number of departments. The output printing statements must also be changed to accommodate such an increase.

If 100 departments were used, for instance, 10,000 spaces would have to be allocated for the factors and 10,000 for the distributed amounts. At a rate of 2 bytes per space, this analysis would require at least 40,000 bytes of storage. Again, this requirement could be reduced significantly by limiting storage to only the actual factors needed and giving up the symmetry of the tables. Note, however, that large values could require double-precision calculations and a corresponding increase in storage requirements.

In APL, the procedure is even simpler, since the final result to the equations can be found in just one step. You get the inverse of the factor table using the quad-divide function and then multiply the inverse by the initial expense vector. Then you print out the appropriate items of initial, final, net costs, and transferred amounts using appropriate array functions. Mathematicians and APLers will love this trivial procedure.

Hand or Desk Calculator Procedure

With a hand or desk calculator and a large piece of paper, you simply simulate the procedure done by a computer by starting with table 1. Use a soft pencil to write down the distribution amounts and the department total (column G), then replace

SPECTACULAR OFFERS

wabash®

5 YEAR WARRANTY

M11	5 1/4"	SINGLE SIDE SINGLE DENSITY	1.49*
M13	5 1/4"	SINGLE SIDE DOUBLE DENSITY	1.89*
M14	5 1/4"	DOUBLE SIDE DOUBLE DENSITY	2.79*
M16	5 1/4"	DOUBLE SIDE QUAD DENSITY	4.19*
F111	8"	SINGLE SIDE SINGLE DENSITY	1.89*
F1312	8"	SINGLE SIDE DOUBLE DENSITY	2.39*
F144	8"	DOUBLE SIDE DOUBLE DENSITY	2.99*

maxell®

LIFETIME WARRANTY

MD1	5 1/4"	SINGLE SIDE DOUBLE DENSITY	2.09*
FD1-128	8"	SINGLE SIDE DOUBLE DENSITY	3.60*

BASF

2 YEAR WARRANTY

54968	5 1/4"	ss,dd	1.79*
53428	8"	ss,sd	1.89*

BASF

LIFETIME WARRANTY

54974	5 1/4"	ss,dd	2.19*
54998	8"	ss,sd	2.29*

TDK

LIFETIME WARRANTY

2501	5 1/4"	ss,dd	2.39*
2801	8"	ss,dd	3.90*

SENTINEL

LIFETIME WARRANTY

58-11	5 1/4"	ss,sd	1.59*
88-11	8"	ss,sd	2.14*

WE ALSO STOCK AT FANTASTIC LOW PRICES

Memorex

OPIS

3M

Dysan

Floppies, Tape, Data Cartridges, Data Cassettes, and Disk Packs

* QUANTITY 100. SMALLER QUANTITIES ADD 5%

<h4>DISK DRIVE HEAD CLEANING KITS</h4> <p>5 1/4"</p> <p>15.95</p>	<h4>C-10 CASSETTES</h4> <p>Get 8 cassettes and Cassette/8 Library Album</p> <p>8.00</p>
---	---

<h4>SNAP-IT POWER CENTER</h4> <p>Turn one outlet into six!</p> <p>Power Surge Control RFI Filtration 15 Amp Circuit Breaker</p> <p>59.95</p>	<h4>LIBRARY CASES</h4> <p>8" Kas-setter/10 2.99</p> <p>5 1/4" Mini Kas-setter/10... 2.49</p>
--	--

<h4>BOOK VALUES</h4> <p>FULL SELECTION, DISCOUNT PRICES on hundreds of titles published by ALFRED, HAYDEN, DILITHIUM, SAMS, TAB, McGRAW HILL and many others.</p>	<h4>SOFTWARE</h4> <p>AT FANTASTIC PRICES SAVE 25% OR MORE on thousands of software packages for all systems, including Business, Language, Engineering, Games, Graphics, Utility, and many more.</p>
---	--

• Written purchase orders accepted from governmental agencies and well rated firms for net 30 day billing. • International orders accepted with a 15.00 surcharge for handling, plus shipping charges. • C.O.D. requires a 10% deposit. • We accept Visa, MasterCard, Money Orders, and Certified checks. • Checks require bank clearances. • All shipments F.O.B. San Diego. • Minimum shipping and handling 2.00, minimum order 10.00. • California residents add 6% sales tax. Prices and terms subject to change without notice. • All sales subject to availability, acceptance, and verification. • All sales are final. • Satisfaction guaranteed or full refund.

We also offer printer ribbons, printwheels, type elements, equipment covers, power consoles, paper supplies, storage and filing equipment, furniture and many other accessories for word and data processing systems. Write for our free catalog.

Orders Only
800-854-1555
Information
619-268-3537

ABC

DATA PRODUCTS

Monday Hotline (Anytime) 619-268-4488
Exclusive Monthly Specials
ITT TELEX 4992217
8668 CLAIREMONT MESA BLVD
SAN DIEGO, CALIFORNIA 92123

CPM / 80 MACRO ASSEMBLERS

We've been selling these industrial-quality assemblers to the development system market since 1978. They are now available for the CP/M market.

FEATURES:

- Fully relocatable
- Separate code, data, stack, memory segments
- Linker included
- Generates appropriate HEX formatted object files
- Macro capability
- Conditional assembly
- Cross reference
- Supports manufacturer's mnemonics
- Expanded list of directives
- 1 year free update

Assemblers now available include:

Chip	Price	Chip	Price
1802/1805	\$495	NSC800	\$495
8051	495	F8,3870	495
6500/01/02	495	Z8	495
6800/01/02	495	Z80	395
6805	495	9900/9995	595
6809	495	Z8000	695
8085	495	68000	695

Take advantage of leading-edge technology. Get your own Relms assembler today. Use your MasterCard, Visa or American Express, and order by phone: (408) 729-3011

Relational Memory Systems, Inc.
1650-B Berryessa Road,
San Jose, CA 95133

All software shipped on a 5 1/4" single density floppy disk. A signed object Code License Agreement required prior to shipping. Prices subject to change without notice.

Listing 1: A BASIC program for determining how indirect costs are distributed among the four departments of a hypothetical company.

```

10 REM program for reciprocal cost distribution among four departments.
20 N=4
30 DATA 0,.1,.15,.15
40 DATA .15,0,.2,.1
50 DATA 0,.1,0,.3
60 DATA .15,.15,.1,0
70 DATA 8000,7000,9000,12000
80 DIM I(4)
90 DIM M(4)
100 DIM T(4)
110 DIM P(4,4)
120 REM set up factor table from data
130 FOR R=1 TO N
140 FOR C=1 TO N
150 READ V
160 LET P(R,C)=V
170 NEXT C
180 NEXT R
190 REM set up initial expense table from data
200 FOR Z=1 TO N
210 READ I(Z)
220 NEXT Z
230 REM set up temporary total expense table
240 FOR Z=1 TO N
250 LET M(Z)=I(Z)
260 NEXT Z
270 REM set up total expense table
280 FOR Z=1 TO N
290 LET T(Z)=I(Z)
300 NEXT Z
310 REM begin calculation iteration
320 FOR R=1 TO N
330 LET G=0
340 FOR C=1 TO N
350 LET D=M(C)*P(R,C)
360 LET G=G+D
370 NEXT C
380 LET M(R)=G+I(R)
390 PRINT R,M(R)
400 NEXT R
410 REM calculate old and new total expenses
420 LET E=0
430 LET F=0
440 FOR Z=1 TO N
450 LET E=E+M(Z)
460 LET F=F+T(Z)
470 NEXT Z
480 PRINT E,F,E-F
490 REM save "new" totals as "old" totals for next iteration
500 FOR Z=1 TO N
510 LET T(Z)=M(Z)
520 NEXT Z
530 REM test for completion of iteration cycles
540 IF (E-F)>=1 THEN 320
550 FOR C=1 TO N
560 LET N(C)=T(C)
570 FOR R=1 TO N
580 LET N(C)=N(C)-T(C)*P(R,C)
590 NEXT R
600 NEXT C
610 FOR Z=1 TO N
620 PRINT INT(I(Z)),INT(T(Z)),INT(N(Z))
630 NEXT Z
640 PRINT "FINISHED"
650 REM print results
660 PRINT "TOTAL EXPENSES ARE:"
670 FOR Z=1 TO N
680 PRINT INT(T(Z)),
690 NEXT Z
700 PRINT " "
710 PRINT
720 PRINT "DISTRIBUTION AMOUNTS ARE:          INITIAL
TOTAL"
730 FOR R=1 TO N
740 FOR C=1 TO N
750 PRINT INT(P(R,C)*T(C)),
760 NEXT C
770 PRINT INT(I(R)),INT(T(R))
780 NEXT R
790 PRINT "NET EXPENSES ARE:"
800 LET Q=0
810 FOR C=1 TO N
820 LET Q=Q+N(C)
830 PRINT INT(N(C)),
840 NEXT C
850 PRINT INT(Q)
860 END

```



MicroAge[®]

"THE RIGHT COMPUTER STORE FRANCHISE FOR ME!"

"They wanted us to succeed and they acted like it!"

"At our West Palm Beach, Florida, MicroAge Computer Store, we sell primarily to business people, professionals and corporate accounts. Being part of the MicroAge Computer Store network gave us the knowledge, support and name recognition we found to be essential to our success. Plus, during our first year and a half, MicroAge developed a relationship with us that helped us bypass potential mistakes and grow."

"Since joining MicroAge, our store size has doubled and our staff has quadrupled. Today our store has expanded from 1,800 square feet to 3,700 square feet, while our staff grew from 3 people to 13 people. Our growth with MicroAge has been beyond my expectations."

"Am I satisfied with my MicroAge franchise...absolutely!"

Lonny Warshaw
Lonny Warshaw
President

To build your own professional computer sales organization with MicroAge write to:

MicroAge[®] COMPUTER STORES

Corporate Center
1457 West Alameda • Tempe, Arizona 85282

(602) 968-3168



MicroAge franchisee Lonny Warshaw shown with Televideo & Altos products —

Circle 236 on inquiry card.

them when better figures are calculated. The totals are also copied to the top of each column (in row 3) to make it easier to find the pair of numbers involved in each calculation of distribution amount.

Computer Capacity Required

From a practical standpoint, the size of the problem that can be solved using the procedure outlined here depends on the maximum number of columns the spreadsheet program can handle and/or the computer's total storage capacity. For example, if you use an electronic spreadsheet program or a program that stores the full table of distributed amounts and the full table of factors, you will need much more storage than if you use only the required nonzero elements.

Because in actual cases about 75 percent of the factors equal zero, you can rearrange and condense the data layout if you're willing to give up the convenience of having all the items line up neatly in their own rows and columns by department. For example, in the 91-department bank

case, only 620 factors of the possible 8281 (91×91) existed. Thus only 7.5 percent of the possible number of transfers occurred.

The bank's problem was analyzed using DOS 2.0 and Lotus's 1-2-3 in a 327,680-byte IBM Personal Computer (PC). Initially 211,340 bytes were free. Data on the 91 departments would not fit in this space, however, and I estimate that the task would have taken an additional 64K bytes, or a total of 280K bytes, of problem space.

Compare these requirements to those for completing the same job in BASIC, coding only the nonzero factors. That approach required only 11,500 bytes of space for data, program, and stored initial, final, and net expenses. And even with full table space stored, the problem might still have fit into the available 61K bytes of free space in an IBM PC. It took only eight iterations to arrive at the solution—a total-expense figure of over \$20 million. That figure is accurate to the nearest dollar. In other words, accuracy improved at a rate of just one iteration per column. And

coding for only the nonzero factors speeded program execution.

Conclusion

The data for determining indirect-cost distribution throughout a company can be found in the firm's accounting records. The arithmetical procedure is simple, and the report forms can be custom formatted to suit various user needs. Current accounting books still ignore the use of small computers for business calculations. The availability of small computers and spreadsheet software eases this standard accounting task and provides far more information than has been available under previous approximation methods. ■

G. Truman Hunter (31 Overlook Dr., Greenwich, CT 06830) holds a Ph.D. in experimental nuclear physics from the University of Wisconsin and an honorary doctor of science degree from the University of Tampa. He retired from IBM in 1975, at which time he held the position of Manager of APL in the Systems Development Division. Since his retirement he has had more time for Scouting and has taught courses on the use of the IBM PC and other systems.

New Inmac Catalog jam-packed with computer/ wp supplies.



Yours free!

Accurately called "the bible of the industry," it's loaded with great products and ideas for your personal computer, minicomputer or word-processing system. You'll enjoy:

■ **One-stop shopping.** Over 2,000 products to choose from.

■ **Easy ordering.** Mail, phone, or TWX. Verbal P.O.'s welcome.

■ **Fast delivery.** 24-hour shipment. Overnight emergency shipments available.

■ **45-day trial.** Full refund if not completely satisfied.

■ **Guaranteed quality.** All products field-tested to highest standards.

■ **Lower shipping costs.** 8 fully stocked distribution centers serving the U.S.

For fastest delivery of your free 100-page Inmac catalog, call 1 (800) 547-5444. 1 (800) 547-5447 in California.

inmac Catalog Dept., 2465 Augustine Drive, Santa Clara, CA 95051
Please be sure to include your phone number. 107132

NAME _____ PHONE _____
COMPANY _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____



Exporting Services

**We Are Buyer's Agent for
Overseas Dealers and Distributors**

- Lowest prices, immediate quotations, prompt delivery.**
- Access to all major hardware and software manufacturers.**
- All professional services provided: Licensing, Export Documentation, and Follow-through.**

**24-Hour Response as Close as Your Telex
TELEX 470851**

American Buying and Export Services
1036 Country Club Drive, Moraga, CA 94556
(415) 376-7600


We're "Customer Friendly"

We're Sun Software. We're new and we're ready to start treating you like a valued customer—not just a voice on the telephone.

And we're convenient, too. Just call our toll-free number to order any one of over 2000 titles and more than 90 formats. Plus we guarantee that our prices are absolutely the lowest you'll find anywhere.

We'll take your order and get it to you in 5 days or less—virtually anywhere in the world. And if you're in the U.S., you'll never pay for shipping.

So call us to access the most in service, the best in selection. We're going to make "customer-friendly" state-of-the-art.

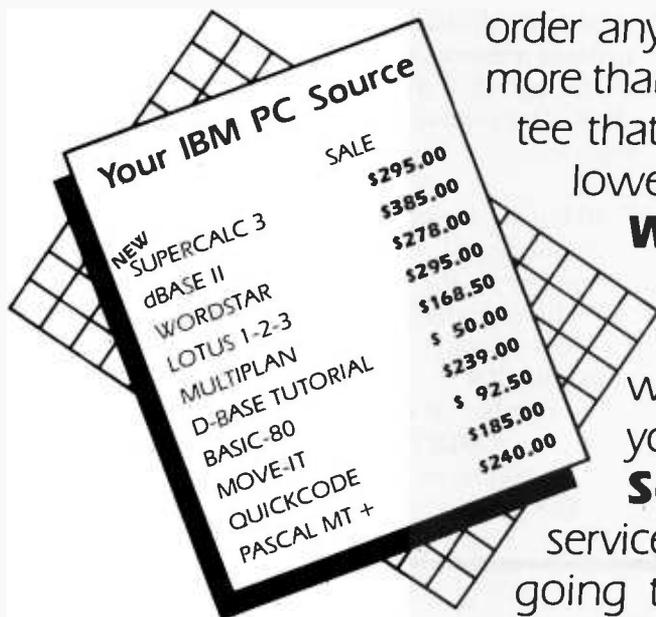

Call 1-800-222-7393

(In California call: 1-800-722-6284)

TELEX: 215604 PCS UR ATTN: Sunmicro

By modem: (213) 458-9209

Sun Software

1344 Fourth Street.

Santa Monica, CA 90401

TERMS: Shipping by UPS Surface, US Mail. Call for UPS Blue or next day delivery. C.O.D., Check, Master Card and Visa accepted. California residents add 6% tax. Los Angeles County residents add 6.5% tax.



**SUN
SOFTWARE™**

A division of Sunmicro Electronics, Inc.

©1983 Sunmicro Electronics, Inc.

Bullet-Proof Pascal Input

This valid-number program holds data-input errors at bay

by David F. Hinnant and Michael B. Smith

One of the major problems with Pascal as implemented on microcomputers and some large mainframes is that data-input errors in running programs can often have catastrophic results. Not only can the program terminate abnormally, but on many microcomputers the entire operating system is often forced to reinitialize; data can be lost or corrupted when disk files are not properly closed or buffers are not flushed before program termination.

When reading in *character* input there is no problem; a character variable can hold practically any key combination available on the terminal keyboard. The data-input error problem surfaces when data of an *unexpected* type is entered. This is most likely to happen when the running program is expecting a number but finds an alphabetic character in its input stream. On most UCSD Pascal systems, a message of the form

```
IO error: bad input format
S# 1, P# 1, I# 10
Type <space> to continue
```

informs the user of such an error, and the operating system must then be reinitialized.

Reasonably, then, you would like to input numbers as character strings because the possibility of input errors is remote—but you cannot do arithmetic with

strings. Fortunately, Pascal provides a relatively simple way of circumventing this dilemma by providing: (1) a capability to input data as an alphanumeric character string, and (2) the ORD() function, which lets the input character string be used to construct a valid number.

The ORD() function returns the integer decimal ASCII (American National Standard Code for Information Interchange) code of the character argument passed to it. Because the ASCII values of the numeric characters are in continuous ascending order (see table 1), each character of the input string can be easily tested to see if its ordinal value minus the ordinal value of the first ordered numeric character (0) is a valid counting number (0 through 9). If it is, then the input character is a valid digit. The central algorithm of listing 1 is really quite simple.


```
str.len := Length(buffer);
position := 1;
number := 0.0;
WHILE (buffer[position] IN ['0'..'9'] AND (position
<= str.len)
DO BEGIN
    number := number * 10 + ORD(buffer[position])
    - ORD('0');
    position := position + 1;
END;
```

Character (decimal)	ORD(character) (decimal ASCII integer code)	ORD(character)—ORD('0') (integer value)
0	48	0
1	49	1
2	50	2
3	51	3
4	52	4
5	53	5
6	54	6
7	55	7
8	56	8
9	57	9

Table 1: The ascending values of the decimal ASCII integer codes correspond to the ascending decimal character integers. By subtracting ORD('0'), which is decimal 48, from the decimal ASCII integer of the input character, the result must fall in the 0-9 range if the input character is to be considered valid.

Our New B-Version Printers:

*User Friendly Controls. 20% Faster.
9% Lower Cost.*

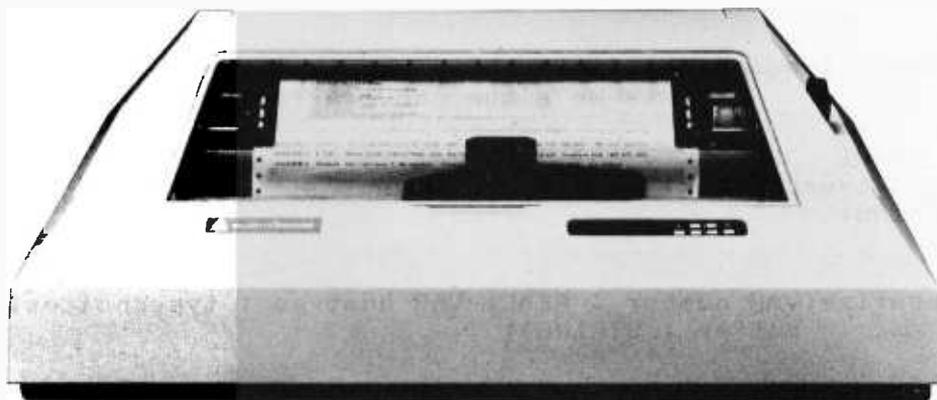

Strong. Silent. Types.

Perhaps the highest quality matrix-impact printer ever built, and certainly one of the quietest, the Silent/Scribe™ A-Version printers have earned a reputation for reliability since their introduction in 1982.

Now from that design, the B-Versions have evolved. Packed with even more performance – 20% faster – and with interface flexibility featuring plug-in Logi/Cards™ for an exact match to your computer.

The new B-Versions can simplify your life, regardless of your computer applications.

Running Word Processing? They give you high speed drafts and Letter Quality. Doing Spread Sheets? You can print 16 Characters-per-Inch to put the whole year on standard 8½-inch wide paper. Or you can go up to 13½-inch paper width if you wish.

Want to mix Word Processing, Math calculations, and Graphics? No problem. The new B-Versions handle text, math symbols (including super- and sub-script), complex

graphics, mid-line font changes, and underlining... the simplified programming and buffer memory is almost like getting a second computer free.

But with all that's new, some things haven't changed. The Anadex commitment to service and support. For example, any Anadex customer can call our toll-free numbers and get technical help. For as long as he owns the printer.

The new, B-Version Silent/Scribes. Now the highest quality matrix printers just got even better. Call us to arrange a demonstration.

Call (800) 4 ANADEX
In California 800-792-9992

 **Anadex**
©Copyright 1983, Anadex, Inc.

MADE IN
USA
FOR THE WORLD

**The more you know printers,
the more you'll like Anadex.**

ANADEX, INC. • 1001 Flynn Road • Camarillo, California 93010 • Telephone: (805) 987-9660 • TWX 910-494-2761
U.S. Sales Offices: Irvine, California (714) 557-0457 • Schiller Park, Illinois (312) 671-1717 • Wakefield, Massachusetts (617) 245-9160
Hauppauge, New York, Phone: (516) 435-0222 • Atlanta, Georgia, Phone (404) 255-8006 • Austin, Texas, Phone: (512) 327-5250
ANADEX, LTD. • Weaver House, Station Road • Hook, Basingstoke, Hants RG27 9JY, England • Tel: Hook (025672) 3401 • Telex: 858762 ANADEX G
ANADEX GmbH • Behringstrasse 5 • 8752 Mainaschaff • W. Germany • Tel: 011-49-06021-7225 • Telex: 4188347

Listing 1: The numbertest program verifies that input characters are valid numbers.

```
(* $r-*)      (* Turn range checking off since we know what we're doing. *)
PROGRAM numbertest(INPUT, OUTPUT);

(*
                                David F. Hinnant
                                Michael B. Smith
                                5-Jan-83
*)

TYPE
  typechoices = (realnumber, innumber, nonumber);
                (* We either have a real, an integer, or garbage *)
VAR
  result : REAL;
  inputkind : typechoices;
  buff : STRING;

PROCEDURE numberize(VAR number : REAL; VAR numtype : typechoices;
                   buffer : STRING);

(*
  This procedure accepts an input string, and parses it to produce a
  number. The number can be either a real or an integer. The returned
  boolean variable 'input' contains the type of the number. If the input
  string contains doesn't contain a decimal point, it is assumed to be an
  integer. The variable 'buffer' contains the input string. The variable
  'number' contains the valid parsed number, if any.
*)

CONST
  radix = 10;                (* We are working with base 10 numbers hopefully *)
  decimal='.';

VAR
  sign, power, position, len, scale : INTEGER;
  negpower : BOOLEAN;
  expset, opset : SET OF CHAR;

BEGIN
  expset := ['e','E'];      (* valid identifiers for scientific notation *)
  opset := ['+', '-'];      (* valid sign operators *)
  numtype := nonumber;      (* initially assume input is invalid *)
  number := 0.0;
  power := 0;
  scale := 0;
  position := 1;            (* Start with the first character *)
  sign := 1;                (* Initially assume that the number is positive *)
  negpower := false;        (* Initially assume power (if any) is positive *)

  len := length(buffer);    (* Get the length of the input string *)
  if len > 0 then          (* If we have something, then parse it *)
  BEGIN
    IF buffer[position] IN opset THEN
      BEGIN
        (* First character is a sign operator *)
        IF buffer[position] = '-' THEN sign := -1; (* Number may be negative *)
        position := position + 1; (* Go to the next position in the input *)
      END;
    IF buffer[position] IN ['0'..'9'] THEN
      BEGIN
        (* First character is a valid digit *)
```

Listing 1 continued on page 432

*SOFTWARE DEVELOPERS
SPRING INTO ACTION!*

*LIST YOUR SOFTWARE
IN THE KAYPRO SOFTWARE DIRECTORY
FREE*



A great opportunity to increase your marketing channels by listing in The Directory distributed throughout the International Kaypro Dealer Network—at no cost to you!

Fill out the attached coupon, or just send your company name and mailing address to: Kaypro Software Directory/533 Stevens Ave./Solana Beach, CA 92075, and we will send you a directory application description form.

Please send me an Application Description Form for my free listing in the Kaypro (portable and desk-top microcomputer) Software Directory.

Company Name: _____

Street: _____ City: _____ State: _____ Zip: _____

Phone: () _____ Attention: _____

Software Specialty: _____

Operating Systems Featured: _____

Software Author Distributor Systems House

Include Kaypro Systems Specifications with form

Send to: Kaypro Software Directory/533 Stevens Ave./Solana Beach, CA 92075

```

numtype := intnumber; (* Number could be an integer *)
REPEAT
  number := radix * number + Ord(buffer[position]) - Ord('0');
  (* Translate the character into a number using 'Ord()' *)
  position := position + 1;
UNTIL (position > len) OR (NOT(buffer[position] IN ['0'..'9']));
(* Keep translating until we run out of characters or input is invalid *)
END;
IF position <= len THEN
BEGIN
  (* We have something left to work with *)
  IF buffer[position] = decimal THEN
  BEGIN
    (* We have encountered a decimal point *)
    numtype := realnumber; (* Number isn't an integer, but may be real *)
    position := position + 1;
    WHILE (position <= len) AND (buffer[position] IN ['0'..'9']) DO
    BEGIN
      number := radix * number + ord(buffer[position]) - ord('0');
      position := position + 1;
      scale := scale+1; (* Count digits past the decimal point *)
    END;
  END;
  IF buffer[position] IN expset THEN
  BEGIN
    (* We have encountered a scientific notation marker *)
    position := position + 1;
    numtype := realnumber; (* All scientific notation is real *)
    IF buffer[position] = '+' THEN position := position + 1;
    IF buffer[position] = '-' THEN
    BEGIN
      (* Scientific notation has a negative power of 10 *)
      position := position + 1;
      negpower := true;
    END;
    WHILE (position <= len) AND (buffer[position] IN ['0'..'9']) DO
    BEGIN
      power := radix * power + ord(buffer[position]) - ord('0');
      position := position + 1;
    END;
  END;
  END;
  WHILE scale > 0 DO
  BEGIN
    (* Move the decimal point to the correct position *)
    number := number / radix;
    scale := scale - 1;
  END;
  IF negpower THEN
  WHILE power > 0 DO
  BEGIN
    (* Divide by radix to compute the correct power *)
    number := number / radix;
    power := power -1;
  END
  ELSE WHILE power > 0 DO
  BEGIN
    (* Multiply by radix to compute the correct power *)
    number := number * radix;
    power := power -1;
  END;
  END;
  number := number * sign; (* Now give the number the correct sign *)
  IF (position <= len) OR (len = 0) THEN numtype := nonnumber;
END; (* numberize *)

BEGIN
  WHILE TRUE DO
  BEGIN
    Write('input? >');

```

Listing 1 continued on page 434

Shakespeare had every gift for writing. Except one.

The FinalWord.

As the Bard himself would have said, "that which we call word processing will never be the same."

Because The FinalWord turns tough writing jobs into play. With an arsenal of word processing commands so powerful, you're free at last to concentrate solely on having great ideas. While The FinalWord concentrates on making them look good on paper. You never format. You only think.

In fact, one reviewer called The FinalWord "the thinking person's word processor."


Here's something else to think about. With The FinalWord, you never have to worry about losing your deathless prose to a system crash or power failure. Because The FinalWord continuously saves it.

See The FinalWord in action at your local computer store. Who knows? It could even determine whether your next masterpiece is to be or not to be.

The FinalWord

Finally, word processing becomes thought processing.

Circle 402 on inquiry card.

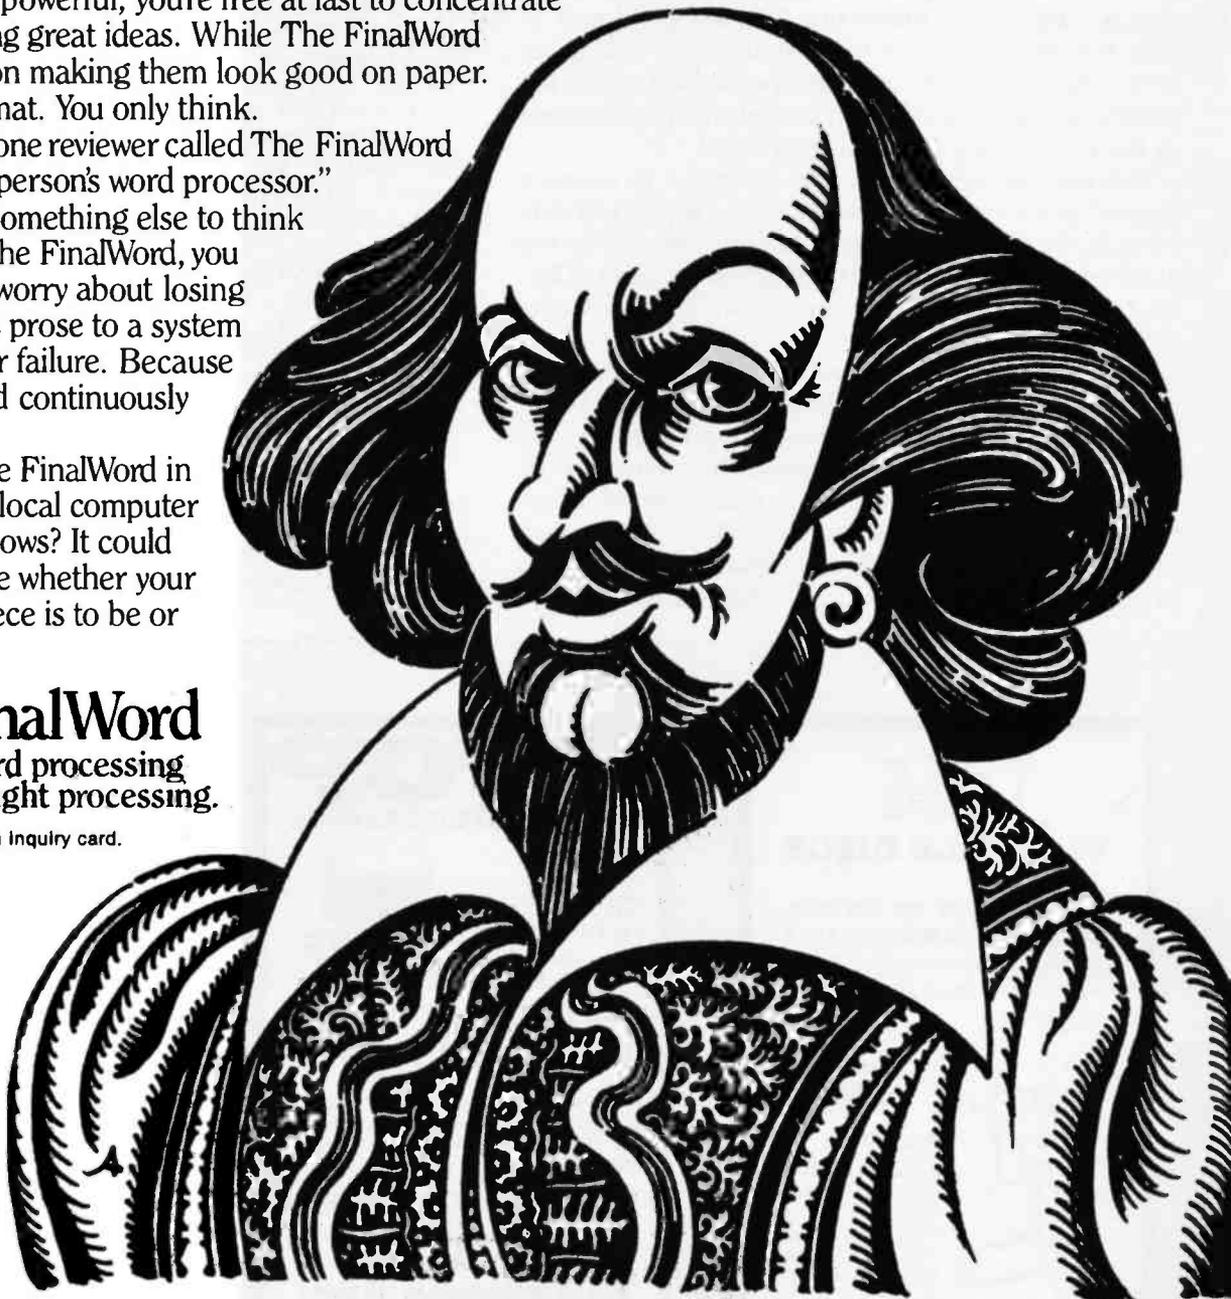

Mark of the Unicorn
222 Third Street
Cambridge, MA 02142
(617) 576-2760

Listing 1 continued:

```
Readln(buff);
numberize(result, inputkind, buff);
CASE inputkind OF
  realnumber : Writeln('The number is ', result, ' and is real. ');
  intnumber  : Writeln('The number is ', trunc(result), ' and is an integer. ');
  nonumber   : Writeln(' ', buff, ' is not a number. ');
END
END;
END.
```

The length of the string is obtained, and the index pointer to individual characters within the string is set to point to the first character. The WHILE-DO loop does the work and operates as follows. First, the character is tested to see if it is a counting number. Then the value of the index is tested to see if it is less than the length of the character string. If both tests are passed, the first digit is computed by subtracting the ordinal value of '0' from the ordinal value of the first character. The index is incremented and the tests are performed again; the process repeats until either an invalid character is found or the entire string has been processed.

This parsing algorithm can be extended to accept a decimal point, optional plus and minus signs, and data input in the form of scientific notation as shown by the numberize procedure in the numbertest program of listing 1. Listing 2 shows sample input and output from the program.

We have found only one problem with this program: in any operating system, underflow and overflow conditions are possible, and we have not guarded against them here. You should either take care not to exceed the limits of your implementation, or modify this algorithm to protect against overflow and underflow. We have successfully used variations of this program for several years in places where error-free data input is critical. ■


Listing 2: Trial input characters and the numbertest program responses.

```
input? >4.5
The number is 4.50000 and is real.
input? >4567
The number is 4567 and is an integer.
input? >3.4
The number is 3.40000 and is real.
input? >3.4000
The number is 3.40000 and is real.
input? >hi there
" hi there " is not a number.
input? >3.4e-10
The number is 3.40000E-10 and is real.
input? >1.2345E+12
The number is 1.23450E12 and is real.
input? >34.34e-03
The number is 3.43400E-2 and is real.
input? >+45
The number is 45 and is an integer.
input? >-34e-01
The number is -3.40000 and is real.
input? >
```

David F. Hinnant (2300 Avent Ferry Rd., Apt. G5, Raleigh, NC 27606) holds a B.S. degree in physics and is a Unix systems analyst with ITT Telecommunications. Michael B. Smith (2504-A East 3rd St., Greenville, NC 27834), a systems programmer at East Carolina University Computing and Information Systems, is a senior in applied physics at ECU.

FLEXIBLE DISCS

WE WILL NOT BE UNDER-SOLD!! Call Free (800)235-4137 for prices and information. Dealer inquiries invited and C.O.D.'s accepted.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. In Cal. call
(800)592-5935 or
(805)543-1037

Circle 284 on Inquiry card.

STOP

FOR GREATER SAVINGS

NEC 8200

Portable Computer

SAVE 26%

LIST \$799

OUR PRICE **\$591.26**

Shipped From Stock



OKIDATA 92A SAVE 40%

LIST \$699

OUR PRICE

\$419.40

All orders shipped immediately. Add 3% for shipping & insurance (Foreign orders add 10%). Add 4% for VISA/MC/ American Express.

NEVADA COMPUTER

(702) 451-9275

Box 50030, Henderson NV 89015

Circle 269 on Inquiry card.

THE 15 MINUTE MICROPROCESSOR TROUBLESHOOTER



The N.W.S. Diagnostic Driver and S/A

You don't need to be a highly skilled technician to use the N.W.S. μ T1000 Signature Analyzer and custom Diagnostic Drivers to troubleshoot your microprocessor-based equipment to the failing component. Typically failing devices can be located within 15 minutes.

Diagnostic Drivers are available for many computers currently on the market.

The μ T1000 Signature Analyzer is extremely accurate and can detect a faulty data stream 99.998% of the time. Call or write for more information on the μ T1000 Signature Analyzer and custom Diagnostic Drivers.

NWS

P.O. Box 62 Westminster, MD 21157
(301) 848-4828

Circle 144 on Inquiry card.

The IBM Personal Computer Work Station. It's optional. (But essential.)

Now, we could hard-sell you on its features. Or we could soft-sell you on its virtues. Instead, we're going to level with you.

You don't have to buy it.

But we have a hunch that the more you know about the IBM Synergetix® PC Work Station the more you'll wonder how your business ever managed without it.

Necessity was surely the mother of this invention.

For as more and more businesses come to rely on the personal computer, new and extraordinary demands are being placed on the work environment itself.

The IBM PC Work Station was specifically developed to meet the challenges of today's technology. And scientifically designed to satisfy the various needs of the people who use it.

It's not just another pretty desk.



First and foremost, the IBM PC Work Station provides a convenient and compact work space that instantly opens up to expand your work area.

In addition, the IBM PC Work Station offers added mobility for your personal computer. So you get more mileage out of your investment as it moves from office to office, person to person, solving problem after problem.

And since your personal computers are as vulnerable as they are valuable, the IBM PC Work Station also functions as a security device.

It deters pilferage by providing a self-contained lockable storage compartment for your CPU, software, keyboard, printer, program books and diskettes.

It also protects valuable information, prohibiting unauthorized access to confidential computer data by keeping it all secure under lock and key.

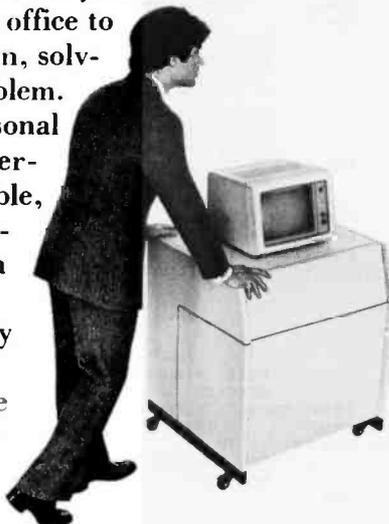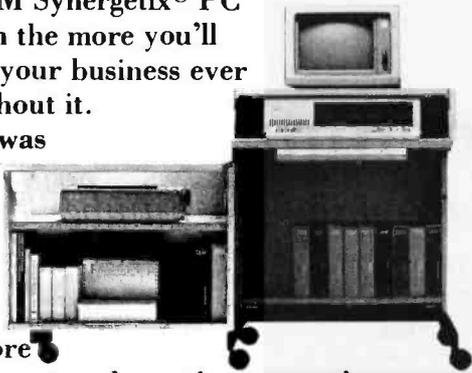

Last but not least, the IBM


PC Work Station is human-factor engineered to meet IBM's strict ergonomic standards for operator comfort.

For as you know, the more comfortable

people are, the more productive they can be.

There's one more important feature to our PC Work Station. It comes equipped with the added assurance of IBM quality. But then, that comes standard on all IBM products.

If all this hasn't convinced you that our PC




Work Station is as essential as it is exceptional, we're sure the price tag will. And IBM's quantity discounts make it absolutely irresistible.

The IBM Personal Computer Work Station—business people are finding it's one of those luxuries they just can't live without.

You can order from IBM Product Centers and ComputerLand® stores. Or call *IBM Direct* toll free at 1800 IBM-2468 Ext. 40.

New model available for larger printers.

IBM®

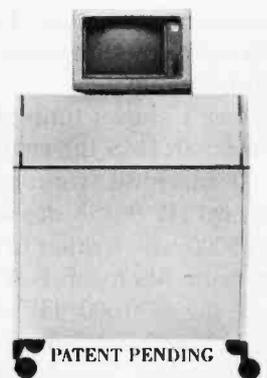

IBM PERSONAL COMPUTER WORK STATION		40
For more information, mail to: IBM Corporation, Attn: <i>IBM Direct</i> , One Culver Road, Dayton, New Jersey 08810		
NAME _____	TITLE _____	
COMPANY _____	TELEPHONE _____	
ADDRESS _____		
CITY _____	STATE _____	ZIP _____

Favorite Benchmarks

Discrete Fourier transforms test your computer's number-crunching ability

by Jeffrey L. Star

One of my favorite benchmarks is based on the calculations loop from a DFT (discrete Fourier transform) program.

The DFT algorithm is one of many in the arsenal of time-series analysis techniques. In my work, I sometimes need the DFT, and I have versions of this algorithm running on everything from S-100 bus machines to a DEC (Digital Equipment Corporation) VAX 11-780.

The code in listing 1 is a good test of the mathematics functions of a computer, particularly transcendental functions. The routine is basically two nested loops, with a final calculation of the square root of the sum of squares of trigonometric functions. Depending on the nature of the data you might feed to this calculation, the processing time can be decreased dramatically. Of course, for the purposes of a *benchmark*, this misses the point entirely.

Table 1 shows timings for this routine on two machines: an IMS International IMS5000 (a 4-MHz Z80A S-100 machine, running CP/M 2.2) and a Hewlett-Packard HP 9845A desktop computer. The code on the IMS5000 was written in CBASIC, CB-80, and in single-precision Microsoft FORTRAN-80. It's amusing to note that the \$30,000 HP desktop computer (which is marvelous for a variety of tasks, but not suited for plain number-crunching because of its BASIC-in-ROM interpreter) is faster than the \$5000 IMS5000's pseudointerpretive CBASIC (version 2) but slower when compared with compiler Microsoft FORTRAN-80. (A word of caution: both CBASIC and CB-80 use double-precision real-arithmetic, which explains their slow speeds.)

As table 1 illustrates, the time the routine takes increases roughly at the same rate as the square of the number of points. For some of the tasks I have to do around the lab, I need to calculate a 400-point DFT, which would take more than 12 hours using CBASIC! ■

Number of Data Points	IMS5000			
	HP 9845A	CBASIC	FORTTRAN-80	CB-80
10	< 4	24	< 3	15
20	15	100	11	67
40	74	443	44	285

Table 1: Timing measurements taken when running the benchmark shown in listing 1. Times are in seconds.

Listing 1: The benchmark algorithm expressed in CBASIC 2. The algorithm for this benchmark is actually the calculation loop from a DFT program and is especially useful when you're testing the mathematical functions employed by a system.

```

REM * PROGRAM DFT - CBASIC 2
REM * TIMING BENCHMARK FOR DISCRETE FOURIER TRANSFORM
REM * J.L. STAR
REM * APRIL 1981
INPUT "What is the ORDER of the TEST? ";N%
DIM D(N%),F(N%)
X1 = 0. : X2 = 1.
I = 1. : N = FLOAT(N%)
D = (X2-X1)/(N-1.0) : W1 = 0. : W2 = 3.1415926/(D*I)
W3 = W2/(N-1.0) : B = 0. : T = 0.
PRINT "*** CREATING DATA VECTOR ***"
FOR I% = 1 TO N%
  D(I%) = SIN(I%) + RND/3.
NEXT I%
INPUT "HIT (RETURN) TO BEGIN CALCULATIONS.....";LINE DUMMY%
PRINT CHR$(7)
FOR I% = 1 TO N%
  W = W3*FLOAT(I%-1) : C1 = 0. : S1 = 0.
  FOR M% = 1 TO N%
    G = W*(X1 + FLOAT(M%-1)*D)
    C1 = C1 + D(M%)*COS(G)
    S1 = S1 + D(M%)*SIN(G)
  NEXT M%
  F(I%) = SQR(S1*S1 + C1*C1)*D
NEXT I%
PRINT CHR$(7) : PRINT "** CALCULATIONS FINISHED **"
PRINT " TRANSFORM" : PRINT
FOR I% = 1 TO N%
  PRINT USING " *** *****";I%,F(I%)
NEXT I%
END
    
```

Dr. Jeffrey L. Star is a development engineer in remote-sensing research at the University of California (Santa Barbara, CA 93106).

Do You Run Your Business OR DOES IT RUN YOU?

The biggest headache you may be facing these days is getting better control of your business. Tracking unpaid bills, sending out second billings, monitoring which salesman sold how much and to whom, keeping track of inventories, and on and on.

There's a remedy. It's called VersaForm... the business database.

VersaForm is a powerful database designed specifically for business, but based on the simplicity and convenience of your familiar business forms.

If you can fill out a business form, you can create a database.

VersaForm starts with your existing forms and procedures. As you copy your forms onto the screen, VersaForm automatically creates a database for you. It records and saves information from Purchase Orders, Invoices, Job Estimates, Disbursement Ledgers... maybe even a few things you're not recording that you should be.

VersaForm is an electronic file cabinet that will store all this information, yet have it at your fingertips when you need it! It's designed with a non-technical user in mind, so you can concentrate on streamlining your business with none of the usual database headaches.

Adapts to your business... your way.

With VersaForm you don't have to completely re-orient your staff. It fits right into the way you're doing business now. Only now your operations will be completed more efficiently and with electronic speed.

- A doctor in Moulton, Texas, posts his patient billing and completes his medical insurance forms with VersaForm.
- A small college in Wheaton, Maryland, uses VersaForm to create tuition invoices, class lists, accounts

receivable, and accounts payable.

- A computer supplies company in Mountain View, California, writes payables checks and does expense distribution with VersaForm.

VersaForm has the power to do these jobs and more because it's designed especially for business. It can also calculate taxes and prices, and can look up discounts, so you don't have to. VersaForm will even print on your own pre-printed forms.

Pull information together fast.

Pulling information together from paper files can be time-consuming and frustrating. Why make it tough? VersaForm puts vital reports like sales analyses, overdue payables, open purchase orders, and alphabetical employee lists at your fingertips. Minimum effort, maximum results.

All in one easy-to-use, integrated package.

VersaForm provides a screen formatter, a data entry program, a database, a report generator and a forms printer. And you can purchase pre-designed Templates for standard jobs like Purchasing, Invoicing, and Expense Journals. VersaForm is the all-in-one business productivity tool. Ask for a demonstration at your computer dealer. Or contact us directly.



- A roofing company in Green Bay, Wisconsin, computes job estimates, contracts, invoicing, and tracks actual costs with VersaForm.
- A manufacturer in Beaver Falls, Pennsylvania, uses VersaForm to build his company's parts records, and generates "where-used" lists.

VersaForm™

New! IBM PC/XT Release

- DOS Files
- Hard Disk Support

If you want to know more, send in this coupon. We've got a lot to tell you about.

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Type of Business _____

Mail to: Applied Software Technology
170 Knowles Drive
Los Gatos, California 95030
(408) 370-2662

142-E

For use with the Apple II, IIe and III, and the IBM PC and compatibles.

Ask BYTE

Conducted by Steve Ciarcia

Apple Robotics

Dear Steve,

I am a 16-year-old Norwegian computer enthusiast who wishes to express his gratitude for your continuous inspiration. Living on the outskirts of computerdom, it often takes months for the latest news to get here.

I am presently planning a robot language and simulation on, and for, the Apple II Plus as a study project. My ambitious goal is to incorporate the Motorola MC68000. I also hope to have a dual operating system—voice/keyboard—as a part of the program.

I would like to have a few questions answered. How can the 68000 be incorporated in the Apple, and which high-level languages are available or can be applied? (I hope to write part of the program in Pascal.) With the chips now available, which is the best speech-recognition and speech-output setup for the Apple?

Thank you for any information you might have on these topics and for keeping the rest of the world in touch.

Erik Edward Syring
Sandvika, Norway

Digital Acoustics has a series of products and boards that interface the Motorola MC68000 to the Apple II. Various utility programs are available to interface some high-level languages. For further information, write the company at 1415 East McFadden, Ste. F, Santa Ana, CA 92705, (714) 835-4884.

There is no "best" speech-output system for the Apple. It depends on the intended application. If a large vocabulary is desired and speech quality is of secondary importance, a

phoneme-type speech synthesizer is best. If extreme clarity of a limited number of words is desired, LPC (linear predictive coding) is the choice. If accents and music are required, an adaptive differential pulse code modulation system is worth considering. . . . Steve

New Zealand TV Standards

Dear Steve,

I have a homebrew computer with hexadecimal keypad entry and LED output. I want to convert it into a simple and inexpensive terminal by connecting it to a TV receiver. It would be easy to get a TV display using a 6847 display generator chip and an RF modulator except that the 6847 uses NTSC timing, and I don't want to modify the timing on my PAL-system TV set.

I am sure that a solution to this problem is available because the Radio Shack Color Computer, which uses the 6847, has a New Zealand version. I would appreciate your help.

Michael Stubbs
Auckland, New Zealand

The NTSC timing in the 6847 display generator chip can be modified for use with the PAL TV system. An article in the November 20, 1980 issue of EDN magazine shows what is required. "Display Generator Chips Implement Smart Terminals" by Bissmire, Farrell, and Fletcher (pages 161-173) describes a complete smart terminal built around the Motorola MC6808 microprocessor and a 6847 display generator. Modifications for the PAL system are also presented. . . . Steve

Dvorak Terminals?

Dear Steve,

As you are probably aware, many people are interested in the Dvorak keyboard layout because it is more efficient than the Qwerty design. Many people are converting to typewriters with the new layout, and some people want it on their computer systems. I have heard that some terminal manufacturers offer it as an option. Do you know of any such manufacturers? Thank you for your assistance.

Norman S. Frye
Grants Pass, OR

The Spring 1983 Peripherals Digest issue of Mini-Micro Systems featured a product guide on alphanumeric terminals, listing some of their pertinent specifications. A column entitled "Special Features" was patently lacking in any reference to a Dvorak simplified keyboard (DSK) option. Manufacturers that boast an "ergonomic" design apparently do not consider DSK as ergonomic. However, this layout is gaining in popularity, and many typewriter manufacturers, such as Remington, Smith-Corona, Royal, and IBM, offer such an option. It will not be long before the major terminal manufacturers join the crowd.

Write to some of the terminal manufacturers, requesting this option. They may offer it upon request but do not want to appear "revolutionary" by advertising it. . . . Steve

Apple Chips

Dear Steve,

I have an Apple II and an Amdek Video 300 monitor. The top five lines of the dis-

play don't line up with the other lines to form a straight column. By using the horizontal hold, I can get them to come close, the top line being 1½ characters off and the fifth line off only a little.

I tried a friend's Amdek Video 300, and the display was the same. I then tried my monitor on his Apple II Plus and the display was perfect. Also, when I hook up the color TV I formerly used, I have a hard time getting the color to come in satisfactorily. The color TV works okay on a normal TV station.

Do you have any suggestions on chips I can try replacing before I take my Apple in to be fixed?

Dave Partyka
Lorain, OH

The video problem with your Apple II is caused by a problem in the horizontal-synchronizing circuitry. The Apple uses a 14.318-MHz crystal oscillator as its master clock and divides the output down to generate, among others, the color subcarrier (3.58 MHz) and the horizontal line rate (15.734 kHz). This is accomplished by four 74LS161 counters labeled D11 through D14 on the motherboard. Refer to page 89 of the Apple II Reference Manual for chip locations using this index. In addition, the output signals from the counters are processed through chips B14, B13, A12 (74LS02), and many others.

First, check the 74LS161 counters by substitution and note any difference. Swapping with other chips of the same type on the board is a convenient way. Note any changes, and the defective chip perhaps can be isolated. Without the use of an oscilloscope, additional suggestions are not practical. If these tests are not fruitful, the best recourse is an authorized Apple

CompuPro...

for Performance, Quality and Reliability

Anyone can sell you a box full of hardware. But is it too much computer? Too little? Will it run the appropriate software? What about service? If you need the right answers before and after the sale, call your nearest Full Service CompuPro System Center. For product information, see pgs. 25 & 401.

ALABAMA

Birmingham
Cost Plus Computers
(205) 879-5976

ARIZONA

Scottsdale
S-100
(800) 528-3138

CALIFORNIA

Bakersfield
Creative Computing Serv.
(805) 835-1118

Berkeley
American Computers
& Engineers
(415) 849-0177

Track Computer Center
(415) 845-6366

Burlingame
Mentzer Computer
Systems
(415) 340-9363

Canyon Country
Creative Computing Serv.
(805) 251-9877

Carmichael
Logic Systems
(916) 971-3133

Chatsworth
Priority One Electronics
(213) 709-6789

Hayward
Best Computers Hayward
(415) 886-4732

Irvine
Priority One Electronics
(714) 660-1411

Los Angeles
American Computers
& Engineers
(213) 477-6751

**Gifford Computer
Systems**
(213) 477-3921

Mountain View
ACC
(415) 969-4969

Oakland
Track Computer Center
(415) 444-8725

Pacific Palisades
System Interface
Consultants
(213) 454-2100

Pasadena

Omni Unlimited
(213) 795-6664

Petaluma
Advanced Information
Management
(707) 763-7283

Pleasanton
Best Computers
Stoneridge
(415) 463-2233

Sacramento
Logic Systems
(916) 922-3377

San Francisco
Gifford Computer
Systems
(415) 391-4570

San Leandro
Gifford Computer
Systems
(415) 895-0798

San Rafael
Computer House
(415) 453-0865

Santa Barbara
Data Bank
(805) 962-8489

Santa Maria
Data Bank
(805) 922-1333

Santa Rosa
Matrix Computers
(707) 542-0571

Sunnyvale
Pragmatic Designs Inc.
(408) 736-8670

COLORADO

Lakewood
Rocky Mountain
Microsystems
(303) 232-4545

FLORIDA

Brandon/Tampa
Micro Computer
Technology
(813) 685-7659

Orlando

Data/Office
(305) 629-6776

Satellite Beach
Binary Magic, Inc.
(305) 777-7080

HAWAII

Kahului Maui
Capacity Plus
Computers
(808) 877-3496

ILLINOIS

Athens
Computers Plus
(217) 636-8491

La Grange Park
Small Business
Systems Inc.
(312) 579-3311

Skokie
Lillipute Computer
Mart Inc.
(312) 674-1383

MARYLAND

Bethesda
JR Systems
(301) 657-3598

MASSACHUSETTS

Boston
New England
Electronic Exchange
(617) 491-3000

Chestnut Hill
Key Micro Systems
(617) 738-7306

MISSISSIPPI

Pascagoula
Automated Accountants
(601) 769-2937

NEW YORK

Amherst
Gifford Computer
Systems
(716) 833-4758

Deer Park
Datapro Systems, Inc.
(516) 595-1311

New York

Park Plaza Computer
Center, Inc.
(212) 759-5820

Park Plaza Computer
Center, Inc.
(212) 505-8200

Park Plaza Computer
Center, Inc.
(212) 344-5151

Park Plaza Computer
Center, Inc.
(212) 595-5353

Staten Island
John D. Owens Assoc.
(212) 448-6283

NORTH CAROLINA

Greensboro
General Semantics
Computers
(919) 378-1500

OREGON

Portland
Microwest Computer
Products
(503) 238-6274

PENNSYLVANIA

Philadelphia
Information Network
Systems
(215) 364-8220

RHODE ISLAND

Coventry
Key Micro Systems
(401) 828-7270

TEXAS

Austin
CPA Systems, Inc.
(512) 458-9281

Informa, Inc.
(512) 459-4216

Dallas
Dator Systems
(214) 521-0915

Fl. Worth
Dataworth Computer
Systems
(817) 877-4041

Houston

Gifford Computer
Systems
(713) 680-1944

Informa, Inc.
(713) 861-7612

Seguin
CPA Systems, Inc.
(512) 379-0660

VIRGINIA

Woodbridge
Office Networks Corp.
(703) 690-3312

WASHINGTON

Bellevue
North Ridge
Computer Systems
(206) 453-0596

Seattle
American Computers
& Engineers
(206) 583-0130

WISCONSIN

Greenfield
Byte Shop
of Milwaukee
(414) 281-7004

Madison
Beam International
(608) 255-2325

AUSTRALIA

Bankstown
Automation Statham
Pty., Ltd.
(02) 709-4144

CANADA

Coquitlam, B.C.
CSC System Center Ltd.
(604) 941-0622

Vancouver, B.C.
Dynacomp Business
Computers Ltd.
(604) 872-7737

THE PHILIPPINES

Quezon City
Corona International Inc.
78-34-71

UNITED KINGDOM

Swansea
Comcen Technology Ltd.
(0792) 796000

CompuPro®

A GODBOUT COMPANY

3506 Breakwater Court, Hayward, CA 94545

dealer. Sync problems can be nasty! . . . Steve

S-100 Advice

Dear Steve,

I want to gradually upgrade my present Exidy Sorcerer system. The first thing I need is an S-100 enclosure. I've looked at a lot of them, but I'm not sure which is best. Can you offer some advice? Thanks.

Walter Jeffries
Hanover, NH

S-100 mainframes consist of a motherboard, power supply, and cabinet. The better mainframes pay careful attention to each of these components. The motherboard should be made from high-quality fiberglass-epoxy material and have heavy-gauge copper traces. The trace areas for the power conductors should be wide enough for the anticipated current requirements. Shielded boards are preferred because they reduce RF radiation and cross talk. There should be either an active or passive termination of the bus lines to minimize noise and sufficient sockets for all anticipated additions. Extra sockets allow increased spacing of those cards that generate excessive heat or interact with adjacent boards.

The power supply should have sufficient capacity (usually 20 amps or greater) and be well filtered to reduce ripple. It should be properly fused and incorporate a line filter to eliminate transients and RFI. Premium mainframes include constant voltage transformers to improve regulation.

The cabinet itself should be of sturdy construction, include a fan to remove heat, and have a sufficient number of cutouts on the rear panel to accommodate serial and parallel connectors. AC convenience outlets are an added feature.

In general, you get what you pay for. . . . Steve

Secondhand Arcade Gear

Dear Steve,

At the local video arcades, I've noticed that some older machines are for sale. Would it be worthwhile to purchase one of these with the intent of improving or modifying the existing game? Is this possible for someone who is not an electrical engineer? Also, are these machines generally too dedicated to gaming for easy modification to serve a more general purpose?

David Young
Springfield, MO

Picking up used electronic equipment at bargain prices and investigating the mysteries of the machine can be a rewarding or a frustrating experience, depending on your purpose.

It can be rewarding from the standpoint that a lot can be learned by studying the designs of these pieces of equipment and what makes them work. It can also be frustrating because schematic diagrams are usually not available and any software built into the system cannot easily be decoded.

It may not be an impossible task to perform some simple modifications to a particular video game, but it will certainly be time-consuming, and you may wind up being a self-taught electrical engineer before you finish.

With the recent drop in prices of computers and home video games, it may cost more to modify an older video game than to purchase one new, depending on the type of game. . . . Steve

Apple + Heath

Dear Steve,

I recently completed a Heath H-89 and want to run Apple software on it. Is there a commercially available 6502 board that will work in my

H-89? If not, is there an easy way of modifying the commonly available 6502 boards?
Aris Espejo
Ft. McMurray,
Alberta, Canada

I am not aware of a commercial product that will enable Apple II programs to run on your Heath H-89 computer. Adding a 6502 microprocessor board to the H-89 may allow programming in 6502 language, but the memory map would not be correct for Apple programs. The Apple makes extensive use of its monitor ROM programs and bit-mapped graphics. Your H-89 is configured as a terminal with character-mapped rather than bit-mapped graphics, so they would not be compatible.

Because much of the Apple operation is software controlled, it is easy to convert the Apple to run other processors by plugging in cards. The Apple functions, in effect, as a bit-mapped graphics terminal for the plug-in card. Going the other way is much more difficult. . . . Steve

Power Supply Considerations

Dear Steve,

I am trying to put together a system based on the S-100 bus. I have a commercial power supply that puts out +8 V at 25 A, +16 V at 3 A, and -16 V at 3 A. The power supply has no overvoltage or overcurrent protection. How important are these protective circuits? Is there a company that supplies them? Can you give me a simple design? Thanks.

Don Carlton
Hanahan, SC

Overvoltage and overcurrent protection in any system are always trade-offs between the price you want to pay for protection devices and the price you will pay if a failure occurs.

In an unregulated supply like the one you describe, the risk of

an overvoltage situation is low if the input voltage remains within nominal tolerances. A commercial surge suppressor on the input to your supply should add sufficient protection from voltage surges in the AC line. A heavy-current supply like this one should also be properly fused on the primary side of the supply and on each DC supply.

Surge suppressors are sold by several advertisers in BYTE, such as Advanced Computer Products and Priority One Electronics.

In an S-100 bus system, some protection is also offered by the distributed voltage regulators on each card. The three-terminal regulators usually used for this application have built-in current limiting and can operate over a large input-voltage range. If you are concerned about a particular board, you could add an overvoltage sensor on board for extra protection. These devices monitor the supply voltage and fire a crowbar SCR (silicon-controlled rectifier) in the event of an overvoltage situation. You can find an overvoltage sensor at Radio Shack stores. . . . Steve

A German Commodore

Dear Steve,

I would like to buy a Commodore 64 with a disk drive. Next summer, however, I will be returning to Germany where electrical and TV standards are different. I know Commodore sells an appropriate version of this computer in Germany, but I don't want to wait that long.

Is there any way to modify the computer or get an adapter so that the American version will run in Germany? It should be no problem to make 110 volts out of 220, but what about 50 Hz out of 60? And is it possible to adapt the TV signal? Thank you very much for your help.

Bernhard Dick
Philadelphia, PA

Are salaries for computer professionals going up?


Find out in our new, free Salary Survey.

No doubt during 1983, you knew that many organizations took a hard line on awarding liberal salary increases.

Yet, on the other hand, did you know that salaries for *some* computer professionals *soared* right on through the uncertain business outlook?

Our 1984 Computer Salary Survey and Career Planning Guide will explain why many computer professionals are able to advance their careers more successfully than others:

- How some professionals—performing the same work and having a similar amount of experience—are earning significantly more than their peers.
- Why some professionals now earn as much as 25% more than they did last year.
- What emerging skills are most in demand and which positions command high salaries now and in the future.
- How size of firm and computer

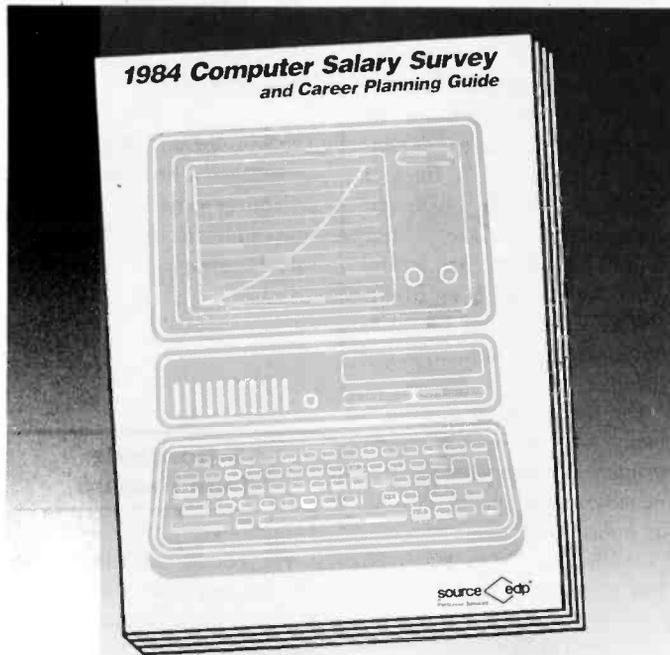

installation greatly affects compensation levels.

The new Survey is based on contacts with more than 44,000 computer professionals and 35,000 organizations. Not only are salary averages for fifty-eight positions reviewed (including ten new ones which we never before covered), but high and low compensation ranges are also covered.

Included are positions in programming, software, systems design, data base/data communications, Edp auditing, operations, computer sales, marketing, marketing support and management.

You owe it to yourself—especially if most of your career lies ahead—to call or write for your free copy today.

source edp
Personnel Services

The world's largest recruiting firm devoted exclusively to the computer profession.

Call Source™ today for your free copy

Is your salary still frozen?

Call the Source Edp office nearest you for a free copy of our new 32-page report. We'll mail a copy to you in strict confidence, without obligation.

If unable to call, write:

Source Edp
Department B1
P.O. Box 7100
Mountain View, CA 94039

When writing, please include your title.

United States:

Alabama	
Birmingham	205 322-8745
Arizona	
Phoenix	602/279-1010
Tucson	602 792-0375
California	
Northern	
Mountain View	415/969-4910
Sacramento	916 446-3470
San Francisco	415/434-2410
Walnut Creek	415 945-1910
Southern	
Fullerton	714/738-1313
Irvine	714 833-1730
Los Angeles/ Downtown	213/688-0041
Los Angeles/ South Bay	213/540-7500
Los Angeles West	213 203-8111
San Diego	619/231-1900
San Fernando Valley	818 781-4800
Colorado	
Denver	303/773-3700

Connecticut	
Danbury	203/797-0590
Hartford	203 522-6590
New Haven	203 787-4595
Stamford	203/329-8411
Stratford	203/375-7240
District of Columbia	
Washington D.C.	202 293-9255
Florida	
Fort Lauderdale	305/491-0145
Jacksonville	904/356-1820
Miami	305 624-3536
Georgia	
Atlanta	
Downtown	404/588-9350
North	404 953-0200
Illinois	
Chicago/E. Loop	312 861-0770
Chicago W. Loop	312 346-1280
Oak Brook	312 986-0422
Rolling Meadows	312/392-0244
Indiana	
Fort Wayne	219/432-7333
Indianapolis	317/631-2900
Iowa	
Des Moines	515/243-0191
Kansas	
Overland Park	913 888-8885
Wichita	316/688-1621
Kentucky	
Louisville	502 581-9900
Louisiana	
Baton Rouge	504 924-7183
New Orleans	504/561-6000
Maryland	
Baltimore	301/727-4050
Greenbelt	301/441-8700
Towson	301/321-7044
Massachusetts	
Boston	617/482-7613
Burlington	617/273-5160
Wellesley	617/237-3120
Michigan	
Detroit	313/259-7607
Grand Rapids	616/459-6539

Lansing	517/484-4561
Southfield	313/352-6520
Troy	313/362-0070
Minnesota	
Minneapolis	
West	612/544-3600
Downtown	612/332-6460
St. Paul	612/227-6100
Missouri	
Kansas City	816/474-3393
St. Louis	314/862-3800
Nebraska	
Omaha	402/346-0709
New Hampshire	
Nashua	603/880-4047
New Jersey	
Cherry Hill	609/482-2600
Edison	201/494-2800
Morristown	201/267-3222
Paramus	201/845-3900
Princeton	609/452-7277
New Mexico	
Albuquerque	505/247-4270
New York	
Albany	518/482-2035
Buffalo	716 835-9630
New York City	
Grand Central	212 557-8611
Penn Station	212/736-7445
Wall Street	212/962-8000
Rochester	716/263-2670
Syosset, L.I.	516/364-0900
Syracuse	315 422-2411
White Plains	914/683-9300
North Carolina	
Charlotte	704/552-6577
Greensboro	919/379-1155
Raleigh	919/847-7605
Winston-Salem	919/724-0630
Ohio	
Akron	216/535-1150
Cincinnati	513/769-5080
Cleveland	216/771-2070
Columbus	614/224-0660
Dayton	513/461-4660
Toledo	419/242-2601

Oklahoma	
Oklahoma City	405/722-7410
Tulsa	918/599-7700
Oregon	
Portland	503/223-6160
Pennsylvania	
King of Prussia	215/265-7250
Philadelphia	215/665-1717
Pittsburgh	412/261-6540
Rhode Island	
Providence	401/751-0065
South Carolina	
Columbia	803/256-7446
Greenville	803/271-7044
Tennessee	
Nashville	615/256-0625
Texas	
Austin	512/479-0720
Dallas	
Central	214/954-1100
North	214/387-1600
Fort Worth	817/338-9300
Houston	
Downtown	713/751-0100
Galleria/Post Oak	713/439-0550
San Antonio	512/342-9898
Utah	
Salt Lake City	801/966-3900
Virginia	
McLean	703/790-5610
Washington	
Seattle	206/454-6400
Spokane	509/838-7877
Wisconsin	
Green Bay	414/432-1184
Madison	608/251-0104
Milwaukee	414/277-0345
Canada:	
Ontario	
Toronto	
Don Mills	416/425-5730
Downtown	416/865-1125
Mississauga	416/848-3344

A unique solution to this problem was described in the January 1983 Ask BYTE column ("Uninterruptible Power Supplies Problem Solved," page 481). The author of the solution, Richard T. Nicholls, used a Tripp Lite power inverter manufactured by Tripp Manufacturing Company to convert a 12-V battery voltage to 110 V, 60 Hz. Using this method, he was able to operate a TRS-80 Model I with no problems. The method also ensures uninterrupted power since it is battery powered. . . . Steve

Centronics Standard Revisited

Dear Steve,

Would you please tell me what the specifications for a Centronics parallel interface are? There seem to be an in-

finite number of devices and computers that use it. My computer doesn't have one, and I would like to put one together. Thank you.

**John G. Lussmyer
Lowell, MI**

The Centronics parallel interface is a de facto standard for a parallel printer port. In its simplest configuration, it consists of eight DATA lines, a STROBE line, an ACK (for acknowledge) line, and GROUND. There are several other signals, such as BUSY, PAPER EMPTY, and SELECT, but they are normally not required.

For the purposes of driving many of the parallel input printers on the market, it is necessary only to wire the lines as indicated below:

Pin	Signal
1	STROBE

- 2 DATA 0
- 3 DATA 1
- 4 DATA 2
- 5 DATA 3
- 6 DATA 4
- 7 DATA 5
- 8 DATA 6
- 9 DATA 7
- 10 ACK
- 16 GROUND

The STROBE and ACK lines are usually active low, but either or both can be active high, in which case an inverter circuit is necessary. . . . Steve

Affordable Tape Backup

Dear Steve,

We converted our office microcomputer (an Altos 8000-15) from floppy-disk to hard-disk storage about nine months ago. We have been using floppy disks for backup, but this has become rather cumbersome. Altos markets a stand-alone tape backup unit, but the price is \$3500.

Does anybody manufacture a reliable after-market tape backup system for \$1000 or less? Thank you.

**C. D. Walker
Germantown, TN**

Pegasus makes a 25-megabyte tape backup system for hard disks that is advertised for \$695. You can contact the company at Pegasus, 2200 West Higgins Rd., Ste. 245, Hoffman Estates, IL 60195, (312) 843-1090.

. . . Steve

High-Resolution S-100 Graphics

Dear Steve,

A large number of color monitors are available for the

IBM PC and its clones but few for S-100 lovers, save some expensive units normally used for basic CAD/CAM applications. Numerous S-100 boards are offered for composite video, but I have been unable to find a suitable S-100 board that will drive an RGB monitor. And inasmuch as I want to configure an S-100 bus machine with an RGB monitor and IBM or Keytronic keyboard, I have a few questions.

First, do you know of an S-100 RGB board that provides, say, 680- by 480-pixel resolution with 16 full-attribute colors? Second, I have considered buying an IBM PC color board with the proper characteristics and kludging it to the S-100 bus, in view of the fact that they both are 8088-based. Do you think that I would face insurmountable problems in doing this, or would a careful mapping of the IBM system-board lines to the S-100 lines suffice?

**Justin Farnsworth
Neully, France**

Cambridge Development Laboratory (100 Fifth Ave., Waltham, MA 02154, (617) 890-8076) markets a board and software that will create high-resolution graphics on an S-100 system. An article describing this system appeared in the November 1982 BYTE. "Cambridge Development Lab's High-Resolution Video Graphics System" by James R. DeKock (pages 148-160) describes the system in detail.

If the rather high price of that system concerns you, you might consider the Microangelo board by Scion. It features 512- by 480-pixel graphics as well as 40-line by 85-character text. It sells for \$795 in single quantities. For further information, write Scion, 12310 Pinecrest Rd., Reston, VA 22091, (703) 476-6100. . . . Steve

P.S. I don't recommend kludges.

MICRO BEE SOFTWARE

Manufacturing licences for the popular Australian designed Micro Bee computer have recently been granted to many companies throughout the world.

MYTEK Computing is the largest and most respected producer of software for the Micro Bee Computer.

MYTEK Computing invites dealers to sample its large and extensive range of Micro Bee Software.

Micro Bee users are also invited to request to be included on MYTEK Computing's free mailing list. Catalogues are air-mailed regularly to all parts of the world.



1 Kent Street, Bicton, 6157, Perth, Western Australia
Telephone: (09) 330 7336

WHY DEC AND INTEL CHOSE THE MARK WILLIAMS C-COMPILER.

DEC and INTEL wanted the best C technology available, with excellent code density, supporting the full C language and their specific operating environments—all at a competitive price.

They found it all at Mark Williams.

WHY YOU SHOULD CHOOSE THE MARK WILLIAMS C-COMPILER.

Our C-compiler supports the dominant 16-bit microcomputers—68000, PDP-11, Z8000, 8086—with a proven reliable, high-technology product. We are shipping versions of C for a large number of environments including CP/M and PC DOS. Both cross and native compilers are available.

Call us for the distributor nearest you. OEM's should contact us directly about their specific requirements.

Mark Williams Company,
1430 West Wrightwood, Chicago, Illinois 60614,
312/472-6659.



European Modem Frequencies

Dear Steve,

I have built your ECM-103 modem (March 1983 BYTE, page 26), and it works fine. The only problem is that it operates only on U.S. frequencies. Is it possible to change it so that it can work on European frequencies?

Bjørn Haaland Tomter, Norway

Texas Instruments has a modem chip designed to work on the European frequencies. The chip number is TMS99534, and it can be obtained from Texas Instruments or its distributors. It uses the same frequency crystal. Write to the company at Texas Instruments, Semiconductor Group, POB 202129, Dallas, TX 75220. . . . Steve

Floppy Disk Use Sans Computer

Dear Steve,

Is there any way to write a Teletype (TTY) signal (110-bps, 20-mA current loop) or an RS-232C signal (300 bps) to a 5¼-inch floppy disk without going through a computer? We have several gamma and liquid scintillation counters that currently output information to TTYS with punch-paper tape. In addition, one gamma counter is a microprocessor-based system that must communicate with the output device.

Because paper tape is an obsolete medium and a paper-tape reader is almost as expensive as the mainframe of our new microcomputer system, we would prefer to use floppy disks to transfer information. One option would be to interface the counters directly into the computer (go on line). How-

ever, we have six such instruments and would have to buy six micros or a minicomputer system with a multi-user operating system.

If we must go through a computer to write a disk, what is the least expensive computer one could use to write in a common disk format (Apple DOS 3.3, CP/M-80, etc.)? This may seem like a trivial question. However, a simple way to write a 5¼-inch floppy disk without going through a computer would have broad application in science and industry.

H. Edward Grotjan Jr. Houston, TX

It is not necessary to interface your equipment through a computer system to store data on 5¼-inch floppy disks, although this certainly can be accomplished with most microcomputers available.

A system called the FDS-100 Minifile can be interfaced to an RS-232C serial port and will store data directly to 5¼-inch floppy disks. The FDS-100 is an intelligent minifloppy-disk system with built-in power supplies and can store up to 179K bytes per disk. The address of the manufacturer of the FDS-100 is Atek NC Corporation, 887 Main St., POB E, Monroe, CT 06468, (203) 268-1839.

Information on the type of disk format used in the FDS-100 should be available from the manufacturer. . . . Steve

RS-232C/RS-422A Interface

Dear Steve,

I have a used IBM 3101 video display that includes only an RS-422A interface. Could you please direct me to a source that shows how I can build an RS-422A-to-RS-232C converter so that I

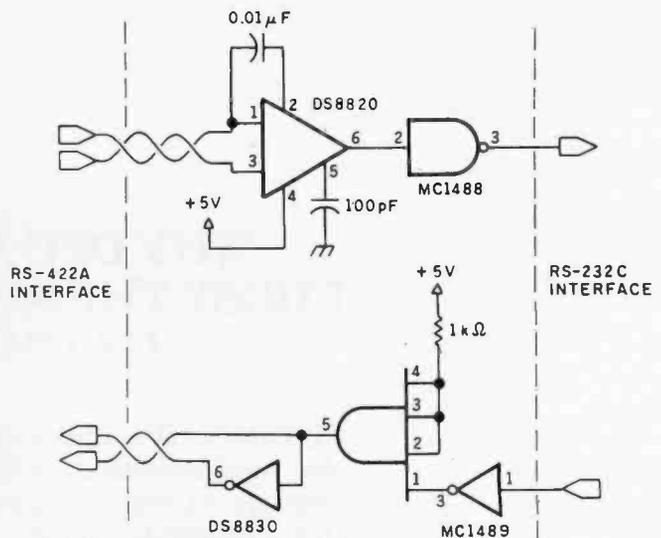


Figure 1: A method for interfacing between the RS-422A and RS-232C standards.

can use the 3101 with my OSI equipment? I also have some IBM boards that output eight RS-422A lines that I would like to use with my RS-232C devices. Any help you can provide will be appreciated.

Keith Brigode Holland, OH

Your problem of communicating between pieces of equipment that contain different interfaces is not uncommon because of the numerous communication standards in use today.


The Electronic Industries Association (EIA) standard RS-422A is an upgraded version of the electrical specifications for the RS-232C interface. The main difference to note for your application is that the RS-422A uses balanced transmission while the RS-232C uses unbalanced transmission.

One method for interfacing between the two standards is shown in figure 1. The balanced transmission output from the RS-422A interface is converted to a TTL signal by a National Semiconductor DS8820 line receiver and then converted to an RS-232C-compatible signal by the MC1488 line driver. In the reverse direction, the RS-232C signals are converted to TTL levels by an MC1489 line driver and then converted to balanced-transmission signals by the DS8830 differential line driver. Proper signal polarity can be obtained by reversing leads at the RS-422A interface.

An excellent description of the differences between the RS-232C and RS-422A interfaces can be found in the article "Welcome to the Standards Jungle" (February 1983 BYTE, page 146).

. . . . Steve

In "Ask BYTE," Steve Ciarcia answers questions on any area of microcomputing. The most representative questions received each month will be answered and published. Do you have a nagging problem? Send your inquiry to:
 Ask BYTE
 c/o Steve Ciarcia
 POB 582
 Glastonbury, CT 06033
 Due to the high volume of inquiries, personal replies cannot be given. All letters and photographs become the property of Steve Ciarcia and cannot be returned. Be sure to include "Ask BYTE" in the address.

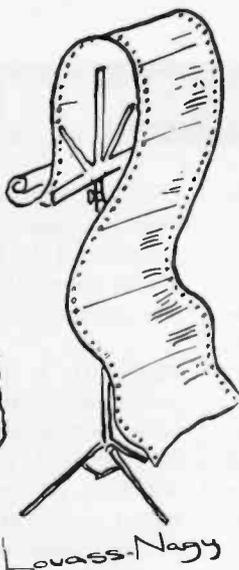

•NEW PRODUCTS•

Before Johann Sebastian Bach developed a new method of tuning, you had to change instruments practically every time you wanted to change keys. Very difficult.

Before Avocet introduced its family of cross-assemblers, developing micro-processor software was much the same. You needed a separate development system for practically every type of processor. Very difficult and very expensive.

But with Avocet's cross-assemblers, a single computer can develop software for virtually any microprocessor! Does that put us in a league with Bach? You decide.

The Well-Tempered Cross-Assembler

Development Tools That Work

Avocet cross-assemblers are fast, reliable and user-proven in over 3 years of actual use. Ask NASA, IBM, XEROX or the hundreds of other organizations that use them. Every time you see a new microprocessor-based product, there's a good chance it was developed with Avocet cross-assemblers.

Avocet cross-assemblers are easy to use. They run on any computer with CP/M* and process assembly language for the most popular microprocessor families.

5¼" disk formats available at no extra cost include Osborne, Xerox, H-P, IBM PC, Kaypro, North Star, Zenith, Televideo, Otrona, DEC.

Turn Your Computer Into A Complete Development System

Of course, there's more. Avocet has the tools you need from start to finish to enter, assemble and test your software and finally cast it in EPROM:

Text Editor VEDIT -- full-screen text editor by CompuView. Makes source code entry a snap. Full-screen text editing, plus TECO-like macro facility for repetitive tasks. Pre-configured for over 40 terminals and personal computers as well as in user-configurable form.

CP/M-80 version \$150
 CP/M-86 or MDOS version \$195
 (when ordered with any Avocet product)

EPROM Programmer -- Model 7128 EPROM Programmer by GTek programs most EPROMS without the need for personality modules. Self-contained power supply ... accepts ASCII commands and data from any computer through RS 232 serial interface. Cross-assembler hex object files can be down-loaded directly. Commands include verify and read, as well as partial programming.

PROM types supported: 2508, 2758, 2516, 2716, 2532, 2732, 2732A, 27C32, MCM8766, 2564, 2764, 27C64, 27128, 8748, 8741, 8749, 8742, 8751, 8755, plus Seqq and Xicor EEPROMS.

Avocet Cross-assembler	Target Microprocessor	CP/M-80 Version	•CP/M-86 IBM PC, MSDOS** Versions•
•XASMZ80	Z-80	\$200.00 each	\$250.00 each
•XASM85	8085		
XASM05	6805		
XASM09	6809		
XASM18	1802		
XASM48	8048/8041		
XASM51	8051		
XASM65	6502		
XASM68	6800/01		
XASMZ8	Z8		
XASMF8	F8/3870		
XASM400	COP400		\$300.00 each
XASM75	NEC 7500		
Coming soon: XASM68K...68000		\$500.00	

(Upgrade kits will be available for new PROM types as they are introduced.)

Programmer \$389

Options include:

- Software Driver Package --
- enhanced features, no installation
- required.
- CP/M-80 Version \$ 75
- IBM PC Version \$ 95
- RS 232 Cable \$ 30
- 8748 family socket adaptor ... \$ 98
- 8751 family socket adaptor ... \$174
- 8755 family socket adaptor ... \$135

- **G7228 Programmer by GTek** -- baud to 2400 ... superfast, adaptive programming algorithms ... programs 2764 in one minute.

• Programmer \$499

- Ask us about Gang and PAL programmers.

- **HEXTRAN Universal HEX File Converter** -- Converts to and from Intel, Motorola, MOS Technology, Mostek, RCA, Fairchild, Tektronix, Texas Instruments and Binary formats.

• Converter, each version \$250

Call Us

If you're thinking about development systems, call us for some straight talk. If we don't have what you need, we'll help you find out who does. If you like, we'll even talk about Bach.

CALL TOLL FREE 1-800-448-8500
 (In the U.S. except Alaska and Hawaii)

VISA and Mastercard accepted. All popular disc formats now available -- please specify. Prices do not include shipping and handling -- call for exact quotes. OEM INQUIRIES INVITED.

*Trademark of Digital Research **Trademark of Microsoft



AVOCET SYSTEMS INC.™

DEPT. 284-B
 804 SOUTH STATE STREET
 DOVER, DELAWARE 19901
 302-734-0151 TELEX 467210

Software Received

Apple

Algebra Arcade, an arcade-type educational game. Design graphs to outwit the Graph Gobbler and Algebroids and simultaneously learn basic and advanced algebra. Choose your own level of play with equations ranging from straight lines to quadratic formulas. For II, II Plus, and IIe; floppy disk, \$49.95. Wadsworth Electronic Publishing Co., 8 Davis Dr., Belmont, CA 94002.

Argos, an arcade-type game. To save Earth, you must destroy Argonians both in space and on land. Fight off waves of their missiles, spaceships, and parachutists. Requires a joystick. For II and II Plus; floppy disk, \$34.95. Datamost Inc., 8943 Fullbright Ave., Chatsworth, CA 91311-2750.

Amphel's Simple Tenant Billing System, a tenant-billing procedure. Up to 500 accounts can be handled enabling rental-property owners and managers to keep track of rents, past-due payments, late charges, utility fees, and miscellaneous charges. For II and IIe; floppy disk, \$99.95. Amphel Industries Inc., Suite 353, 2888 Bluff St., Boulder, CO 80301.

Bats in the Belfry, a strategic extermination game. Your job is to catch and dispose of bats that have infested an old schoolhouse before they reach its belfry. Avoid the fuzzballs and trapdoors that slow you down. If your score is high enough, you can become a Bat Master. For II, II Plus, and IIe; floppy disk, \$29.95. Phoenix Software Inc., 64 Lake Zurich Dr., Lake Zurich, IL 60047.

The Exchange, a stock-market game with high-resolu-

tion graphics. Buy and sell stocks to make as much money as you can. Business tips from the computer's news service help you analyze market trends. Be prepared for capital-gains tax, splits, rises and declines in stocks. For II, II Plus, and IIe; floppy disk, \$59.95. Kelcom Management Ltd., 30 Southampton Dr. SW, Calgary, Alberta T2W 0T5, Canada.

Enchanter, an interactive-prose fantasy game. Learn the wisdom of the medieval guilds from cartographers, orators, scribes, physicians, and fletchers. These magical powers enable you to destroy the evil warlock, restore peace to the kingdom, and become an enchanter. For the II; floppy disk, \$49.95. Infocom Inc., 55 Wheeler St., Cambridge, MA 02138.

Gnosis VII, a role-playing, educational adventure game. Mental horizons expand as you try to discover seven secret names in a mythical land called Gnosis. You must perform hierarchical, secular tasks that enhance cultural values. No two scenarios are the same. For II Plus and IIe; floppy disk, \$19.95. Magnetic Harvest, POB 255, Hopkins, SC 29061.

Hypertyper, an educational typing program. Learn or improve typing skills at a pace and level that you select. Words per minute and accuracy percentage are displayed when you complete each exercise. For the II; floppy disk, \$29.95. Summit Software Corp., Suite 2, 880 Second St., Santa Rosa, CA 95404.

Masquerade, a high-resolution graphics adventure game. You are a detective trying to break a tough case. All but one clue is a dead end.

Use your expertise to decipher this game of logic. For II, II Plus, and IIe; floppy disk, \$34.95. Phoenix Software Inc. (see address above).

Matrix II, a machine-language matrix package that speeds up Applesoft. Solve mathematical problems in scientific, engineering, statistical, and computer-graphics applications efficiently. A 36-page tutorial assists beginning and advanced users in matrix manipulations. For II Plus and IIe; floppy disk, \$19.95. LRS Systems, 810 North Seventh, St. Charles, MO 63301.

The Money Manager: A Personal Finance Simulation. Teachers of high school personal-finance and consumer-education classes can use this program that simulates budgeting, banking, use of credit, insurance planning, consumer purchases, and income tax preparation. This teacher's guide includes a student workbook. For II, II Plus, and IIe; floppy disks, \$74.95. Sterling Swift Publishing Co., 7901 South IH-35, Austin, TX 78744.

Personal Tax Planner 1983/84, a personal federal income tax planning program. Reduce your tax based on informed decisions about second jobs, investments, and the advantages or disadvantages of long- or short-term capital gains and losses. For the IIe; floppy disk, \$99. Aardvark/McGraw-Hill, 1020 North Broadway, Milwaukee, WI 53202.

Plato's Cave, an educational program that compares evidence with inference. Players must confront the problem of trying to understand reality by seeking and analyzing information. This program requires active data

probing within limited information-gathering abilities. For the II Plus; floppy disk, \$49.95. Krell Software Corp., 1320 Stony Brook Rd., Stony Brook, NY 11790.

Portfolio Minder, a stock and bond portfolio-tracking program for brokers and household uses. Up to 50 portfolios with 200 transactions per account can be manipulated using cross-referencing and an editor. Printouts include realized and unrealized gains and losses, portfolio income, status, and other transactions. For II Plus and IIe; floppy disk, \$125. Softcell, 13 Webster Ave., Hanover, NH 03755.

Round About, an arcade-type game. As the captain of the starship *Roundabout*, you must shoot down alien invaders to make outer space as safe as possible. The enemy travels in large packs and can assume various threatening shapes. For the II Plus; floppy disk, \$29.95. Datamost Inc. (see address above).

Short Cuts, an applications-writing program. Add extra commands to Applesoft BASIC programming to sort data such as strings, real numbers, or integer arrays. Other features include error checking during input, print formatting, help screens, and user-defined error messages. For the II, II Plus, IIe, and III; floppy disk, \$39.95. Penguin Software, 830 Fourth Ave., POB 311, Geneva, IL 60134.

Spare Change, a humorous arcade-type game in which you are the owner of a busy arcade. Unfortunately, your two best customers are trying to pilfer enough tokens to retire. Try to distract them by playing their favorite tunes, ringing pay phones, and

COMPU SHACK

PRICES AND AVAILABILITY SUBJECT TO CHANGE WITHOUT NOTICE
ALL RETURNED MERCHANDISE SUBJECT TO A 20% RESTOCKING FEE.

ADD 10% FOR NET TERMS

PRICES GOOD IN U.S. ONLY.

PRICES REFLECTED IN THIS

SECTION ARE LOWER THAN FRANCHISE STORES.

WE TEST EVERY COMPUTER SYSTEM BEFORE WE SHIP IT!

SPECIAL OF THE MONTH!

TAVA PC

Desk Top IBM PC® Compatible Computer. 128K RAM. Two 320KB Disk Drives. Floppy Disk Controller. Video Adapter and Monitor. One Parallel Port. Two Serial Ports. System runs DOS 1.1, 2.0, and CP/M86®

\$1995



Suggested List \$2395.00

Low Price High Quality TAVA Personal Computer Uses The Industry Standard Operating Systems: CP/M86® MS DOS® UCSD p-system® One year warranty on all parts. Runs most of the Software for IBM PC, eg. Lotus 1-2-3® dBase® Words Star® Multiplan® PFS® and Thousands more



PRINTERS

OKIDATA

82A	\$429.00
83A	\$699.00
84AP parallel	\$999.00
84AS serial	\$1099.00
92A	\$525.00
93A	\$899.00

Daisywriter Daisywheel

Printer **\$1175.00**

NEC

SPINWRITER

NEC

7710-1	\$2095	3510	\$1495
7715-1	\$2295	3515	\$1495
7730-1	\$2095	3530	\$1695
7720-1	\$2695	3550	\$1995
7725-1	\$2695	PC8023A	\$ 595



MONITORS

AMDEK

300A	\$199.00	I	\$349.00
300G	\$169.00	II	\$699.00
310A	\$199.00	III	\$399.00
IV			\$1199.00

PRINCETON GRAPHICS SYSTEMS

High Res. Color **\$499**

APPLE IIe



Computer System Controller, Two Disk Drives, Monitor **\$1699**

ROMAR II Apple compatible Computer

W/Z-Card Controller, Two Disk Drives and a Monitor for **\$1195.00**

BROTHER, TAVA, NEC, TANDON, SHUGART, AND OTHER MFGR. PRODUCTS AVAILABLE!!

COMPU SHACK

HIGH TECHNOLOGY • LOW PRICES

CALL FOR STORE LOCATION

THE UNIQUE FRANCHISING CONCEPT WITH THE FOLLOWING FEATURES:

PRIVATE LABEL PRODUCTS WITH NO ROYALTIES, DISCOUNT PRICES, FULL SERVICE & SUPPORT, COURTESY AND MORE.

Circle 69 on Inquiry card.



IBM
PERSONAL
COMPUTER

Special of the Month!

IBM PC® COMPLETE LINE

IBM PC


64K. Two 320KB Disk Drives. Floppy Disk Controller. Video Card and High Res Monitor **\$2599.00**

HARD DISK SYSTEM FOR IBM PC

256K IBM PC® 360KB Disk Drive. FDC. 10MB Hard Disk W/Controller. Cabinet Controller & Software. Video Card and Monitor **\$3999.00**

Hard Disk Sub-System for IBM PC By TAVA CORP \$1275.00

LOTUS 1-2-3 SOFTWARE \$399



FLOPPY DISK DRIVES For IBM PC

ADD-ON DRIVE FOR PC Jr.® .. CALL

TANDON

TM-100-2 DS/DD **CALL**

SLIMLINE 320KB \$229.00

SHARP PORTABLE

A Portable IBM PC Compatible Light Weight Computer With 128K CPU, Liquid Crystal Display 8 linesx80, Keyboard, 128K Bubble **\$1995.00**

With Built-In 80 Column Thermal Printer **\$2395.00**

INTRODUCING APPRICOT

A handsome Computer and almost totally compatible with IBM PC. Includes 256K Memory, Two Disk Drives and Monitor. A Complete System with **\$1250** worth of Software **\$2999.00**

AST RESEARCH

IO Plus-Parallel & Serial Port. Clock Calendar W/Bat. back-up. Superdrive, Superspool **\$199.00**

Combo Plus—256K, Parallel & Serial Port. Clock Calendar W/Bat. back-up. Superdrive. Superspool **\$450.00**

Mega Plus—512K, Parallel & Serial Port. Clock Calendar W/Bat. back-up **\$999.00**

QUADRAM

Quad Board - 256K, Parallel Port. Serial I/O Clock Calendar with battery backup **\$450.00**

512K Ram with Serial I/O **\$799.00**

CONOGRAPHIC

Color Card **\$995.00**

HERCULES GRAPHICS CARD

This card gives you 720x350 graphics **\$499.00**

BIG BLUE \$479.00

MAYNARD SANDSTAR SERIES

Multifunction Card \$95.00

Floppy Disk Controller **\$225.00**

Memory Card **\$189.00**

HAYES MICROCOMPUTER PRODUCTS

Micromodem 300 baud **\$299.95**

Smartmodem 1200 baud **\$529.95**

*IBM PC is a registered trademark of IBM Corp
*dBASE II is a registered trademark of ASHTON-TATE, Inc.
*LOTUS 1-2-3 is a registered trademark of Lotus Development
*Wordstar, Spoolstar, Mailmerge are registered trademarks of Micropro International
*Visicalc is a registered trademark of Visicorp

Multiplan is a registered trademark of Microsoft Corp
PFS is a registered trademark of Software Publishing Co
CP/M86 is a registered trademark of Digital Research, Inc.
MS-DOS is a registered trademark of Microsoft Corp
UCSDP is a registered trademark of Sottech Microsystems

PRODUCTS AND PRICES NOT AVAILABLE AT ALL STORES

ALL FLOPPIES REPAIRED QUICKLY AT LOW COST

(714) 261-1000

FRANCHISE INQUIRIES WELCOME

16861 ARMSTRONG, IRVINE, CA 92714

HEADQUARTERS/TELEX: 181667—ANSWER BACK: COMPU SHACK IRIN

Software Received

popping popcorn. You're often treated to slapstick cartoons. For II, II Plus, and IIe; floppy disk, \$34.95. Broderbund Software Inc., 1938 Fourth St., San Rafael, CA 94901.

Spell Perfect, a spelling-correction program that detects misspelled words. Reduce proofreading to a one-step process with easy prompts, a word count, a dictionary you create, and displays of words that are spelled similarly. For II, II Plus, and IIe; floppy disk, \$89.95. LJK Enterprises Inc., 7852 Big Bend Blvd., St. Louis, MO 63119.

Unit Professional, a library unit to be used with programming in Pascal. You can solve some of the simpler problems of formatting and error checking on input and output before you code it. Screens and their fields are

user-defined. For II Plus and IIe; floppy disk, \$39. D & L Professional Micro-computing, 1201 Lincoln Ave., New Castle, IN 47362.

Wizardry—Legacy of Llylgamyn, a three-dimensional fantasy and adventure game. This is the third scenario in the Wizardry series in which you are one of the descendants of the heroes of the Knight of Diamonds. As such, you are to seek the dragon L'kbreth and regain the mystical orb to balance nature's upheavals. For II, II Plus, IIe, and III; floppy disk, \$39.95. Sir-Tech Software Inc., 6 Main St., Ogdensburg, NY 13669.

Wordworx, two educational word games for all ages. Myspellery is a vocabulary builder in which you decode mystery words using as few clues as you can. Sentence

Maker challenges your ability to invent grammatically correct sentences given a string of five letters. You can add your own mystpelleries to challenge other players. For II Plus and IIe; floppy disk, \$34.95. Reston Publishing Co., 11480 Sunset Hills Rd., Reston, VA 22090.


Atari

Capture The Flag, a two-player game for all ages. In a split-screen display, the invader must exit the three-dimensional labyrinth through one of two doors to reach the flag. If the defender touches you it will prevent you from capturing the flag. Adjusted tempo in music reflects action. For 800/1200; floppy disk, \$39.95. Sirius Software

Inc., 10364 Rockingham Dr., Sacramento, CA 95827.

Moviemaker, an interactive sequential-animation package in which you are a movie director. You devise the action, set the scene, and create actors, and the program plays back the completed computer-generated movie. For 800/1200; floppy disk, \$60. Reston Publishing Co., 11480 Sunset Hills Rd., Reston, VA 22090.

Nightraiders, a space-war game. You have joined the Nightraiders corps to rescue Earth from tyranny. Destroy the enemy's military strength and cross the battlefield to attack the base. As you fly over enemy territory you encounter targets such as a tank, bridge, radar tower, missile, train cars, and more. For 800/1200; floppy disk, \$29.95. Datamost Inc., 8943

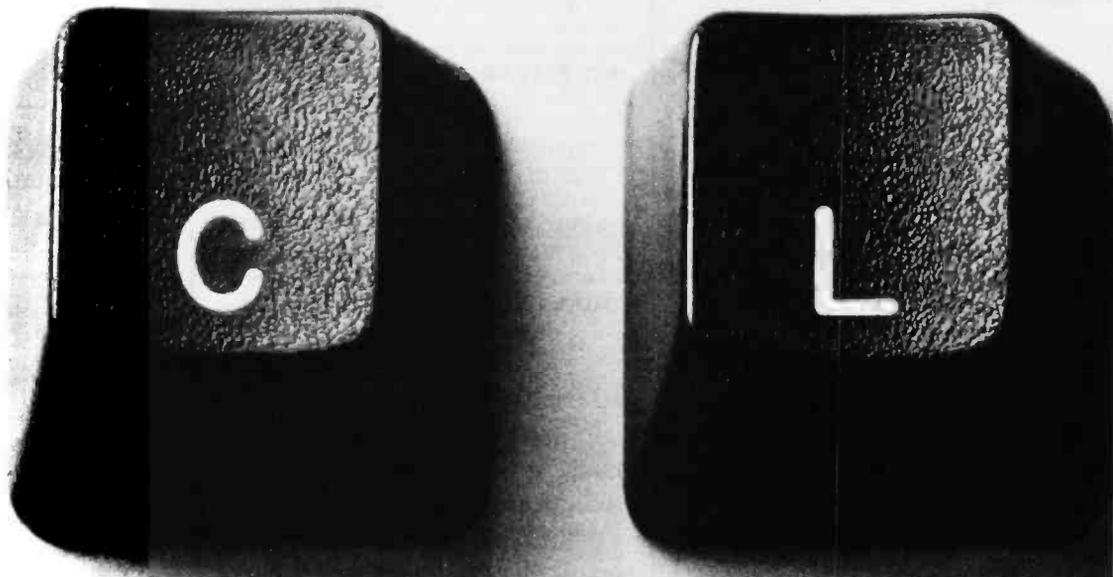

The best career move you can make is to

It's free. It's confidential.

Today's technical career market changes fast.

But now there's a way to keep up with it. This new key to career opportunity is your personal computer. And the cost is nothing but a phone call.

Just call CLEO. That stands for Computer Listings

of Employment Opportunities.

CLEO responds to your commands. You specify what job categories, companies, or geographic locations interest you. CLEO calls up the appropriate ads right on your screen. At every step, you're guided by explicit online instructions.

Daily updates keep CLEO job listings current.

Fullbright Ave., Chatsworth, CA 91311-2750.

Popeye, an arcade-type game. As Popeye, you must catch all of Olive's hearts, notes, and cries for help before they hit the water and sink. Eat spinach for strength but beware of Brutus, the Sea Hag, and vultures. Levels of difficulty increase. For 400/800/1200; cartridge, \$40. Parker Brothers, 50 Dunham Rd., Beverly, MA 01915.

The Return of Heracles, a Greek mythology adventure game. When you become a Greek hero or heroine, Zeus will assign 12 tasks but will not offer any clues as to how to do them. The Oracle of Delphi has the advice you seek, but it's not free. For 800/1200; floppy disk, \$32.95. Quality Software, Suite 105, 6660 Reseda Blvd., Reseda, CA 91335.

CP/M

Co-Sort, a sort-and-merge utility program. With this program you can sort small data sets using a fast algorithm without transferring files. It allows for fixed- or variable-length records, all data types, and provides many keys in any direction. Floppy disk, \$200. Information Resources, Box W, Manhasset, NY 11030.

List-master, an information-management utility program for CP/M 2.2-based systems. You can keep track of lists including 30,000 data items, each with 252 characters. It includes a full-screen editor for data entry, sort and criteria-select procedures, and integrates with BASIC programs. Floppy disk, \$149.95. Palace Software, RD #1, Box 331, Moundsville, WV 26041.

Magikey, a keyboard-enhancement program for version 2.2-based systems. This program lets you define and assign a string of characters to any key. Features include built-in batch-processing capabilities, console and printer I/O redirection, and extensive string-editing options. Floppy disk, \$100. Pro Microsystems, 16609 Sagewood Lane, Poway, CA 92064.


Plotpro, a set of three Microsoft BASIC programs that make scientific applications graphs on any 80- or 132-column printer. Protemp creates templates of the physical appearance of any graph. Proquick controls plotting and printing of infinite-length graphs. Plotpro creates linear and logarithmic plots and can plot multiple functions on the same graph. Floppy disk, \$49.95. BV Engineering,

POB 3351, Riverside, CA 92519.

Commodore

Music Tutor, a set of six programs that teach beginning music students the basic elements of music. Programs include bass- and treble-clef notes, rhythms, symbols, music terms, and a review game. For the 64; cassette, \$30. MKI Software, 15295 Oceana, Allen Park, MI 48101.

Portfolio Manager, a stock-market analysis program to assist in personal investments and financial management. Files let you create and update as many as 70 stocks based on current market quotes. You can thus spot

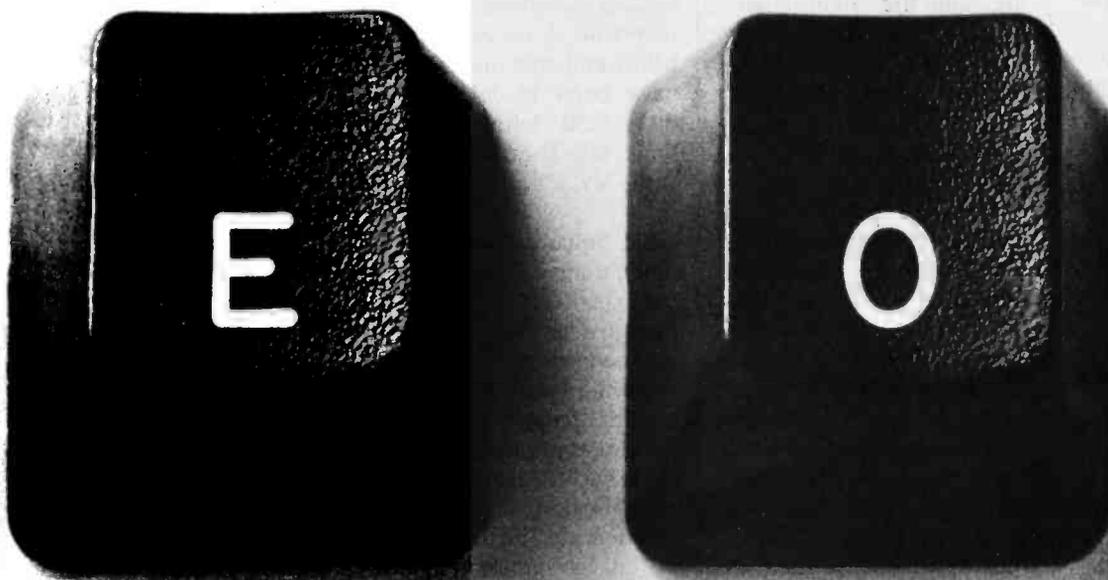

the keyboard of your personal computer.

You can even apply for positions right from your own terminal. For a detailed job search, or just an idea of what's available, CLEO is waiting for your call today. With today's opportunities.

**CLEO access: (415) 482-1550 (408) 294-2000
(213) 618-8800 (714) 476-8800 (619) 224-8800**

Circle 55 on inquiry card.

300 BAUD, full duplex, standard ASCII code.
Access assistance: (213) 618-1525

CLEO

Computer Listings of Employment Opportunities

Recruitment advertisers—
call (213) 618-0200 collect
to find out how you can
place your ad on CLEO.
An electronic publishing activity of The Copley Press, Inc.

February 1984 © BYTE Publications Inc. 449

trends for buying and selling. For 64 and VIC-20; floppy disk and cassette, \$29.95. Basic Byte Inc., POB 924, Southfield, MI 48037-0924.

Spectrum-64, a fast Fourier transform-analysis program for use in college junior to graduate-level calculus classes. This program finds the frequency spectrum or inverse for waveform or data analysis when you enter a signal or data sample. Applications include signal-spectral content, filter design and response, antenna-radiation patterns, convolution integrals, and a variety of other technical uses. For the 64; floppy disk and cassette, \$79.95; \$59.95 with proof of student or teacher status. Red-Shift Software, POB 45488, Seattle, WA 98145-0488.

Zeppelin Rescue, an arcade-type game. Your mission as the pilot of a blimp is to rescue hundreds of people stranded in a hazardous environment while keeping watch on your gas gauge and avoiding obstacles. Choose from five cityscapes and four levels of difficulty. Requires a joystick. For the 64; floppy disk, \$24.95. Computer Software Associates Inc., The Silk Mill, 44 Oak St., Newton Upper Falls, MA 02164.

Heath/Zenith

Disarm.Com, an artificial-intelligence puzzle program. Using extensive graphics, a robot that learns additional command words through analysis is told how to disarm a bomb by remote control. For the H/Z-89; floppy disk, \$35. Friendliware, POB 21206, Lansing, MI 48909.

Slabs.Com, a graphic adaptation of Towers of Hanoi. Try to rearrange the slabs in a minimum number of moves.

For the H/Z-89; floppy disk, \$15. Friendliware (see address above).

FLJ Soft, a graphics and printing program that helps you modify Zenith's interactive business graphics package to provide printing of graphs and pie charts. It's written in assembly language with a source code for customized modification. For the H/Z-100; floppy disk, \$19.95. FLJ Software Co., POB 3293, Hialeah, FL 33013.

IBM Personal Computer

Acme Linear Optimization, a mathematical-formulation program that allocates limited amounts of resources to different projects to minimize costs and maximize profits. Only a basic knowledge of algebra is needed to operate for planning in business, marketing, engineering, and the environment. Floppy disk, \$150. Acme Computer Co., 532 Northeast 83rd St., Seattle, WA 98115.

Enchanter, an interactive-prose fantasy game (see description under Apple). Floppy disk, \$49.95. Infocom Inc., 55 Wheeler St., Cambridge, MA 02138.

The Exterminator, a BASIC-programming tool. This program uses labels instead of line numbers and lets you write a type of control statement. You can write programs in several different files and combine them in any order you select. Floppy disk, \$49. Micromedia, POB 33071, Northglenn, CO 80233.

dB/RA, a dBASE II utility package. This array program permits the creation of a group of related data with a similar format, provides storage of over 65,000 memory

variables, and allows access to data from up to 12 files simultaneously. Floppy disk, \$200. Gryphon Microproducts, POB 6543, Silver Spring, MD 20906.

Harvard Project Manager, a project-planning and management program. This program aids in analysis, planning, and scheduling projects by determining which parts of the project are critical to the total project time. It also helps to efficiently schedule tasks at minimum cost while still meeting deadlines. Floppy disk, \$395. Harvard Software Inc., Software Park, Harvard, MA 01451.

Investment Tax Analyst, a user-friendly series of Visicalc templates for accountants, stockbrokers, financial planners, and individual investors to analyze the tax implications of different investment strategies. This program can determine the total tax cost and effects of investments up to six years, both before and after investments have been made. Floppy disk, \$150. John Wiley & Sons, 605 Third Ave., New York, NY 10158.

Least Squares Curve Fitter (LSF), a curve-fitting method package. This program is used to derive a relationship between sets of variables by collecting, storing, and retrieving large amounts of data for applications that include such fields as politics, mathematics, engineering, and finance. The three types of curves generated are linear, quadratic, and cubic. Floppy disk, \$39.95. Prentice-Hall Inc., Rt. 9W, Englewood Cliffs, NJ 07632.

PC Life, a game centered on a simulation of a cell's life-cycle. Create a world with a life pattern for all single-cell beings to follow on the grid of your screen. Cells produce

colorful kaleidoscopic-type patterns as they grow and die. Floppy disk, \$24.95. PCWare, Department BMS1, POB 3174, Gaithersburg, MD 20878.

Planfin, an accounting program designed to forecast, budget, and figure discounted cash-flow for your business needs. It is menu driven and allows you to change values in areas such as production and sales, pricing, financing, inflation, foreign-exchange movements, and more. Floppy disk, \$195. Business Software Pty. Ltd., 10 Help St., Chatswood, New South Wales 2067, Australia.

Plotpro, a set of three Microsoft BASIC programs (see description under CP/M). Floppy disk, \$49.95. BV Engineering, POB 3351, Riverside, CA 92519.

Professional Tax Plan, a tax-planning program for such professionals as accountants, attorneys, trust officers, and insurance agents. This program lets you index tax years for 1985 and after. It offers ten-year averaging, capital-gain deduction, self-employment tax, taxable unemployment compensation, medical expenses, credit limitations, and other features. Floppy disks, \$350. Aardvark/McGraw-Hill, 1020 North Broadway, Milwaukee, WI 53202.

Profin, a financial-analysis program. You can financially evaluate your investments including irreversible capital-gain projects. This menu-driven program lets you ask "What if..." questions. You can produce business-oriented forecasts, budgets, discounted cash flows, and returns on investments. Floppy disk, \$295. Business Software Pty. Ltd. (see address above).

The personal, portable daisywheel printer.

Only \$599.

For the first time, your letter-quality printer can be used almost anywhere! Bring the new Transtar 120 with you to work, to school, and home again! Conveniently weighing in at less than 19 pounds, it generates unrivaled print quality and is the size of a standard briefcase. The new 120 is so light, so small, that you can take it with you!

Remarkably, the new \$599 Transtar 120 is "plug and go" compatible with the best-selling word processing programs. Just plug the 120 into your personal computer and watch this precision printer purr along at 14 cps Shannon text speed producing superscript, subscript, underlining and a true boldface. Even using letterhead is now a breeze with the 120's automatic single sheet loading!

Don't worry about durability: it's a tough little machine. It joins the highly reliable family of Transtar printers with a failure rate that's the envy of the industry: less than 1%. Should your 120 ever need repair, a nationwide network of authorized service centers stands ready for speedy repair on your six-month end-user warranty.

Just think of it: everything you want in a letter-quality printer...anywhere you want it. Only \$599.

Transtar

P.O. Box C-96975, Bellevue, Washington 98009

Circle 362 on Inquiry card.

Software Received

Mr. Quartermaster, a menu-driven inventory-control system for businesses and institutions. This program lets you print reports for inventory, reordering, and usage listings. You can update stock and inventory items plus maintain comprehensive files with add, change, or delete. Floppy disk, \$120. RJL Systems, 106 New Haven Ave., Milford, CT 06460.

1983 Tax Preparer, a program for professional, computer-automated preparation and filing of 1983 tax returns. It also keeps individual tax records throughout the year. Features include preprinted 1040 forms, instant access, a disk library, client-billing letter for professionals, and foolproof error recovery. Floppy disk, \$250. Howard Software Services, Suite 310, 8008 Girard Ave., La Jolla, CA 92037.

Real Analyzer, a real estate program. You can analyze both income and home property over 5 years. This program will help you decide when it's best to buy, sell, exchange, or refinance any property by projecting cash flow and profitability before and after taxes. Floppy disk, \$195. Real-Comp Inc., POB 1263, Cupertino, CA 95015.

RIP, a real estate investment package. This set of 12 Visicalc templates helps in time-consuming calculations. The analysis template will perform a detailed 8-year analysis on property by comparison of investment alternatives. Floppy disk, \$29.95. Tom Ciulik, 3011 Bunker Hill Circle, Marietta, GA 30062.

Sailing, a sailing-adventure simulation game. You must sail your boat through the Caribbean Sea in a race

against time to rescue swimmers trapped in the Bermuda Triangle. Beware of the creeping mist, gravitational vortices, storms, and other obstacles. Floppy disk, \$34.95. Accupipe Corp., 222 West Lancaster Ave., Paoli, PA 19301.

Supercalc 3, an electronic spreadsheet with integrated graphics and data- and text-management capabilities. It is geared toward professional managers who need to solve financial and numerical analyses. You can create line and bar graphs and pie and exploded-pie charts. Floppy disk, \$395. Sorcim Corp., 2310 Lundy Ave., San Jose, CA 95131.

Triple Brain Trust, a question-and-answer game for all ages. After a question is correctly answered, the player places an X or an O on a tic-

tac-toe grid. Categories include word recognition, basic reading, geography, movies, and general sports trivia. Floppy disk, \$39.95. Reston Publishing Co., 11480 Sunset Hills Rd., Reston, VA 22090.

TRS-80

The BASIC Answer, a text-processing utility program. BASIC programmers can construct code in a structured manner. It uses labels instead of line numbers and supports variable names of up to 14 significant alphanumeric characters. For the Model 4; floppy disk, \$69. Logical Systems Inc., 8970 North 55th St., POB 23956, Milwaukee, WI 53223.

Games for the II (vol. 2), three arcade-type games. In Palestine, you pilot your fighter to destroy the enemy.

You can
now order
article
reprints
from this
publication

University Microfilms International, in cooperation with publishers of this journal, offers a highly convenient Article Reprint Service. Single articles or complete issues can now be obtained in their original size (up to 8½ x 11 inches). For more information please complete and mail the coupon below.

ARTICLE REPRINT SERVICE

University Microfilms International

- YES! I would like to know more about the Article Reprint Service. Please send me full details on how I can order.
 Please include catalogue of available titles.

Name _____ Title _____

Institution/Company _____

Department _____

Address _____

City _____ State _____ Zip _____

Mail to: University Microfilms International
Article Reprint Service
300 North Zeeb Road
Ann Arbor, Michigan 48106

An Analog and Digital I/O board for your IBM PC™ at just \$295!* Who does Molinari think he is?

Ho ho ho.

Don't laugh. We're not kidding. Data Translation is practically giving away a new single board plug-in that brings complete analog and digital I/O capabilities to your IBM Personal Computer.

Ordered in lots of 500 or more, you can enjoy full data acquisition capability for as little as \$295. And smaller unit orders also qualify for considerable savings... one unit is only \$495.

But what would you expect from an innovator like Data Translation? Whether you're working in laboratory research or industrial process control, our latest board can give you measurement and control capabilities at tremendous savings.

The DT2808 includes 16-channel 10-bit A/D, 2-channel 8-bit D/A, 16 lines of digital I/O, a programmable clock and direct memory access capability. And all of these functions are supported by PCLAB,™ our BASIC callable subroutine library running under PC DOS.™

A comprehensive user manual with many programming examples will get your application up and running fast.



This easy to use, easy to program board is highly reliable, and of course, fully backed by Data Translation's service and support team.

The new DT2808. The lowest cost data acquisition for your IBM PC. And just one in a long line of software compatible analog I/O boards offered by the industry leader. Data Translation.

Yes Virginia, there is a Santa Claus. He's president of Data Translation.


For more information, call one of our elves.

(617) 481-3700.



Data Translation provides a full family of analog and digital I/O boards with software support for the IBM PC.

*500 pcs., \$495: quantity one

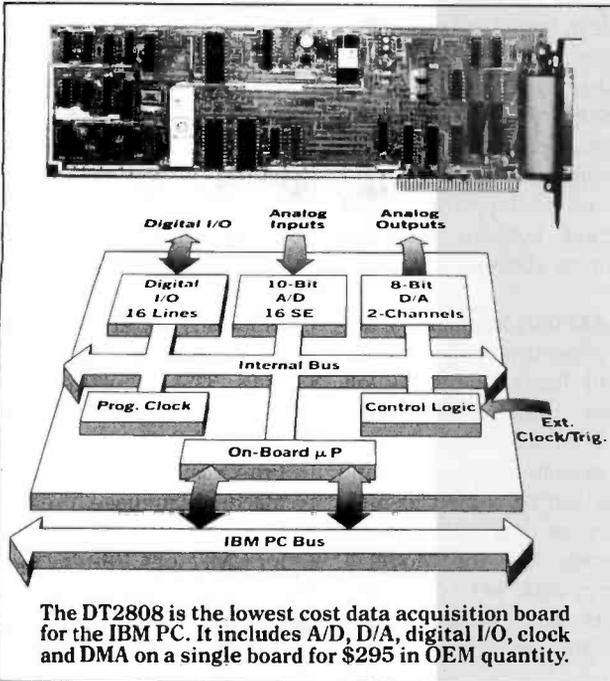

DATA TRANSLATION

World Headquarters: Data Translation, Inc., 100 Locke Dr., Marlboro, MA 01752 (617) 481-3700 Tlx 951 646.
European Headquarters: Data Translation, Ltd., 430 Bath Rd., Slough, Berkshire SL1 6BB England (06286) 3412 Tlx 849 862.
In Canada: (416) 625-1907.
IBM PC, IBM Personal Computer and PC DOS are registered trademarks of IBM. PCLAB is a trademark of Data Translation, Inc.

Circle 105 on inquiry card.

www.americanradiohistory.com

**IT'S SIMPLE.
CALL & SAVE MONEY!**

*** 1-800-841-0860 ***

**DIRECT MARKETING COMPUTERS AND
EQUIPMENT TO SAVE YOU MONEY!**

SINCE 1978

**TRS-80
COMPUTERS**

• PURE RADIO SHACK EQUIPMENT •

UP
TO **20** %
AND
MORE

DISCOUNT

***** CALL FOR PRICES ***
ON COMPLETE LINE**

PRINTERS AND EQUIPMENT

**EPSON
OKIDATA**

**SCM SMITH
CORONA**

RB ROBOT

**C
A
L
L**

stair
MICRONICS-INC

C. Itoh

Hayes

Novation

CALL

**WE SELL IBM
P.C. COMPATIBLES**

Since 1978

- PIONEER IN DIRECT TO CONSUMER SALES OF MICRO COMPUTERS AND ELECTRONICS
- NAME BRAND PRODUCTS
- LARGE INVENTORIES
- NEXT DAY SHIPMENT ON MOST PRODUCTS
- FREE UPON REQUEST**
- DISCOUNT PRICE LIST AND INFORMATION KIT
- COPY OF MFR'S WARRANTY
- PRICES AND PRODUCTS ARE SUBJECT TO CHANGE WITHOUT NOTICE



**Micro Management
Systems, Inc.**

2803 Thomasville Road East
Cairo, Georgia 31728
(912) 377-7120 #1

Software Received

In Ape Escape, you climb through the jungle to save Alvin Ape. And in Saucers, you help Andorians exterminate eight types of pests. For Models II, 12, and 16; floppy disk, \$29.95. Maryland Model II Games, 3304 Carlton Ave., Temple Hills, MD 20748.

Kaleidophone, a programmable color-organ/video-music system. Create an unlimited variety of color displays that change in time with the music. You can play this like a video instrument or operate it from built-in displays. For the Color Computer; cassette, \$20. New Salem Research, West Main St., New Salem, MA 01355.

LS-FED II (File Editor), an all-purpose file and disk editor. This utility program displays a 256-byte sector of a file in both ASCII and hexadecimal notation. Any byte of a displayed sector can be modified and you have several options for movement through the sectors. For the Model 4; floppy disk, \$49. Logical Systems Inc. (see address above).

LS-FM (File Manager), a utility program for file management. It lets you display, kill, move, remove, and copy files. Wildcard characters can be used to purge a disk, and files can be copied to more than one disk drive simultaneously. For the Model 4; floppy disk, \$49. Logical Systems Inc. (see address above).

LS-Help Generator, a utility program for use with LDOS Help that lets you create your own help files for use with LDOS. The Help Generator takes a text file and changes it into a data file that can be accessed with LDOS Help. For the Model 4; floppy disk, \$49. Logical Systems Inc. (see address above).

LS-LDOS Help, a screen-oriented utility program that displays information about LDOS. Simply type HELP and a keyword to obtain information on LDOS or LBASIC commands. For Models I, III, and 4; floppy disk, \$29. Logical Systems Inc. (see address above).

LS-Help Text Source, ASCII text files covering LDOS and LBASIC commands. The files may be incorporated into the LDOS Help utility or appended to create your own help files. For Models I, III, and 4; floppy disk, \$29. Logical Systems Inc. (see address above).

LS-Technical Help, ASCII text files covering assembly-language programming with LDOS. The four files contain a description of the Z80 mnemonic functions, flag set/reset information, and op codes. For use with two disk drives and LDOS Help. For the Model 4; floppy disk, \$39. Logical Systems Inc. (see address above).

Plotpro, a set of three Microsoft BASIC programs (see description under CP/M). For Models I, III, and 4; floppy disk, \$49.95. BV Engineering, POB 3351, Riverside, CA 92519.

Pro-Cess, a menu-driven, machine-language program that provides maintenance for CMD- or CIM-type load-module files. It allows file appending, mapping, sorting, packing, offsetting, and partitioned data-set member extraction. You can reorganize large, inefficiently generated load modules. For the Model 4; floppy disk, \$40. Misosys, POB 4848, Alexandria, VA 22303.

Smal-LDOS 5.1.3, a disk operating system based on a subset of LDOS. It features many of the filters and utili-

The Micromint Collection

Micromint. Supporting the varied projects that appear in Steve Ciarcia's monthly article in BYTE Magazine, "Ciarcia's Circuit Cellar." Offering a wide range of computers and peripherals designed to meet the exacting demands of the hobbyist as well as worldwide corporate clients.


TERM-MITE ST SMART TERMINAL BOARD

As featured in Ciarcia's Circuit Cellar BYTE Magazine, January & February 1984

All you need to build a Smart Video Terminal equivalent to the types advertised for \$1,000.00 or more is a Term-Mite ST circuit board, scanned or parallel keyboard, video monitor and power supply.

- Uses brand new Nat'l Semi NS4554 Terminal Processor.
 - 24 lines by 80 characters. 25th reverse-video status.
 - Upper & lowercase. Line (block) graphics.
 - Selectable data rate, parity & display options.
 - Reverse video, half intensity, double height & width, underlined, blinking and/or blank character.
 - Separate sync or composite video output. Self Test.
- Term-Mite ST Video Display Terminal Board
BCC22 Assembled & Tested \$284.
BCC23 Complete Kit 244.

Z8 BASIC SYSTEM CONTROLLER NEW!!!



As featured in Ciarcia's Circuit Cellar. BYTE Magazine, July & August 1981

The Z8 Basic System Controller is an updated version of our popular BCC01. The price has been reduced and features added. The entire computer is 4" by 4 1/2" and includes a tiny BASIC interpreter, up to 6K bytes of RAM and EPROM, one RS-232C serial port with switchable baud rates and two parallel ports. BASIC or machine language programming is accomplished simply by connecting a CRT terminal. Programs can be transferred to 2732 EPROMs with an optional EPROM programmer for auto start applications. Additional Z8 peripheral boards include memory expansion, serial and parallel I/O, real time clock, an A/D Converter and an EPROM programmer.

- Uses Zilog Z8 single chip microprocessor.
- Data and address buses available for 124K memory.
- Can be battery operated.
- Cross assemblers for various computers.

BCC11 Assembled & Tested \$149.
 New Low Price

Z8 MEMORY, I/O EXPANSION, CASSETTE INTERFACE

- 8K bytes of additional RAM or EPROM.
 - Three additional 8 bit parallel ports.
 - Cassette interface—300 baud K.C. Standard.
 - Software real time clock.
- BCC03 w/4K RAM Assembled & Tested \$150.**
BCC04 w/8K RAM Assembled & Tested 180.

Z8 EPROM PROGRAMMER

- Transfer BASIC or Assembly Language application programs from RAM to 2716 or 2732 EPROM.
 - Comes with programming & utility routines on EPROM.
 - Requires BCC03 Z8 Expansion Board for operation.
- BCC07 Assembled & Tested \$145.**

Z8 ANALOG TO DIGITAL CONVERTER

- Uses Analog Devices 7581 IC, 8-channel 8-bit.
 - Adds process control capability to the Z8 system.
 - Over 1,000 conversions per channel per second.
 - Monitors 8 analog signals in one of two 10v ranges.
- BCC13 Assembled & Tested \$140.**

Z8 SERIAL EXPANSION BOARD

- Adds additional RS-232C and opto-isolated 20 ma. current loop serial port to the Z8 System.
 - Runs at 75 to 19,200 baud in all protocols.
 - Comes with listings of sample serial I/O routines.
- BCC08 Assembled & Tested \$160.**

Z8 16K MEMORY EXPANSION BOARD

- Add up to 16K of additional memory, RAM or EPROM, to your Z8 System Controller in any multiple.
 - Accepts 2016, 6116, 2716, or 2732 memory types.
 - Four 16K cards may be installed on the Z8 System bringing the total memory to 64K.
- BCC14 Assembled & Tested w/8K RAM \$120.**
BCC16 Assembled & Tested w/16K RAM 155.

COMING SOON! FORTH LANGUAGE VERSION OF THE Z8

With the new Z8 with on board 4K FORTH you can program high speed control functions in a few simple high level language commands. Perfect for data reduction, process control and high speed control applications.

- BCC20 Z8F FORTH Microprocessor chip \$150.**
BCC21 Z8F FORTH System Controller
 (This board is a BCC11 with a BCC20 installed)
Assembled & Tested 280.

Z8 CROSS ASSEMBLERS

- From Micro Resources
IBM PC, APPLE, 6502 Systems 5 1/4", CP/M 2.2 8" \$ 75.
- From Allen Ashley
TRS-80 Model I, III, Northstar 5 1/4" 75.
CP/M 2.2 8" 150.

Z8 FIVE SLOT MOTHER BOARD

- Expand your Z8 BASIC System with minimum effort.
 - Contains five slots complete w/44 pin connectors.
- MB02 Assembled & Tested \$69.**

TRIPLE VOLTAGE POWER SUPPLIES

- +5V @ 300 ma. +/-12V @ 25 ma.**
UPS01 Assembled & Tested \$35.
UPS02 Complete Kit 27.
- +5V @ 1 Amp. +12V @ .5 Amp. -12V @ 50 ma.**
UPS03 Assembled & Tested 60.
UPS04 Complete Kit 50.

SPEECH SYNTHESIZERS

MICROVOX TEXT-TO-SPEECH SYNTHESIZER



As featured in Ciarcia's Circuit Cellar BYTE Magazine September, October 1982.

Microvox is a second generation professional voice quality text-to-speech synthesizer that is easily interfaced to any computer, modern, RS-232C serial or parallel output device and provides speech of unbelievable clarity.

- Unlimited vocabulary.
- 64 programmable inflection levels.
- 6K text-to-speech algorithm.
- Full ASCII character set recognition and echo.
- RS232C and parallel output.
- 1000 character buffer, 3000 optional.
- Adjustable baud rates (75-9600).
- Spelling output mode.
- 7 octave music and sound effects.
- On board audio amplifier & power supply.
- X-On-X-Off handshaking.


- MV01 Assembled with 1K buffer \$299.**
MV02 Complete Kit with 1K buffer 219.
 Add \$15.00 for 3K buffer option.

VOTRAX SC-01A PHONETIC SPEECH SYNTHESIZER IC

The SC-01A Speech Synthesizer is a completely self-contained solid state device that phonetically synthesizes continuous speech of unlimited vocabulary. Used in our Microvox and Sweet-Talker.

- SC01A Quantity 1-99 \$44. ea.**
100 + 32. ea.
1000 + 24. ea.

MICRO D-CAM DIGITAL TV CAMERA



As featured in Ciarcia's Circuit Cellar BYTE Magazine, September & October 1983

GIVE YOUR COMPUTER THE DIMENSION OF SIGHT

- Interprets, enhances and stores images.
- 256 x 128 digital image sensor.
- Plug-in boards for the IBM-PC, APPLE II+ or e.
- Software includes utilities for auto exposure, multi-level greyscale, screen dump and image enhancement.
- Includes interface card, 4 foot extension cable, camera assembly, manual, and software on diskette.

- DC01 IBM PC Assembled & Tested \$299.**
DC02 IBM PC Complete Kit 264.
DC03 APPLE II Assembled & Tested 299.
DC04 APPLE II Complete Kit 264.

300 BAUD ANSWER/ORIGINATE MODEM KIT



As featured in Ciarcia's Circuit Cellar BYTE Magazine, March 1983

Micromint's latest 300 Baud Modem Kit is crystal controlled. Uses the TI TMS99532 IC, contains just 25 parts and requires no calibration or adjustments. Use with acoustic coupler or in direct connect mode.

MD04 Complete Kit as shown \$60.
MD05 Transformer for Direct Connect Mode 20.
AC01 Acoustic Coupler Kit 20.

E-Z COLOR GRAPHIC INTERFACE WITH SPRITES

APPLE II E-Z Color plug-in board with Graphics Editor on 3.3 disk

- EZ01 Assembled & Tested \$150.**
EZ02 Complete Kit 125.

APPLE II E-Z Color Plus

- Allows the use of a single monitor or TV set.
- EZ11 Assembled & Tested w/Graphics Editor \$200.**

KRELL LOGO for E-Z Color and E-Z Color Plus Supports Sprite Graphics.

- EZ21 Krell LOGO w/full documentation \$89.**

Animation Software for E-Z Color Plus

- Draw with Sprites using Joystick or Koala Pad.
 - Animate Sprites from your own BASIC program.
- EZ21 Animation Software \$49.**

\$100 E-Z Color Graphics Board


- With sound generator & joystick interface.
 - MBASIC Graphics Editor on 8" diskette.
- EZ04 Assembled & Tested \$289.**

MICROMINT, INC. 561 Willow Avenue, Cedarhurst, NY 11516

To Order: Call Toll Free 1-800-645-3479

For Information Call: 1-516-374-6793

Call: Monday-Friday, 9-5 PM



MPX-16 MICROCOMPUTER IBM PC COMPATIBLE



As featured on the cover of BYTE Magazine. Also featured in Ciarcia's Circuit Cellar November, December 1982 & January 1983

The Computer With A Split Personality. —Use it as an IBM PC look alike that directly boots PC DOS 1.1 and accepts all expansion boards designed for the IBM PC.

—Use it as a powerful 8088 single board computer for all your OEM applications. Just add serial terminal, disk drive and power supply. Directly boots CP/M-86.

Buy the MPX-16 in the form that best meets your needs or budget. As a bare board, as a wave soldered board that contains all components less ICs, as an assembled and tested circuit board or as a complete system.

- Directly boots PC DOS 1.1 and CP/M-86.
- Most IBM PC software executes with no modifications.
- IBM PC bus compatible + 9 expansion slots.
- Intel 8088 16-bit microprocessor.
- Optional Intel 8087 math coprocessor.
- 256K bytes on board memory.
- Up to one megabyte of system memory.
- Up to 64K bytes of system ROM/EPROM.
- 2 RS-232C Serial & 3 Parallel I/O ports.
- Disk controller for 5 1/4" or 8" drives.
- Sixteen levels of vectored interrupts.

- MPX-16 Circuit Board Assembled w/64K RAM \$1,200.**
OEM 100 quantity price 900.
- MPX-16 Circuit Board Assembled w/256K RAM 1,400.**
- MPX-16 Semi-Kit (wave soldered circuit board w/all components) Less ICs 595.**
Complete Kit of ICs w/256K RAM 595.
- MPX-16 Unpopulated (bare) PC Board 300.**
CP/M-86 Operating System + Manuals 80.
MPX-16 Switching Power Supply 300.
MPX-16 Technical Reference Manual 50.
MPX-16 Metal Enclosure with Fan Tandon TM 100-2 Double Sided/Density Drive 300.
IBM PC Keyboard Interface Adapter 100.
- Shipping & handling additional on all MPX-16 orders.

IBM PC is a trademark of International Business Machines Inc.
 CP/M-86 is a trademark of Digital Research Inc.
 Z8 is a trademark of Zilog Inc.

Circle 242 on inquiry card.

Software Received

ties of the original system. For Models I and III; floppy disk, \$59. Logical Systems Inc. (see address above).

Student Grade System, a student-average teacher's aid program. Teachers can keep track of students using numbers or letter grades, easily add or delete names, and print a student's progress during a term. For the Model III; floppy disk, \$75. Tinker Techniques, 435 Greenway Ave., Trenton, NJ 08618.

Z Graph, a graphics-editor package in machine-language. Construct screen images using the computer's block-graphics capabilities. You can automatically generate lines, circles, and rectangles, or save any image generated from other programs. For Models I and III; floppy disk, \$50. Misosys (see address above).

Timex/Sinclair 1000

AC and DC Circuit Analysis, two electronic-analysis programs. You can compute general numerical solutions to electrical circuits containing 12 nodes and 25 branches

of resistors or controlled sources. The program also displays node and branch voltages, currents, and powers. Cassette, \$15.95. Computer Heroes, 1961 Dunn Rd., East Liverpool, OH 43920.

1983 Tax Return Helper, a 1983 income tax calculation program. A set of five programs automatically correlates, updates lines, and checks errors when you enter information for Form 1040 and Schedules A, B, C, D, and E. Cassette, \$14. K Soft, 845 Wellner Rd., Naperville, IL 60540.

RPNZL Programming System, a set of four programs that provides the speed and control needed in BASIC programming. It includes a 3000-bit-per-second tape system, a full-screen text editor, compiler, sampler, linker, and other features. Cassettes, \$29.95. The Golden Stair, 141A Dore St., San Francisco, CA 94103.

Other Computers

Cape Cod Golf, a graphics-simulation game. You control

the swing and make shots with a joystick on a 9-hole golf course. Try to par the course while avoiding trees, sand traps, and water hazards. Ideal for both avid golfers and nongolfers. For the Texas Instruments 99/4A; cassette, \$14.95. Harry P. Richard, 18 Fruitwood Dr., Burnt Hills, NY 12027.

Plotpro, a set of three Microsoft BASIC programs (see description under CP/M). For Victor computers using MS-DOS; floppy disk, \$49.95. BV Engineering, POB 3351, Riverside, CA 92519.

Supercomp-Twenty, an electronic spreadsheet for financial modeling and decision-support applications. This program is designed to be used in a distributed network so that models can be moved between different computers. You can also import data to a graphics or word-processing package. For the Digital Equipment Corporation (DEC) Professional 350; floppy disk, \$395. Access Technology Inc., 6 Pleasant St., South Natick, MA 01760. ■

This is a list of software packages that have been received by BYTE Publications during the past month. The list is correct to the best of our knowledge, but it is not meant to be a full description of the product or the forms in which the product is available. In particular, some packages may be sold for several machines or in both cassette and floppy-disk format; the product listed here is the version received by BYTE Publications.

This is an all-inclusive list that makes no comment on the quality or usefulness of the software listed. We regret that we cannot review every software package we receive. Instead, this list is meant to be a monthly acknowledgment of these packages and the companies that sent them. All software received is considered to be on loan to BYTE and is returned to the manufacturer after a set period of time. Companies sending software packages should be sure to include the list price of the packages and (where appropriate) the alternate forms in which they are available.

NOT ONLY ANOTHER TECHNOLOGICAL BREAKTHROUGH BUT ALSO EASY TO USE AND TO INSTALL

Modems are the most important device used to link two products together through ordinary telephone lines at miles apart. The INCOMM STARCOM, a 300/1200 bps Auto Dial, Auto Answer, Auto Log On modem was introduced to

link two high speed devices together with having absolutely NO knowledge of computers or communications in general. Anybody can install and operate the STARCOM Family in a few minutes.

- STARCOM is a 300/1200 bps Auto Dial/Auto Log On/Auto Answer Modem.
- OSCOM is a 300/1200 bps Auto Dial/Auto Log On/Auto Answer with Osborne (TM) Computer Software (included) modem.
- COMSOFT is a communication software package.
- OEM MODEM BOARD is also available for custom installation.

FREE \$150.00 value subscription to Official Airlines Guide with purchase of each Starcom or Oscom. Get immediate electronic access to airline fare and schedule info. OAG Electronic Edition can save you at least 30% on most business trips and could save you thousands of dollars annually!

**DEALER INQUIRIES
INVITED
(312) 459-8881
or 1-800-323-2666**

INCOMM

115 N. WOLF RD. WHEELING, IL 60090

THE
STARCOM
\$399.



THE
OSCOM
\$450.

SO COMPACT:
Only 1 1/4" x 6 1/2" x 7 1/2". 1.5 lbs.
Fits in your coat pocket!

Event Queue

February 1984

February-April

Courses from Integrated Computer Systems, various sites throughout the U.S. "Implementing Local Area Networks" and "Computer Network Design and Protocols" are two of the courses to be presented. For course information, contact Ruth Dordick, Integrated Computer Systems, 6305 Arizona Place, POB 45405, Los Angeles, CA 90045, (213) 417-8888.

February-April

Courses in C Language and Unix, various sites throughout the U.S. Three five-day courses are offered: "C Programming Workshop," "Advanced C Topics Seminar," and "Unix Workshop." For complete details, contact Joan Hall, Plum Hall Inc., 1 Spruce Ave., Cardiff, NJ 08232, (609) 927-3770.

February-July

Reliability and Maintainability Engineering Institutes and Short Courses, various sites throughout the U.S. A few of the programs to be offered are "Reliability Engineering, Testing, and Maintainability Engineering" and "The Tenth Annual Reliability Testing Institute." For a complete schedule, contact Dr. Dimitri Kececioglu, College of Engineering, Aerospace and Mechanical Engineering Department, University of Arizona, Tucson, AZ 85721, (602) 621-2495.

February-August

Conferences and Expositions from the Society of Manufacturing Engineers, various sites throughout the U.S. and around the world. More than 25 conferences and expositions are scheduled. For a calendar, contact the Public

Relations Department, Society of Manufacturing Engineers, One SME Dr., POB 930, Dearborn, MI 48121, (313) 271-0777.

February 13-16

Kuwait Info '84, International Exhibition Center, Kuwait City, Kuwait. Exhibits in this third annual event will encompass a broad range of information businesses, including data and word processing, communications, office automation, micrographics, security systems, and environmental control systems. Information is available from Carol Purdey, Intermarket Network Corp., Suite 203, 1110 Vermont Ave. NW, Washington, DC 20005, (202) 822-9127.

February 14-15

The First Annual Automated Manufacturing Systems Conference: A Market Assessment, Inn of Westchester, White Plains, NY. For information, contact Carol Saphchin, Frost & Sullivan Inc., 106 Fulton St., New York, NY 10038, (212) 233-1080.

February 14-16

The Twelfth Annual ACM Computer Science Conference, Franklin Plaza Hotel, Philadelphia, PA. Papers, panel sessions, and abstracts will address the central themes of "Factory of the Future," "Coping with Small Computers," and "Social and Ethical Implications of Computers." Exhibits will feature over 50 computer and instructional materials. Particulars are available from the Association for Computing Machinery, 1133 Avenue of the Americas, New York, NY 10036, (212) 265-6300.

February 15-16

Intermountain Telecommunications Show, Expomart, Salt Lake City, UT. This

show, cosponsored by Jon Taylor & Company and the Utah Telecommunications Management Association, will focus on the latest developments in voice- and data-communications equipment and services. For information, contact Jon Taylor & Co., POB 356, Salt Lake City, UT 84110, (801) 298-3100.

February 17

Computer-aided Manufacturing for Semiconductor Fabrication Applications, Palo Alto, CA. This intensive short course, sponsored by Continuing Education in Engineering and the College of Engineering of the University of California in Berkeley, will survey CAM trends. Advanced registration is required due to limited enrollment. The fee is \$215. For information, contact Continuing Education in Engineering, University of California Extension, 2223 Fulton St., Berkeley, CA 94720, (415) 642-4151.

February 17-19

Computer Expo '84, Expo Centre, Orlando, FL. This show will feature more than 100 demonstrations of micro-computer hardware and software. Attendees can participate in a wide range of seminars and hands-on workshops. For details, contact Laurel Netzer, POB 3435, Longwood, FL 32750, (305) 862-6917.

February 18-22

Euroshop 84, Fairgrounds, Dusseldorf, West Germany. This international trade fair will feature more than 600 exhibitors from 20 countries and will be supplemented by workshops exploring various facets of the merchandising business. For show details, contact Dusseldorf Trade Shows, 500 Fifth Ave., New York, NY 10110, (212) 840-7744.

For information on travel and arrangements, contact the Housing Division at (800) 221-3302; in New York, (212) 974-1934.

February 20-22

The 1984 Office Automation Conference (OAC '84), Convention Center, Los Angeles, CA. The theme of this conference is "Office Automation and You." For the first time, an executive-only program will be offered. Further information is available from the American Federation of Information Processing Societies Inc., 1899 Preston White Dr., Reston, VA 22091, (703) 620-8926. For details on the Executive Program, contact John J. Connell, Office Technology Research Group, POB 65, Pasadena, CA 91102.

February 20-23

Arabian Productivity Advancement Using Computers/Graphics, APAC '84, Inter-Continental Hotel, Riyadh, Saudi Arabia. This is the first international conference and exposition on computer graphics to be held in Saudi Arabia. Industry and government representatives from Middle Eastern and Western nations will attend. For information, contact APAC '84 Conference Director, World Computer Graphics Association Inc., Suite 399, 2033 M St. NW, Washington, DC 20036, (202) 775-9556.

February 21

High-resolution Lithography, Palo Alto, CA. This intensive short course, sponsored by Continuing Education in Engineering and the College of Engineering of the University of California in Berkeley, will focus on advances in electron-beam lithography, optical lithography tools, and more. Advanced registration is re-

quired due to limited enrollment. The fee is \$215. For information, contact Continuing Education in Engineering, University of California Extension, 2223 Fulton St., Berkeley, CA 94720, (415) 642-4151.

February 21-23

Softcon, Superdome, New Orleans, LA. This international software conference and trade fair is designed for retailers, independent sales organizations, consultants, government agencies, educational institutions, and professional software developers. Registration is \$15. For information, contact Northeast Expositions, 822 Boylston St., Chestnut Hill, MA 02167, (800) 841-7000; in Massachusetts, (617) 739-2000.

February 22-24

Fundamentals of Finance and Accounting Using a Microcomputer, New York City. This three-day seminar is sponsored by the Data Processing Institute of the New York University School of Continuing Education. It will cover microcomputer applications for effective decision making and controlling business requirements. Previous computer knowledge is not required. The fee for the course is \$695. For details, contact the NYU School of Continuing Education Seminar Center, 575 Madison Ave., New York, NY 10022, (212) 748-5094.

February 22-24

Pick Spectrum '84, MGM Grand Hotel, Reno, NV. This business-computer forum, designed for people in computer education and the technical or manufacturing paths, will feature a wide array of demonstrations and exhibits. Seminars will be available on Pick implementations, networking, magnetic tape media, and voice response and recognition. The fee is

\$350. To register, contact International Database Management Association Inc., Suite 210, 9740 Appaloosa Rd., San Diego, CA 92131, (619) 578-3152.

February 22-28

Imprinta 84, Fairgrounds, Dusseldorf, West Germany. This international congress and exhibition will feature techniques and services in print communication and its alternatives. For details, contact Dusseldorf Trade Shows, 500 Fifth Ave., New York, NY 10110, (212) 840-7744.

February 23-24

Computers in Construction, Orlando, FL. This seminar is designed to assist construction contractors and construction management firms in acquiring computer systems. The fee is \$425 per registrant. More details are available from CIP Information Services Inc., 1105-F Spring St., Silver Spring, MD 20910, (301) 589-7933.

February 23-26

Technology, Entertainment, Design Communications Conference, Conference Center, Monterey, CA. Audio and visual presentations documenting technological advances and their usage in communications processes will be presented at this conference. Registration fees are \$475. Contact Judi Skalsky, T. E. D. Communications Conference, 635 Westbourne Dr., Los Angeles, CA 90069, (213) 854-6307.

February 25-26

Computers & Reading/Learning Difficulties, Hilton, San Francisco, CA. This second annual conference is designed for those people who use computers in the reading and language arts, and for overcoming learning disabilities. Interested persons may request brochures from Educational Computer Confer-

ences, Department N, 1070 Crows Nest Way, Richmond, CA 94803.

February 25-26

The Computer Supermarket Personal Computer Show, County Fairgrounds, San Mateo, CA. Retailers, manufacturers, and distributors will offer savings on a wide variety of personal computers, software, and accessories for hobby, business, and home uses. For exhibitor and show information, contact Microshows, POB 4323, Foster City, CA 94404, (415) 571-8041.

February 27-28

Software Tools for Distributed Support Systems, Westin Hotel at Copley Place, Boston, MA. This conference, targeted at managers and professionals, will feature in-depth demonstrations and discussions by leading software vendors. For details, contact Dr. Warren Briggs, The Software Tools Conference, Suffolk University, Beacon Hill, Boston, MA 02114, (617) 723-4700.

February 27-29

Fundamentals of Finance and Accounting Using a Microcomputer, Chicago, IL. For details, see February 22-24.

February 27-29

Micro Technology & Auditing, Westin Peachtree Plaza, Atlanta, GA. This intensive conference provides an update on state-of-the-art technology, controls, security, and auditability of microcomputer systems. Topics to be presented include a Unix system tutorial, recovery management for microcomputers, encryption, the Pick operating system, and the portable audit office. For details, contact MIS Training Institute Inc., 4 Brewster Rd, Framingham, MA 01701, (617) 879-7999.

February 27-March 2

MICAD '84, Paris, France. An exhibition associated with the MICAD biennial conference will be held for the first time. This event also marks the tenth anniversary of MICADO, the French Computer Graphics Association. MICAD will provide an opportunity for manufacturers of computer graphics hardware and software to make contact with the rapidly growing French computer-graphics market. For information, contact Caby Smith, World Computer Graphics Association Inc., Suite 399, 2033 M St. NW, Washington, DC 20036, (202) 775-9556. In Europe, contact MICADO, ZIRST, Chemin de Pre Carré, 38240 Meylan, France; tel: (76) 90-31-90; Telex: 980 882 F.

February 27-March 2

Welcome to the World of Personal Computing, Fort Lauderdale, FL. This workshop serves as a comprehensive introduction to the uses of microcomputer technology in business, industry, and government. Six modules, ranging from user productivity to software reliability, are on the agenda. For further information, contact Keston Associates, 11317 Old Club Rd., Rockville, MD 20852, (301) 881-7666.

February 28-29

The Twelfth Annual Midwest Digital Equipment Exhibit and Seminar, Thunderbird Motel, Minneapolis, MN. More than 100 manufacturers of computer terminals, data-communications equipment, peripherals, data-acquisition systems, and digital test instruments will display their products. Admission to both the exhibits and seminars is free of charge. For more details, contact Countryman Associates Co., 1821 University Ave., St. Paul, MN 55104, (612) 645-9151.

February 28-March 1

The Annual Computer Fair of the Computer Society of Bermuda, Princess Hotel, Southampton, Bermuda. The theme for this event is "Bermuda-The International Offshore Software Mart." Seminars, demonstrations, presentations, and vendor exhibits will highlight this show. For full details, contact James H. Young Jr., Computer Society of Bermuda, POB 1479, Hamilton 5, Bermuda, (809) 295-7111.

February 28-March 1

COMPCON Spring '84, San Francisco, CA. For details, contact the IEEE Computer Society, POB 639, Silver Spring, MD 20901, (301) 589-8142.

February 28-March 2

The Air Force Conference on Technology in Training and Education, School of Health

Care Sciences, Sheppard Air Force Base, TX. This conference will explore technology in aerospace applications, technical training, and education, with emphasis on current developments in the Department of Defense. Topics of discussion include computer-generated simulations and training aids and innovative uses of interactive videodiscs. For information, contact Captain Jim Campbell, SHCS/USAF/MSSA, SAFB Wichita Falls, TX 76311, (817) 851-6461.

March 1984

March 1-2

The Microcomputer Jungle: Impact on Health Care, Kansas City, KS. This course is designed to broaden the knowledge base for novice, intermediate, and advanced

small system users who work in health-care fields. The fee is \$90 for physicians, nurses, therapists, and administrators; \$45 for student/residents. For details, contact Jan Johnston, Office of Continuing Education, University of Kansas Medical Center, 39th and Rainbow, Kansas City, KS 66103, (913) 588-4480.

March 6-8

Professional Development Week '84 (P.D.W. '84), Holiday Inn, Ottawa, Ontario, Canada. The theme of this event sponsored by the Data Processing Institute is "Technology—Solution or Problem." Held in conjunction with Interchange '84, both events will cover various government electronic data processing applications and systems. For information, contact the Data Processing Institute, Box 2458, Station D, Ottawa, Ontario K1P 5W6,

Canada, or call Carol Halikas at (613) 992-3333.

March 8-9

Computers in Construction, San Diego, CA. For details, see February 23-24.


March 8-10

The Role of the Microcomputer in Education IV, Arlington Park Hilton, Arlington Heights, IL. In-depth seminars and sessions covering a wide range of educational topics make up this conference. Further information is available from Rick Nelson, Micro-Ideas, 1335 North Waukegan Rd., Glenview, IL 60025, (312) 998-5065.

March 12-14

Auditing and Controlling Microcomputers, Houston, TX. This seminar reviews the technology behind microcomputers and shows how they can be used by an audi-

NRZ DIGITAL DATA RECORDER



FEATURES:

.4800 BAUD data rate (3" per second) 1 ERROR in 10⁸ BITS • RS-232 or TTL interface — NO EXTERNAL INTERFACE REQUIRED • ASYNCHRONOUS COMMUNICATIONS STANDARD "HANDSHAKING" • SPEED STABILITY — LONG TERM ±.1% • COMPATIBLE with DC-3 • Works with CERTIFIED DATA or high quality FeO AUDIO TAPES • OPTIONS: 115v ac, 220v ac, 12v ac; Stand alone; Rack-mountable; 9600 BAUD; Buffered Version

The PD-1 SERIES DIGITAL DATA RECORDER continues to set new NRZ INDUSTRY STANDARDS. Its tachometer feedback LC stabilized motor circuit and heavy duty drive mechanism provide STABILITY, ACCURACY and RELIABILITY. You get LESS BIT DROP-OUT when capturing crucial information at HIGHER DATA TRANSFER RATES... at a MUCH LOWER COST. \$335.00

USED IN:


• PROCESS CONTROL • POINT-OF-SALE • TELEPHONE SWITCH LOGGING (Call Activity and Station Message Detail) • DIAGNOSTIC SUPPORT (local/remote) • HARD DISC BACKUP (for personal or small computer systems) • Many Other Applications

• An intelligent, buffered version of this device is also available.

TO ORDER, DIAL:
(201) 356-9200



From Computer Plus to YOU... PLUS after PLUS after PLUS



BIG SAVINGS ON A FULL COMPLEMENT OF RADIO SHACK COMPUTER PRODUCTS

COMPUTERS	PRINTERS	
Color Computer 64K ext. basic 5305	Silver Reed EXP500 D.W. 425	Model IIIa Drive 2 289
Model 4 Portable 64K 2 Drives 1525	Silver Reed EXP550 D.W. 645	Model IIIa Drive 3 259
Packet Computer 2 165	Daisy Wheel II 4745	Primary Hard Disk M12 2689
Packet Computer 3 89	DWP410 1159	Primary Hard Disk M11 1799
Packet Computer 4 59	DWP210 629	ETC.
Model 12 64K 1 Drive 2699	CGP145 159	CCR-81 Recorder 52
Model 12 64K 2 Drive 3375	CGP115 545	Cassette Tapes (10 Pk) 9.95
Model 168 1Dr 256K 4249	CGP220 link Jet 545	16K Ram Chips 25
Model 168 2Dr 256K 4915	DMP100 315	64K Ram Chips 75
MODEMS	DMP200 735	Model 4 64K Upgrade Kit 140
Hayes Smartmodem II 235	OWP500 1219	M100 Bar Code Reader 89
Hayes Smartmodem 4200 565	OHP2100 1689	8K Printer Buffer 135
Novation Smartcat 1200 459	Gemini 10X 315	Printer Stand 25
Novation J-Cat 425	Delta 10 515	Printer Cables 399
R.S. AC-3 129	Gemini 15X 399	Printer Ribbons 375
R.S. Modem I 89	Flower II 649	Printer Paper 649
R.S. Modem II 160	Oxidata 129	Dust Covers CALL
	Epson 89	Computer Books CALL
	DISK DRIVES	
	Model IIIa Drive 0 515	
	Model IIIa Drive 1 195	


CALL TOLL FREE
1-800-343-8124

- LOWEST POSSIBLE PRICES
- BEST POSSIBLE WARRANTY
- KNOWLEDGEABLE SALES STAFF
- TIMELY DELIVERY
- SHOPPING CONVENIENCE



computer plus
P.O. Box 1094
480 King Street
Littleton, MA 01460
SINCE 1973

IN MASSACHUSETTS CALL 1617 486-3193

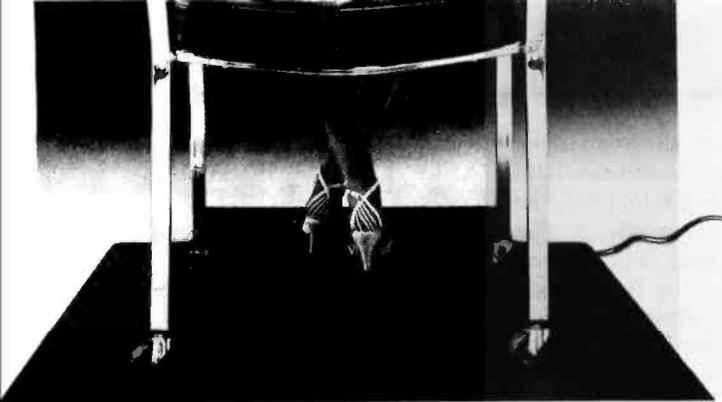

YOU CAN'T FIGHT STATIC SITTING DOWN.

Static electricity exists everywhere in an office environment—it's not just confined to a few square feet around a CRT. And when you consider that someone casually walking past a terminal can generate enough charges to trigger a major malfunction, it's clear that a small anti-static mat is hopelessly ineffective in protecting sensitive computers.

The solution is Staticide®. Unlike bulky mats, which can be unwelcome in a smartly-decorated office setting, Staticide provides an invisible barrier against static—a shield that remains in effect for up to six months with a single application. And while mats can cost hundreds, a quart of Staticide is only a few dollars. What's more, now you could wipe out static and dust attraction on CRT screens and keyboards with new Staticide® Wipes™.

Staticide from ACL. When you compare it against anti-static mats, the results will floor you.

Staticide
by ACL Incorporated

 1960 East Devon Ave.
Elk Grove Village, IL 60007
(312) 981-9212, TELEX: 4330251



We offer no static to our customers.

Event Queue

tor for practice management or as a tool in an audit engagement. For a course outline, contact Miriam Hoyt, MIS Training Institute Inc., 4 Brewster Rd., Framingham, MA 01701, (617) 879-7999.

March 12-15

Interface '84, Convention Center, Las Vegas, NV. For details on this twelfth annual data communications/information-processing conference and exposition, contact the Interface Group Inc., 300 First Ave., Needham, MA 02194, (800) 325-3330; in Massachusetts, (617) 449-6600.

March 13

NorWesCon-84, Red Lion Inn Convention Center, Bellevue, WA. The theme of this ninth annual Pacific Northwest industrial electronics trade show is "Discover Solutions in Technology." Almost 50 manufacturers will present exhibits, demonstrations, and seminars of original equipment manufacturing and end-user products for the industrial electronics marketplace. Admission is free for all members of the industry. For information, call the sponsor, Almac Electronics Corp., 14360 Southeast Eastgate Way, Bellevue, WA 98007, (206) 643-9992.

March 13-15

CIMCOM, Convention Center, Washington, DC. The Computer-integrated Manufacturing and Communications (CIMCOM) conference and exposition is sponsored by the Computer and Automated Systems Association of the Society of Manufacturing Engineers (CASA/SME). It will focus on software development and applications, beginning with manufacturing planning and continuing through the manufacturing-control processes. For information, contact CASA/SME, One SME Dr., POB 930,

Dearborn, MI 48121, (313) 271-1500, ext. 521.

March 13-15

Micro/SET 84: Microcomputer Expo for Scientific, Engineering, and Technology, Engineering Society of Detroit, MI. Papers emphasizing microcomputer applications in research, design, engineering, and manufacturing will be presented. Complementing the conference program will be displays of scientific, engineering, and technical microcomputer hardware and software. For more information, write to the Conference Manager, Engineering Society of Detroit, 100 Farnsworth, Detroit, MI 48202.

March 13-15

Optical Storage of Documents and Images, Biltmore Hotel, Los Angeles, CA. Topics to be covered are read-write and read-only storage of analog and digital information including office documents, engineering drawings, and parts catalogs. The fee is \$695 for the first person from an organization and \$595 for each additional attendee. For more information, contact Technology Opportunity Conference, POB 14817, San Francisco, CA 94114-0817, (415) 626-1133.

March 15-16

Technology Outlook, the Wisconsin Center, Madison, WI. This seminar, conducted by the University of Wisconsin—Extension Engineering and Applied Science Program, is for industrial executives seeking an understanding of telecommunications, automation, computer advances, and genetics. The fee is \$475. For information, contact the University of Wisconsin—Extension, Department of Engineering and Applied Science, 432 North Lake St., Madison, WI 53706, (608) 262-3748.

March 18-22

Saudicomputer '84—The Business Computer Show, al-Dhiafa Exhibition Centre, Riyadh, Saudi Arabia. For information, contact Philip Jenkinson, Saudicomputer '84, Overseas Exhibition Services Ltd., 11 Manchester Square, London W1M 5AB, England; tel: 01-486 1951; Telex: 24591 Montex G.

March 19-21

Material Characterization Techniques for Integrated Circuit Processing, San Mateo, CA. This three-day course is designed to acquaint participants with current techniques for integrated-circuit development, process monitoring, and failure analysis. The course fee is \$450 for lectures only or \$695 for the third-day lab session. For information, contact Continuing Education in Engineering, University of California Extension, 2223 Fulton St., Berkeley, CA 94720, (415) 642-4151.

March 19-22

Automated Manufacturing Conference and Exhibition (AM84), Textile Hall, Greenville, SC. The latest automated manufacturing technologies will be the focus of this combination exhibition and seminar. Representatives from more than 200 firms are expected. Complete details about the conference can be obtained from the AM84 Registration Control Center, POB 5616, Station B, Greenville, SC 29606, (803) 242-3170, ext. 260. Details about the exhibition are available from AM84, POB 5823, Greenville, SC 29606, (803) 233-2562.

March 19-22

The Eighth Annual Federal Office Systems Expo (FOSE '84), Convention Center, Washington, DC. The theme for this year's expo is "Realities of Integration: Technologies, Applications, Human

Resources." More than 60 conference sessions and 1200 exhibits are planned. Address inquiries to Jacqueline Voigt, National Trade Productions, 9418 Annapolis Rd., Lanham, MD 20706, (800) 638-8510; in Maryland, (301) 459-8383.

March 22-23

Computers in Construction, New York, NY. For details, see February 23-24.

March 22-25

The Ninth West Coast Computer Faire, Civic Auditorium and Brooks Hall, San Francisco, CA. This is one of the year's largest computer shows. For information, contact the Computer Faire Inc., Suite 201, 181 Wells Ave., Newton, MA 02159, (617) 965-8350.

March 23

The 1984 Computer Law Institute, Cleveland, OH. This event, sponsored by the Bar Association of Greater Cleveland, will cover current legal and tax issues that affect the computer industry. For details, contact Carole Falcone, Mall Building, Cleveland, OH 44114, (216) 696-3525.

March 26-28

The Seventh International Conference on Software Engineering, Orlando, FL. This conference seeks to evaluate what has been learned from the past and to provide directions for future investigations in software engineering. Its theme is "Fifteen Years of Software Engineering: Results and Futures." A software tools fair will be held concurrently. Contact the IEEE Computer Society, POB 639, Silver Spring, MD 20901, (301) 589-3386.

March 26-29

Personal Computer Interfacing and Scientific Instrument Automation, Blacksburg, VA. These hands-on

COHERENT™

The most powerful UNIX™-compatible operating system available for the IBM PC™, IBM XT™ and compatibles.

Now you can have the multi-user, multitasking programming capability of a mainframe on a microcomputer. The UNIX-compatible environment of COHERENT™ lets you take C code developed using UNIX V7 system utilities and compile and run it on the IBM PC, IBM XT and Corona.

COHERENT'S highly-optimized kernel lets you access over 145 different commands including a C-compiler, a text-formatter and LEX and YACC. Extensive hard disk and memory card support is available now. By the time this ad appears more devices and more IBM PC compatibles will be supported.

The cost — far less than the cost of similar UNIX-based operating systems and when you buy COHERENT from NCI you receive all the documentation and technical support you need to operate it.

Call or write



Network Consulting Inc.
Discovery Park,
3700 Gilmore Way, Suite 110,
Burnaby, B.C. Canada V5G 4M1
(604) 430-3466

COHERENT is a trade mark of Mark Williams Co. UNIX is a trade mark of Bell Laboratories. IBM PC and IBM XT are trade marks of International Business Machines Corporation.



Event Queue

workshops, sponsored by the Virginia Polytechnic Institute and State University, provide participants with experience in wiring and testing interfaces on popular personal computers. For information, contact Dr. Linda Leffel, C.E.C., Virginia Tech, Blacksburg, VA 24061, (703) 961-4848.

March 26-30

The Sixth NC Industrial Automation and Robot Conference and Exhibition, Milan Fair, Milan, Italy. Controls for automated material handling, variable mission manufacturing systems, and quality control will be featured. A concurrent conference consisting of 20 sessions will be presented. For more information, contact the Society of Manufacturing Engineers, One SME Dr., POB 930, Dearborn, MI 48121, (313) 271-0023.

March 27-29

Southwest Computer Conference (SWCC), Myriad Convention Center, Oklahoma City, OK. This seventh annual business and industry conference is aimed at management and technical personnel. It will feature more than 50 seminar presentations and 250 exhibits. For details, contact E. Z. Million, SWCC, POB 950, Norman, OK 73070, (405) 329-3660.

March 28-30

The Sixth Annual Computer Graphics Conference, Doral Hotel On-the-Ocean, Miami Beach, FL. The theme for this conference is "Forecasts and Assessments." Further details are available from Carol Saphchin, Frost & Sullivan Inc., 106 Fulton St., New York, NY 10038, (212) 233-1080.

March 30-31

Third Annual Conference on

Communication Technology, Joseph Stokes Auditorium, Children's Hospital of Philadelphia, PA. This program presents advances in technology and treatment alternatives for physically handicapped and speech-impaired persons. Speakers, equipment demonstrations, and workshops are planned. The two-day registration fee is \$95, which includes all course materials. If your registration request is post-marked before March 10, the fee is \$85. Group rates are offered. For full particulars, contact Joan Bruno, Children's Seashore House, 4100 Atlantic Ave., POB 4111, Atlantic City, NJ 08404, (609) 345-5191, ext. 278.

March 30-April 1

The NY Personal Computer Show, Exposition Rotunda, Madison Square Garden, New York City. Formerly


called the Eighty/Apple/PC Computer Show, this event will feature products and services for all small computer systems. Complete show details can be obtained from the Kengore Corp., POB 13, Franklin Park, NJ 08823, (201) 297-2526.

April 1984

April 1-4

The 1984 EFT Expo, Hyatt Regency, Grand Cypress Resort, Orlando, FL. This annual convention and exposition, sponsored by the Electronic Funds Transfer (EFT) Association, provides the opportunity to meet with leaders and experts in the field of automated payments systems and services. The fee is \$495 for EFT members and \$625 for nonmembers. For details, contact the EFT Association, Convention

INTEX-TALKER™ TEXT TO SPEECH SYNTHESIZER



A NEW STANDARD IN PROFESSIONAL VOICE QUALITY

The new INTEX-TALKER features professional voice quality, unlimited vocabulary and automatic inflection control. The built-in text-to-phoneme algorithm is highly accurate. INTEX-TALKER can speak or spell any ASCII text - including punctuation. 8 K bytes of user programmable memory are included. A 2.7 K character buffer is available for text storage or downloading user programs. Other features include:

- 64 inflection levels (automatic or manual control)
- RS232C and Parallel connectors
- Spelling and phoneme access modes
- Adjustable baud rates (75-9600)
- 5 octaves of music
- 6502 Microprocessor
- Completely self-contained (requires no overhead)
- Built in speaker option
- Available at board level in OEM quantities

For More Information

Write or call us at (313) 540-7601 to order or request our product brochure. Visa/Master Charge accepted. \$345.00 (plus shipping).

Intex Micro Systems Corporation

725 S. Adams Rd. - Suite L-8
Birmingham, Michigan 48011



"CAT-100 COMPUTER"

The CAT-100 Computer. Some say it's ahead of its time, we say it's just in time, with its dual onboard processor Z80/6502, the CAT-100 is capable of running both Apple II and CPM software. System monitor ROM includes only boot program. Base price includes 64K memory, one disk drive and four Apple compatible expansion slots. The CAT-100 has optional dual slim-line disk drives, made by quality famous ALPS of Japan. The detachable full ASCII keyboard has standard upper/lower case, auto repeat & N key rollover capabilities. Standard on the keyboard are separate cursor control keys and a numeric keypad. Last but not least the display has composite color or B/W output with six color graphic display (280 * 192 line or 280 * 160 with 4 text lines). Game I/O connector and built-in speaker are standard, not options. So when you read this ad call us for a brochure. You won't be too late, you'll be just in time.

PRICE: **\$850⁰⁰** (keyboard, 64K and disk drive included)

SEI, Inc. 641 Academy Dr., Northbrook, IL 60062

To order out-of-state call: 1-800-323-1327

For information & Illinois orders call: 1-312/564-0104

VISA & MasterCard acceptable - Add 5% for shipping & handling

Coordinator, Suite 800, 1029 Vermont Ave. NW, Washington, DC 20005.

April 2-4

Speech Tech—84, St. Moritz Hotel, New York City. This voice-synthesis and recognition applications show covers voice input/output as applied to computers, telecommunications, defense electronics, robotics, education, and aids for the handicapped. For information, contact Stanley Goldstein, Media Dimensions Inc., 525 East 82nd St., New York, NY 10028, (212) 680-6451.

April 2-5

The 1984 Test & Measurement World Expo, Brooks Hall, San Francisco, CA. This is the third annual expo sponsored by *Text and Measurement World*, a magazine from Interfield Publishing. For details, contact Meg Bowen, Test & Measurement World Expo, 215 Brighton Ave., Boston, MA 02134, (617) 254-1445.

April 3-5

Cincinnati Business Show, Convention-Exposition Center, Cincinnati, OH. Exhibits include automated office

equipment, computers, communications, telephone systems and equipment, word processors, business systems and forms, and software and computer peripherals. For information, contact Weber and Associates Inc., 10608 Millington Court, Cincinnati, OH 45242, (513) 791-6303.

April 3-6

DEXPO East 84, Bayside Exposition Center, Boston, MA. This conference, dedicated to professionals who use Digital Equipment Corporation (DEC) equipment, is sponsored by the national independent DEC user group of Warwick, Rhode Island. Topics to be covered are office automation, personal computers, communications, security and disaster planning, education, graphics, technology trends, and other areas of interest. For information, contact Expoconsul International Inc., 55 Princeton-Hightstown Rd., Princeton Junction, NJ 08550, (609) 799-1661.

April 4-11

CeBIT, Hannover, West Germany. This office-equipment and data-processing technology exhibition will bring to-

gether exhibitors from more than 25 countries. For information, contact Hannover Fairs Information Center, POB 338, Route 22 E, Whitehouse, NJ 08888, (800) 526-5978; in New Jersey, (201) 534-9044.

April 5-7

COMDEX/Winter, Convention Center, Los Angeles, CA. This conference and exhibition will feature separate hardware and software sections on the same exhibit floor. For information, contact The Interface Group Inc., 300 First Ave., Needham, MA 02194, (800) 325-3330; in Massachusetts, (617) 449-6600.

April 8-11

World Retailers Business & Equipment Exposition, Palais des Congres, Paris, France. This exposition is sponsored by the National Retail Merchants Association (NRMA) and runs concurrently with NRMA's Ninth World Conference of Retailers. The exposition is designed to introduce store merchants to new developments, equipment, and procedures. Admission is free, although retail store mer-

chants must show ticket. For complimentary tickets and details, write to Dan Soskin, NRMA Enterprises, 100 West 31st St., New York, NY 10001.

April 9-12

Intergraphics '84, Sasakawa Memorial Hall, Tokyo, Japan. This conference and exposition is cosponsored by the Society of Manufacturing Engineers (SME) and the World Computer Graphics Association (WCGA). It will focus on the growing importance of computer graphics in business and manufacturing industries. For information, contact James McLaughlin, Society of Manufacturing Engineers, One SME Dr., POB 930, Dearborn, MI 48121, (313) 271-0023.

April 13-14

The Fourteenth Annual Virginia Computer User's Conference, Sheraton Hotel, Blacksburg, VA. This conference is sponsored by the Virginia Tech Student Chapter of the ACM (Association for Computing Machinery) and the computer science department of Virginia Tech. Topics include modeling and simulation, STARS and

a message to our subscribers

From time to time we make the BYTE subscriber list available to other companies who wish to send our subscribers material about their products. We take great care to screen these companies, choosing only those who are reputable, and whose products, services, or information we feel would be of interest to you. Direct mail is an efficient medium for presenting the latest personal computer goods and services to our subscribers.

Many BYTE subscribers appreciate this controlled use of our mailing list, and look forward to finding information of interest to them in the mail. Used are our subscribers' names and addresses only (no other information we may have is ever given).

While we believe the distribution of this information is of benefit to our subscribers, we firmly respect the wishes of any subscriber who does not want to receive such promotional literature. Should you wish to restrict the use of your name, simply send your request to the following address.

BYTE Publications Inc
Attn: Circulation Department
70 Main St
Peterborough NH
03458

BEST IN PRICE & QUALITY

Call Now TOLL FREE 800-368-3404 (In VA, Call Collect 703-237-8695)

AMPEX • INTERTEC • TEXAS INSTRUMENTS • GENERAL DATA COMM. • ANDERSON JACOBSON • C. ITOH • QUME • BEEHIVE • DATASOUTH • DIABLO • CENTRONICS • NEC • PRENTICE

MICROS

INTERTEC SUPERBRAIN II	
64K DD*	\$1798
64K QD*	\$2143
64K SD* (96TPI)	\$2689
*(Includes M/Soft BASIC)	
DYNABYTE 8/16 BIT	Call
CALLAN 16/32 BIT	Call

PRINTERS

NEC	
7710 Ser.	\$1899
7715	\$1949
7730 Par.	\$1899
7720	\$2449
7725	\$2496
Std. Tractor 77xx	\$ 199
3510	\$1364
3515	\$1394
3530	\$1390
3550 (IBM)	\$1709
DATASOUTH DS180	Call
DATASOUTH DS220	Call

DIABLO

620-SPI	\$ 849
630-R-102/147	\$1949
630ECS	\$2389
630-R155*	\$1694
*(for IBM PC, Apple II, TRS-80)	
630K104 (KSR)	\$2265

QUME	
Sprint 11/40-PLUS	\$1288
Interface	\$ 76
Sprint 11/55	Call
Sprint 9/45 FP	\$1794
Sprint 9/55 FP	\$2080
Bi-Dir Forms Tractor	\$ 219
CENTRONICS: 122 Par	
351	\$689
BarCode	\$1673
	\$ 98

TERMINALS

AMPEX	
D80	\$ 689
PHAZE (3270 Ex. Mem)	\$1589
BEEHIVE (SMART DISPLAY)	
DM5	Call
DM5A	Call
DM83 (Burroughs)	Call
DM3270 (3270 Emulator)	Call
Protocol Converter	Call
QUME	
QVT-102	\$ 549
QVT-108	Call
C. ITOH	
CIT 101	\$1289
CIT 161 (64 Colors)	Call
CIT 201 (Graphics for TEK 4010/4014)	Call

CIT 414 (Graphics 640 x 480 Res.)	
	Call
TEXAS INSTRUMENTS	
745 Standard	\$1172
745 Std. (Reconditioned)	Call
765 Bbl M'my	Call
785/787	Call
810 Basic	\$1249
810 Package	\$1439
820 Package RO	\$1610
820 KSR Package	Call
703 Std.	\$ 459
707 KSR	\$ 549
850 Tractor Feed	\$ 549

MODEMS

Prentice Star 300 Bd.	\$ 124
U.S. Rob	
Password AD (212A)	\$ 347
US Rob TelPack	\$ 69
Stat Muxes	Call
Ventel 212 + 3E	Call
Prentice 24/9600 bd	Call

DISC DRIVES

QUME	
Data Trak 5 \$ 289 or 2 for \$	549
Data Trak 8 \$ 519 or 2 for \$	999

SOFTWARE

BISYNC-3780	\$ 569
WordStar	\$ 279
DataStar	\$ 218
Mail Merge	\$ 144
SpellStar	\$ 144
Plan 80	\$ 249
d Base II	\$ 489
CalcStar	\$ 119
SuperSort	\$ 144
SuperCalc	\$ 144
InfoStar	\$ 279
InfoStar (8")	Special \$ 249
CIS Cobol	\$ 689
Forms II	\$ 159
MACRO 80	\$ 183
"C" Compiler	\$ 239

WordStar Professional (WS, SS, MM, S1)	
	\$ 399
ReportStar	\$ 199
StarIndex	\$ 129
PlanStar	Call
StarBurst	Call
InfoStar Plus	Call

IBM PC

256K RAM Bd.	\$ 256
256K RAM Bd Full Parity	\$ 305
BabyBlue	\$ 600
BabyTex	\$ 600
BabyTalk 3270 BISYNC	\$ 895
8" Disk Controller	\$ 395

We also make EIA RS 232 or RS 449 cables to your order, can supply you with ribbons, printer stands, print wheels, thimbles for all printers listed. Plus many, many more items. Most items in stock. CALL NOW.

All items shipped freight collect either motor freight or UPS unless otherwise specified. All prices already include 3% cash discount. Purchase with credit card does not include discount. Virginia residents, add 4% Sales Tax. For fastest delivery send certified check, money order or bank-wire transfer. Sorry, no C.O.D. orders. All equipment is in factory cartons with manufacturers warranty (honored at our depot). Prices subject to change without notice.



TERMINALS TERRIFIC

Terminals Terrific, Inc., P.O. Box 216, Merrifield, VA 22116
Phone: 800-368-3404 (In VA, Call Collect 703-237-8695)

Event Queue

Japanese fifth-generation computers, and microcomputers. For information, contact Suzanne Nagy or Roger Goff, VCUC-14, 562 McBryde Hall, Virginia Tech, Blacksburg, VA 24061.

April 13-15

The International Personal Robotics Congress and Exposition, Convention Center, Albuquerque, NM. International corporations and high-technology executives can view the latest in robots designed to serve personal needs. For details, contact Albuquerque Convention and Visitors Bureau Inc., POB 26866, Albuquerque, NM 87125-6866, (505) 243-3696.

April 16-18

Videotex '84, Chicago, IL. The focus of this international conference and exhibition is commercial applications and activities of videotex. For details, contact Sally Summers, London Online Inc., Suite 1190, 2 Penn Plaza, New York, NY 10121, (212) 279-8890.

April 17-19

IPAD II, Marriott Hotel, Denver, CO. This is the second national symposium to promote a wider awareness of the technology surrounding the Integrated Program for Aerospace-vehicle Design (IPAD). The focus will be on advances in distributed database management technology to support integrated CAD/CAM requirements. It is sponsored by the National Aeronautics and Space Administration, the Department of the Navy, and the Industry Technical Advisory Board for IPAD. Information is available from the IPAD Project Office, Mail Stop 246, NASA Langley Research Center, Hampton, VA 23665, (804) 865-2888.

April 18-20

The 1984 Rocky Mountain Data Processing Expo &

Conference, Denver, CO. This is the seventh annual expo sponsored by the Mile High Chapter of the Data Processing Management Association. Displays will include mini- and microcomputers, word processors, software, educational services, and network systems. It is being held in conjunction with the DPMA's Region 4 conference. For information, contact Industrial Presentations West Inc., Suite 304, 3090 South Jamaica Court, Aurora, CO 80014, (303) 696-6100.


April 24-25

Workspace 84, Moscone Center, San Francisco, CA. This second annual conference and exposition, sponsored by National Fairs Inc., will be devoted to the concerns of the automated office. For details, contact Charley Yourd, National Fairs Inc., 1902 Van Ness Ave., San Francisco, CA 94109.

April 26-28

Science Park '84, New Haven, CT. This microcomputer conference and exposition is designed for small-business executives. For details, contact Science Park '84, Five Science Park, New Haven, CT 06511, (203) 436-3089. ■

In order to gain optimal coverage of your organization's computer conferences, seminars, workshops, courses, etc., notice should reach our office at least three months in advance of the date of the event. Entries should be sent to: Event Queue, BYTE Publications, POB 372, Hancock, NH 03449. Each month we publish the current contents of the queue for the month of the cover date and the two following calendar months. Thus a given event may appear as many as three times in this section if it is sent to us far enough in advance.

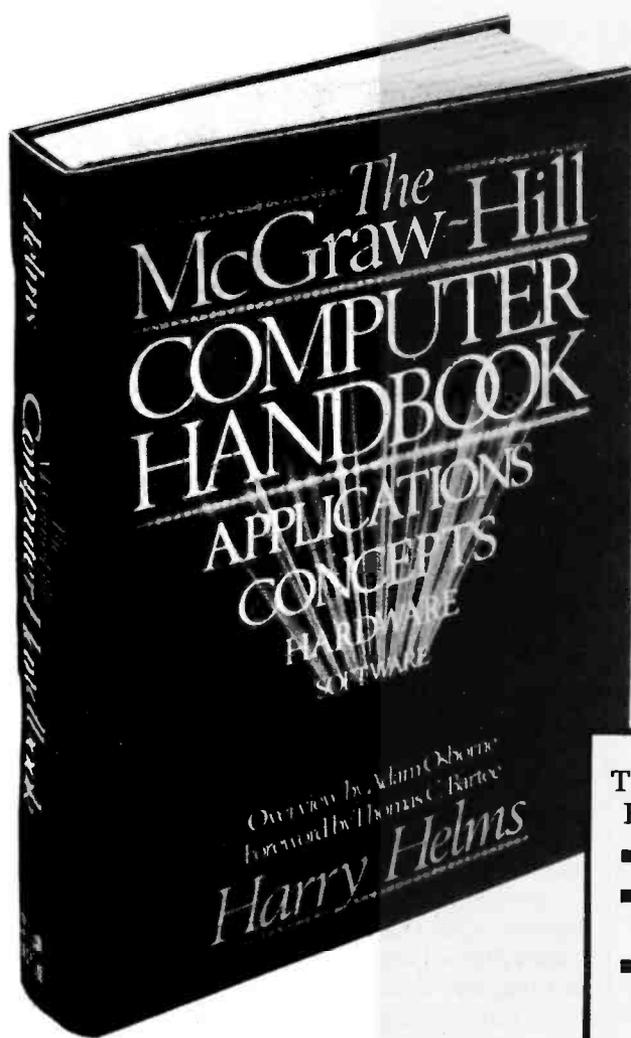

Take this giant \$79.50 Handbook for only \$3.00...

when you join the **Byte Book Club™**

You simply agree to buy 3 more books – at handsome discounts – within the next 12 months.

THE MCGRAW-HILL COMPUTER HANDBOOK
Editor in Chief, Harry Helms

- 30 big sections give you in-depth answers
- 992-page mammoth sourcebook includes nearly 500 helpful illustrations
- a staff of well-known contributors share the expertise that helped launch the computer revolution

It puts the whole spectrum of computer science at your fingertips!

4 more reasons to join today!

1. Best and newest books from ALL publishers! Books are selected from a wide range of publishers by expert editors and consultants to give you continuing access to the best and latest books in your field.

2. Big savings! Build your library and save money too! Savings range up to 30% or more off publishers' list prices – usually 20% to 25%.

3. Bonus books! You will immediately begin to participate in our Bonus Book Plan that allows you savings up to 70% off the publishers' prices of many professional and general interest books!

4. Convenience! 14-16 times a year (about once every 3-4 weeks) you receive the Club Bulletin FREE. It fully describes the Main Selection and alternate selections. A dated Reply Card is included. If you want the Main Selection, you simply do nothing – it will be shipped automatically. If you want an alternate selection – or no book at all – you simply indicate it on the Reply Card and return it by the date specified. You will have at least 10 days to decide. If, because of late delivery of the Bulletin you receive a Main Selection you do not want, you may return it for credit at the Club's expense.

As a Club member you agree only to the purchase of three additional books during your first year of membership. Membership may be discontinued by either you or the Club at any time after you have purchased the three additional books.

Whether you're a micro owner or a data processing professional, whether you use a computer for your business or in your home, here is the ideal single-volume reference.

Organized for fast, easy access, it offers thorough coverage of every aspect of computer science and engineering. Unlike other books which offer brief overviews, *The McGraw-Hill Computer Handbook* gives full-length, signed chapters to really fill you in on subjects as wide-ranging as:

- circuitry
- software
- languages
- peripherals
- networking
- robotics

It's the one-stop "answer book" that covers everything from basic computer theory to specialized areas like voice recognition and artificial intelligence.

Computerworld praises it for having "the depth and usefulness typical of a McGraw-Hill reference." It's "very readable," says *Compuserve*. And *Stock Market* magazine calls it "an invaluable reference tool for both the professional and the beginner."

Take advantage of this incredible limited time offer – join the Byte Book Club today and get your Handbook for only \$3!

Fill out the card and mail today! If the card is missing, write to:

BYTE BOOK CLUB™

P.O. Box 582,
Hightstown, New Jersey 08520



Books Received

The Academic Apple, Richard Mowe. Reston, VA: Reston Publishing, 1983; 176 pages, 15.3 by 23 cm, softcover, ISBN 0-8359-0033-9, \$10.95.

Advanced Database Machine Architecture, David K. Hsiao, ed. Englewood Cliffs, NJ: Prentice-Hall, 1983; 416 pages, 18.5 by 24.3 cm, hardcover, ISBN 0-13-011262-3, \$35.

Apple II DiskGuide, Zelda Gifford. Berkeley, CA: Osborne/McGraw-Hill, 1983; 46 pages, 13.5 by 13.5 cm, spiral-bound, ISBN 0-931988-96-9, \$7.95.

Atari 400/800 DiskGuide, John Taylor. Berkeley, CA: Osborne/McGraw-Hill, 1983; 64 pages, 13.5 by 13.5 cm, spiral-bound, ISBN 0-931988-95-0, \$7.95.

Automating Your Financial Portfolio, Donald Woodwell. Homewood, IL: Dow Jones-Irwin, 1983; 272 pages, 15.5 by 23.5 cm, hardcover, ISBN 0-87094-399-5, \$19.95.

Automation, John Diebold. New York: American Management Associations Book Division, 1983; 224 pages, 14.5 by 21.3 cm, hardcover, ISBN 0-8144-5756-8, \$14.95.

BASIC Subroutines for Commodore Computers, Eddie Adamis. New York: John Wiley & Sons, 1983; 320 pages, 17 by 25.3 cm, softcover, ISBN 0-471-86541-9, \$12.95.

C-Bims: Cassette-Based Information Management System for the PET, Gary Greenberg. Blue Ridge Summit, PA: Tab Books, 1983; 224 pages, 13 by 21 cm, softcover, ISBN 0-8306-1489-3, \$10.95.

The COBOL Programmer's Book of Rules, G. Ledin Jr., M. Kudlick, and V. Ledin. Belmont, CA: Lifetime Learning Publications, 1983; 240 pages, 15 by 23 cm, softcover, ISBN 0-534-97923-8, \$14.95.

CP/M DiskGuide, Curtis A. Ingraham. Berkeley, CA: Osborne/McGraw-Hill, 1983;

40 pages, 13.5 by 13.5 cm, spiral-bound, ISBN 0-931988-97-7, \$8.95.

CP/M for the IBM Using CP/M-86, Judi N. Fernandez and Ruth Ashley. New York: John Wiley & Sons, 1983; 272 pages, 17 by 25 cm, softcover, ISBN 0-471-89719-1, \$14.95.

Commodore 64 User's Handbook, the WSI staff. Cleveland, OH: Weber Systems Inc., 1983; 312 pages, 13.5 by 21.5 cm, softcover, ISBN 0-938862-50-2, \$14.95.

Computer Graphics for the IBM Personal Computer, Donald Hearn and M. Pauline Baker. Englewood Cliffs, NJ: Prentice-Hall, 1983; 352 pages, 18 by 24.5 cm, hardcover, ISBN 0-13-164335-5, \$24.95.

Computers for Profit, David C. Dykstra. Reston, VA: Reston Publishing Co., 1983; 272 pages, 17.5 by 23.5 cm, softcover, ISBN 0-8359-0867-4, \$14.95.

CONLAN Report, R. Piloty, M. Barbacci, D. Borrione, D. Dietmeyer, F. Hill, and P. Skelly. Lecture Notes in Computer Science, #151. New York: Springer-Verlag, 1983; 192 pages, 16.5 by 24.5 cm, softcover, ISBN 0-387-12275-3, \$10.

Controlling Financial Performance, An APPLE Business User's Guide, D. P. Curtin, J. R. Alves, and A. K. Briggs. Somerville, MA: Curtin & London, 1983; 176 pages, 21.5 by 28 cm, softcover, ISBN 0-930764-58-7, \$15.50.

Controlling Financial Performance, An IBM PC Business User's Guide, D. P. Curtin, J. R. Alves, and A. K. Briggs. Somerville, MA: Curtin & London, 1983; 176 pages, 21.5 by 28 cm, softcover, ISBN 0-930764-57-9, \$15.50.

Cryptography, Thomas Beth, ed. Lecture Notes in Computer Science, #149. New York: Springer-Verlag, 1983; 416 pages, 16.5 by 24 cm, softcover, ISBN 0-387-

11993-0, \$18.50.

DBMS For Distributed Computers and Networks, Dimitris N. Chorafas. Princeton, NJ: Petrocelli Books, 1983; 272 pages, 16 by 24 cm, hardcover, ISBN 0-89433-184-1, \$24.95.

The Design of Dynamic Data Structures, Mark H. Overmars. Lecture Notes in Computer Science, #156. New York: Springer-Verlag, 1983; 192 pages, 16.5 by 24 cm, softcover, ISBN 0-387-12330-X, \$10.

The Design of Well-Structured and Correct Programs, Suad Alagić and Michael A. Arbib. New York: Springer-Verlag, 1978; 304 pages, 16.5 by 24 cm, hardcover, ISBN 0-387-90299-6, \$17.

Direct Methods for Sparse Matrices, Ole Osterby and Zahari Zlatev. Lecture Notes in Computer Science, #157. New York: Springer-Verlag, 1983; 136 pages, 16.5 by 24.3 cm, softcover, ISBN 0-387-12676-7, \$8.50.

Easy Add-On Projects for Spectrum, ZX81 & ACE, Owen Bishop. London, England: Bernard Babani Ltd., 1983; 192 pages, 11 by 17.8 cm, softcover, ISBN 0-85934-099-6, £2.75.

Effective Structured Programming, Lem O. Ejiogu. New York: Petrocelli Books, 1983; 192 pages, 16 by 24 cm, hardcover, ISBN 089433-205-8, \$24.95.

Electro-Optical Communications Dictionary, Dennis Bodson and Dan Botez, eds. Rochelle Park, NJ: Hayden Book Co., 1983; 176 pages, 15.5 by 23.5 cm, hardcover, ISBN 0-8104-0961-5, \$16.95.

Electronics Handbook, Matthew Mandl. Reston, VA: Reston Publishing Co., 1983; 376 pages, 16 by 24 cm, hardcover, ISBN 0-8359-1603-0, \$29.95.

40 Easy Steps to Programming in BASIC & Logo, James L. Poirot and R. Clark

Adams. Austin, TX: Sterling Swift Publishing Co., 1983; 64 pages, 21.5 by 28 cm, softcover, ISBN 0-88408-275-X, \$3.95.

44 Dynamic ZX-81 Games and Recreations, Ian Davies. Englewood Cliffs, NJ: Prentice-Hall, 1983; 174 pages, 15.3 by 22.8 cm, softcover, ISBN 0-13-329144-8, \$19.95.

Foundations of Computation Theory, Marek Karpinski, ed. Lecture Notes in Computer Science, #158. New York: Springer-Verlag, 1983; 532 pages, 16.5 by 24.3 cm, softcover, ISBN 0-387-12689-9, \$22.

Getting Started on the Sharp 1500 & Radio Shack PC-2, H. C. Pennington, Gary Camp, and Ralph Burns. Upland, CA: IJG Inc., 1983; 280 pages, 21 by 27.5 cm, ISBN 0-936200-11-1, \$16.95.

Getting the Most Out of Your Word Processor, Arnold Rosen. Englewood Cliffs, NJ: Prentice-Hall, 1983; 222 pages, 17.3 by 23.5 cm, softcover, ISBN 0-13-354548-2, \$9.95.

Graph-Grammars and Their Application to Computer Science, Hartmut Ehrig, Manfred Nagl, and Grzegorz Rozenberg, eds. Lecture Notes in Computer Science, #153. New York: Springer-Verlag, 1983; 464 pages, 16.6 by 24.3 cm, softcover, ISBN 0-387-12310-5, \$20.50.

Guide to the IBM Personal Computer, Walter Sikonowiz. New York: BYTE Books/McGraw-Hill, 1983; 312 pages, 15.3 by 22.9 cm, softcover, ISBN 0-07-057484-7, \$19.95.

Hardware Interfacing with the Apple II Plus, John E. Uffenbeck. Englewood Cliffs, NJ: Prentice-Hall, 1983; 256 pages, 18 by 24 cm, hardcover, ISBN 0-13-383851-X, \$19.95.

How to Win at Video Games, the editors of *Consumer Guide*. New York: Crown Publishers, 1983; 64 pages, 21

Books Received

by 27.5 cm, spiral-bound, ISBN 0-517-42470-3, \$3.98.

I Speak BASIC to My VIC, (Teacher's Manual), Aubrey B. Jones Jr. Rochelle Park, NJ: Hayden Book Co., 1983; 272 pages, 21 by 28 cm, softcover, ISBN 0-8104-6169-2, \$18.75.

IBM and the U.S. Data Processing Industry: An Economic History, Franklin M. Fisher, James W. McKie, and Richard B. Mancke. New York: Praeger Publishers, 1983; 544 pages, 16 by 24.3 cm, hardcover, ISBN 0-03-063059-2, \$37.95.

IBM Data Files, David Miller. Reston, VA: Reston Publishing Co., 1983; 272 pages, 15.3 by 22.8 cm, softcover, ISBN 0-8359-3026-2, \$15.

IBM PC DiskGuide, David A. Wilson. Berkeley, CA: Osborne/McGraw-Hill, 1983; 48 pages, 13.5 by 13.5 cm, spiral-bound, ISBN 0-931988-94-2, \$8.95.

The IBM/PC & Business Software, James E. Kelley Jr. Wayne, PA: Banbury Books, 1983; 354 pages, 18 by 23.5 cm, spiral-bound, ISBN 0-88693-000-6, \$39.95. Includes two 5¼-inch floppy disks.

The IBM Personal Computer, Robert J. Traister. Blue Ridge Summit, PA: Tab Books, 1983; 202 pages, 19.5 by 23.5 cm, softcover, ISBN 0-8306-1496-6, \$10.95.

IC Timer Cookbook, 2nd ed. Walter G. Jung. Indianapolis, IN: Howard W. Sams & Co., 1983; 384 pages, 13 by 21 cm, softcover, ISBN 0-672-21932-8, \$17.95.

Kaypro User's Handbook, the WSI staff. Cleveland, OH: Weber Systems Inc., 1983; 312 pages, 13.5 by 21.5 cm, softcover, ISBN 0-938862-12-X, \$14.95.

The Master Memory Map for the Commodore 64, Paul Pavelko and Tim Kelly. Reston, VA: Reston Publishing

Co., 1983; 192 pages, 15.3 by 22.5 cm, softcover, ISBN 0-8359-4243-6, \$14.95.

Mastering Micros, Hannah I. Blank. New York: Petrocelli Books, 1983; 368 pages, 16 by 24 cm, hardcover, ISBN 0-89433-207-4, \$24.95.

Microcomputer Graphics and Programming Techniques, Harry Katzan Jr. New York: Van Nostrand Reinhold, 1982; 244 pages, 16 by 23.3 cm, hardcover, ISBN 0-442-28419-5, \$22.50.

Minute Manual for Apple Writer II, Jim Pirisino. Columbia, MD: Minuteware, 1983; 85 pages, 13.5 by 21.5 cm, softcover, ISBN 0-913131-00-8, \$7.95.

Office Automation and Word Processing Fundamentals, Shirley A. Waterhouse. New York: Harper & Row, 1983; 368 pages, 18.7 by 23.4 cm, softcover, ISBN 0-06-046954-4, \$14.50.

PC DOS Using the IBM PC

Operating System, Ruth Ashley and Judi N. Fernandez. New York: John Wiley and Sons, 1983; 240 pages, 17 by 25 cm, softcover, ISBN 0-471-89718-3, \$14.95.

Personal Computers & Games, the editors of *Consumer Guide*. New York: Crown Publishers, 1983; 64 pages, 21 by 27.5 cm, spiral-bound, ISBN 0-517-41595-X, \$3.98.



Pictorial Data Analysis, R. M. Haralick, ed. New York: Springer-Verlag, 1983; 480 pages, 17 by 25 cm, hardcover, ISBN 0-387-12288-5, \$49.70.

Planning and Budgeting, An APPLE Business User's Guide, J. R. Alves, D. P. Curtin, and A. K. Briggs. Somerville, MA: Curtin & London, 1983; 144 pages, 21.5 by 28 cm, softcover, ISBN 0-930764-62-5, \$15.50.

Planning and Budgeting, An IBM PC Business User's Guide,

DANA'S COMPUTER DISCOUNT

★ Highest Quality - Lowest Prices ★

<p>IBM PC KIT INCLUDES:</p> <ul style="list-style-type: none"> • DELUXE CASE • POWER SUPPLY W/FAN • DETACHABLE LOW PROFILE KEYBOARD • MOTHER BOARD FULLY SOCKETED • ALL COMPONENTS INCLUDED • FULL DOCUMENTATIONS • 128 K RAM • 5 EXPANSION SLOTS <p>ONLY \$995⁰⁰ ASSEMBLE IN 1 HOUR</p>	 <p>HALF HEIGHT Apple II & E Compatible Slim line - 40 trac w/patch Single sided 163 K capacity \$194⁹⁵</p>	<p>FULL HEIGHT Apple II & E Compatible 35 Trac Single sided 143 K capacity \$169⁹⁵</p> 	 <p>TEAC FD55B The Highest Quality! Slim line - 40 trac capability Double sided, double density Compatible \$189⁹⁵</p>	<p>LMS JOYSTICK Apple II & E Compatible Heavy duty case. \$29⁹⁵</p> 
---	---	---	---	--

Commodore® Compatible Drive \$299⁹⁵

RAM CHIPS 4164 150NS \$5.95 ea. Limit 64 Pcs
4164 200NS \$5.50 ea. per customer

Dana's Discount Computer Buyers Club ★ ★ ★ ★

- \$12.00 ANNUAL MEMBERSHIP (REFUNDABLE)
- \$10.00 CREDIT TOWARD FIRST PURCHASE.
- SPECIAL ADDED DISCOUNTS.
- MONTHLY SPECIALS FOR MEMBERS ONLY.
- SPECIAL MEMBERSHIP ACCOUNT AND I.D. CARD.
- PERSONAL CHECKS ACCEPTABLE FROM CLUB MEMBERS.

TRAC FD55F (DSOD-96TPI).....	\$239.95
12" Amber Monitor Low Res.....	89.95
12" Green Monitor Low Res.....	89.95
13" BMC Color Monitor.....	249.95
12" Alrona Amber Monitor HI Res.....	109.95
12" Alrona Green Monitor HI Res.....	109.95
80 Col. BMC Printer.....	249.95
3¼ Apple Compatible.....	CALL
3¼ IBM PC Compatible.....	CALL
5¼ (SSDD) Floppy Discs (Box of 10).....	16.95
Cooling Fans for Apple.....	44.95

APPLE II & E

Disc Drive Controller Card

Printer Interface Card

Epson Compatible



\$44⁹⁵

APPLE COMPATIBLE COMPUTER ONLY:

64 K Upper Lower
247 Functions on Keyboard
Numeric Keypad
H.D. Case

\$499⁹⁵

IC's Available & More	
74LS323.....	\$2.25
6116.....	4.90
2114.....	1.49
6502.....	4.95

ORDER DESK 8:00 A.M. TO 5:00 P.M.
PST MON. THRU FRI.
Orders normally shipped within 48 hours.

Join Our
Club
And Save!

Orders: 1-800-262-DANA

Dana's Computer Discount

P.O. Box 15485, Santa Ana, California

In California: (714) 953-9105

International orders accepted with a \$5.00 surcharge for handling, plus shipping charges. We accept Visa, MasterCard, Money Orders, and Certified checks. Checks require bank clearance. California residents add 6% sales tax. All subject to availability, acceptance, and verification. All sales are final. Satisfaction guaranteed or full refund.

* Eagle, IBM, Apple, Apple IIE, and Commodore are all registered trade marks of Eagle, IBM, Apple and Commodore corporations.

Books Received

J. R. Alves, D. P. Curtin, and A. K. Briggs. Somerville, MA: Curtin & London, 1983; 144 pages, 21.5 by 28 cm, softcover, ISBN 0-930764-61-7, \$15.50.

Polishing Your Apple, vol. 2, Herbert M. Honig. Indianapolis, IN: Howard W. Sams & Co., 1983; 112 pages, 14 by 21.5 cm, softcover, ISBN 0-672-22160-8, \$4.95.

Problem Solving and Structured Programming with Fortran 77, Martin O. Holioien and Ali Behforooz. Monterey, CA: Brooks/Cole Publishing Co., 1983; 528 pages, 18.5 by 23.5 cm, softcover, ISBN 0-534-01275-2, \$21.95.

The Programmer's CP/M Handbook, Andy Johnson-Laird. Berkeley, CA: Osborne/McGraw-Hill, 1983; 512 pages, 18.5 by 23.5 cm, softcover, ISBN 0-88134-103-7, \$21.95.

The Programmer's Craft, Richard J. Weiland. Reston, VA: Reston Publishing Co., 1983; 176 pages, 18 by 24 cm, hardcover, ISBN 0-8359-5645-8, \$18.95.

Programmer Productivity, Myths, Methods, and Morphology, Lowell Jay Arthur. New York: John Wiley & Sons, 1983; 314 pages, 16 by 24 cm, hardcover, ISBN 0-471-86434-X, \$22.95.

Programming a Personal Computer, Per Brinch Hansen. Englewood Cliffs, NJ: Prentice-Hall, 1983; 440 pages, 18 by 24.5 cm, hardcover, ISBN 0-13-730267-3, \$25.

The Programming Languages, C. H. Smedema, P. Medema, and M. Boasson. Englewood Cliffs, NJ: Prentice-Hall International, 1983; 160 pages, 15 by 23 cm, softcover, ISBN 0-13-729756-4, \$16.95.

The Programming Language Ada Reference Manual, ANSI/MIL-STD-1815-1983. Lecture Notes in Computer Science, #155. New York: Springer-Verlag, 1983; 344 pages, 16.5 by 24 cm, softcover, ISBN 0-387-12328-8, \$14.50.

Programming Languages, De-

sign and Implementation, 2nd ed. Terrence W. Pratt. Englewood Cliffs, NJ: Prentice-Hall, 1984; 624 pages, 18.5 by 24 cm, hardcover, ISBN 0-13-730580-X, \$24.95.

Programming the Apple II in BASIC, Paul Tebbe. Englewood Cliffs, NJ: Prentice-Hall, 1983; 192 pages, 15.3 by 22.8 cm, softcover, ISBN 0-13-729749-1, \$16.95.

Quadpack, A Subroutine Package for Automatic Integration, R. Piessens, E. de Doncker-Kapenga, C. W. Überhuber, and D. K. Kahaner. New York: Springer-Verlag, 1983; 312 pages, 15.5 by 23 cm, softcover, ISBN 0-387-12553-1, \$22.

Semiconductor Device Technology, Malcolm E. Goodge. Indianapolis, IN: Howard W. Sams & Co., 1983; 512 pages, 16.3 by 24.3 cm, hardcover, ISBN 0-672-22074-1, \$34.95.

Simulation of Computer Communication Systems, Charles H. Sauer and Edward A. MacNair. Englewood Cliffs, NJ: Prentice-Hall, 1983; 174 pages, 18.3 by 24.3 cm, hardcover, ISBN 0-13-811125-1, \$25.

Software Design and Development, Philip Gilbert. Chicago, IL: Science Research Associates, 1983; 704 pages, 19 by 24.5 cm, hardcover, ISBN 0-574-21430-5, \$32.

Software Directory, 7th ed. Fairfax, VA: PC Clearinghouse, 1983; 840 pages, 21.5 by 27.5 cm, softcover, ISBN 0-88674-000-2, \$29.95.

The Structured Alternative: Program Design, Style, and Debugging, Don Cassel. Reston, VA: Reston Publishing Co., 1983; 256 pages, 16 by 23.5 cm, hardcover, ISBN 0-8359-7084-1, \$24.95.

Structured Cobol Report Writer, David Schechter and George Yvkoff. Reston, VA: Reston Publishing Co., 1982; 320 pages, 18.3 by 24.3 cm, hardcover, ISBN 0-8359-7097-3, \$24.95.

25 Advanced Games for the PET/CBM, Larry Hatch. Reston, VA: Reston Publish-

ing Co., 1983; 224 pages, 15 by 23 cm, softcover, ISBN 0-8359-7894-X, \$12.95.

The User's Guide to Commodore 64 & VIC 20 Computers, Software & Peripherals, the editors of *Consumer Guide*. New York: Crown Publishers, 1983; 80 pages, 21 by 27.5 cm, spiral-bound, ISBN 0-517-41447-3, \$4.98.

User's Handbook to the Atari 400/800 Computers, Jeffrey R. Weber and Stephen J. Szczecinski. Cleveland, OH: Weber Systems Inc., 1983; 322 pages, 13 by 21.5 cm, softcover, ISBN 0-938862-15-4, \$13.95.

User's Handbook to the IBM Personal Computer, Jeffrey R. Weber. Cleveland, OH: Weber Systems Inc., 1982; 300 pages, 21.5 by 13.8 cm, softcover, ISBN 0-938862-13-8, \$13.95.

User's Handbook to the TRS-80 Model II Computer, Jeffrey R. Weber. Cleveland, OH: Weber Systems Inc., 1983; 304 pages, 13 by 21.5 cm, softcover, ISBN 0-938862-01-4, \$13.95.

User's Handbook to the VIC-20 Computer, Jeffrey R. Weber and Stephen J. Szczecinski. Cleveland, OH: Weber Systems Inc., 1983; 280 pages, 13.3 by 21.5 cm, softcover, ISBN 0-938862-48-0, \$13.95.

Using VisiCalc, Carol Klitzner and Matthew J. Plociak Jr. New York: John Wiley & Sons, 1983; 277 pages, 17 by 25 cm, softcover, ISBN 0-471-89852-X, \$16.95.

VIC BASIC, A User-Friendly Guide, Ramon Zamora, Don Inman, Bob Albrecht, and Dymax. Reston, VA: Reston Publishing Co., 1983; 360 pages, 15 by 23 cm, softcover, ISBN 0-8359-8377-3, \$14.95.

Visicalc DiskGuide, David A. Wilson, Berkeley, CA: Osborne/McGraw-Hill, 1983; 16 pages, 13.5 by 13.5 cm, spiral-bound, ISBN 0-931988-98-5, \$6.95.

A Z80 Workshop Manual, E. A. Parr. London, England:

Bernard Babani Ltd., 1983; 192 pages, 11 by 18 cm, softcover, ISBN 0-85934-087-2, £2.75. ■

This is a list of books received at BYTE Publications during this past month. Although the list is not meant to be exhaustive, its purpose is to acquaint BYTE readers with recently published titles in computer science and related fields. We regret that we cannot review or comment on all the books we receive; instead, this list is meant to be a monthly acknowledgment of these books and the publishers who sent them.

The answer to the cryptogram on page 386 reads:

SOME CONSIDER IT FOOLISH TO WORK THESE PUZZLES, WHILE OTHERS PREFER ANAGRAMS AND CROSSWORDS. I LIKE THEM ALL AND HOPE THAT YOU HAD SOME FUN WITH THIS EASY ONE.

BYTE's Bugs

Gremlins Tiptoed Here

Author Raymond A. Diedrichs wrote in to say that Gremlins had tiptoed through the version of his Font program ("A Character Editor for the IBM PC," November, page 467). The following patches should be made in the indicated program lines:

line 2090 "I + 1" instead of "I"
line 2175 "CROW + 1" instead of "CROW"
line 2280 "1 TO 8" instead of "0 TO 7"
line 2325 "1 TO 8" instead of "0 TO 7" ■

Clubs and Newsletters

Scope for Scholars

Scope (Scholarly Communications: Online Publishing and Education) is a newsletter that is produced bimonthly at Queens College in Flushing, New York, and contains information on networks, publishing opportunities, calls for papers, a calendar, and annotated bibliographies. An annual subscription is \$47. For details, write to *Scope*, Queens College, City University of New York, Flushing, NY 11367-0904.

A Word for IBM PC Users

The Washtenaw IBM Personal Computer User Society (WIPCUS) meets on the third Thursday of every month in Ann Arbor, Michigan. The monthly publication, *WIPCUS Word*, contains minutes of meetings, information of sources for the IBM Personal Computer, and a list of recent acquisitions in the WIPCUS disk library. The club also maintains a hotline and an electronic bulletin board system, the WIPCUS Wire, that operates 24 hours a day on the three commonly used modem protocols. Membership is \$18 a year; \$12 for students and senior citizens. Address all correspondence to Sue Wooley, WIPCUS, 2647 Yost, Ann Arbor, MI 48104.

Innovations in Education

Hands On is a quarterly newsletter produced by Technical Education Research Centers (TERC), a nonprofit, public service corporation dedicated to improving education by encouraging the appropriate use of microcomputers in labs and class-

rooms. Each issue includes articles, book and software reviews, a bulletin board, news, and an idea exchange. A \$10 contribution is requested to receive the quarterly newsletter. For information, contact Technical Education Research Centers Inc., 8 Eliot St., Cambridge, MA 02138.

Computer Assistance for the Disabled

The Center for Computer Assistance to the Disabled (C-CAD) is a nonprofit corporation that meets regularly to discuss how the discovery of computers has contributed to the quadriplegic businessperson. Meetings also include demonstrations of Logo, adaptive software, voice recognition, and more. For details, write to C-CAD, POB 314, Hurst, TX 76053.

A Students' Scroll

Scroll, a newsletter prepared by students in the technical-writing program at Middlesex Community College in Massachusetts, contains information about career objectives and skills that potential technical writers will need to develop. For further details, write to the Technical Writing Program, Middlesex Community College, Springs Rd., Bedford, MA 01730, or call Caryl Dunderf at (617) 275-8910, ext. 278.

Guide to Periodicals

The Computer Newsletter, a guide to microcomputer information, is produced ten times a year in six editions for various brands of computers available today. Each

issue contains a directory of recent articles from more than 50 periodical publications. References are annotated to include relevant source information. One subscription is \$17.50 for all ten issues; when subscribing, include the name and model of your computer. Contact MHN Services Inc., Department M3, POB 952, Cleveland, OH 44120.

Compupro Across the Board

A national nonprofit users group for owners of Godbout's Compupro provides a forum in which to share technical information, solutions, and special-purpose applications. A monthly newsletter, a bulletin board system, and a member-list publication are planned. An optional charter membership is available for \$10. To inquire or join, send your name, address, and equipment information to CPro Users Group, POB 1474, Woodbridge, VA 22193.

Newsletter for Productive Lawyers

The Automated Law Office Consultant is a newsletter that provides lawyers with information and analyses about automated-office products and how to select equipment that will improve productivity in the law office. A subscription is \$65 a year from Roadrunner Publications Inc., POB 13548, Austin, TX 78711.

IBM Users In Bluegrass Country

The Bluegrass IBM PC Users Group meets on the fourth Saturday of every

month at 1 p.m. in the University of Kentucky Computing Center's Micro Lab (Room 107, McVey Hall). Membership is \$5 a year and includes a monthly newsletter and access to a software library. For further information, write to Diane Skoll, Room 72, McVey Hall, University of Kentucky, Lexington, KY 40506-0045.

For Genealogical Researchers

The Quinsept User Group produces a newsletter that covers such topics as genealogical-book reviews, problem solutions, and articles of interest to genealogical researchers. The newsletter will begin as a quarterly and progress into a bimonthly publication. Membership is \$15 annually and includes a subscription to the newsletter. To apply for membership, write to Quinsept User Group, 5855 Santa Teresa Blvd., San Jose, CA 95123.

Oregonian Commodorians

The Southern Oregon Users Group meets twice a month to discuss the best uses for the Commodore 64 and VIC-20 computers. A newsletter is planned and anyone with ideas or suggestions is encouraged to send them to Jim Powell, 3600 Madrona Lane, Medford, OR 97501, (503) 779-7631.

A Capital Idea

The Capital Osborne Users Group (CAPOUG) meets once a month at the library in Bethesda, Maryland, to serve users from Maryland, northern Virginia, and the District

Clubs and Newsletters

of Columbia. A \$12 membership fee includes access to the software library maintained by the club and a subscription to the newsletter that contains articles, tutorials, and advertisements. For details, write to Merrill Hessel, 6200 Winnebago Rd., Bethesda, MD 20816.

Math and Science Education Journal

The Association of Computers in Mathematics and Science Teaching (ACMST), a nonprofit organization, produces a substantive quarterly publication called *The Journal of Computers in Mathematics and Science Teaching (JCMST)*. It is applicable to elementary, secondary, and college educators who would benefit from extensive features, re-

views, resources, and a calendar. Members can benefit from the group's Computer Book Center, in which more than a dozen participating publishers of computer books provide reduced rates. Membership in ACMST is \$15 a year and includes a subscription to the quarterly *JCMST*. Author's guidelines and advertising rates are available upon request. For further details, write to *The Journal of Computers in Mathematics and Science*, POB 4455, Austin, TX 78765.

Ataris are OK In Duncan

The Duncan Area Atari Computer Users Group (DAACUG) welcomes everyone interested in computing with Ataris to attend their monthly meetings in south-

western Oklahoma. Separate sessions for novice and experienced users are held after each general meeting. Annual membership dues are \$10 and include access to the club's disk library and discounts on hardware and software purchases. For further details, contact John Borchardt, DAACUG, 911 Primrose St., Duncan, OK 73533.

A Band of Colors

The Vancouver Color Computer Club meets at 7:30 p.m. on the third Tuesday of every month in Burnaby, British Columbia. To develop as broad a base as possible, everyone interested in the TRS-80 Color Computer is welcome to join. The \$15 annual membership entitles you to participate in group purchases, the software library, hardware lending, and voting in the club. For details, contact the Vancouver Color Computer Club, 333 Boyne St., New Westminster, British Columbia V3M 5J9, Canada.

ABACOS By the Bunch

A Bunch of Atari Computer Owners (ABACOS) has formed in the Saugerties area of New York state to serve the users who live between Albany and New York City. A newsletter, *Refresh*, is produced every two months and contains software re-

views, an editorial, and a program of the month. A \$4 annual membership includes a subscription to the newsletter. For details, contact ABACOS, 90-A Partition St., Saugerties, NY 12477, (914) 246-7193.

News for Epson Users

QHX, an independent newsletter for users of the Epson QX-10 and HX-20 computers, is produced every month by the Epson Computing Group. Readers are welcome to submit questions, hints, or articles about new products to *QHX* for publication. The number of the free, club-maintained, active electronic bulletin board is (618) 997-3220. A one-year subscription to the newsletter is \$25. For further details, contact the Epson Computing Group, 400-2 East DeYoung, Marion, IL 62959, (618) 993-3600.

Forum for Data

The Data Forum is a user-oriented and -operated information exchange free to users who apply via the communications line. The database has plans to expand with user input. For information, contact Stephan Anderson, Suite 718, 20993 Foothill Blvd., Hayward, CA 94541, or call (415) 276-6322. ■

ATTENTION LA36 USERS

The DS120 Terminal Controller makes your LA36 perform like a DECwriter® III.

The Datasouth DS120 gives your DECwriter® II the high speed printing and versatile performance features of the DECwriter® III at only a fraction of the cost. The DS120 is a plug compatible replacement for your LA36 logic board which can be installed in minutes. Standard features include:

- 165 cps bidirectional printing
- Horizontal & Vertical Tabs
- Page Length Selection
- 110-4800 baud operation
- 1000 character print buffer
- X-on, X-off protocol
- Self Test
- RS232 interface
- 20 mA Current Loop interface
- Top of Form
- Adjustable Margins
- Double wide characters
- Parity selection
- Optional APL character set


Over 9,000 DS120 units are now being used by customers ranging from the Fortune 500 to personal computing enthusiasts. In numerous installations, entire networks of terminals have been upgraded to take advantage of today's higher speed data communications services. LSI microprocessor electronics and strict quality control ensure dependable performance for years to come. When service is required, we will respond promptly and effectively. Best of all, we can deliver immediately through our nationwide network of distributors. Just give us a call for all the details.

datasouth
computer corporation

P.O. Box 240947 • Charlotte, North Carolina 28224
704/523-8500

If you would like BYTE readers to know about your club or newsletter send the details accompanied by no more than one newsletter to Clubs and Newsletters, BYTE Publications, POB 372, Hancock, NH 03449. Overseas groups are encouraged to participate. Please allow at least three months for your announcement to appear.

ANNOUNCING THE INSIDE STORY ON DATA SPEC™ CABLES.

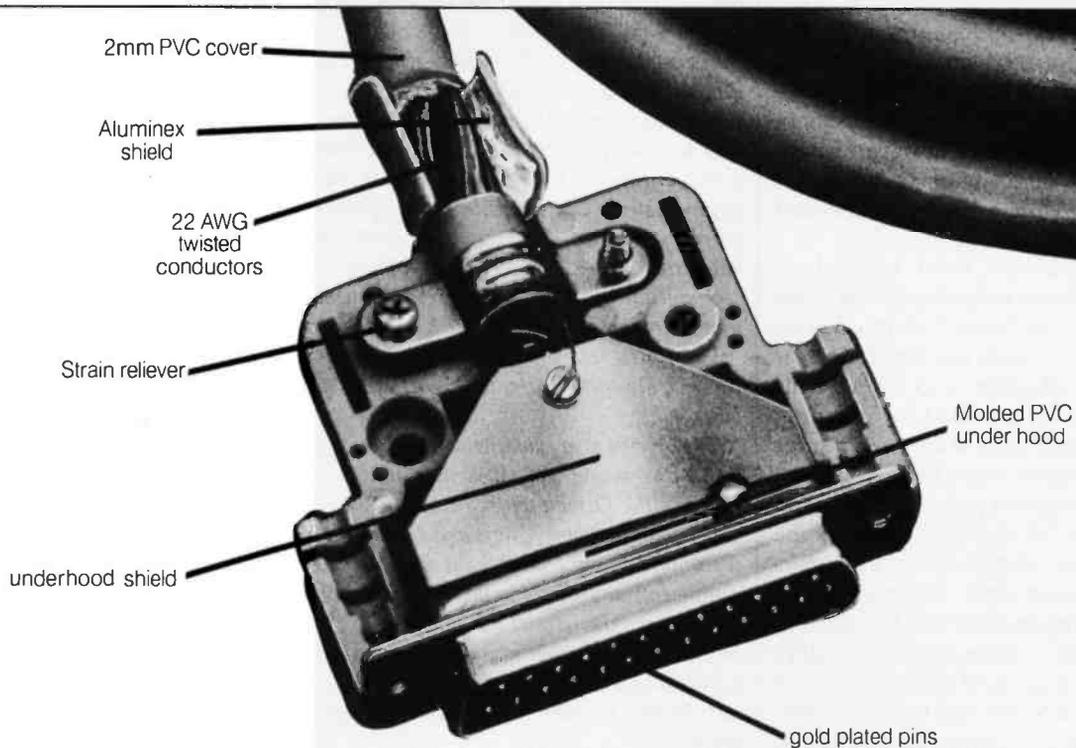

Take a look at the picture above. The shielding under the RS232 connector hood of DATA SPEC™ cables is different from anything you've seen before. No flimsy foil. Or painted hood. Instead, DATA SPEC™ gives you an extra heavy gauge shield under the normal hood which ensures that the cables exceeds the FCC requirements on emission standards.

And, if you look further inside, under the shield, you'll see the advent of PDT™* Technology. DATA SPEC™ cables are the first to employ this technique outside of aerospace applications. PDT Technology ensures that you will never have to solder a broken joint or even open the hood.

However, the biggest news is actually the littlest part of the story. The price.

You can find out about it at your dealer who carries DATA SPEC™ products. Modern manufacturing techniques have made DATA SPEC™ cables priced lower than lesser quality shielded cables.

DATA SPEC™ cables. There's more to it than meets the eye.

*PDT (Poly-vinyl doping technique) involves the injection of poly-vinyl under the shield to fuse the conductors and pins together, thus ensuring reliability under the most adverse conditions. PDT is a registered trademark of Advanced Tool Technology Inc.

DATA SPEC™

THE FAMILY OF HIGH INTEGRITY COMPUTER SUPPORT PRODUCTS.

18215 Parthenia Street, Northridge, 91326 CA (213) 701-5848

Circle 395 for Dealer inquiries.
Circle 396 for End-User inquiries.

BYTE's User to User

Conducted by Jerry Pournelle

Tried and True

Dear Jerry,

You stated in "Epson QX-10, Zenith Z-29, CP/M-68K, and More" (August, page 434) that you are interested in the UCSD p-System, especially under the CP/M operating system. A number of years ago, North Star had such a package available. It was purchased with the North Star Horizon I am using (1979 vintage) and runs fairly smoothly. I am quite intrigued by the concepts it presents in program development; however, I have had so much difficulty in getting its text editors to work properly that I abandoned the project.

On another subject, I don't believe I can write you without including my fair share of cracks at your User's Column, which I read faithfully. I still use the North Star 1979-vintage Horizon with CP/M. This machine, and several workhorse machines that friends of mine own, serve us well year after year. I think you don't mention enough the path of the tried and true. Certainly I don't recommend the same hardware that I have to newcomers in the computer field. However, I also would not recommend the Sage, Compupro 68000 processor, or a host of other products you speak of quite fondly. For those of us who are not hardware/software experts and cannot afford the frequent services of an expert (I am not saying that you can, by the way), a somewhat less exotic, but time-tested, machine is the better buy.

Lastly, I will make these off-the-cuff comments. You don't seem to give adequate press to North Star, Qume, and a host of other equipment. Also, the S-100 bus seems to have fallen out of favor with you. Need I cite the Epson, Otrona, Sage, and possibly more? I don't know about you, but as I look for a computer to supplement the services of my North Star, I am glad that I have a bus ready to plug new boards into. Any computer that I purchase in the next few years will certainly be an S-100 machine.

**Paul Kile
Appleton, WI**

My late mad friend also gave up on the UCSD Pascal editors, which caused him to scrap public-domain UCSD Pascal. I gather that Softech has made considerable im-

provements, but I haven't seen its UCSD Pascal for S-100 machines.

I don't know where you get the impression that S-100 systems have fallen out of my favor. I'm writing this on a Compupro Z80, our workhorse machine is a Compupro 8085/8088 Dual Processor, and our major experimental machine is a Compupro that we use to test 8086 and 68000 boards. I remain very much an S-100 bus enthusiast.

The only problem with S-100 systems is that they do take a bit of knowledge to get them set up and running. I'd never advise a casual user to order an S-100 system by mail from a discount house. On the other hand, Compupro Systems Centers sell working systems properly configured for anyone's needs at advertised prices. I have no hesitation in recommending a Compupro from a Systems Center to any user, no matter how naive.

I can also recommend Sage machines to those willing to learn UCSD Pascal or CP/M-68K.

The Otrona is my favorite portable, largely because Workman has got Write running on it; I use the Otrona when I travel.

If I seem to ignore Qume and North Star, it's only because I don't have any of their equipment, and efforts to make contact with those companies haven't been successful. I'm not a theorist: I must write about machines I know and use. I try to look at a lot of them, but there's no way I can keep up with everything! . . . Jerry

Fawning Sci-Fi Writers

Dear Jerry,

I enclose an article whose headline reads: Osborne Ceases Production: Furloughs Most Workers. It makes your pro-Osborne article ("The Next Five Years in Microcomputers," September, page 233) a bit less fawning.

Having read your gushing article, I have only one observation. Where is Texas Instruments? When Apple and IBM finish their latest round of court cases against Franklin, its copycat-clone ACE, and the Taiwan/Japanese stolen-technology copycats, all the unlucky owners of those clones of Apple and IBM will be orphans without any company support! A corollary is that very little will be left in the professional market except TI PC (Pegasus)—very carefully ignored by BYTE—IBM PC, Apple, TI-99/4A, TI-99/8,

and Commodore 64. Certainly Mattel will fold, then Apple and Commodore will founder. What we are watching is the sinking of the first wave of innovators and the survival of the fittest, regardless of fawning by science-fiction writers who should know better. Who sold the first mass-market 16-bit microprocessor with speech? Who has more complete systems (i.e., disk drives and peripheral-expansion boxes) in homes, and who has cornered the market on assembly-language ROMs to plug in for those who don't wish to program or who wish to greatly expand the rather unexciting (to Jerry Pournelle) TI-99/4A? I run mine with the PE Box, an Epson printer, a 128K-byte 4-bank RAM card, a 64K-byte CP/M card, and two double-sided Tandon drives—all sold for the 99/4A. When everyone on the medium and low end of the market finally goes under, will BYTE finally have any recognition of the 99/4A, TI PC, and the improved 99/4A called the TI-99/8?

I doubt it. We TI owners call it "Apple on the Brain Syndrome," with submanias about IBM and assorted high-priced dinosaurs that only a lucky few will ever purchase, unless they own an oil well or two.

Balance your BYTE articles! I know my personal subscription will not survive unless I perceive reality as opposed to personal fantasy and Quasi-Religious Fawning over ISOLATED low-retail-flow computer events/products!

**R. Castleton
Richardson, TX**

Gee, I never knew what my problem was.

Castleton reads different versions of both BYTE and the daily papers than I do; I thought we'd done a fair job of talking about TI equipment; also that there was some problem with the TI-99/4A's profitability.

No one more eagerly awaited the TI-99 than I did, and no one was more disappointed when we discovered that TI wasn't interested in publishing anything about its internal details. When you deliberately cut yourself off from the hobbyist world, you forfeit very little potential market—but you do forfeit an important source of software.

I think Adam Osborne did a lot for this field, and his low-cost all-up machine complete with software and documents was one of the crucial events in micro history. If that be fawning, make the most of it. . . . Jerry

Magazines and Advertisements

Dear Jerry,

Screenwriter II *can* be copied. I used Locksmith 4.0 on my copy and can *usually* load the copy. Sometimes the program load fails, but the failure is not totally catastrophic, that is, it returns to the menu after considerable disk grinding. Then it loads the program on the second try. Slightly less than totally satisfactory, but it does preserve the original disk for future use. These days, with Wordstar on another machine, the 40-column Apple screen usually drives me away.

In October's User to User (page 540), Mr. Henkin may be having trouble with an added feature of Screenwriter. After trying it on several Apples at my local dealer, I have come to the conclusion that trying to use the joystick option causes the total failure to boot. I don't know what the problem is, but I have never been able to boot the optioned Screenwriter with the joystick option enabled. Leave out that one option, and it does work.

The function of character search within a displayed line was deleted between Superscribe and Screenwriter. I missed that feature when I made the change. And Screenwriter uses the disks in an odd manner that is not quite convenient and I think would be bothersome for anyone not fully oriented to making obstinate hardware work like your "late mad friend" and me.

I was attracted to Calcstar by its similarity in command structure to Wordstar. Last week I placed an order with a BYTE advertiser; last evening the brown truck delivered the box (not COD as ordered). I went through the instruction manual, installing a copy of Calcstar, doing the exercises, and then tried to set up a time card for my work.

While I found that I could set up some sort of a time card to take in hours' and minutes' beginning and ending times and to compute total elapsed time, I have been unable to accomplish anything that resembles proper numerical computation. Like IBM FORTRAN, Calcstar uses binary floating point that even with 14 significant digits shows some approximation errors. Then Calcstar column formats only truncate the display, not the stored data. So I took a column of start and end times, computed elapsed times, totaled elapsed times, and then tried to round to the nearest 0.1 hour (a fetish of mine on

customers' bills), and multiplied the result by my hourly rate. The result? The charge shown in the next cell did not match the calculator multiplication of the displayed data. That's not a good way to give the clients confidence in your arithmetic prowess when dealing in engineering services! Conclusion: Calcstar is inherently too badly constructed to be called a spreadsheet.

So, the next step is to send it back to the store and hope that some other spreadsheet functions better (as some of the reviews and books on spreadsheet programs do declare), right? Nope, wrong. The advertiser said, "It does like the book says, then it is not defective and we won't take it back. You should have spent full retail if you wanted to try the product first." And, "Since we failed to send it COD, it hasn't been paid for; we will be sending you an invoice."

I use CP/M partly not to have to worry about protection schemes that promise to prevent using programs for gainful purposes, and to have access to good programs. Now I have wasted a half day or more and have spent money without gaining a useful program, and the seller of the product refuses to take it back under any conditions. Is this the way BYTE magazine wishes to treat its readers?

Gerald N. Johnson, P.E.
Ames, Iowa

Few copy-protection schemes work for long; what one can do, another can undo. The real trouble is that the copy-protection attempt makes the software fragile. After all, the idea of copy protection is to make it difficult for the machine to read the disk—which may be a good idea for the vendor, but it's hardly what the user wants!

Many spreadsheet programs have limited precision; it's a feature one must check very carefully.

I'd like it if every mail-order house had a money-back guarantee, but some of the discount outfits operate at such a low markup that they simply can't do it. In general: the lower the price, the less support you can expect from the dealer.

Alas, you have the wrong idea about magazines and advertisements. The advertising department doesn't tell me what to write, and I don't tell them what ads to accept. Indeed, as long as advertisers pay their bills, it's legally very difficult to reject an ad, even if the magazine doesn't want to take it. We had one item that generated lots of angry letters,

but legal advisors said we couldn't reject the outfit's ad! Fortunately, they got in a snit about one of my reviews and cancelled, causing joy among those who had to open and file all the hate mail. . . . Jerry

Assembly-Language No-Man's Land

Dear Jerry,

I greatly enjoy your User's Column in BYTE. Keep up the struggle for better documentation! It is partly in that regard that I am writing to you. Perhaps you can recommend some books or articles that deal with an area that is not often addressed.

Texts on assembly-language programming invariably assume either that the reader knows all about it and only wants the details of some new processor (including hardware considerations that the programmer doesn't necessarily need) or that the reader knows nothing and must be told about number bases, etc. They then lead into the writing of whole programs, systems, monitors, etc. Texts on high-level languages work in much the same way. Two sorts are available: references that define syntax with railroad diagrams and introductory texts that have to explain about the meaning of arithmetic assignment statements and such.

A no-man's land exists between these two extremes that interests me. Specifically, how do I use assembly language to write the critical subroutine that determines program efficiency and link it into the main program that is written in FORTRAN-80, compiled MBASIC, or whatever? I have purchased Microsoft F-80 (subset FORTRAN-IV), L-80 (Linker), M-80 (Macro-assembler), and MBASIC compiler in order to do such things. A recent article in BYTE ("Chisel Your Code with a Profiler," August, page 286) described ways to conduct activity analysis to identify the 10 percent of the code that does 90 percent of the work. But it (as with most books and documentation) says only to use assembly code to optimize that 10 percent.

I know how to identify the critical subroutine. In a recent research project (a new numerical neutron-transport scheme), most of the code is input of the problem parameters, initialization of arrays, analysis of results, and printout. This all executes once per run. But one

subroutine is called 294,912 times in a typical run. The program runs four hours on a 5-MHz 8088/8087 system.

The documentation (and the advertising) indicates that F-80, L-80, Lib-80, M-80, and MBASIC compiler constitute a "software development system" and that FORTRAN and assembly-language routines can be called from BASIC programs, etc. However, all the manuals point to each other as containing the details, and I have not successfully managed to use this software for its intended purpose. (When I called Microsoft Tech Support for details, the response was "Just try it. It all works." I found this less than helpful, but I tried it. The result: error messages. In particular, it seems that the FORTRAN subroutine requires that the Forlib library be linked to define various global symbols. The main program similarly requires that Obslib be linked or the run-time system used. I prefer stand-alone code. However, linking both libraries results in "multiply defined global symbol" errors, and the programs don't run. If you fail to link either library, you get "undefined global symbol" errors.

These tools were expensive, and it burns me not to be able to use them. So my question is: where do I find a text that will walk through some examples of actually using assembly code to optimize a routine for a program written in a high-level language?

Kirk Mathews
Springboro, OH

Good question. I wish I had such a book myself. There are Z80-code cookbooks and plenty of books on how to write the assembly-language programs, but darned little showing you precisely how to link in assembly programs to previously written stuff.

I've found the same kind of problem with CB-80 and Digital Research's RMAC assembler; it ought to be easy to do that kind of thing, but there are insufficient examples to let me puzzle it out.

Maybe one or another of the readers can help? . . . Jerry

Benchmark Marks

Dear Jerry,

Below are listed three variations of your 20 by 20 array benchmark, adapted to run in BASIC09 under the OS9 operating system on a 6809 card in an Apple II. BASIC09 compiles to an intermediate

code that is then interpreted and is thus directly comparable to CBASIC in that respect.

Benchmark Variation	Time (min:sec)
Integer Arrays, Integer Loop Indexes	00:31
Real Arrays, Real Loop Indexes	01:11
Real Arrays, Integer Loop Indexes	00:45

In comparison with your published figures (October 1982 BYTE, page 262) for other processor/language combinations the times would seem to be extremely good, especially when you consider that the 6809 is running at the Apple's nominal clock speed of 1.023 MHz. I don't think you've published figures for this particular combination. Please notice that a 68000 processor runs p-code almost as fast as an 8086 runs its machine language. If it weren't so popular, the 8086 and its 8088 cousin would be good jokes. I've never been able to understand why anybody would transplant 8-bit architecture to a 16-bit processor.

Frank C. Kuechmann
Vancouver, WA

You and my son agree on the 68000 as a better way to go, but a number of people I respect prefer the 8086 (followed by the 286, etc.). As for me, I'm not so interested in chip architecture or in assembly languages. As the machines get fast enough and memory falls in price, most real programming will be done in higher-level languages.

We at Chaos Manor are doing most of our work in Pascal just now, with the intention of switching to Modula-2 as soon as we have stable Modula compilers. Our programs are portable between the Sage and the Godbout 8086, and we expect to be able to recompile them and run on more advanced systems as they come out. . . . Jerry

Transmitting Pages

Dear Jerry,

As a fellow H/Z-19 terminal owner, can you tell me who knows the special routine to make the "Transmit Page" (ESC #) function work? See enclosure. Two letters to Heath have drawn blanks.

Peter Eng
La Jolla, CA

As your enclosure shows, the Heath documentation (page 23) discusses "Transmit Page" but refers to the possibility of special routines in the host computer. In big machines, you can edit material on the terminal and, when the screen is set up the way you want, send the whole page at once. This is useful for time-sharing systems because you're not using central-computer time while editing.

I know of few microcomputers that operate in the transmit-page mode. If you want to save stuff from the Z-19 screen, you'll have to write a special routine. The Z-19 manual describes what the terminal pitches; you have to write the catcher. . . . Jerry

Copyrighting and Personalizing

Dear Jerry,

In the August 1983 issue of *PC Magazine* (page 58) under the Letters banner "Legal Matter," the secretary of Cincinnati's IBM PC User's group requests clarification of the legality of distribution of software copied from the pages of *PC Magazine*. I can't believe PC's response, which I quote: "The contents of each issue of *PC Magazine* are copyrighted by the publisher, and all rights of reproduction in all forms and media are strictly reserved. The original purchaser/subscriber only is authorized to make copies solely for his/her own use. Distribution, transmission, or transfer of copies to any other person is an infringement of the copyright. —Ed." To your knowledge, is this an industry standard?

On to other things. Seems to me that a partial solution of the software-piracy conflict is to personalize each product. That is, include in each screen the name of the purchaser. Pirates would be easier to spot and would have to suffer at least some embarrassment to be blatantly using a product that was licensed to someone else. Sure it complicates manufacture and it could be defeated on a case-by-case basis by clever counter-programming, but it is a thought. (If the retail vendor had to run a purchaser-specific customization procedure at the store, then at least it would guarantee the machine readability of the disks you purchase.) It would be irritating to be constantly reminded that a program you were using often was illicitly copied from another user whose name you are frequently reminded of.

I use Compuvie's Vedit on an Osborne 1 and am pleased with it. (This machine can perform string searches so much faster than any larger machine I've ever used that I'm continually amazed.) I'm glad to hear that the customization process will be simplified. I like Compuvie's software-update subscription option (\$50 per year for Vedit).

Larry Weiss
Garland, TX

Actually, PC's statement is just an explanation of the copyright laws. Only the copyright holder has the right to sell or distribute copies of copyrighted matter. There is no restriction on resale of the original material; it's legal for me to sell or lend used books. However, I may not make copies of them (except as provided under the "fair use" provisions of the Copyright Act). Specifically, I can't make a copy, then sell the original.

Magazines traditionally buy various packages of rights (the right to publish in magazines, the exclusive or nonexclusive right to include the article in anthologies, and so on); what's bought varies from magazine to magazine and often from author to author within the magazine.

Personalizing software is costly; imagine what it would cost to imprint the purchaser's name on each book sold by B. Dalton!

We're also pleased with Vedit for programming, although the number of commands can be overwhelming when you first try it. . . . Jerry

Wordstar Spelling Checker

Dear Jerry,

I recently discovered a useful way of using The Word Plus spelling checker with Wordstar. Instead of having The Word Plus mark the words you choose with asterisks or similar characters, I use a null character, CTRL @, as the marking character. There are several advantages to this.

First, if you forget to remove a mark before printing, at least you don't call attention to the mistake—useful if you only have time to print one copy of whatever you are working on.

Second, you can use some of the Spellstar options of Wordstar, e.g., you can find the marks that you have placed by typing CTRL-QL. This has the advantage that it doesn't destroy any other searches you have previously set up by using CTRL-QA or CTRL-QF, and it

remembers changes that you have already made. So if you tell it to ignore a mark you placed, when it "sees" the same word again, it removes the mark from that and continues automatically.

Third, any words you tell Wordstar to put in dictionaries or ignore are recorded in a file called filename.ADD, which you can later edit and turn into a special dictionary for The Word. (You must edit the file first—Wordstar adds I, D, or S to the front of the word.)

By the way, I just read the book you wrote with Larry Niven, *Oath of Fealty*. I particularly chuckled over the part where the police have asked MILLIE for all the files in Rand's directory and MILLIE is told to print them at 300 baud. I trust that this was your idea.

Miles Thomas
Franklin Lakes, NJ

Thanks for the kind words, and also for the tip. We tried it on the Z-100 Wordstar and it worked fine.

Larry and I usually won't answer questions about who wrote what in our books, but given his public disclaimer on computer knowledge, I suppose I can admit that MILLIE was mostly my idea. . . . Jerry

Z-DOS and MS-DOS

Dear Jerry,

Your brief note in "Eagles, Text Editors, New Compilers, and Much More" (September, page 307) about the incompatibility problem between IBM PC programs and the Zenith Z-100 was moderately helpful. It could have been more so if Victor Wright's address in Louisville, Kentucky, had been included.

Your mention earlier in the column of your own Z-100 prompts me to ask you for any assistance and/or advice you can give in regard to "standard" program availability for the Z-DOS implementation of MS-DOS.

Gerald Erskine
New Brunswick, Canada

It's been my general policy not to include people's private addresses. Alas, I don't keep answered mail (much to the relief of my wife, housekeeper, and assistants; where would they put it?), so I can't look it up for you.

BUSS ("The Independent Newsletter of Heath Co. Computers," 716 E St. SE, Washington, DC 20003, (202) 544-0900) is usually the first to list new Z-DOS software

and is well worth the \$20 annual subscription fee. (Single issues are \$2.) I generally don't comment on anything I haven't used, and lately I haven't received much Z-DOS stuff. Of course, as soon as I write this, it will flood in. I hope so; the Z-100 is a good machine. . . . Jerry

No Problems with Valdocs

Dear Jerry,

As an almost first-time computer user I feel compelled to defend the Epson QX-10 computer and its Valdocs system. You were too harsh in your judgment of it and missed the point of who the system was really designed for. I purchased one of the first systems released and have had next to no difficulties with it.

As a way of introduction, I'm a physician with only a peripheral interest in computers up to now. I am a charter subscriber to BYTE and bought a Radio Shack TRS-80 Model I computer when it first came out. I learned a lot about computers from the Model I and how to program in BASIC, but I could never get the damn thing to save programs on cassette tapes and I didn't want to add the expense of a disk drive to a diabolical machine that drove me crazy.

So I went back to reading computer magazines and waiting. Then I saw an article in BYTE ("An Introduction to the Human Applications and Standard Computer Interface," Parts 1 and 2, October and November 1982, pages 291 and 379, respectively) by Chris Rutkowski about a new computer system that he was working on; it looked too good to be true. I then found out that a computer store in my town would be carrying it, and I became a permanent fixture in that store. Rumors were rampant—it will be out next month, next week, any day now, by Christmas. I was such a persistent customer (pest?) that when the store received the first QX-10 I took it home even without instructions.

I can honestly say that I have never taken a complex piece of machinery out of the box, plugged it in, and had it work as I thought it should with fewer problems. It has changed my life. I have a problem with poor handwriting (typical physician?) and spelling. To use a typewriter involves a high frustration level, much time, and reams of paper. My use of a computer involves letters, short papers, and minutes of meetings. The Ep-

son QX-10 has done this with no problems whatsoever.

My three daughters watched over my shoulders and wanted to use it for school work and letters to their friends. I let them try and, again, no problems. In fact, I had to give them each their own data disk so I could find my own material.

The clincher happened when I tried another word processor. I wanted to try a spreadsheet and a dictionary; I got a deal on a package of four programs from Peachtree Software. As this package included Peachtext, I decided to try it. It includes some features not found on the Valdoks program. I spent most of one weekend on the self-instruction book and got about halfway through it. A week later when I got back to it I had to start at the beginning. I'm sure that I could learn it, but unless I used it every day I would have the same problem each time I went back to it. I just returned from a two-week vacation, and using my QX-10 with the Valdoks program was like finding an old friend.

I haven't had any problems with lost data. I use Control-M to change data disks and periodically press Menu and then Undo to save material as I write it. This takes about 10 seconds of my time. I guess if I got used to a faster program than Valdoks, I might enjoy it, but as it is, I can live with it!

I will say that computers seem to be like a virulent virus. I now am making a pest of myself at the computer store again, waiting for the TPM primer and the Valdoks technical manual. I'm anxious to find out more about what goes on in my computer and how to make it do all sorts of wonderful things. I have bought books on BASIC, assembly-language programming, CP/M, Supercalc, etc. In a year or

two, I might agree with your criticism. Who knows? But for now, don't take my QX-10 and Valdoks away from me.

By the way, I agree with you about the Epson FX-80 printer. It is quiet and seems to print well but is not at all easy to load. It does work fine with form-feed paper but not with individual sheets. My haunt of the computer store paid off yesterday, however. I now have a Comrex CR-II printer (\$600), and it seems to correct all of the above-mentioned problems.

**Herbert Thompson
Decatur, IL**

I'm glad you like your machine. Heaven knows, the QX-10 has got to be a lot better than no computer at all, and it certainly is easy enough to get running. (The only one I know of that's easier to get going right out of the box is the Eagle 1600). Moreover, if you intend to print only on continuous paper, without using stationery or letterhead, Valdoks isn't so bad (except that it takes too long to address the envelope).

One question: why was your letter to me done on a Selectric typewriter instead of on your machine? . . . Jerry

And the Next Five Years

Dear Jerry,

The next time you unlock your crystal ball to look into the future, you might want to have it checked out first. When you used it to write "The Next Five Years in Microcomputers" (September, page 233), it seems to have been looking into my window rather than the future.

I am using a multiuser, multiprocessor system with a custom-designed serial board that enables me to appear to be five "virtual terminals." I can run up to five


separate programs and jump back and forth between them by pressing function keys. The programs continue to run and update their own virtual-terminal screen even if they are not currently being displayed on the "real" terminal. When I jump back to a program, its current screen (including all character attributes) is displayed from memory in the custom-serial board. The board can also be used to allow two terminals to appear as two virtual terminals each. The multiprocessor consists of a main Z80 with 64K, three satellite Z80s with 64K, an 8088 with 256K, and a 68B09E with 128K. All run under Micromation's M/NET, a derivative of Digital Research's MP/M.

**Frank Korzeniewski
Berkeley, CA**

It sounds like a wonderful system. Not long after I wrote "The Next Five Years. . ." I found out some other outfits, including Compupro, had some pretty neat tricks up their sleeves.

In my defense, two things: "The Next Five Years. . ." was written as a speech to be delivered in early spring, and I only said these things would happen in the next half decade, not what part of it! Some of what I predicted hasn't happened yet. . . . Jerry

Jerry Pournelle welcomes readers' comments and opinions. Send a self-addressed, stamped envelope to Jerry Pournelle, c/o BYTE Publications, POB 372, Hancock, NH 03449. Please put your address on the letter as well as on the envelope. Due to the high volume of letters, Jerry cannot guarantee a personal reply.

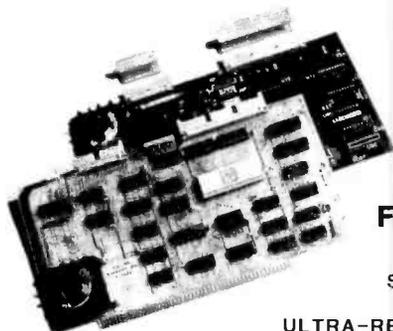

ULTRA-RES™ GRAPHICS

IEEE-696 S-100

- 1 X 512 X 512 \$495
- 3 X 512 X 512 \$1250
- 1 X 1024 X 1024 \$995

IBM-PC

- 1 X 512 X 512 \$495
- 1 X 1024 X 1024 \$995
- CONSOLE EMULATOR \$50
- PLOT 10 \$150


FEATURES

Software drivers, Hardware zoom, Programmable Display Resolution, Windowing, Multi-Controller Capability, NEC UPD7220 Graphic Controller

Starting Prices

ULTRA-RES Trademark CSD Inc.
IBM-PC Trademark IBM

C.S.D. Incorporated
P.O. BOX 253 Sudbury, MA 01776
(617) 443-2750



S-100
ESTABLISHED 1977

MODEM ORDERS 602-991-1387
SALES 800 - 528-3138
TECHNICAL 602-991-7870

CompuPro

A GODFRUIT COMPANY

SYSTEM 816/A	\$3899
SYSTEM 816/B	\$4899
SYSTEM 816/CH*	
w/40 Mb HARD DISK	\$8749
SYSTEM 816/68K*	\$8749
SYSTEM 816/10*	CALL
THE ABOVE FULLY ASM., TESTED, & BURNED-IN	
*INCLUDES ON-SITE XEROX SERVICE	
CPU 8086 A&T	\$529
CPU 8086/87 A&T	\$739
CPU 68K W/CP/M 68K & map FORTH	\$732
CPU 286 A&T	\$1119
CPU 16032 A&T	\$489
RAM 16 64K STATIC, 8 OR 16, A&T	\$389
RAM 22 256K STATIC, 8 or 16, A&T	\$1229
DISK I A&T	\$349
INTERFACER 3-B SERIAL A&T	\$489
SIX SLOT MOTHERBOARD W/TERM	\$99

Qume TERMINAL
QVT 102G \$469

MORROW

MD2 w/MDT50 TERMINAL & TALLY SPIRIT PRINTER	\$1599
MD3 SYSTEM AS EQUIP ABOVE	\$1899
MD11 SYSTEM AS EQUIP ABOVE	\$2745
W/CP/M 3.0, 128K RAM, DSDD FLPY & 11Mb HD	
MDP-3 PORTABLE Same as MD-3 w/5x7 Screen And Detachable K.B.	CALL



SUPERSIX 128K RAM	\$800
SUPERSLAVE 6MHz, 128K	\$595
HDC-1001-5" H.D. CONTROLLER	\$450
CP/M 3.0	\$350
TURBODOS MULTI-USER	\$600
FLUKE FLUKE 77 DVO METER 0.3% DC Accuracy	\$119
S-100's DUAL EXTENDER BD.	\$39
16K EPROM BD.	\$99

Votrax Personal Speech System

PE-14 Erases 6 Eproms	\$65
PE-14T Same as PE-14 w/Timer	\$89
PE-24T Erases 9 Eproms in 15 Min. W/Timer	\$135

DIGITAL RESEARCH

MP/MII	\$315
MP/M-86	\$455
CONCURRENT CP/M	\$245
CP/M PLUS	\$245
"C" COMPILER	\$420
PASCAL MT+86	420
SPEED PROG PKG	\$175
ACCESS MNGR-86	\$280
DISPLAY MNGR-86	\$350
PL/1-86	\$525

COMPUTER INNOVATIONS 'C' COMPILER/PC-DOS	\$297
---	-------



PROFESSIONAL PACK	\$379
Wordstar, Spellstar, Mail Merge, Star Index	
DATA STAR 8 CP/M	\$199
CALC STAR 8 CP/M	\$99
SUPER SORT 8 CP/M	\$175
MAILMERGE OR SPELLSTAR	\$150

SDSYSTEMS

SBC 300 6 MHz	\$619
EXPANDORAM IV W/EDC 256K	\$1,499
VERSAFLOPPY II/696 W/CP/M 3.0	\$419
VFW-III 3x5 1/4" H.D. + 4x5 1/4" & 8" DRVS.	\$679
PROM100 2708, 2758, 2716's	\$234
RAMDisc 256K Disk Drive Emulator	\$700
ROMDisc 128K	\$280
SD 300 CHASIS 6 Slot "Folded" Bus	\$535

PRINTERS

DAISYWRITER 2000 W/48K	\$1095
TALLEY SPIRIT 80CPS	\$299
EPSON MX 100	\$569
OKIDATA 93	\$959

FLOPPY DISK DRIVES

ADD-ON DRIVES W/INDUSTRIAL QUALITY CABINETS

W/2 QUME 142 5/4" DSDD	\$447
W/2 QUME 242 8" DSDD	\$999
W/2 QUME 842 8" DSDD	\$1259

BARE DRIVES

Qume 842 8" DSDD STD.	\$460
242 8" DSDD Thin	\$416
142 5/4" DSDD Thin	\$186

Tandon 100-2 5/4" DSDD	\$229
-------------------------------	-------

SCION MICRO ANGELO 512	\$695
SCION MICRO ANGELO 520	\$965

DEALER INQUIRIES WELCOME



MICROBUFFER/EPSON™ CARD	
MBS-16/32K SERIAL	\$129
MBS-32K SERIAL	\$159
MBP-64K PARALLEL	\$199
MICROBUFFER IN-LINE™ STAND ALONE	
MBIS SERIAL 64K	\$259
MBIP PARALLEL 64K	\$259
MICROBUFFER II +™ 16K, APPLE II, II+ IIe	\$195

PC MATE by **TEGMAR** FOR
IBM-PC


CAPTAIN w/384K, Clock/CAL w/Battery, Serial, Para, RamDisk, Spooler	\$557
IEEE 488 BD. W/Software	\$368
1st MATE 256K, CL/CAL W/BATTERY, SERIAL, PARA, RAM DISK, SPOOLER	\$419

5Mb CART WINCH IN PC GRAPHICS MASTER HI-RES RGB COLOR GRAPHICS	\$1479
256K DYNAMIC MEMORY	\$575
TIME MASTER W/BATTERY BACK-UP	\$349
	\$109

ZENITH data systems CALL



TELPAC SOFTWARE	\$56
S-100 BD. MODEM 300/1200 BAUD	\$315
PASSWORD 300/1200 BAUD	315
AUTO DIAL 212A	\$420
PERSONAL MODEM For IBM-PC BUS	\$315
PERSONAL w/64K, Serial, Para, Clock/Cal-Battery, Software	\$489



IBM-PC 1200B MODEM BOARD	\$479
--------------------------	-------



PB1 Eprom Programmer	\$225
VB1C Memory Mapped Video Bd.	\$175

NOVATION

J-CAT 300 Baud	\$105
D-CAT 300 Baud	\$169
SMART CAT 212A/103	\$459

Subject to Available Quantities
Prices Quoted Include
Cash Discounts
Shipping & Insurance Extra

14425 North 79th Street
Scottsdale, Arizona 85260
TELEX: 16 5025 FTCC SEC PHX

FULL DEALER SUPPORT
VISIT OUR SHOWROOM
Hrs. 9:00AM - 5:30PM M-F

Circle 321 on inquiry card.

Book Reviews

Legal Care for Your Software

Daniel Remer
Nolo Press
Berkeley, CA: 1982
232 pages, softcover,
\$19.95

Reviewed by
Ed Bernstein

Legal Care for Your Software by Daniel Remer is a step-by-step, simply written, and thorough guide for anyone who writes or publishes commercial computer software or who wonders if it would be worth the trouble to do so. The book is full of examples, explanations, and even do-it-yourself legal forms that are basic to anyone trying to untangle the web of software law. Remer's point is that you may be the most talented programmer alive—and may deserve to be the richest—but if you aren't just as smart when it comes to the law, you could be in trouble.

Remer, an attorney who serves as legal counsel to several software companies, never forgets what many programmers learn the hard way: although the law may try to keep pace with technology, the fact is that it is often left "from months to

centuries behind." Software can, of course, be legally protected, but the programmer's challenge is figuring out which legal methods apply and how to go about putting them in place.

Because no one law applies to every situation, Remer explains carefully, and with humor, the relative merits of trade secrets, copyright and patent protection, trademarks, contracts, licensing agreements, and so on. Plenty of specific examples serve to illustrate each case.

But his book isn't designed to replace lawyers, Remer says. In many complex cases, or in cases where mistakes have already been made, a lawyer may indeed be needed. But a knowledgeable author or publisher can save time and money by understanding that "If you want full legal protection for your software, you are going to have to do much of the work yourself."

Protecting code is a case in point. The ways to protect source code (the actual language the programmer uses, frequently in a high-level language such as BASIC, FORTRAN, or FORTH) may be far different from those used to protect object code (the low-level instruction to the

computer created by the source code).

Trade-secret law applies to both source and object code, Remer explains, and it is the industry's favorite way to protect software. But, as Remer notes, there are weaknesses inherent in trying to protect code—the programmer's ability, for example, to "keep a zipped lip." He also outlines a variety of other procedures that ensure that trade-secret status remains in place, including several nondisclosure agreements.

Copyright protection is among the easiest to obtain; your software is, in fact, "born" with a copyright that makes it illegal for anyone else to copy it. But you have no protection against a fellow programmer who independently produces a program that just happens to operate exactly like yours. A copyright offers protection of an expression of an idea, not an idea itself. Two programs can produce identical results, but both can be copyrighted if they accomplish that task in unique ways.

Patent protection sounds like the perfect solution because it protects not only the expression of the idea but the idea itself. Unfortunately, software is almost never

patentable, Remer says, and even if it were, the time and legal trouble involved in obtaining a patent could easily exceed the lifespan and value of the program itself.

Trademarks serve only one purpose: protecting the name of a program.

Remer warns, at some length, about protecting yourself as well as your software. He discusses a variety of ways to limit personal liability in the event of unhappy customers, an inevitability in the real world.


Finally, the book provides copies of various contracts, agreements, and disclaimers that you can customize for your own applications. The sample forms and contracts—nearly 100 pages of them—may be the most useful part of the book. A careful reading of these forms can be as educational as the chapters that explain them.

Remer writes clearly and with plenty of common sense. It's hard to imagine a more useful or less intimidating guide to the legal complexities of protecting software. ■

Ed Bernstein (30 Belle Ave., Fairfax, CA 94930) is director of editorial development for Broderbund Software Inc. of San Rafael, California.



Through the Trap Door
March 1979—\$35

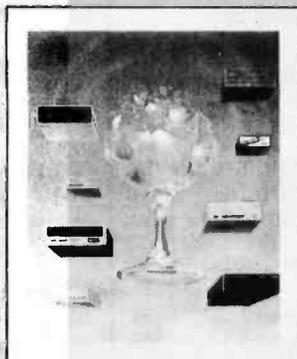


Breaking the Sound Barrier
September 1977—\$35

BYTE COVERS

The prints shown at left are beautiful Collector Edition Byte Covers, strictly limited to 750 prints each, and signed and numbered by the artist, Robert Tinney. Each print is 18 in. x 22 in., and is accompanied by its own Certificate of Authenticity. To order, use the coupon below. Visa and MasterCard orders may call 1-504-272-7266.

Please send _____ Through the
Trap Door prints (\$35). _____ Visa MasterCard
Breaking the Sound Barrier
prints (\$35), or _____ sets of both prints Card No. _____
(\$55). I have included \$3 per order shipping Expres: _____
and handling (\$8 overseas). Name: _____
City: _____
 I have enclosed check or money order Address: _____
State: _____ Zip: _____

Robert Tinney Graphics • 1864 N. Pamela Dr. • Baton Rouge, LA 70815

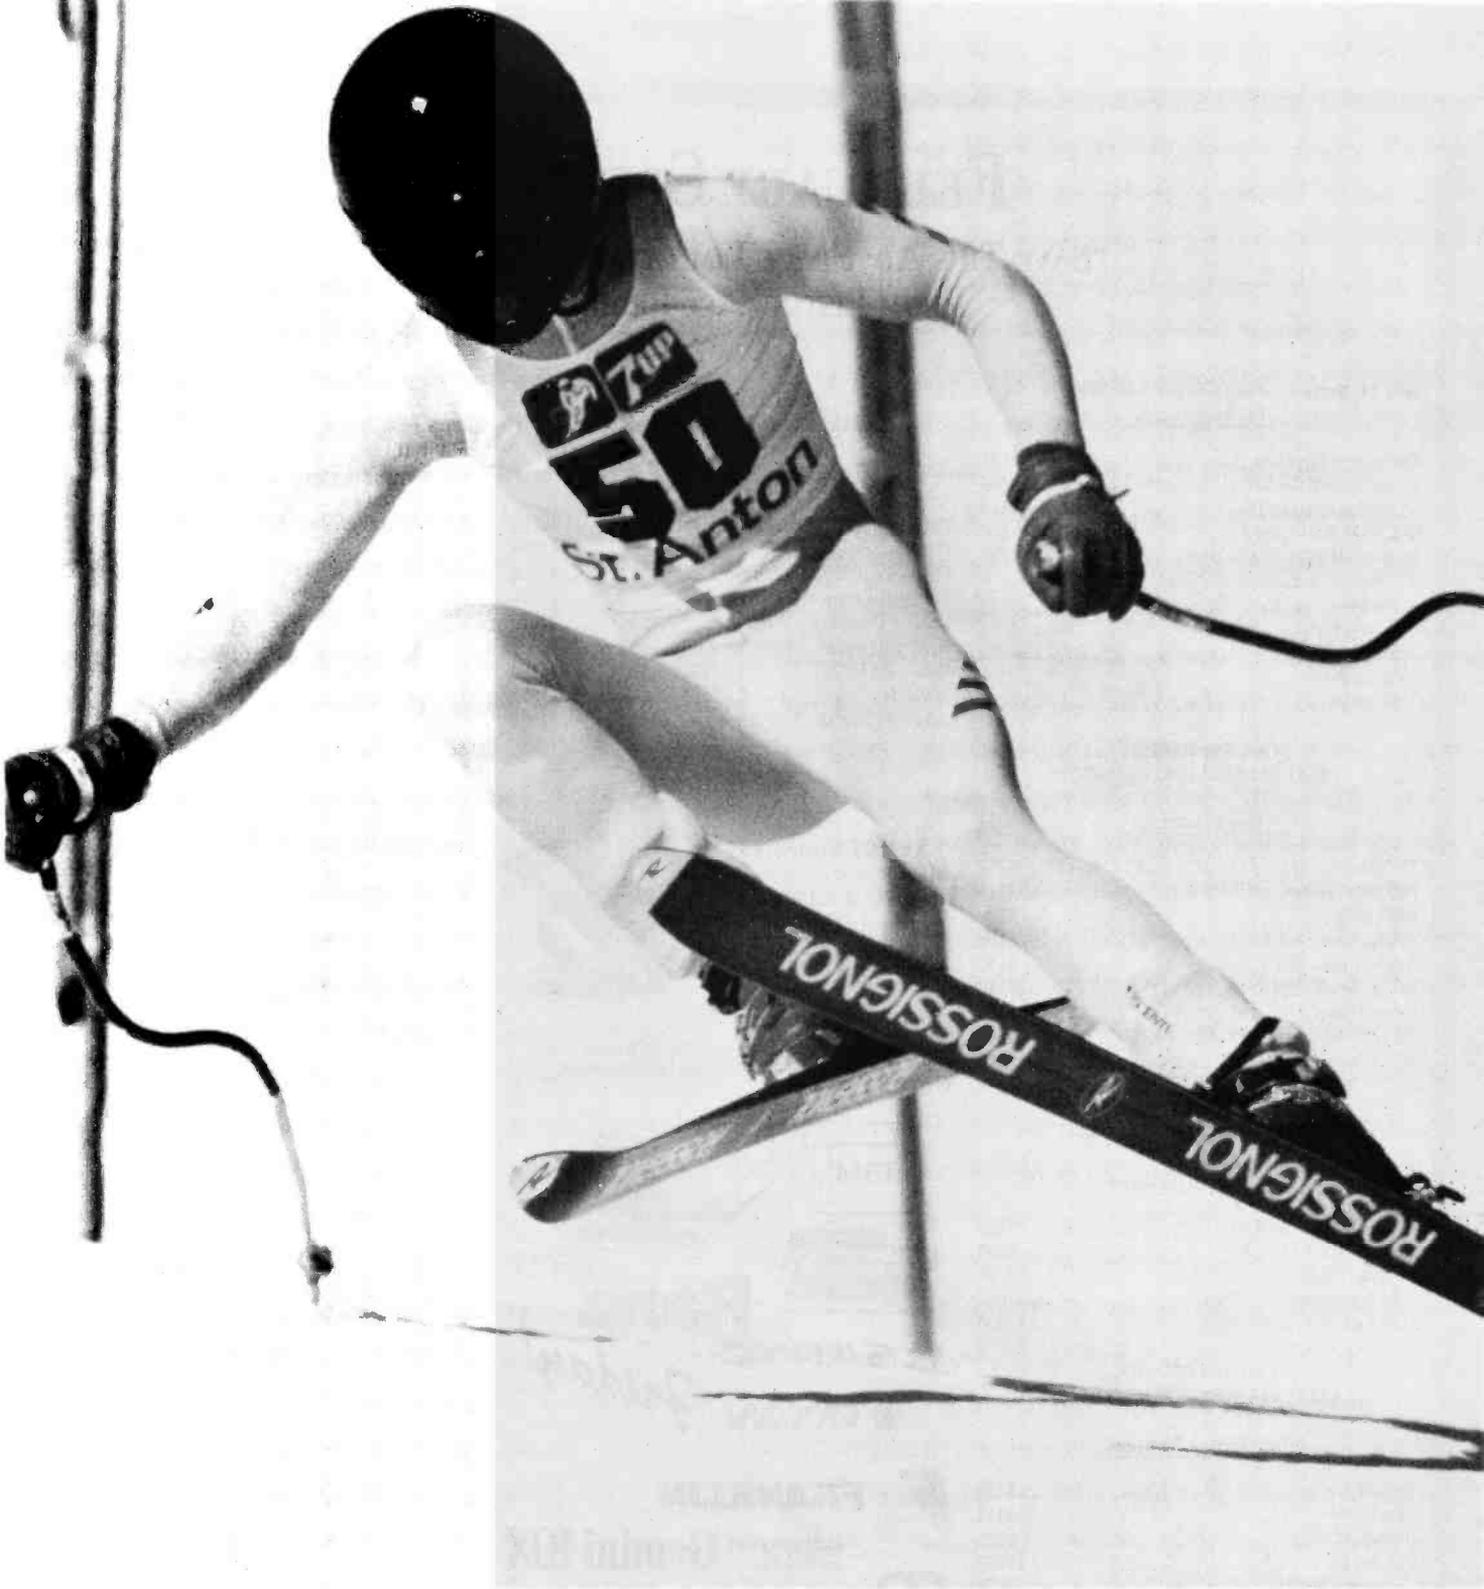

He's facing an uphill battle unless you help.

This year, the U.S. Ski Team has given Americans a great deal to be proud of.

Phil Mahre posted his second consecutive overall World Cup title while Bill Koch presented the U.S. with its first ever Nordic World Cup crown. The U.S. Women's team finished the season number one in the world.

It's hard to believe that these magnificent athletes should need anyone's help, but they do.



They need yours. Our Alpine and Nordic teams are not subsidized by the government. Members of the team dedicate years of their lives training to win. And they depend on you for support.

Please send your tax-deductible donations to the U.S. Ski Educational Foundation, Box 100M, Park City, Utah 84060. Thanks.

FEBRUARY SPECIALS

"SAVE THIS AD SPACE LIMITATIONS PREVENT US FROM LISTING ALL PRODUCTS."

IBM PC SYSTEM - PRICES START AT \$2650 PC ACCESSORIES

KEYTRONICS KEYBOARD.....	\$195
QUADLINK IBM TO APPLE CONVERTER.....	\$495
10 MEGABYTE HARD DISK.....	\$1575
64K RAM EXPANSION SET.....	\$59
TANDON TM100-2 DSDD DRIVE.....	\$237
AST RESEARCH EXPANSION CARDS:	
I/O PLUS.....	\$120
COMBO PLUS.....	\$257
SIXPAK.....	\$270
MEGA PLUS.....	\$305
MEGA PAK.....	\$257

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

VIDEO MONITORS

****MONTHLY SPECIAL****JCS-RGB 13" FOR PC.....	\$370
PRINCETON GRAPHICS HX-12.....	\$475
BMC RGB.....	\$420
AMDEK AMBER 300A.....	\$160
AMDEK GREEN 300.....	\$140
DYNAX AMBER 20MHZ.....	\$140
DYNAX GREEN.....	\$129
MB122G GREEN 12" (PC MONOCHROME).....	\$200
MB122A AMBER 12" - BY ROLAND.....	\$210

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

DAISYWHEEL PRINTERS

DYNAX DX-15 (15 CPS).....	\$495
BROTHER HR-1 (19 CPS).....	\$630
BROTHER HR-25 (25 CPS).....	\$795
F-10 STARWRITER (40 CPS).....	\$1050
F-10 PRINTMASTER (55 CPS).....	\$1400

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

DOT MATRIX PRINTERS

EPSON FX-80.....	\$550
OKIDATA 92.....	\$440
OKIDATA 93.....	\$720
OKIDATA 84.....	\$1050
PROWRITER 8510.....	\$370
PROWRITER-II 1550.....	\$650
GEMINI 10x.....	\$305
GEMINI 15x.....	\$450
MANNESMANN-TALLY 160L.....	\$699
IDS PRISM-80 COLOR.....	\$1150
RITEMAN PORTABLE PRINTER.....	\$385
MOST PRINTER CABLES.....	\$35

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

OTHER COMPUTERS

COLUMBIA I600-1 DESKTOP W/SOFTWARE.....	\$2750
COLUMBIA PORTABLE VP.....	\$2599
COLUMBIA HARD DISK DESKTOP.....	\$3900
CORONA DESKTOP - 2 DRIVES.....	\$2475
CORONA PORTABLE - 2 DRIVES.....	\$2375
NEC APC GREEN - 2 DRIVES #H02.....	\$2800
EPSON QX-10.....	\$2195
APPLE II-E.....	\$1375
SEKON 64 SYSTEM (LIKE APPLE).....	\$1025

EXPERT COMPUTERS

21804 ROSCOE BLVD., SUITE 18
CANOGA PARK, CA 91304

(213) 344-6063
(800) 528-9537



ADD 2% FOR VISA/MASTERCARD. 20% PREPAID DEPOSIT REQUIRED ON COD ORDERS. CALIFORNIA RESIDENTS ADD SALES TAX. PRICES MAY CHANGE - CALL TO VERIFY PRICES AND DELIVERY.



SANYO

TAXAN

Rana
*Friday!*TM

FRANKLIN

star Gemini 10X

Hayes®

Novation

SOFTWARE

LOTUS 1-2-3.....	\$335
dBASE II.....	\$425
FLIGHT SIMULATOR.....	\$40
MEGAWRITER (WORD PROCESSOR FOR PC/APPLE).....	\$90
MEGASPELLER.....	\$90
MAIL MERGE.....	\$95
FRIDAYS.....	\$260
CATALIST (UNIVERSAL "MAIL MERGE").....	\$170

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

EXTRAS FOR OTHER COMPUTERS

ALS CP/M CARD.....	\$285
ALS SMARTERM II (80 COLUMN CARD).....	\$145
RANA ELITE I.....	\$265
RANA ELITE II.....	\$435
RANA ELITE III.....	\$555
RANA 2.5 (2.5MBYTE FOR PC).....	\$CALL
MICROTEK DUMPLING-16K.....	\$160
GRAPPLER +.....	\$125
PROMETHEUS 16K RAM CARD.....	\$60
SEKON 16K RAM CARD.....	\$55
SEKON 80 COLUMN CARD.....	\$95
SEKON HUNTER (LIKE WILDCARD).....	\$100
SEKON Z-80 CARD.....	\$115
VIDEO CABLE FOR TI 99/4.....	\$15

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

NEW ARRIVALS

SANYO MBC550 - 1 DRIVE, 3 SOFTWARES.....	\$995
SANYO MBC555 - 2 DRIVES, 6 SOFTWARES.....	\$1395
****FEBRUARY SPECIAL - ORDERS FOR SANYO EARN \$100 DISCOUNT ON A VIDEO MONITOR OR PRINTER****	
WE'VE SIGNED UP 4 MORE BRANDS OF IBM COMPATIBLE COMPUTERS.....	\$CALL
INDUS GT DRIVE FOR APPLE W/ 3 SOFTWARES.....	\$250
KRAFT JOYSTICK.....	\$39
DOW JONES CONNECTOR.....	\$45
PEARL SOFT (DATA BASE) - 6 FORMATS.....	\$200

CALL THE EXPERT
(213) 344-6063 (800) 528-9537

DISKETTES

VERBATIM VEREX SSDD.....	\$17
DATALIFE SSDD.....	\$25
DATALIFE DSDD.....	\$33
HEAD CLEANER KIT.....	\$9
FLIPIT (USE BACK SIDE OF DISKS).....	\$17
DISKETTE HAMPER.....	\$24
LIBRARY CASE - HOLDS 10 DISKS.....	\$2.25

EXPERT COMPUTERS

"When you know enough to buy mail order, you're wise enough to buy from an expert."

What's New?

TAXING SOFTWARE

Tax Package Handles More Than 30 Forms

The Micro-Tax tax-preparation system can compute and print more than 30 IRS schedules and forms for multiple clients, partnerships, and corporate returns. Depreciation is computed by individual items or groups of items. Other tax-computation abilities include underpayment penalties, self-employment taxes, minimum and alternative minimum tax, and income averaging. Micro-Tax is said to be easy to use because it calls for simple prompts and organizes data entry in a sequence that's similar to that of manual tax preparation.

Micro-Tax is available for the DEC Rainbow 100 and MS-DOS- and CP/M 8080-, 280-, 8085-, and 8086-based systems. Three versions are offered: personal, commercial accountant, and partnership and corporate. The home computer Micro-Tax costs \$195. The other versions are \$1000 each. Annual updates and state tax-preparation programs are available. For more information, contact Microcomputer Taxsystems Inc., Suite A, 6203 Variel Ave., Woodland Hills, CA 91367, (818) 704-7800. Circle 550 on inquiry card.

Individual Tax Planner

The Individual Tax Planner calculates alternative taxes for individuals and fiduciaries for 1983 and



beyond. Projections for multiple years and cases are displayed on screen, and instant recalculations in a worksheet format allow rapid examination of the consequences of alternative tax plans. Computations include income averaging tax, alternative minimum tax, and automatic indexing of post-1984 years. Client information can be saved to disk for printing out comprehensive reports. Full help screens are provided.

The Individual Tax Plan-

ner for 1983 is available for a first-year subscription price of \$595, which includes documentation and toll-free assistance. An IBM or IBM-compatible computer with 128K bytes of memory, two disk drives, a monitor, and a printer are required. For further information, contact Tax Management Inc., 1231 25th St. NW, Washington, DC 20037, (800) 372-1033; in Maryland, (800) 352-1400; the District of Columbia, 258-9401.

Circle 557 on inquiry card.

Professional and Personal Tax Programs

Aardvark/McGraw-Hill markets tax-preparation programs for professional and personal use. In addition to standard tax calculations, Professional Tax Plan Version 3.0 can compute self-employment taxes under the regular method, taxable unemployment compensation, taxable Social Security benefits for

1984 and after, and limitations for most credits. It can generate an investment report that summarizes the after-tax effect of investment assumptions; additional reports, such as income averaging, are possible. Other features include income inputs, help screens, a file-information screen, and a calculator

function. It runs on Apple, Hewlett-Packard, IBM, and CP/M systems. The suggested retail price is \$350.

For home use, Aardvark/McGraw-Hill offers the Personal Tax Planner. This \$99 program, which runs on Apple and IBM Personal Computers, can handle returns for homeowners and renters and one- or two-income households. Personal Tax Planner will cipher short- and long-term capital gains and losses, the purchase or sale of real estate, and business. It's available at bookstores and computer retailers nationwide. For more information, contact Aardvark/McGraw-Hill, 783 North Water St., Milwaukee, WI 53202, (414) 289-9988.

Circle 552 on inquiry card.

Accountant's 1040 Preparation System

G & G 1040 is designed for accountants using CP/M-80 and CP/M-86 computers. This professional-level program features input screens that match IRS forms and the ability to provide choices for the least tax consequences, such as whether Schedule A is preferable to the standard schedule. Additional calculations include optional state sales tax, excess FICA, earned-income credit, income averaging, and minimum tax. The program processes 39 IRS schedules and comes with a batch compute/print mode and a depreciation module. It's claimed that the program calculates an entire return in 10 to 15 seconds.

What's New?

The suggested list price for the G & G 1040 Professional Series is \$750. Annual updates are available. A Starter Series that processes 15 forms but does not include batch opera-

tions or a depreciation module costs \$195. Contact G & G Software Inc., 610 Park Blvd., Austin, TX 78751, (512) 458-5760. Circle 553 on inquiry card.



Lettered Schedules, 20 Forms in One Package

The Series 1040 tax-preparation program contains all lettered tax schedules and 20 numbered forms. With Series 1040, you have to enter information only once, which saves time and minimizes errors. All figures and new entries are automatically carried over to applicable forms and schedules. Tax results are calculated and displayed instantly. The display screens replicate 1040 forms. Further

highlights are that it asks questions, traps mistakes, and prompts you from item to item. Series 1040 works on such machines as the IBM Personal Computer.

Series 1040 costs \$1150. Selected state modules are available. Complete information can be obtained from Calcu-Tax Computer Software Inc., 19-21 West Mount Pleasant Ave., Livingston, NJ 07039, (201) 992-2274.

Circle 556 on inquiry card.

Personal Tax System for Multiplan

EZ Ware's Tax-Prep personal tax system works with Microsoft's Multiplan electronic spreadsheet. Provided with 19 tax forms and schedules, Tax-Prep uses display screens that simulate IRS forms as working templates. A data-entry procedure interrelates templates for a complete series of federal tax forms and automatically applies entered data to appropriate forms and schedules. Tax-Prep will print directly on IRS 1040 forms and schedules, continuous 1040 forms, and computer paper used with an overlay. In addition, it can be used with Multiplan's advanced features to perform tax planning, budgeting, and analysis.

Tax-Prep works with the Apple, Compaq, TI Professional, IBM PC, and Zenith Z-100. Complete with a manual and tutorial, it costs \$89.95. Annual updating is available. Tax-Prep is available factory-direct from EZ Ware Inc., 17 Bryn Mawr Ave., Bala Cynwyd, PA 19004, (215) 667-4833.

Circle 551 on inquiry card.

Tax Relief for IBM PC

Tax Relief I and II for the IBM PC have been announced by Micro Vision. Tax Relief II, a professional package, has such features as income averaging, alternate minimum and minimum tax, data and calculation carryover to relevant places, client summaries, and a client directory. Entries can be

changed and deleted at any time, and on-line helps aid data entry. Several print options and 25 federal schedules and forms are supported. An IBM PC or PC XT with a minimum of 128K bytes of memory, DOS 2.0, two disk drives, monochrome or color display, and a parallel printer are required. Tax Relief II costs \$299. Annual updates are available.

Tax Relief I is designed for individual use. It supports 15 forms and has most of the features of Relief II. The suggested price is \$149. For more details, contact Micro Vision, 145 Wicks Rd., Commack, NY 11725, (516) 499-4010.

Circle 554 on inquiry card.

Commodore Tax Program

Northland Accounting's Taxaid was developed by experienced tax accountants for use on Commodore 64 and VIC-20 computers. It computes a line-by-line readout of Form 1040 and related schedules. A manual with step-by-step instructions for data entry is supplied.

Three versions of the program are available: Taxaid I, II, and III. Taxaid I, \$19.95 tape or \$24.95 floppy disk, is designed for the basic VIC-20. It outputs information to your monitor only. Taxaid II is tailored for 16K-byte VIC-20s. Output is to the monitor or a printer. An expanded version for the Commodore 64, Taxaid III will also output to either the monitor or printer. Taxaid II and III are available on floppy disk or cassette for

What's New?

\$29.95 or \$24.95. Contact Northland Accounting Inc., Software Department, 606 Second Ave., Two Harbors, MN 55616, (218) 834-5012. Circle 555 on inquiry card.

SOFTWARE

Templates Extend 1-2-3

Professional Software Technology has introduced two templates that expand the versatility of Lotus Development Corporation's 1-2-3: Personal Tax Preparer and Time and Billing.

The Personal Tax Preparer condenses 1-2-3 to seven single-letter commands. Save, Print, and Destroy are the only fundamentals you need to prepare Form 1040 and a variety of lettered schedules. Once entered, numbers are automatically carried to the appropriate locations on supporting forms and schedules. Standard features include internal tax tables, screen displays of all forms in use, and the ability to print directly on federal forms.

For its single-letter commands, Time and Billing uses simple associations, such as Z for zapping an account. It accommodates more than 20 people per disk. A total of 10,000 clients can be maintained, each with up to 2000 billing entries. It shows numbers as they are entered, calculations as they are made, and the interrelationships between entries or the bottom line. Any system of keeping time slips can be used. Time and Billing lets you customize up

to 30 abbreviated service codes, which minimizes billing-entry descriptions. Receivables are monitored, and the aging of accounts is displayed.

Both programs work with 1-2-3 Release 1A and any computer with 256K bytes of memory and a hard-disk or two floppy-disk drives. Previous knowledge of 1-2-3 is not necessary. Each program retails for \$175. For full details, contact Professional Software Technology, POB 269, Rockport, MA 01966, (617) 546-3494. Circle 567 on inquiry card.

Fast Word Processor

The Qwerty word processor from HFK Software can keep pace with you even if you can type 140 words per minute. Qwerty provides variable margin settings ranging from 1 to 150 columns, tab stops, paragraph indentations, up and down scrolling, forward/backward search and search and replace operations, and block moves. Dynamic insertion and typeover with automatic word and back wrap is supported. Text can be dynamically centered, and such character attributes as underscore, boldface, subscript, superscript, double underscore, and strike-through can be applied during or after text entry. Left, right, and delete operations can be performed by character, word, or line. On-line helps aid operation.

Qwerty supports a wide range of printers. Print options include a number of pitch and line-spacing set-

tings, variable form and character sizes, automatic pagination with widow line elimination, and automatic user-selectable page numbering. Sixteen color sets are available when you use Qwerty with an RGB color graphics monitor.

This program is designed to run on the IBM PC, PC XT, Chameleon, Compaq,

and other computers using PC-DOS. With DOS 2.0, 96K bytes of memory are required. Complete with a tutorial workbook, Qwerty costs \$325. For \$25, you can try a full-function Qwerty. Qwerty is available factory-direct from HFK Software Inc., Old Danbury Rd., Danbury, NH 03230, (617) 259-0059. Circle 559 on inquiry card.



Printer-Control Program

Set-FX, a machine-language printer-control program for Epson FX-80/100 printers and the IBM PC or the Compaq portable, has been introduced by Softstyle Inc. With Set-FX, Epson printers can produce the full IBM PC character set, line graphics, foreign language characters, and math and science symbols exactly as they appear on screen. Menus are provided for setting condensed, emphasized, proportional, and italic characters. Set-FX includes a custom font generator. According to the manufacturer, special fonts can be printed at 160

cps.

Set-FX requires one disk drive and a monitor. Memory requirements are 64K bytes when running under PC-DOS 1.1 or 96K bytes with DOS 2.0. It's compatible with any hard disk operated under PC-DOS and with all Epson print modes. Complete with a manual, quick reference card, and a demonstration program, Set-FX costs \$59.95, plus \$2 handling. Contact Softstyle Inc., Suite 200, 7192 Kalaniana'ole Highway, Honolulu, HI 96825, (808) 396-6368.

Circle 558 on inquiry card.

What's New?

Communications Software and Controller Emulator for Lisa

Apple Computer has introduced a pair of data-communications products, Lisaterminal and the Apple Cluster Controller, that enable Lisa to interact with mainframe systems. Available at authorized Lisa dealers and through Apple's national account executives, Lisaterminal costs \$295, and the Cluster Controller ranges from \$4500 to \$7000.

Lisaterminal provides Lisa with TTY and DEC VT100/52 terminal emulation and the ability to exchange information via a modem with computers supporting asynchronous protocols. It permits access to remote mainframes and information services such as CompuServe and Dow Jones. Also provided are icons, cut and paste integration between application programs, and multiple windows.


A protocol converter, the Cluster Controller works like an IBM 3270-type cluster controller. When used with Lisaterminal, Lisa can communicate with IBM mainframe networks by mimicking IBM 3278 Model 2 terminal functions. It converts SNA/SDLC or BSC protocols to asynchronous protocols and monitors the flow of information in both directions, ensuring accurate transmissions. Both the Lisa and an attached printer communicate through a single Cluster port. The Cluster Controller can be accessed via a modem, making remote

communications with a mainframe possible. The Cluster Controller comes with three or seven serial RS-232C ports for mixing and matching Lisas and printers.

Apple has also announced that Ryan-McFarland Corporation's

RM/COBOL and RM/FORTRAN language compilers are available for the Lisa. For more information, contact Apple Computer Inc., 20525 Mariani Ave., Cupertino, CA 95014, (800) 538-9696; in California, (408) 996-1010.

Circle 560 on inquiry card.

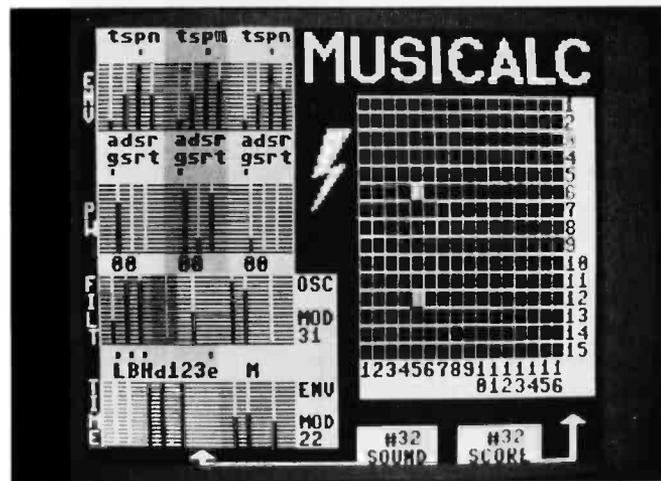

Music Synthesizer for Commodore 64

Musicalc converts the Commodore 64's Sound Interface chip into a three-voice music synthesizer. Musicalc lets you play along with preprogrammed melodies, create and store melodies for later playback, and compose music in a variety of styles. Standard features include real-time sequencing, slide controls, modulators, and trans-

posers. Musical creations can be played back through television sets, stereo systems, or professional amplifiers by means of standard RCA patch cords.

The suggested retail price is \$74.95. For details, contact Waveform Inc., 1912 Bonita Way, Berkeley, CA 94704, (415) 841-9866.

Circle 563 on inquiry card.

Mouse Commands Integrated Software

Jane is an integrated software package consisting of a word processor, spreadsheet, and a file/list manager. A mouse-driven system employing easily understood pictures and symbols rather than programming instructions is at the heart of Jane's user in-

terface. Access to various applications and the entering of data is performed by pointing the mouse to the appropriate symbol on screen. Each application interacts with the others, and you can work with any or all of the applications through up to four on-

screen windows. Window dimensions can be expanded or contracted.

Jane runs on most 8- or 16-bit personal computers, such as the Apple, Atari, Commodore 64, and IBM PC, with 64K bytes of RAM. It comes with the mouse, mouse controller card, and users guide. The suggested retail price is \$295. Graphics and communications programs will be available. For complete details, contact Arktronics Corp., 113 South Fourth Ave., Ann Arbor, MI 48104, (800) 225-5275; in Michigan, (313) 769-7253. Circle 561 on inquiry card.

Software Targeted at Business

Superex International Marketing recently released 15 programs targeted at businesses. Applications focus on wholesalers, retailers, importer/exporters, financial analysts, mail-order houses, and pharmacists. An integrated accounting package with accounts receivable/payable, general ledger, and payroll modules is also available.

Most Superex programs are designed for use on floppy- or hard-disk systems, and many are offered in a special network configuration. A few programs, such as the Pharmacist Assistant, require hard disks. Superex programs support Apple, Columbia, Compaq, Corona, DEC Rainbow, Eagle, Franklin, IBM PC, Texas Instruments Professional, and Toshiba computers. BASICA or GW BASIC is necessary. Under MS-DOS, the minimum memory require-

What's New?


ment is 128K bytes. Versions for Apple and Franklin need 64K bytes of RAM. Prices range from \$300 to \$2000. For full particulars, contact Superex International Marketing, 151 Ludlow St., POB 248, Yonkers, NY 10705, (800) 862-8800; in New York, (914) 964-5200.

Circle 562 on inquiry card.

Ovation for Integrated Software

Ovation software lets you create, access, move, extract, and manipulate data in various forms without reentering data, preparing different files, or swapping applications modes. This program provides built-in formats for letters, spreadsheets, and notes, customizing capabilities, single-keystroke macro instructions, and advanced macros via text files. Five applications capabilities are provided: spreadsheet, graphics, information management, word processing, and data communications. Different applications can be entered at any time, and data that is entered into a spreadsheet can be turned into a graph or inserted into a report on the same screen. A linking process automatically reflects any changes in associated forms.

Thirty English-language commands, entirely summarized on a single card, are all that you have to learn to run Ovation. The commands are common across applications. Other features include context-sensitive helps, automatic backup and disk number-

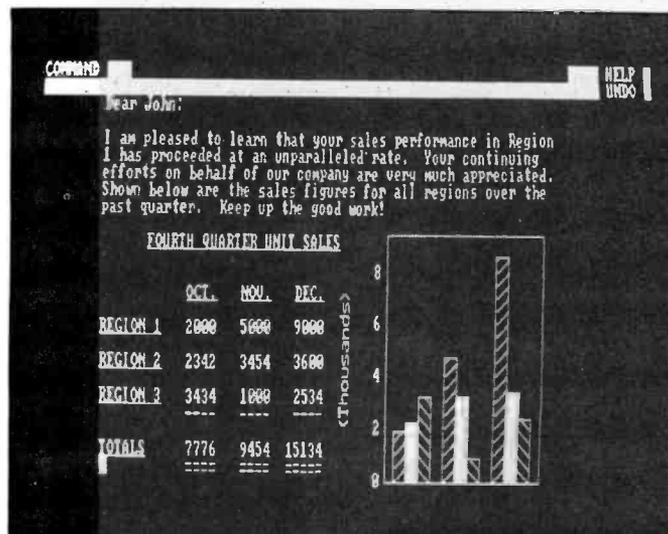

ing, and continuous prompts. Ovation runs on the Tandy 2000 and IBM PC and PC-compatible 8086/8088-based systems using MS-DOS. It requires 256K bytes of memory. A PC XT with a hard disk is recommended, but Ovation will run with two flo-

py disks. Color and most printers are supported. The suggested retail price is \$795. For additional information, contact Ovation Technologies Inc., 770 Dedham St., Canton, MA 02021, (617) 821-1420.

Circle 564 on inquiry card.

Multifunction Package Offers Six Modules

Integrated-6, a multifunction software package for the IBM Personal Computer, is manufactured by Mosaic Software. Its basic ingredients are a relational database, presentation-quality business graphics, a word processor, a spreadsheet, IBM PC-to-PC communications capabilities, and DEC VT100/52 or IBM 3101 terminal emulation. Standard operating features include menu-driven commands, fill-in-the-blank input formats, and built-in help screens. Integrated-6 lets you create, store, analyze, graphically display, combine, and condense information and transfer it between modules and

computers. The same information can be output in a variety of formats for presentations.

The database module features disk access with a capacity of up to 100,000 records per file. The graphics module, based on the Superchartman II program, offers nearly 20 graphic styles, ranging from pie and text charts to pie/bar chart combinations. Able to handle as many as 256 columns and 2000 rows, Integrated-6's spreadsheet can use information created and stored in the database for graphic displays or merge it with text to produce reports.

Integrated-6 is written in

the C language. It requires a minimum memory of 256K bytes. The company intends to transport it to other computers and enhance its emulation capabilities. The suggested retail price for Integrated-6 is \$495. Contact Mosaic Software, 1972 Massachusetts Ave., Cambridge, MA 02140, (617) 491-2434.

Circle 566 on inquiry card.

TERMINALS



Hi-Res Terminal Comes with DIN Keyboard

Liberty Electronics' Freedom 200 is a high-resolution, nonglare 12-inch video-display terminal with a 106-key DIN-standard keyboard. This tilt-and-swivel unit features eight foreign character sets, 7 by 9 character cells in a 9 by 12 matrix, a 24-line by 80-character display format, and a user-accessible 25th status line. A software setup mode and 10 programmable function keys offer operator convenience.

The Freedom 200 has nonvolatile memory for storing function keys and setup modes during power-down. Nonembedded character attributes for both the visual display and data

What's New?

entry as well as double-height and double-width characters and 86 graphics characters are provided. Miscellaneous highlights include programmable hand-shaking protocol, a bidirectional buffered auxiliary port with expandable buffers, programmable answer back, smooth scrolling, adjustable screen time-out, split-screen capabilities with

definable scroll regions, and Televideo 950 and Lear-Seigler ADM 31 emulation.

The single-unit price for the Freedom 200 is \$745. Quantity discounts are available. For more information, contact Liberty Electronics, 625 Third St., San Francisco, CA 94107, (415) 543-7000.

Circle 569 on inquiry card.



CAD/CAM Graphics Monitor

Colorgraphic Communications Corporation believes that its XL-13 monitor is a cost-effective solution for CAD/CAM graphics requirements. Plug-compatible with the IBM Personal Computer, the XL-13 consists of a bit-mapped graphics board, graphics primitives, a high-performance 13-inch color video display, and a power supply. Its standard screen format is 80 columns by 24 or 48 lines, and character sizes can be 7 by 9 dots in an 8- by 10-dot grid or bit-map programmable. Both text and graphic cursor types are supported, with visible, invisible, blinking, or

nonblinking attributes. Graphics features include an escape sequence interpreter for such graphic functions as vectors, arcs, circles, polygons, and parallelograms; draw over and behind; independent draw and erase between graphics and text; geometric and complex fills; 128 fill patterns; zoom, pan, scroll, and scaling; and prefill or post-bounded fill with solid color or pattern.

The graphics board provides a 1024 by 512 by 4 resolution. The 40-MHz bandwidth monitor is swept at 32 kHz horizontally and 60 Hz noninterlace vertically. This combination

provides a flicker-free viewing window of 640 by 480 pixels. The IBM PC's high- and medium-resolution and alphanumeric modes are supported.

The XL-13 lists for \$3495. A 19-inch monitor version, the XL-19, costs \$3995. Volume discounts are offered. For additional information, contact Colorgraphic Communications Corp., 2379 John Glenn Dr., POB 80448, Atlanta, GA 30366, (404) 455-3921. Circle 570 on inquiry card.

Touch-Sensitive Monitor for IBM

Microtouch Systems has unveiled the Point 1 touch-sensitive monitor for the IBM Personal Computer. Point 1 lets you position the cursor, select from menus, and manipulate graphics with the touch of a finger on the video display. An on-board 8-bit 65F11 microprocessor controls data formats and calibrations and comes with a FORTH interpreter, 2K bytes of RAM for user programs, and 4K bytes of ROM for MTS firmware. Switch settings include 110 to 9600 bps data rates; none, even, odd parity; 1 or 2 stop bits; and software-adjustable parameters. The monitor is available with TTL or composite outputs and amber or green-phosphor screens. Resolution is 1024 by 1024 points at 75 points per second; the data rate is 200 points per second. Output is asynchronous RS-232C. Five commands are used to configure the screen, set parameters, and perform self-tests. Additional pro-



gramming can be done using a proprietary Touch Commands Set and user-defined commands.

Versions of the Point 1 are available for both monochrome and color graphics cards. A 4K-byte EEPROM is available as an option. In small quantities, Point 1 costs less than \$850. An OEM kit of the touch screen can be obtained. For complete details, contact Microtouch Systems Inc., Suite 5050, 400 West Cummings Park, Woburn, MA 01801. Circle 568 on inquiry card.

PERIPHERALS

IBM Data Acquisition and Control

Metrabyte Corporation has announced an A/D data-acquisition and control board for the IBM Personal Computer. The Dascon-1 features 12 bits of digital I/O, 12-bit resolution of analog I/O, four analog input channels with overvoltage protection, switch-selectable input filters, two adjustable voltage references, two 1-mA constant current sources, external interrupt capabilities, and a battery-backed real-time clock. Resolution is 500 microvolts per bit. Optional switch selections can extend the

What's New?

resolution to 0.5 microvolt per bit on two channels. Two channels contain RTD interfaces for built-in temperature measurements from -200 to 650 degrees Centigrade.

Supplied software includes I/O driver sub-routines and such utilities as graphics and calibration/set-up procedures. Options include two channels of 12-bit D/A output with switch-selectable ranges, a screw terminal connector, a solid-state I/O module board, and an electromechanical relay output board. Dascon-1 costs \$485, including manual, 37-pin D connector, calibration

resistors, and card guide. Options range from \$12 to \$128.

Also available from Metrabyte is a parallel digital I/O card that provides 24 TTL/DTL-compatible digital I/O lines. It has interrupt input and enable lines as well as external connections to the IBM PC's bus power supplies. The two dozen I/O lines are provided through an 8255-5 programmable peripheral interface. It costs \$89. For more information on these products, contact Metrabyte Corp., 254 Tosca Dr., Stoughton, MA 02072, (617) 344-1990.

Circle 571 on inquiry card.

than 22 commands provide printing flexibility.

The Grappler comes with all necessary cables and its own serial ports. Power is drawn from the Commodore's expansion port. The suggested retail price is \$139. For the name of your nearest dealer, contact Orange Micro Inc., 1400 Lakeview Ave., Anaheim, CA 92807, (714) 779-2772.

Circle 575 on inquiry card.


Comprehensive Data Encryptor

Transcryptor blocks unauthorized access to computers and terminals, generates its own encryption keys, and automatically encrypts messages upon transmission and decrypts them upon receipt. Transcryptor operates asyn-



chronously, and it automatically adjusts to data rates ranging from 150 to 9600 bps. It has an error-correction feature that causes automatic resynchronization when line-noise errors occur. System hardware includes a Z80 central processor and dual RS-232C ports.

Transcryptor can be easily installed between a computer and modem or a direct line. The suggested retail price is \$945. Contact Cryptext Corp., POB 425, Northgate Station, Seattle, WA 98125, (206) 364-8585. Circle 573 on inquiry card.

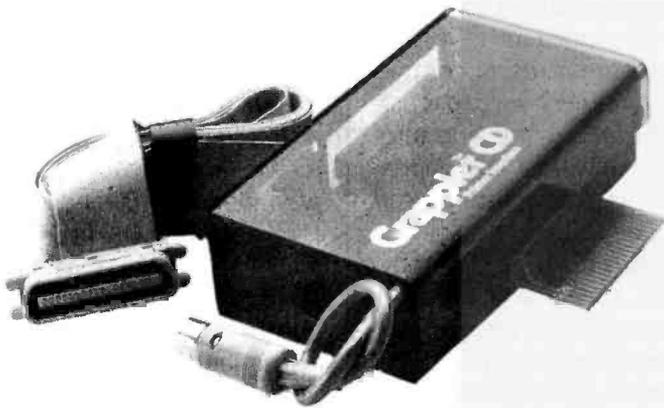

Interface Grapples with Printer

The Grappler CD intelligent printer interface for the Commodore 64 is marketed by Orange Micro. The Grappler's C-1525 printer-emulation mode provides the means for such dot-matrix printers as Epson, Star, Okidata, Pro-writer, and NEC to produce graphics and special characters. Standard print features include high-

resolution graphics screen dumps, text screen dumps, a transparent operation mode, and block graphics screen dump. Double-size, inverted, rotated, and emphasized graphics are accessible through simple commands. Margin and tab settings, page length, and skip-over perforation are among the Grappler's text-formatting features. More

SYSTEMS

16-bit Desktop from Sperry

Sperry's 16-bit Personal Computer has built-in communications capabilities. The basic unit contains an 8088 microprocessor, floppy- or hard-disk drives, an asynchronous adapter for mainframe communications, and expansion slots. Standard hardware includes switch-selectable 4.77- or 7.16-MHz clock rates, 128K bytes of RAM, and seven expansion slots.

Two color display monitors are offered for the Sperry Personal Computer: medium and high resolution. The 15-inch medium-resolution display has an 80

or 40 by 25 format, 16K-byte buffer, 320 by 200 or 640 by 200 resolution, and up to 16 colors. Character size is 5 by 7 in an 8- by 8-dot block. The 12-inch color monitor has four resolutions, ranging from 320 by 200 to 640 by 400, a 192K-byte buffer, and the ability to display up to 256 characters. Its character size is 7 by 14 dots in an 8- by 16-dot block. A monochrome display is also available.


Mass storage is provided by 320K- or 360K-byte floppy-disk drives or by a 10-megabyte hard-disk

What's New?

drive. MS-DOS level 1.25 or level 2.0 is standard, depending on disk storage. Some of the applications programs currently offered are Multiplan, Wordstar, dBase II, and Mail Merge.

The Sperry Personal Computer is available in seven models, differing in

regard to monitor and storage selections. A dot-matrix printer is optional. Prices range from \$2643 to \$5753. For more information, contact Sperry Corp., Computer Systems Division, POB 500, Blue Bell, PA 19424, (215) 542-4213. Circle 590 on inquiry card.

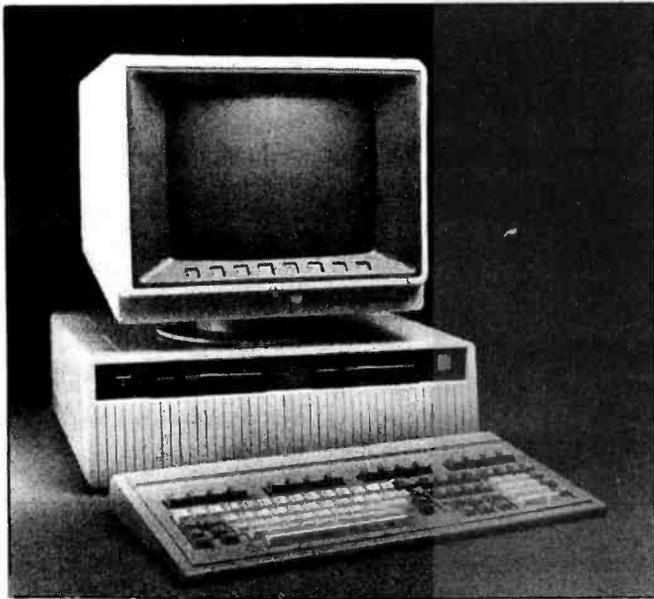

M68000 Computer Runs Uniplus

Perkin-Elmer's 7350 Professional Computer is a desktop computer founded on the M68000 microprocessor. The 7350 is a modular machine consisting of a display unit, detached keyboard, a 15-megabyte Winchester hard-disk drive, and two double-density double-sided floppy-disk drives. The furnished DOS is Uniplus, a Bell Labs Unix System III derivative. The 7350 is offered in single-user, color graphics, and multifunction cluster console configurations.

The single-user workstation comes with 320K bytes

of user memory. The color graphics version has 448K bytes of memory and a palette of 27 colors, 16 of which can be displayed simultaneously. The 1-megabyte multifunction cluster console can accommodate three terminals. Its satellites have complete access to all host programming facilities and most applications. A number of applications packages are available for all versions of the 7350.

The single-user workstation begins at \$8400. The cluster console starts at \$11,750. For more information, contact Perkin-Elmer,

Data Systems Group, 2 Crescent Place, Oceanport, NJ 07757, (201) 870-4768. Circle 587 on inquiry card.

Royal Introduces Personal Computer

Royal Business Machines has introduced the Alpha-tronic Personal Computer. This Z80A-based machine comes with 64K bytes of RAM and 32K bytes of ROM. It has a BASIC interpreter in ROM and interfaces for a cassette recorder, two disk drives, and a parallel printer. It can be used with a home television or an RGB monitor; the display format is 80 or 40 by 24. Character resolution is formed in an 8- by 12-dot matrix. A 79-character keyboard with six programmable-function keys and separate cursor controls and numeric keypad is provided. For game and tutorial software, the Alpha-tronic has a built-in cartridge slot.

Slimline 5¼-inch floppy-disk drives and software cartridges are options. The suggested price is \$695. For details, contact Royal Business Machines Inc., 500 Day Hill Rd., Windsor, CT 06095, (203) 683-2222. Circle 586 on inquiry card.

Tandy 2000 Is Powered by 80186

The 16-bit Tandy TRS-80 Model 2000, an MS-DOS-based system, is powered by Intel's 8-MHz 80186 microprocessor. Under MS-DOS, the 2000 can run such software as MS-Windows, Ovation, and Multi-



plan. The 2000 has a 90-key keyboard with 12 function keys and is offered in two configurations, both of which can accommodate up to 768K bytes of RAM. The basic 128K-byte 2000 has twin 5¼-inch floppy-disk drives, totaling 1.4 megabytes of storage. It lists for \$2750. The 256K-byte 2000 HD system has a 10-megabyte hard-disk drive augmented with a single floppy-disk drive. It costs \$4250.

A 12-inch monochrome and a 14-inch eight-color monitor are offered. The display format is 80 by 25. High-resolution 640 by 400 graphics are optional. Other options include a mouse and a monitor stand.

The Tandy TRS-80 Model 2000 is available at more than 1100 Radio Shack Computer Centers. Contact Tandy Corp./Radio Shack, 1800 One Tandy Center, Fort Worth, TX 76102. Circle 585 on inquiry card.

MISCELLANEOUS

Tool Identifies Dead Components

Metrifast's Thermoprobe lets you quickly identify dead components without coming into direct contact

What's New?

with the PCB. A solid-state device consisting of a thermistor probe connected to a modified Wheatstone bridge circuit. Thermoprobe measures minute temperature changes of 1/25 degree Fahrenheit (1/45 degree Centigrade). Because dead ICs, resistors, transformers, and diodes do not emit heat, they can be readily identified on the unit's built-in S-meter, which indicates null to warm as the device is passed above the components.

Thermoprobe is small enough to fit inside a shirt pocket. It's powered by a 9-volt battery. Thermoprobe is available for \$21.95, postage paid, from Metrifast, 51 South Denton Ave., New Hyde Park, NY 11040. Circle 593 on inquiry card.

Money Talks

The American Foundation for the Blind is marketing a device that identifies and vocalizes the value of U.S. paper currency. The machine, known as the PMI (paper money identifier), uses an optical scanning device to identify \$1, \$2, \$5, \$10, and \$20 bills and a voice synthesizer to announce the value. If a bill is fed into the machine face down, the voice says "over." PMI will also say "please try again" if a bill is tattered or otherwise unrecognizable.

The rectangular PMI measures 3½ by 6 by 15¾ inches and weighs 6 pounds, 2 ounces. Two controls, an on/off switch and a volume selector, are located on the front panel. PMI plugs into any standard

three-prong, 120-volt outlet and can be used with a talking cash register developed by the Foundation.

PMI costs \$600. Purchasing details are outlined in a free catalog, *Products for People with Vision Problems*, which is available in print or braille from the American Foundation for the Blind, Consumer Products, 15 West 16th St., New York, NY 10011.

Circle 591 on inquiry card.

Rewrite Labels


When used with their complementary marking pen, Holman Data Products' Rewrite Labels can be erased with a damp cloth and reused. These 4- by 4½-inch labels have seven lines for information. A package of 100 Rewrite Labels with one marking pen costs \$9.95. Quantity discounts are available. Contact Holman Data Products, 2059 West Lincoln, Oroville, CA 95965, (916) 533-5992.

Circle 595 on inquiry card.

Workshelves Adjust to Your Taste

The Stack*Rack line of computer workshelves comprises nine models that can be adapted to any microcomputer on the market. Produced by California Design Works, Stack*Racks feature adjustable shelves that can be set level, sloped, or vertically to suit personal tastes. They are made of solid red oak with an oil finish.

Stack*Racks are available with 14-, 18-, or 22-inch

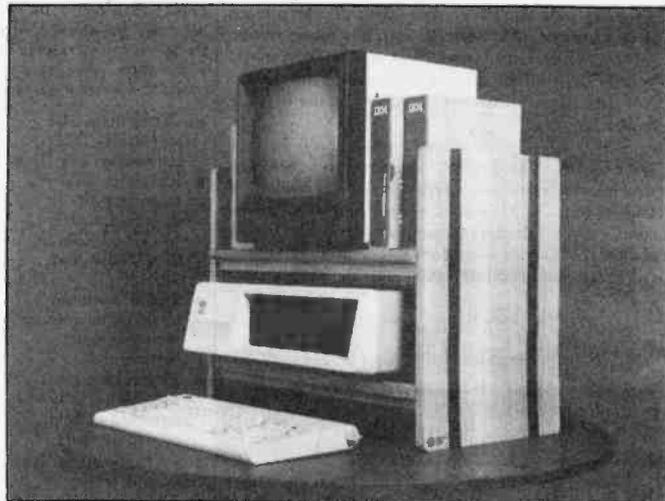

shelves in single- or double-shelf configurations. Prices range from \$38 to \$118. For complete details,

contact California Design Works, POB 3052, Monterey, CA 93940. Circle 596 on inquiry card.

Micro Charts Aid Programmers

Micro Logic Corporation's Micro Chart #7 is a double-sided, full-page reference card for 8086 and 8088 programmers. Micro Chart represents the reconstruction of the bits, codes, and special conditions found in data manuals. The data are presented in a fully decoded format, which facilitates programming, debugging, and patching. Areas covered are conversion of instructions to and from hexadecimal, instruc-

tion descriptions, cycle time, addressing modes, flag codes, register map, memory map, pinouts, and ASCII codes. Diagrams and cautionary notes are provided as well.

Micro Chart #7 is made of the same type of plastic as a credit card. In lots of one to nine, it costs \$5.95, plus \$1 postage. Order Micro Chart directly from Micro Logic Corp., 100 2nd St., POB 174, Hackensack, NJ 07602, (201) 342-6518.

Where Do New Products Items Come From?

The information printed in the new products pages of BYTE is obtained from "new product" or "press release" copy sent by the promoters of new products. If in our judgment the information might be of interest to the personal computing experimenters and homebrewers who read BYTE, we print it in some form. We openly solicit releases and photos from manufacturers and suppliers to this marketplace. The information is printed more or less as a first-in first-out queue, subject to occasional priority modifications. While we would not knowingly print untrue or inaccurate data, or data from unreliable companies, our capacity to evaluate the products and companies appearing in the "What's New?" feature is necessarily limited. We therefore cannot be responsible for product quality or company performance.

RIBBON RE-INKERS

Introducing the Pika-Ink™, an incredible new device which extends the life of your fabric printer ribbons by a factor of TEN! Works with any fabric ribbon with 1/8-inch or narrower width. Automatically re-inks your ribbons either on or off the printer for consistent dark black print. Pays for itself on the first ribbon!

The Pika-Ink™ is a kit which includes • Stainless steel ink reservoir • ball bearing assembly • transfer felts • 115v 60Hz electric motor • power cord • special computer ribbon ink (extra ink available). Comes with complete instructions. Requires assembly and fabrication with hand tools.

Pika-Ink kit each 3+ 10+
 \$89 \$84 \$78


TERMINALS & PRINTERS

Micro-Term E301	\$875	Qume QVT-108	\$850
Visual 55	\$850	Qume Sprint 11/40	\$1495
Visual 102	\$1050	Sprint Interface	\$90
Qume QVT-102	\$675	Sprint Tractor	\$235

RS-232 BREAKOUT BOX

The Pika-Box™ RS-232 I/O tester is the most advanced breakout box on the market today. An absolute necessity for anyone who uses or works with RS-232 peripherals, interfaces, or data lines. Saves hours of aggravation. Available in standard or deluxe tri-state models. Lifetime warranty!

- 25-pin male DCE and female DTE connectors.
- Individual LED's monitor pins, 2, 3, 4, 5, 6, 8, 15, 17, 20, 21, 22, 25, plus MARK and SPACE.
- 24 DIP switches allow signal lines to be individually interrupted.
- 25 test pins for monitoring or cross patching with included jumpers.
- Tri-State model displays signals as high, low, or invalid.
- Fits in shirt pocket. 2.9"x5.5"x1.5", wt. 8 oz, with batteries (included).
- Fully assembled, ready to use.

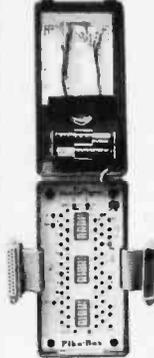

Pika-Box list each 3+
 Tri-State Pika-Box \$199 \$179 \$174
 \$249 \$219 \$211

RS-232 SWITCHES SAVE 40% TO 80%!

Allows several devices to share a single RS-232 data line. Enhances flexibility of your system and puts an end to juggling cables. You've heard them called AB switches or T-switches, and they have outrageous prices!

The Pika-Switch™ is an economical alternative in kit form. You assemble it yourself and save 40% to 80%! Available in two models: 2-device (AB + common) with 3 female connectors, and 5-device (ABCDE + common) with 6 female connectors. Switches any 8 lines. Silver plated switch contacts, gold plated connector contacts. Complete, nothing else to buy.



Pika-Switch # 2 (AB) each 3+
 \$79 \$75
 Pika-Switch # 5 (ABCDE) \$145 \$135
 Male Connector Option No Charge

TERMS: All Sales exclusively by mail/phone order. Cash, check, money order, MC, Visa. No COD. Add \$4.50 shipping, NM residents add 4% tax. (Foreign customers: payment must be in U.S. funds drawn on a U.S. bank, add 10% for air shipment).

pika

ORDERS ONLY

Ask for Dept. 501

1-800-547-4000



In Oregon, and outside the U.S. call (503) 620-1602



Pika-Box

Div. of Applied Computing
 Dept. 501
 1808 Pomona Dr.
 Las Cruces, N M 88001

BYTE Back issues for sale

	1976	1977	1978	1979	1980	1981	1982	1983	1984
Jan.				\$2.75	\$3.25	\$3.25		\$3.70	\$4.25
Feb.			\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$3.70	\$4.25
March			\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$3.70	
April			\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$3.70	
May		\$2.00	\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$3.70	
June		\$2.00	\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$3.70	
July	\$2.00	\$2.00	\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$4.25	
Aug.		\$2.00	\$2.75	\$2.75		\$3.25	\$3.70	\$4.25	
Sept.		\$2.75	\$2.75	\$2.75	\$3.25		\$3.70	\$4.25	
Oct.			\$2.75	\$2.75	\$3.25	\$3.25	\$3.70	\$4.25	
Nov.				\$3.25		\$3.25	\$3.70	\$4.25	
Dec.		\$2.75	\$2.75	\$3.25	\$3.25	\$3.25	\$3.70	\$4.25	

Prices include postage in the US. Please add \$.50 per copy for Canada and Mexico; and \$2.00 per copy to foreign countries.

Check enclosed

Payments from foreign countries must be made in US funds payable at a US bank.

VISA

Master Card

Card # _____ Exp. _____

Signature _____

Please allow 4 weeks for domestic delivery and 8 weeks for foreign delivery.

name _____

address _____

city _____

state _____ zip _____

Circle and send requests with payments to:
BYTE Back Issues
P.O. Box 328
Hancock, NH 03449

Apple Country Ltd. has your Number for ROCK BOTTOM PRICES



1-800-222-2602

MONITORS

AMDEK COLOR I PLUS	294.95
AMDEK COLOR II PLUS	424.95
AMDEK COLOR III	369.95
AMDEK COLOR IV	749.95
AMDEK VIDEO 300 (GREEN)	134.95
AMDEK VIDEO 300 (AMBER)	144.95
AMDEK VIDEO 310 (AMBER)	164.95
BMC 12AU 12" GREEN	89.95
BMC AU1919U 13" COLOR	299.95
BMC 1401 13" RGB COLOR	349.95
BMC AU1919MU 13" RGB IBM	629.95
COMMODORE COLOR MONITOR	269.95
COMREX 13" COLOR W/SOUND	269.95
COMREX 12" HI-RES AMBER	134.95
COMREX 12" HI-RES GREEN	129.95
COMREX 12" HI-RES LT GRN	129.95
COMREX 13" RGB COLOR	269.95
ELECTROHOME 9" GREEN	129.95
ELECTROHOME 12" GREEN	144.95
ELECTROHOME 13" RGB IBM	379.95
ELECTROHOME 13" RGB COLOR	359.95
GORILLA 12" GREEN	89.95
NEC 12" GREEN SCREEN	154.95
NEC 12" ECO-NO GREEN	109.95
NEC 12" LO-RES COLOR	289.95
NEC 12" AMBER SCREEN	164.95
NEC 12" COLOR - IBM	479.95
PRINCETON GRAPHICS HX-12	489.95
SAKATA 13" COLOR	264.95
SAKATA 13" RGB COLOR	499.95
SAKATA SUPER RGB MONITOR	679.95
SAKATA 12" GREEN	104.95
TAXAN 12" GREEN	124.95
TAXAN 12" AMBER	129.95
TAXAN RGB VISION I	294.95
TAXAN RGB VISION III	439.95
ZENITH 12" AMBER	119.95
ZENITH 12" GREEN	99.95
ZENITH RGB COLOR MONITOR	389.95
USI 9" AMBER MONITOR	129.95
USI 9" GREEN MONITOR	119.95
USI 12" AMBER	149.95
USI 12" GREEN MONITOR	139.95
USI 14" LO-RES COLOR	289.95

MODEMS

ANCHOR MARK I (RS-232)	79.95
ANCHOR MARK II (ATARI)	79.95
ANCHOR MARK III (TI99/4A)	99.95
ANCHOR MARK V (OSBORNE)	94.95
ANCHOR MARK VI (IBM PC)	199.95
ANCHOR MARK VII (RS-232)	109.95
ANCHOR MARK XII (RS-232)	279.95
NOVATION J-CAT	104.95
NOVATION 212 AUTO CAT	579.95
SMARTCAT 212 (1200 BAUD)	429.95
SMARTMODEM 300 BAUD	194.95
SMARTMODEM 1200 BAUD	484.95
SMARTMODEM 1200B - IBM	449.95
US ROBOTICS AUTODIAL 212	449.95

PRINTERS

ANADEX DP-9725B COLOR/SCRIBE	
ANADEX DP-9625A	1339.95
ANADEX DP-9620A	1129.95
ANADEX WP-6000	2199.95
ANADEX DP-6500TR 500CPS	2329.95
C. ITOH 8510SCP WHEEL	NEW!! 539.95
C. ITOH 8510SP	569.95
COMREX CR-I DAISY WHEEL	629.95
COMREX CR-II DAISY WHEEL	469.95
DAISEYWRITER 2000	1129.95
DIABLO 630R155	1784.95
EPSON FX-80 W/TRACTOR	LOW!!
EPSON FX-100 F/T	LOW!!
EPSON LQ-1500 LETTER QUALITY	LOW!!
EPSON MX-100 F/T	LOW!!
EPSON RX-80	LOW!!
EPSON RX-80 F/T	LOW!!
GEMINI 10X	LOW!!
GEMINI 15X	LOW!!
GORILLA BANANA PRINTER	189.95
IDS MICROPRISM	479.95
NEC PRISM 132	1299.95
IDS PRISM 132C - COLOR	1499.95
JUKI 6100 PRINTER (P)	549.95
MANNESMANN TALLY MT160L	599.95
MANNESMANN TALLY MT180L	799.95
MANNESMANN TALLY MT440L	NEW!!
NEC 3550 SPINWRITER-IBM	1754.95
NEC 8025 120 CPS 136 COL	719.95
OKIDATA MICROLINE 80	299.95
OKIDATA PACEMARK 2350S	1999.95
OKIDATA PACEMARK 2350S	2199.95
OKIDATA PACEMARK 2410P	2329.95
OKIDATA PACEMARK 2410S	2499.95
OKIDATA 82A W/GRAPHICS	379.95
OKIDATA 83A W/GRAPHICS	579.95
OKIDATA 84P	1049.95
OKIDATA 84S	1129.95
OKIDATA 92P	449.95
OKIDATA 93P	729.95
OKIDATA 93S	829.95
PRINTMASTER (DAISY)	1549.95
PROWRITER I PRINTER	344.95
PROWRITER II PRINTER	619.95
QUADJET COLOR INK JET PRINTER	LOW!!
QUME SPRINT 11/40+	1399.95
SANYO PR5500 DAISY WHEEL	659.95
SILVER-REED 550 DAISY	699.95
STAR DELTA-10 160CPS	LOW!!
STARWRITER DAISY WHEEL	1099.95
TOSHIBA P-1350 LP	1579.95
TRANSTAR 315 COLOR	449.95
TRANSTAR 120P 14CPS	464.95
TRANSTAR 130P 18CPS	699.95
TRANSTAR 140S 40CPS	1229.95
EPSON SERIAL (RS-232)	134.95
GRAFITT CARD	84.95
GRAPPLER	119.95
MICROBUFFER II 16K	144.95
PKASO INTERFACE	129.95
WIZARD BPO 16K	129.95
WIZARD SOB 16K	179.95

OTHER PRINTERS AVAILABLE

COMPUTERS

COMMODORE 64	LOW!!
COMMODORE 1541 DRIVE	LOW!!
IBM PC	LOW!!
COLUMBIA VP PORTABLE	2349.95
COLUMBIA COMPLETE SYS.	2649.95
IBM-PC COMPATIBLE SYSTEM	
128K, 2-DS/DD DRIVES, KEYBOARD	
AND COMPLETE SOFTWARE PACKAGE	
CORVUS CONCEPT MC68000	\$3199
256K, 8" FLOPPY DRIVE	
COMPLETE SOFTWARE PACKAGE	
BI-DIRECTIONAL 8-1/2X11 SCREEN	
CORVUS CONCEPT 512K	\$3599
EAGLE PC II 128K SYSTEM	2649.95
EAGLE SPIRIT XL	3649.95
PORTABLE 128K RAM EXPANDABLE	
TO 640K RAM ON BOARD, 1 320K	
FLOPPY 10 MEGABYTE HARD DISK,	
IBM COMPATIBLE KEYBOARD,	
MONOCHROME MONITOR, 2 SERIAL &	
1 PARALLEL PORT, MS DOS 2.0,	
GW BASIC, CP/M 86	
KAYPRO II	1449.95

LEADING EDGE

IBM COMPATIBLE COMPUTER	
8088 MPC 7.16 MHz	
7 EXPANSION SLOTS, BUILT IN	
CLOCK, PARALLEL AND SERIAL	
PORTS, 128K RAM, MONITOR,	
WORD PROCESSING SOFTWARE.	
CALL FOR LOW PRICE!	
NEC APC-H01	\$2049
NEC APC-H02	\$2549
NEC APC-H03	\$3049
SANYO MBC 550 SYSTEM	769.95
SANYO WBC-1000	1529.95

TELEVIDEO 16-BIT DESKTOP
128K 8088 5MHz DUAL 360K DRIVES
INCLUDES CP/M \$3499.95

TELEVIDEO 910 TERMINAL	549.95
TELEVIDEO 925 TERMINAL	789.95
TELEVIDEO 970 TERMINAL	1199.95

ZENITH Z-120 ALL-IN-ONE
BUILT-IN GREEN SCREEN
DUAL DRIVES SPECIAL \$2999.95

APPLE //e NOW AVAILABLE

WILDCAT STARTER SYSTEM 64K 2DR.	
6502 & Z80 APPLE-CLONE	1499.95

DISKETTES

SS/SD ELEPHANT 16.95	OPUS 15.95
SS/DD ELEPHANT 19.95	OPUS 17.95
DS/DD ELEPHANT 25.95	OPUS 24.95

APPLE HARDWARE

ALS CP/M CARD	299.95
AMDEK AMDISK 3" DISK DR	239.95
APPLE-CAT II	264.95
APPLE DUMPLING GX	119.95
4TH DIMENSION DRIVE+CTRL	289.95
4TH DIMENSION DRIVE-ONLY	199.95
HANES MICROMODEM Iie	249.95
KENSINGTON SYSTEM SAVER	64.95
KOALA GR/TABLET W/SFTWR	99.95
LAZER MICROSYSTEM DRIVE	189.95
MICRO-SCI A2 DRIVE ONLY	239.95
MICRO-SCI A2 W/CTRL-CARD	299.95
MOUNTAIN MUSIC SYSTEM	289.95
ORANGE MICRO SMART CARD	NEW!!
PREMIUM SOFTCARD Iie	334.95
QUADRAM 64K80COL CRD Iie	124.95
RANA ELITE I W/CTRL-CARD	349.95
RANA ELITE II W/CTRL	499.95
RANA ELITE III W/CTRL	649.95
SOUNDCHASER MUSIC SYSTEM	619.95
SOFTCARD (Z-80 CARD)	234.95
SWEET P PLOTTER	459.95
TG JOYSTICK W/TOGGLE Iie	49.95
TRANSMODEM 1200	499.95
WIDC APPLE MOUSE	124.95

IBM

KOALA PAD TOUCH TABLET	99.95
KRAFT JOYSTICK	54.95
MICROSOFT SYSTEMCRD 256K	449.95
MICROSOFT MOUSE	134.95
MOUSE SYSTEMS PC MOUSE	224.95
QUADLINK APPLE EMULATOR	489.95
QUADRAM QUADBOARD I 64K	289.95
QUADRAM QUADCOLOR I	229.95
QUADRAM QUADCHROME MON	524.95
QUADRAM QUADSCREEN MON	1549.95
RANA DS/DD DISK DRIVE	259.95
STB SUPER I/O MULTIFUNCT	169.95
TG JOYSTICK W/TOGGLE	49.95
TRANSEND P.C. MODEM 1200	399.95
VERSAWRITER GRAPH TABLET	239.95
WIZARD SPOOLER P/S 16K	239.95

IBM64 HARDWARE

CARDBOARD/5 5 SLOT EXPAN.	54.95
CARD GRAPHICS INTERFACE	64.95
DATA20 Z80 VIDEOPAK	224.95
GRAPPLER CD NEW PRINT INTERFACE	
KOALA GRAPH TABLET W/SFT	79.95
MSD-SDI DISK DRIVE	339.95
VOICE BOX	99.95

Circle 24 on inquiry card.

We will try to meet or beat any advertised price!
CALL US... WE CAN HELP! 1-800-222-2602

For technical assistance, order status and California calls (619) 765-0239
Apple Country, Ltd., P.O. Box 1099, 2602 Washington St., Julian, Calif. 92036

Terms: We accept American Express. No extra charge for Visa/MasterCard, Cashier's Check, personal check (allow 2 weeks to clear) Shipping & Handling: 5% (\$5 min.); APO FPO Alaska Hawaii & Monitors 5% (\$10 min.) Foreign orders 15% (\$15 min.) All items are new with manufacturer's warranty. Prices are subject to availability & change without notice. Purchase order must include check. California residents add 6% sales tax. Send \$1 (good toward first purchase) for new fall catalog.

Apple Country, Ltd. is a **DISCOUNT MAIL ORDER HOUSE** for the micro computer industry and is a California corporation not affiliated with Apple Computer Inc. Apple is a trademark of Apple Computer Inc.



CHECK SUNTRONICS NEW LOW PRICES

TOLL FREE (ORDERS ONLY) **1-800-421-5775**
Calif. orders and all Info Call 213-644-1149

IBM Compatible Products Apple Compatible Products General Products- cont.

S-100 Products



COLUMBIA PC 1600-1
Includes: Drives, Video Card, Perfect Software Package, MS-DOS, CP/M, Fast Graphics, BASIC, CP/M-86, Home Accountant and Communications Program.
PC 1600-1.....only \$2850.00
COLUMBIA VP (Portable).....only \$2750.00

AST SIXPACK CARD
Six-function card with 64K-348K RAM Memory, Parallel Port, Serial Port, Clock Calendar, Super Drive and Super Spool.
AST Sixpack Card.....only 291.00

MSI DUAL I/O
2 Serial/2 Parallel Ports, Clock..... 175.00

MSI 256K RAM Board
256K RAM Board with 64K..... 199.00
256K RAM Board with 256K..... Call

MSI 256K w/Parallel or Serial Port
256K w/Parallel Port and 64K..... 259.00
256K w/Parallel Port and 256K..... Call
256K w/Serial Port and 64K..... 259.00
256K w/Serial Port and 256K..... Call

VISTA DISKMASTER
Diskmaster Floppy and Hard Disk Controller..... 225.00

APPRATE IBM PROM Blaster..... 129.00

CABLE for IBM Parallel Printer..... 29.95

CABLE for Columbia MPC Parallel Printer..... 29.95

MODEM Novation 103 Smart-Cat..... \$210.00



AFDC-1 Floppy Disk Drive Controller..... **\$69.95**
Runs DOS 3.3 with any standard Shugart compatible 5 1/4" disk drive. (2 drives each card). Does not read 1/2 track.

Apprate PROM Blaster..... 119.00
"ALS" 80 Column Card..... 159.00
"ALS" Z-CARD (Z80 CPU)..... 149.00
API Apple Parallel Printer Interface card, Centronics Compatible..... \$45.00

Software

WORD PROCESSOR (Benchmark)
For IBM or MS-DOS..... \$299.00

MAILING LIST (Benchmark)
For Apple II..... 140.00
For IBM or MS-DOS..... 140.00

SPELLING CHECKER (Benchmark)
For IBM or MS-DOS..... 105.00

TELECOM (Benchmark)
For IBM or MS-DOS..... 85.00

CDEX
IBM Training..... 52.00

TALLGRASS (J format)..... 50.00

General Products

Mitsubishi Disk Drives, 5 1/4" and 8" Slim
5 1/4" Thin DSDD 40 Track..... 310.00
8" Thin DSDD 80 Track..... 450.00

DISKETTE SALE

5 1/4" Diskettes	10 up	100 up
SS/DD (100% certified)	1.75	1.55
DS/DD (100% certified)	2.50	2.30

SAMWOO 18MHz Video Monitors

AMBER 9"..... 119.00
GREEN 12"..... 124.00
AMBER 12"..... 127.00
Composite video I/O. 750 lines resolution. 75/10K ohm impedance.



BMC 13" COLOR monitor for your home computer/video game display. Offers 350 x 350 resolution with 400 dots at the center.
9191U..... 249.00



BMC PRINTER

BX-80 dot matrix printer with 80 cps, 9 x 7 print head. Quiet, reliable and priced for entry level end-user..... **\$259.00**

Note: Please add \$10.00 shipping and handling for the video monitors or printer.


EPROM & RAM SUPER SALE

P/N	Description	8-24	25up
2716	(450nS)	3.95	3.95
2732	(450nS)	4.40	4.40
2764	(28 pin)	8.95	5.95
4164	(in stock)	Call	Call
6116P-3	(150nS)	6.10	Call

Mother Boards & Card Cages

SLOTS	Bare Bd	KIT	A & T	w/CAGE
6	\$19.00	\$44.00	\$59.00	\$84.00
8	24.00	56.00	81.00	116.00
12	29.00	75.00	110.00	150.00

10MHz. No termination. Includes power indicator and wiring for muffin fan. Uses OK connector for solderless installation and removal of power & reset lines.



64KSM A&T without RAM..... **\$155.00**

64KSM Board w/64k RAM (32-6116's)..... 339.00
S-100 Board Uses 6MHz 6116's, 1/2 Amp max. power, Bank Select plus Extended Addressing allows for multi-memory board set-up. 4 independent 16K Blocks make easy use with multi-user systems. Any 2K RAM may be replaced by a 2716 EPROM.

SBC-880 Z80A CPU, A&T..... \$169.00
SBC-880 Z80A CPU, Kit..... 149.00
4MHz Z80A CPU boards with Serial/Parallel Ports.....

UFDC-1 Floppy Controller, A&T..... 245.00
UFDC-1 Floppy Controller, Kit..... 225.00

The UFDC-1 Floppy Controller uses the WD1795 chip which runs either and/or 8" 5 1/4" Disk Drives.

CLOCK CALENDAR A&T..... 115.00
CLOCK CALENDAR Kit..... 95.00

This S-100 Clock Calendar Board has 4 Interrupts, Time, Day of Week and Battery Backup.

Special Sale Items

Apple Keyboard Assm & Tested..... \$49.95

SUN-721 S-100 Prototype Board..... 9.95

SUN-722 Apple Prototype Board..... 5.95

See our January 1984 BYTE Ad for above item descriptions. Quantities are limited.



SUNTRONICS CO., INC.
12621 Crenshaw Blvd., Hawthorne, CA 90250

STORE HOURS: MON.-FRI. 9:00am to 6:00pm SATURDAY 10:00am to 5:00pm

Mail Order—Min. Order \$10. Visa or MasterCard (please include expiration date). Add \$2.00 (shipping and handling) for first 3 pounds plus .50 for each additional pound to your order. CA residents add Calif. sales tax.

MEGA BYTES FOR MICRO BUDGETS

Why pay more for top quality peripherals and accessories when our prices are consistently among the lowest anywhere? Expand your system and shrink your cost. We invite you to compare prices, then call us.

MICROSOFT.	SALE PRICE
MULTIPLAN.....	\$176.00
MULTIWORD..... WITH MOUSE.....	339.63
MULTITOOOL FINANCIAL STATEMENT.....	70.49
MULTITOOOL BUDGET.....	104.96
SOFTCARD SYSTEM CARDS.....	CALL

MISC. ITEMS	SALE PRICE
92P... OKIDATA... PRINTER.....	485.10
93P... OKIDATA... PRINTER.....	812.70
NEC JB1260... MONITOR.....	112.50
NEC JB1205... MONITOR.....	177.50
AMDEK COLOR II... MONITOR.....	466.50
PEGASUS... DISK DRIVES.....	CALL
CORVUS... DISK DRIVES.....	CALL

DYSAN DISKETTES (Boxes of 10 each)	SALE PRICE
104/1..... 5.25" .SS.SD.....	\$32.83
104/1D..... 5.25" .SS.SD.....	34.72
104/2D..... 5.25" .DS.DD.....	41.04
3740/1..... 8" .SS.SD.....	34.09
3740/1D..... 8" .SS.DD.....	42.29
3740/2..... 8" .DS.SD.....	42.29
3740/2D..... 8" .DS.DD.....	49.24

VIDEX	SALE PRICE
UL-00..... ULTRATERM.....	\$282.39
VT-600..... VIDEOTERM 60.Hz.....	207.87
VT-601..... VIDEOTERM 60.Hz SOFTSWITCH.....	230.22
VT-602..... VIDEOTERM 60.Hz SOFTSWITCH INVER.....	237.68
PS-000..... PSIO.....	170.61
ENH-000..... ENHANCER II.....	111.04
ENH-FS-000..... FUNCTION STRIP.....	29.06
ENH-FS-001..... ENHANCER II, FUNCTION STRIP.....	133.37

MODEMS	SALE PRICE
01 HAYES..... CHRONOGRAPH.....	\$200.79
02 HAYES..... SMARTMODEM 300.....	232.37
03 HAYES..... SMARTMODEM 1200.....	568.29
04 HAYES..... MICROMODEM II.....	313.60
05 NOVATION..... DCAT.....	180.58
06 NOVATION..... AUTOCAT.....	657.95
07 NOVATION..... JCAT.....	122.30
08 NOVATION..... SMARTCAT 103/212.....	488.35
09 NOVATION..... SMARTCAT 103.....	204.43
10 U.S. ROBOTICS... PASSWORD.....	395.75
11 U.S. ROBOTICS... AUTO DIAL.....	525.00

ORDERS ONLY 800-858-4810
IN CAL. 800-821-6662




COMMERCIAL BUSINESS SYSTEMS
2858 S. ROBERTSON BLVD. LOS ANGELES, CA 90034



INFORMATION
(213) 559-0596

Phone orders accepted on Visa and Mastercard only. California residents add 6.5% sales tax. No C.O.D. Actual shipping and handling charge added to all orders. Prepaid orders as follows: Money orders or cashier's check—merchandise shipped upon receipt. Personal checks must clear before shipping. 20% restocking fee. Prices and availability subject to change. \$100 minimum order.



CHANNEL CONNECTIONS

The Channel Connecting You And Computers


APPLE SOFTWARE		Perfect Writer/Speller	199.00	IBM SOFTWARE		QUADRAM Quadlink	485.00
*AST Versa Form	\$245.00	Perfect Filer	199.00	*AST Versa Form	245.00	Quadboard 64K	285.00
Qbase	139.00	Perfect Calc	99.00	Qbase	139.00	Quadboard II 64K	285.00
Templates PO/INV @	39.00	Writer/Speller/Filer/Calc	489.00	Templates PO/INV @	39.00	Quad 512 plus 64K	265.00
ML/CRJ/EJ @	33.00	PHOENIX Zoom Grafix	34.00	ML/CRJ/EJ @	33.00	Quad 512 plus 256K	420.00
ARTSCI Magic Window	99.00	QUALITY Bag of Tricks	29.00	* ASHTONE-TATE ™ dBase II	385.00	Quad 512 plus 512K	675.00
Magic Mailer	49.00	SENSIBLE Speller	83.00	Bottomline Strategist	279.00	64K Ram Chips	79.00
Magic Words	49.00	SIERRA ON LINE		Financial Planner	419.00	Quadchrome	519.00
Magic Calc	99.00	Screen Writer II	85.00	Friday!	198.00	Quadscreen	1,595.00
* ASHTONE-TATE ™ dBase II	385.00	Dictionary	69.00	BLUE CHIP Millionaire	39.00	TG Paddles	39.00
Bottomline Strategist	279.00	Screen Writer/Dictionary	135.00	BPI ™ GL/AP/AR/PR @	459.00	Joy Stick	49.00
Financial Planner	419.00	Frogger	25.00	CENTRAL POINT Copy II PC	32.00	Track Ball	49.00
Friday!	198.00	Ultima II	39.00	COMPREHENSIVE		WICO Joy Stick	59.00
BEAGLE BROTHERS		SILICON VALLEY		PC Tutor 1.1	45.00	MODEMS	
Alpha Plot	28.00	Word Handler	39.00	PC Tutor 2.0	45.00	HAYES ™ Micromodem II	
Apple Mechanic	22.00	List Handler	35.00	CONTINENTAL ™ FCM	79.00	w/SC I (II)	249.00
Beagle Bag	22.00	SIRIUS Type Attack	28.00	Home Accountant Plus	89.00	SMARTCOM I (II)	89.00
Doss Boss	17.00	Pascal Graphics Editor	75.00	Property Management	329.00	SMARTMODEM 1200B	
Double Take	27.00	SOFTWARE PUBLISHING ™		DATAMOST Write On	89.00	w/SCII (PC)	439.00
Pronto Dos	22.00	(Specify II+ or IIe)		DIGITAL RESEARCH ™ CP/M 86	45.00	SMARTCOM II (PC)	89.00
Utility City	22.00	pfs: File	84.00	Concurrent CP/M 86	235.00	SMARTMODEM 1200	
BLUE CHIP Millionaire	39.00	pfs: Report	79.00	Dr. Logo	79.00	(RS232)	499.00
BPI GL/AP/AR/INV/PR@	295.00	pfs: Graph	84.00	Other Products	CALL	SMARTMODEM 300	
BROOERBUND ™ A.E.	25.00	pfs: Write (IIe only)	84.00	OW JONES ™ Market Analyzer™	275.00	(RS232)	205.00
Choplifter	25.00	SPINNAKER ™	up to 30% off	Market Manager™	235.00	CHRONOGRAPH (RS232)	189.00
Bank St. Writer	45.00	SSM Transcend I	69.00	Market Microscope	525.00	NOVATION Apple Cat II	
Lode Runner	26.00	Also SEE MODEMS		Investment Evaluator™	129.00	(300B) (II)	269.00
G. W/AP	305.00	STONEWARE D.B. Master	145.00	Connector	85.00	212 Apple Cat II (300/1200B)	
AR/PR @	275.00	D.B. Master Ver. 4	229.00	FOX & GELLER Quick Code	195.00	(II)	559.00
CENTRAL POINT Copy II Plus	32.00	SUBLOGIC Flight Simulator	25.00	dGraph	195.00	212 Apple Cat II	
Filer	15.00	TERRAPIN Logo	119.00	dUtil	69.00	Upgrade Kit	319.00
CONTINENTAL ™ GL/AP/AR/PR@	158.00	VISICORP Visicale		HAYDEN Pie Writer	135.00	Cat (300B) (RS232)	139.00
Home Accountant	49.00	(II/II+) (IIe)	169.00	HAYES Smart Com II	89.00	D-Cat (300B) (RS232)	159.00
FCM	68.00	Other Products	CALL	INFOCOM ™ Deadline	34.00	J-Cat (300B) (RS232)	109.00
CRANE Menu Generator	29.00	APPLE HARDWARE		Zork I/II/III@	27.00	SMARTCAT 103	
DATA SOFT (Zaxxon)	27.00	CENTRAL POINT Alaska Card™	99.00	INSOFT Data Design	169.00	(300B) (RS232)	199.00
Micropainter	25.00	DANA * Fan	59.00	MICROCOM Micro Terminal	69.00	SMARTCAT 103 /212	
DIGITAL RESEARCH ™	CALL	EPS Keyboard	319.00	* MICROSOFT ™ Multiplan	169.00	(RS232)	409.00
DOW JONES ™ Market Analyzer™	275.00	Prom @	29.00	Budget System	109.00	212 Auto Cat (RS232)	569.00
Market Manager	235.00	GIBSON LABS LPS Light Pen	279.00	Financial Statement	69.00	Transmodem 1200 (II)	259.00
Market Microscope	525.00	HAYES Micromodem II W/SC I	249.00	Word	275.00	AIO-2 Ser/Par Interface	499.00
Investment™ Evaluator	129.00	KOALA ™ Graphic Tablet	85.00	Word w/Mouse	339.00		169.00
Connector	85.00	KRAFT Joystick	49.00	Other Products	CALL	MONITORS	
EDUWARE	CALL	Paddle	39.00	MONOGRAM Dollars & Sense	119.00	AMDEK Video 300	135.00
FOX & GELLER ™ Quick Code	195.00	MICRO SCI A2 w/o Controller	219.00	MUSE ™ Supertext Pro	73.00	Video 300A	149.00
dGraph	195.00	A2 Controller	79.00	* PEACHTREE Peachtext 5000	235.00	Color I	289.00
dUtil	69.00	A40 w/o Controller	299.00	* PERFECT SOFTWARE ™	CALL	Color I plus	319.00
Quick Screen	119.00	A70 w/o Controller	399.00	PETER NORTON Utilities	59.00	Color II	439.00
HAYDEN Pie Writer	99.00	A40/A70 Controller	79.00	SIRIUS Type Attack	29.00	Color III	389.00
HAYES ™ Smartcom I	89.00	MICROSOFT ™ 16K Ramcard	69.00	Gorgon II	29.00	Color IV	895.00
INFOCOM ™ Deadline	34.00	Softcard	219.00	SOFTWARE ARTS TK Solver	219.00	DVM Interface (II)	169.00
Zork I/II/III @	27.00	Softcard Plus	449.00	SOFTWARE PUBLISHING		DVM Interface (IIe)	169.00
INSOFT Electric Duet	22.00	Softcard Premium	479.00	pfs: File	94.00	NEC 12" Green JB1201	159.00
GraphForth	56.00	Premium Softcard IIe	369.00	pfs: Report	84.00	12" Color JC1215	299.00
KENSINGTON ™ Format II	113.00	NOVATION	See MODEMS	pfs: Graph	94.00	12" RGB JC1203 (PC)	559.00
LOTUS ™ Executive Briefing System	149.00	ORANGE MICRO ™		pfs: Write	94.00	JC1203 to PC Cable	24.00
MICROCOM Micro Terminal	59.00	Buffered Grappler 16K	179.00	SPINNAKER ™	up to 30% off	PGS HX-12	539.00
MICRO PRO ™ Infostar	259.00	PRACTICAL PERIPHERALS		STONEWARE		QUADRAM Quadchrome	519.00
* MICROSOFT Multiplan™	169.00	Microbuffer II plus 16K PAR	199.00	D.B. Master Advanced	449.00	Quadscreen	1,595.00
Budget System	109.00	Other Products	CALL	SUPERSOFT Personal Database	90.00	TAXAN 13" Color	319.00
Financial Statement	69.00	SSM	See MODEMS	VISICORP	CALL	12" Green	145.00
Other products	CALL	TG Paddles	29.00	IBM HARDWARE		12" Amber	149.00
MONOGRAM Dollars & Sense	79.00	Joy Stick	45.00	AMDEK MAI Board	519.00	RGB Vision 1 12" Lo	319.00
MUSE ™ Supertext Home Office	73.00	Select a Port	45.00	AST	Call	RGB Vision 3 12" HI	559.00
Supertext Pro. (IIe)	73.00	Track Ball	49.00	HAYES Smartmodem 1200B /SCII	439.00	PRINTERS	
Castle Wolfenstein	22.00	Joy Stick (IIe)	49.00	KOALA ™ Graphic Tablet	109.00	EPSON FX 80/100	CALL
PENGUIN		TENCAL Cool & Time	75.00	KRAFT Joystick	49.00	OKIDATA Complete Line	CALL
Complete Graphics System II	49.00	VIDEX Videoterm w/ss	239.00	Paddle	39.00	DISKETTES	
Graphics Magician	39.00	Ultraterm	279.00	MICROSOFT ™ Mouse	149.00	OYSAN ™ 5 1/4" SS/SD	32.00
Special Effects	29.00	WICO Joy Stick	59.00	System Card 64K	295.00	5 1/4" SS/DD	37.00
PERFECT SOFTWARE ™				System Card 256K	465.00	5 1/4" DS/DD	43.00
Perfect Writer	149.00					Plastic Box Add	1.50
Perfect Speller	99.00						

TERMS: Add 3% for shipping & handling, \$3.00 minimum. Allow 2 weeks for checks to clear. Add 6% for Calif. Sales Tax. Add 2% to total for Visa & Master/Charge. All sales final for software, accessories & diskettes. Defective Hardware, Monitors, Printers returns must be within 10 working days of purchase accompanied by RMA # for exchange only. Apple is the Registered Trademark of Apple Computer Inc. IBM is the Registered Trademark of International Business Machines Corp.

ORDER DESK: National: 1-800-821-4381 Calif: 1-800-421-3245
Product Support: (805) 683-1779 Local Orders: (805) 683-3006

STORE HOURS: M-F 9-6pm, Sat. 9-5pm ORDER HOURS: Mon.-Sat. 8-6:30pm Circle 50 on inquiry card.

**SUNNY LOW LOW COST
POWER SUPPLIES
(LINEAR & SWITCHING)
FOR S-100, DISK DRIVES**

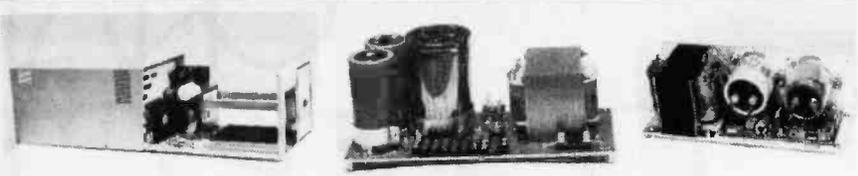

No. 806 & No. 516 Mainframes Kit 1, 2 & 3 for S-100 R₂, R₃ for 2 Drives (Floppy & Hard)

S-100 & DISK POWER SUPPLIES: OPEN FRAME, ASSY. & TESTED, 6 OUTPUTS, ADJU. & FUSES PROTECT.

ITEM		+5V OVP	-5V (or -12V)	+24V (OR +12V)	+8V	±16V	SIZE W x D x H	PRICE
S ₃	12 SLOT & 2 FLOPPY (1 Floppy & 1 Hard Disk)	5A	1A	5-7A PEAK	13A	3A	10" x 6" x 5"	105.95
S ₄	6 SLOT & 2 FLOPPY	4A	1A	4-5A PEAK	8A	3A	8 3/8" x 5" x 4 3/4"	95.95



DISK POWER SUPPLIES: OPEN FRAME, ASSY. & TESTED, REGULATED, ADJUSTABLE & FUSES PROTECT.

ITEM	IDEAL FOR	+5V OVP	-5V (or -12V)	+24V (or +12V)	+8V Unreg.	±12V	SIZE W x D x H	PRICE
R ₀	2 x 8" SLIMLINE	2.5A		2.5A - 5A Peak			5" x 4" x 4"	51.95
R ₁	2 x 8" or 2 x 5 1/4" DISK	4A	1A	3A - 5A Peak	2A		8" x 4" x 3 3/4"	56.95
R ₂	3 x 8" (or 5 1/4") FLOPPY	6A	1A	6A - 8A Peak			10" x 4 7/8" x 3 3/4"	71.95
R ₃	or 1x Floppy & 1x Hard	6A	1A	6A - 8A Peak		1A	9" x 6 1/4" x 4 3/8"	98.95

S₃, S₄ for S-100 & 2 Drives


AC & DC POWER CABLES WITH CONNECTOR FOR 2 DRIVES 8.00

S-100 POWER SUPPLY KITS (OPEN FRAME WITH BASE PLATE, 3 HRS. ASSY. TIME)

ITEM	(IDEAL FOR)	+8V	-8V	+16V	-16V	+28V	SIZE: WxDxH	PRICE
KIT 1	15 CARDS	15A	---	2.5A	2.5A	---	12" x 5" x 4 7/8"	54.95
KIT 2	20 CARDS	25A	---	3A	3A	---	12" x 5" x 4 7/8"	61.95
KIT 3	DISK SYSTEM	15A	1A	3A	3A	5A	13 1/2" x 5" x 4 7/8"	69.95

SHIPPING FOR EA. PWR SUPPLY: \$5.50 IN CALIF.; \$8.00 IN OTHER STATES; \$18.00 IN CANADA. FOR EA. TRANSFORMER: \$5.00 IN ALL STATES; \$12.00 IN CANADA. CALIF. RESIDENTS ADD 6.5% SALES TAX.

DEALER INQUIRIES INVITED



No. 806 Mainframe

6 SLOT MAINFRAME ASSY. & TESTED ONLY \$399.95 \$299.95 + SHIPPING \$18.00

EACH MAINFRAME (ITEM NO. 806 OR 516) CONTAINS: EMI FILTER • FUSE HOLDER • AC POWER CORD • POWER SWITCH & INDICATOR • RESET SWITCH • 4 1/2" COOLING FAN • S-100 BUS 6 SLOT CARD CAGE • (110/220 VAC, 50/60 HZ.) POWER SUPPLY FOR DISK DRIVES & S-100 SLOTS • 2 EA. DC POWER CABLES WITH CONNECTOR AND MOUNTING HARDWARE FOR DISK DRIVES • 9 EA. CUT-OUTS; 7 FOR DB25 CONNECTOR, 1 FOR 50 PIN CONNECTOR & 1 FOR CENTRONICS • CUSTOM FINISH & LOGO-LESS • COMPACT SIZE • LIGHTWEIGHT, 28 LBS. ITEM #806 FOR 2 EA. 8" THINLINE FLOPPY (TANDON TM848-1 & 848-2 OR EQUIV.), OR ONE HARD DISK, POWER SUPPLY: +8V/8A, ±16V/3A, +5V/5A OVP. 5V/1A & 24V/5A. SIZE: 12"(W) x 19.5"(D) x 9.8"(H).

MAILING ADDRESS:

P.O. BOX 4296
TORRANCE, CA 90510
TELEX: 182558

SUNNY INTERNATIONAL

(TRANSFORMERS MANUFACTURER)
(213) 328-2425 MON-SAT 9-6

SHIPPING ADDRESS:

22129 1/2 S. VERMONT AVE
TORRANCE, CA 90502



★ ★ ★ The **GRAY MARKET**

We don't play games

Lowest Prices Anwhere! Here is why:

1. Low Advertising Budget
2. Large Volume Buying
3. No Support
4. No Repair Service

Our advertising budget is kept low, we sell in large volume and you benefit by getting the best prices anywhere. You may use **Visa, MasterCard, American Express** or prepay (cashier's check or money order).

We carry so many products that we are unable to list them all. However, call us for your specific needs. We have listed examples of some of our products and prices. Believe it or not, all our products are priced the same.

**ALL PRODUCTS ARE NEW
IN SEALED CONTAINERS**

**IF YOU WANT THE LOWEST
AND BEST PRICES CALL US
(714) 557-3934**

COMPUTERS	SCALL	MONITORS	SCALL	IBM PERIPHERALS	SCALL
ALTOS	SCALL	AMDEK COLOR I	SCALL	RAM CARDS	SCALL
VIC 20	SCALL	NEC	SCALL	QUADRAM	SCALL
COLOMBIA	SCALL	ZENITH	SCALL	RAYTRONICS	SCALL
CORONA	SCALL	SANYO	SCALL	AST	SCALL
NORTH STAR	SCALL	TAXAN	SCALL	COLOR MONITORS	SCALL
FRANKLIN	SCALL	USI	SCALL	10 MEGA BYTE HA	SCALL
DEC RAINBOW	SCALL	COMREX	SCALL	GRAPHICS CARDS	SCALL
TELEVIDEO	SCALL	GORILLA	SCALL	DISC DRIVES	SCALL
SANYO	SCALL	MODEMS	SCALL	MODEMS	SCALL
TEXAS INSTRUMENT	SCALL	HAYES 300 BAUD	SCALL	COMMADOR 64 - VIC 20	SCALL
ZENITH	SCALL	NOVATIONS	SCALL	PERIPHERALS	SCALL
PIED PIPER	SCALL	SIGNALMAN	SCALL	DIS DRIVES	SCALL
ZORBA	SCALL	TERMINALS	SCALL	MONITORS	SCALL
PRINTERS - DOT MATRIXES	SCALL	TELEVIDEO 925	SCALL	INTERFACES	SCALL
EPSON FX-80	\$519.00	QUME	SCALL	CARDCO	SCALL
OKIATA 92A	\$429.00	ZENITH	SCALL	THE CONNECTION	SCALL
STAR MICRONICS	SCALL	AMPEX DIALOG	SCALL	SOFTWARE	SCALL
C. ITHO	SCALL	TERMIFLEX	SCALL	PAPER CLIP	SCALL
PROWRITER	SCALL	DISC DRIVES	SCALL	DATA 20	SCALL
IDS	SCALL	SHUGART	SCALL	WORD PLUS	SCALL
DATASOUTH	SCALL	TANDON	SCALL	EXPANSION BOARD	SCALL
ANADEX	SCALL	SIEMANS	SCALL	PLOTTERS	SCALL
NEC	SCALL	REMX	SCALL	HEWLETT PACKARD	SCALL
TOSHIBA	SCALL	RANA	SCALL	BAUSCH & LOMB	SCALL
RITEMAN	SCALL	COMMADOR 64 DRI	SCALL	AMDEX	SCALL
MANNMAN TALLY	SCALL	APPLE PERIPHERALS	SCALL	BMC	SCALL
OLIVETTE	SCALL	GRAPPLER PLUS	\$115.00	STROBE	SCALL
RKO	SCALL	MICROTEK	SCALL	HARD DISC DRIVES	SCALL
LETTER QUALITY	SCALL	OTHER PARALLEL	SCALL	SWITCH BOXES	SCALL
BROTHER HR-1	\$59.00	INTERFACES	SCALL	ACCESSORIES	SCALL
DYNAX DX-15	\$449.00	SERIAL INTERFAC	SCALL	DUST COVERS	\$7.95
COMREX	SCALL	80 COLUMN CARDS	SCALL	PRINT WHEELS	SCALL
NEC	SCALL	CPM CARDS	SCALL	RIBBONS	SCALL
DIABLO	SCALL	16K RAM CARDS	SCALL	DISKETTE CASES	SCALL
QUME	SCALL	LANGUAGE CARDS	SCALL	SURGE PROTECTOR	SCALL
C. ITHO	SCALL	APPLE DISK DRIV	SCALL	DISKETTES DS/DD	SCALL
STARWRITER	SCALL	BUFFERS	SCALL	10 ea.	\$28.95
SILVER REED	SCALL	COMPLETE STOCK OF	SCALL		
JUKI	SCALL	CABLES	SCALL		

SUPERMARKET SAVINGS

TOLL FREE 1-800-545-2633 - Continental U.S.

TRADE YOUR 5 1/4" DRIVE

SGL SIDE/DBL DEN FOR DBL SIDE/
DBL DEN DRIVE \$75.00 ALLOWANCE

DBL SIDE/DBL DEN FOR 2 EA
(TM100-2) FOR 1/2 HGT DBL SIDE/DBL
DEN DRIVES \$175.00 ALLOWANCE

★ IBM ACCESSORIES

AST	
Combo Plus (Serial/Par/CLK 64 to 256K)	249.00
Six Pak Plus (Serial/Par/CLK 64K Expands to 384K)	289.00
Meg-A-Plus (Serial/CLK/64K Expands to 256K)	269.00
Meg-A-Pak (Expands Meg-A-Plus to 512K)	269.00
I/O Plus (SP)	129.00
PC-Net (with Shared User Software)	556.00
PC-Net Starter Kit	1,192.00
AST-5251 (Allows connection of IBM PC to System 340038)	700.00

MANY OTHER OPTIONS AVAILABLE.

ASHTON-TATE

D-Base II	400.00
Bottom Line Strategist	279.00
Financial Planner	499.00
Friday	189.00

D.C. HAYES

Smartmodem 1200B-Smartcom 2 software included	429.00
Smartcom 2-Telecomputive for 300/1200 on disk	89.00

LOTUS DEVELOPMENT

Lotus 1-2-3 (on disk)	369.00
---------------------------------	--------

KRAFT

Joy Stick	47.50
Paddle (pair)	37.00

KEYTRONICS

Enhance your PC-with a superior keyboard	210.00
--	--------

M.P.I.

B-52 (DS/DD) 320K	210.00
-----------------------------	--------

MAYNARD

Floppy Controller	155.00
Floppy Controller (Serial)	225.00
Floppy Controller (PAR)	205.00

MODULAR ADD-ONS FOR SANDSTAR MOD-FDC

Sandstar MOD-FDC (for 5 1/4" or 8" drives)	200.00
Pararel MOD	60.00
Serial-MOD	79.00
Clock Calendar MOD	69.00
Game Adapter MOD	49.00

Sandstar Multi-Function Bd (Holds up to 6 modular add-ons)	82.00
--	-------

PLANTRONICS COLOR PLUS

Color + Color Display Card (16 colors)	395.00
--	--------

PRINCETON GRAPHICS

PGS HX12-Hi-Res Color, The Best	469.00
---	--------

QUADRAM

Quadlink—Allows Apple Software to be used in IBM PC HAS 64K Ram-Game Port Display Gen-Disk Intf. w/software	489.00
Quadboard 2—64K Ram (expands to 256K) 2 Ser Port CLK and software	289.00
Quadboard — 64K (expands to 256K) Par and Serial Port CLK and software	289.00
Quad 512 — 64 Ram (expands to 512K) Serial Port and software	259.00
Quadchrome — Color Monitor	489.00
Tilt Table	40.00
Chronograph Clk/Calendar BD.	229.00

SHUGART DISK DRIVES

SA455L-1/2 HGT 320 K DS/IDD w/BRACKETS	225.00 ea.
440.00 for 2 ea.	

TANDON DISK DRIVES

TM100-2A 320K DS/IDD	225.00
TM55-2 1/2 HGT 320 K DS/DD w/BRACKETS	249.00 ea.
440.00 for 2	

★ APPLE/FRANKLIN ACCESSORIES

ALS	
CPM 3.0 Card	289.00
Z-Card II	139.00

ASHTON-TATE

D-Base II	400.00
---------------------	--------

ASTAR

RF Modulator	19.00
------------------------	-------

COOL TIME

Fan, Clock, Surge Protector	80.00
---------------------------------------	-------

GENERIC

Z-80 Card (Emulates Micro-Soft)	99.00
80 Col. Video (Videx Compatible)	99.00
80 Col. Video w/Soft Switch	125.00
Joy Stick	20.00
E-Prom Writer	79.00
Pararell Interface	49.00
Pararell Interface w/Graphics	65.00
16K Ram Card	40.00
RF Modulator	13.00

HAYES

Joy Sticks	29.00
Micro-Model II	259.00
Micro-Model II w/terminal package	279.00

KENSINGTON

System Saver/Fan & Surge Pro	75.00
--	-------

KOALA TECH

Koala Gr/Tablet w/Software	89.00
--------------------------------------	-------

KRAFT

Joystick for II E	44.00
-----------------------------	-------

LOTUS DEVELOPMENT

Executive Briefing System	139.00
-------------------------------------	--------

MICRO-MAX

View Max 80 (80 Col for II +)	139.00
View Max 80E (80 Col w/64K Memory Exp to 128K)	129.00

MICROTEK

Dumpling 64K/Interface and Graphics 64K Buffer	235.00
Dumpling GX-P/Par Interface Card and Cable	99.00
Parallel Interface Board (RV611C)	61.00
BAM 16 (16K Add-on Memory)	45.00

NOVATION

Apple Cat II w/software	269.00
212 Apple Cat	625.00
Handset	29.00

ORANGE MICRO

Grappler + (Graphics Interface)	119.00
Grappler + 16K (Buffer and 5 to 64K)	175.00
Buffer Board	135.00

PRINCETON GRAPHICS

Interface Card allows use of HX12 Color Monitor	156.00
---	--------

QUADRAM

RAM 80—80 Col 64K card	119.00
APIC—Par Intf. card	60.00
APIC/G—Par Intf. w/Graphics	65.00
CPI—8' Cable (APIC to Cen. Printer)	34.00
APIC III—Par Printer Intf. for Apple w/8' Cable	95.00

TG PRODUCTS

Joy Stick—For Apple II +	38.00
Paddles	29.00
Selecta Port	38.00

VIDEX

Ultraterm	279.00
Videterm	189.00

VISTA

A800 Floppy Controller for 8" Drives	300.00
A-800-1 Cable	27.00

★ APPLE DISK DRIVES

ALL DRIVES 1 YR. WARRANTY

Vista Solo (35TR)	189.00
Micro-Scl A-2 (35TR)	209.00
Micro-Scl A-40 (40TR)	269.00
Micro-Scl A-70 (Quad)	329.00
Micro-Scl Controller	70.00
Rana Elite I	249.00
Rana Elite II	399.00
Rana Elite III	509.00
Rana Controller	85.00
Super 5 "THINLINE" 1/2 size 163K 40TR Green	189.00
Super 5 "THINLINE" 1/2 size 163K 40TR (TEAC DIRECT DRIVE) Red	225.00

★ ATARI

KRAFT Joy Stick	15.00
PERCOM AT 88 SS/DD Disk Drive w/Printer Port	499.00
RANA Rana 1000—SS/DD Disk Drive	379.00
TRAK AT-D2 SS/DD Disk Drive	379.00

★ COMMODORE

STAR Star GeminiI interface to VIC 20 + CMD 64	65.00
DOW JONES Dow Jones Invest/Evaluator	125.00
KRAFT Joy Stick	15.00
KOALA Koala GR/Tablet w/software (specify VIC20 or CMD64)	99.00

★ KAPRO II — IV

Sprinter K (5MHZ Speed-up)	99.00
K-Clock (Batt Backup Clk/Cal)	99.50
Video Output BD (allows use of Video monitor)	125.00
Kaypro II Upgrade Disk Drives (DS/DD) (Trade In Allowance \$75 for SS/DD Drive)	239.00

★ TI-PROFESSIONAL

LOTUS 1-2-3	389.00
QUADRAM TI-64 64K Ram Card	206.00
QUADRAM TI-92 192K Ram Card	339.00

★ WESPER

WIZARD BPO (Same as Grappler + 16K Specify Printer)	149.00
WIZARD IPI (Same as Grappler + Specify Printer)	89.00
WIZARD EBO (Internal Buffer for Epson)	109.00
WIZARD 80 Col/64K For II E	139.00
WIZARD 80 Col/ For II +	139.00

**IBM
UP-GRADE KIT
INCLUDES 9 EA. 4164-
200NS FOR EXPANSION
ON ALL IBM
PRODUCTS WITH
PARITY
\$55.00/per set**



**TOLL FREE
1-800-545-2633
CONTINENTAL U.S.**
Circle 158 on inquiry card.

**The Great Salt Lake
Computer Company, Inc.**
1-801-972-2717

Retail Sales
123 East 200 South
Salt Lake City, Utah 84111
Retail Hours
Monday-Friday 10 AM to 6 PM
Saturday 10 AM to 5 PM
Retail Phone — 364-0057



SUPERMARKET DEALS

TOLL FREE 1-800-545-2633 - Continental U.S.
MINIMUM SHIPPING \$3.00 - NO SURCHARGE ON VISA/MASTERCHARGE

★ DISK DRIVES

SHUGART	
5 1/4" SA400 (35 TR) 160K	169.00
5 1/4" SA400L (40 TR) 190 K	189.00
5 1/4" SA455L (40 TR) 320 K 1/2 HGT	225.00
8" SA801R(SS/DD) 600 K	355.00
QUME	
5 1/4" 142 (40TR) 320 K 1/2 HGT	225.00
8" DT8 (842)	490.00
MITSUBISHI	
5 1/4" M-4853 1/2 size 96 TPI same as TM 100-4	410.00
M 2896-63 (DS/DD) 220V	449.00
8" M-2896-63 Thinline 8" DS/DD 1.2 MG	419.00
8" M-2894-63 (110V) STD 8" DS/DD 1.2 MG	399.00
CDC	
5 1/4" 9409-DS/DD	225.00
TANDON	
5 1/4" TM100-1 SS/DD 160K	150.00
5 1/4" TM100-2A DS/DD (320K) FOR IBM-PC	225.00
TM101-4 (96 TPI Quad Den)	339.00
8" TM848-2 (DS/DD) 1.2 MG	425.00
SIEMAN'S	
8" FD100-8 (SS/DD) 110V 801 R	169.00
8" FD100-8 (SS/DD) 220V Compatible	199.00
MPI	
5 1/4" B-51 40TR SS/DD 180 K	145.00

★ AC SURGE ELIMINATORS

Grizzly (200W) uninterruptible power system + surge protection	750.00
Grizzly (500W) uninterruptible power system + surge protection	1,802.00
Hawk AC power monitor w/surge protection	180.41
Lemon (6AC outlets-3 prong)	44.00
Lime (5'3 prong pwr cord w/on-off switch	69.00
Orange-AC surge + EMI filter (6 outlets)	95.00
Peach (3 outlets) AC surge/EMI filter	69.00

★ DATA CABLES

8"DSC 88-2SKT-for 2-8" drvs w/skt. conn.	20.00
5 1/4"DSC55-2SKT-for 1-5 1/4" dvs w/skt. conn.	20.00
RS232MM-5' (male to male)	19.00
IBM to PAR	32.00
Osborne to PAR	32.00
Kaypro to PAR	32.00
OKI-Data Serial	24.00

★ CONNECTORS

RS232 Connectors			
SOLDER TYPE			
DB25P	2.50	S-100 Connectors . 10/25.00	
DB25S	3.00	DE9P	2.00
DB25 Hood	1.00	DE9 Hood	1.00

★ DISK DRIVE CABINETS

8" CABINETS	
8" DDC88V28 w/PS vertical for 2-8" drives	269.00
8" DDC88T-1 w/PS vertical-for 2 or 4-8" thinline drives	269.00
8" DDC88T-2 w/PS vertical for 2 8" thinline drives	200.00
8" DDC8V w/PS vertical for 1 8" drive	249.00
8" DDC88H w/PS horizontal for 2-8" drives	269.00
5 1/4" CABINETS	
5 1/4" DDC5H w/PS horizontal-for 1-5 1/4" drive	55.00
5 1/4" DDC5V w/PS vertical-for 1 ea. 5 1/4" drive	65.00
5 1/4" DDC55V w/PS vertical-for 2-5 1/4" drives (NEW)	85.00

★ DISKETTES

FOR APPLE, ETC.	
5 1/4" Soft Sector SS/DD	17.00/10
For IBM PC & PARTNERS for Qty of 100 (15% Discount)	
5 1/4" Soft Sector DS/DD	24.00/10

★ CENTECH

Color code your files: 5 colors in each pkg. (Red, Yellow, Blue, Green, Brown)	
5 1/4" Sgl slide/dbl den	23.00/10
5 1/4" Dbl slide/dbl den	30.00/10
5 1/4" 10 sector	24.00/10
5 1/4" 16 sector	24.00/10
8" Sgl slide/dbl den	30.00/10
8" Dbl slide/dbl den	40.00/10

★ MAXELL

Sgl. slide/dbl. den 5 1/4"	24.00
Dbl. slide/dbl. den 5 1/4"	36.00
Dbl. slide/quad den 5 1/4"	45.00
MEMOREX, TDK, VERBATIM	CALL

★ DISKETTE STORAGE

AA-5 1/4" (Holds 82 Disks)	17.00
AA-8 (Holds 82 Disks)	26.00
Smoked Plexiglass Disk Tubs	
LIBRARY CASES	
CAS-5 1/4"	2.50
CAS-8"	3.00
Color Burst (Pack of 5)	12.00

★ FLIP "N" FILE

Flip "N" File 25-5 1/4" (holds 25) w/lock	21.00
Flip "N" File 50-5 1/4" (holds 50) w/lock	27.95
Flip "N" File "Original-5" (holds 50)	21.00
Flip "N" File "Original 8" (holds 50)	29.95

Colors Available; color burst asst., beige, black, blue, red, gray

★ E-PROM ERASERS

QUV-T8/1H (hobby)	49.95
QUV-T8/2I (industrial version)	68.95
QUV-T8/2P (w/timer & safety switch)	97.50

★ DISK SUB ASSEMBLY

OUR BEST BUYS	
8" SUB ASSEMBLY	
DDS + 0 2EA SS/DD Siemens FD100-8 Drives w/cabinet	595.00
DDS + 2 2EA DS/DD Mitsubishi M2894-63 w/cabinet	1,075.00
DDS + 4 3EA DS/DD 8" Thinline Drives w/cabinet	1,150.00
Specify—Vertical or Horizontal Cabinet	
5 1/4" SUB ASSEMBLY	
DDS + 5 1EA SS/DD Disk Drive (SA400L)	239.00
DDS + 6 2EA SS/DD Disk Drive (SA400L)	469.00

★ MODEMS

Hayes Smart 300	219.00
Hayes Smart 1200	499.00
Multi-Tech MT 212 AD (1200/300)	475.00
Novation J-Cat 300	119.00
U.S. Robotics 212A Auto Dial	469.00
U.S. Robotics (300/1200) Password	375.00

★ VIDEO DISPLAY MONITORS

GREEN	
BMC 12AU (15 MHZ) 80 Col/12"	80.00
Dynac GM 120 (20 MHZ) Hi-Res/80 Col/12"	129.00
Sakata SC-1000 (18 MHZ) 80 Col/12"	119.00
USI PI-1 (20 MHZ) Hi-Res/9"	119.00
USI PI-2 (20 MHZ) Hi-Res/12"	129.00
AMBER	
Dynac AM121 (20 MHZ) Hi-Res/80 Col/12"	139.00
USI PI-4 (20 MHZ) Hi-Res/80 Col/9"	125.00
USI PI-3 (20 MHZ) Hi-Res/80 Col/12"	129.00
COLOR	
Amdek I-12" Composite (For Apple)	259.00
Amdek II-12"-RGB (For IBM-PC) w/audio	429.00
Amdek I + Composite w/audio	275.00
Princeton HX-12-RGB (For IBM-PC)	469.00
Sakata SC-100-13" Composite (For All)	260.00
Sakata SC-200-RGB (For All)	469.00

★ CARD CAGES/MOTHER BOARDS

*IEEE-696-No termination required				
Slots	Bare Bd	A+T	w/card cage	bare card cage
4	15.00	40.00	60.00	20.00
6	20.00	48.00	70.00	22.00
8	25.00	69.00	100.00	31.00
12	30.00	99.00	140.00	41.00
18	45.00	150.00	200.00	50.00
22	60.00	185.00	—	75.00

All card cages will accommodate a 4" fan
 Add \$20.00 for 1 fan-Add \$30.00 for 2 fans

★ SIERRA DATA

SDS-SBC-100-280 (4mhz) master 2 serial 2 par/floppy controller/64k ram	\$855.00
SDS-SBC-100S4mhs slave/2 serial 2 par/64k ram	\$565.00
SDS-ZSIO/4 4 serial port I/O bd	\$250.00
SDS-MUX-RS232 multiplexer bd	\$235.00
SDS-HDI-M-Hard disk bd for microprobs	\$129.00
SDS-CPM/B105-cp/m for SBC100 w/BIOS	\$150.00
SDS-Turbodocs-Multi-user for master & slaves	\$645.00

★ MAINFRAMES

For 2 Standard 8" Drives	
MF + DD6 (6 slot M/B)	575.00
MF + DD8 (8 slot M/B)	625.00
MF + DD12 (12 slot M/B)	675.00
For 2 Thinline 8" Drives	
IMF + DD6F	300.00
For 2-5 1/4" Disk Drives	
MF + MD12 (12 slot M/B)	580.00
Standard Plain Front	
MF + 12 (12 slot M/B)	499.00
MF + 22 (22 slot M/B)	550.00

All mainframes except IMF + DD6F have EMI filter, 2 AC outlets, 15 ea. DB25, 2 ea. 50 pin, 2 ea. 34 pin, 1 ea. Centronic cutouts, power supply for 8" MF (-5V1A/+5V6A/+8V16A/±16V3A/+24V6A)

★ CLOCK/CALENDAR

S-100*Time In hrs, min, sec.*AM/PM or Military Format*Date in Mo, Day, Yr, Day of Week & Leap Year recognition*4 hard Interrupts (1024 Hz, 1 Hz, 1 min, 1 hr)* On board battery (will last 14 mos. w/no power on)	\$45.00
QTC-CCS-BB (S-100)	\$45.00
QTC-CCS-A (A + T) for S-100	\$100.00

S-100 PRODUCTS

★ COMPUTIME/QT BARE BD. SET

PN-2048 Best Bare Board Set Available	
QTC-SBC 2/4 CPU (SBC 880)	
QTC-EXP + III 256K (CT256) Memory	
bd/Expandable to 1MG	
QTC-FDC 5/8 Floppy disk controller	
Bare Board Set	\$150.00
1) Includes manuals & assembly instructions	
2) Parts available	
3) Monitor & B10S available. Add \$30.00.	

★ CPU/MEM/IO

QTC-SBC 2/4 BB (SBC880)	\$50.00
QTC-SBC 2/4 A + T (SBC880)	\$265.00
QTC-Z + 80 BB (BIG Z)	\$28.00
DYNAMIC (64K/256K or 1 MEG)	
QTC-EXP + III Bare Bd. (CT256)	\$75.00
QTC-EXP + III 64K A + T (CT256)	\$375.00
QTC-IO + BB 2 SER 2 PAR A + T	\$75.00
QTC-IO + A + T	\$300.00
QTC-ADA ADA Converter A + T	\$400.00
QTC-Dual GPIB-488 IEEE 488 Intfc. bd.	\$795.00

★ COMPUPRO

20 Slot MB	CALL
CPU 8085/88	CALL
CPU 8086/8087	CALL
Disk I	CALL
CPM 2.2 for Disk I	CALL
Disk II	CALL
Ram 16-64K	CALL
Ram 17-64K	CALL
Ram 21-128K	CALL
Interface 1	CALL
Interface 2	CALL
Interface 3	CALL
Interface 4	CALL
System Support I	CALL
Active Terminator	CALL
Enclosure 2 (Desk)	CALL
Enclosure 2 (Rack MT)	CALL
CPU-Z	CALL
M-Drive H	CALL
6 Slot MB	CALL
12 Slot MB	CALL
CPU 68K	CALL

Circle 159 on inquiry card

CUSTOMER SERVICE

DAVID

1-801-972-2739

The Great Salt Lake Computer Company, Inc.

1-801-972-2717


www.americanradiohistory.com

Retail Sales
 123 East 200 South
 Salt Lake City, Utah 84111
Retail Hours
 Monday-Friday 10 AM to 6 PM
 Saturday 10 AM to 5 PM
 Retail Phone — 364-0057



SUPERMARKET SERVICE

**8 YEARS (1976) EXPERIENCE IN
COMPUTER MAIL ORDER BUSINESS**
CALIFORNIA RESIDENTS SAVE 6% SALES TAX



- ★ **ALPHACOM**
- FOR ATARI, COMMODORE or TI.
- 40 or 80 COL.
- 80 CPS
- FULL CHARACTER SETS
- GRAPHICS
- LIGHT WT. 4 TO 6 LBS.
- FRICTION FEED
- ALPHACOM 42 (40 col) w/Interface 89.00
- ALPHACOM 81 (80 col) w/Interface 149.00
- 40 COL PAPER (per roll) 2.80
- 80 COL. PAPER (per roll) 4.50
- ★ **BROTHER**
- HR-1A 17CPS Daisywheel 3K Buff 550.00
- HR-1A 17 CPS Daisywheel 3K Buff 589.00
- ★ **CENTRONICS**
- 351P—200CPS, Par 100 CPS CORR. 1,795.00
- 6085P—600CPS, Par w/cabinet 6,500.00
- 6085S—600CPS, Serial w/cabinet 7,000.00
- 6085IBM—600CPS w/cabinet 7,500.00
- 358 3 or 4 Automatic cut sheet feeder 695.00
- ★ **DATA-SOUTH**
- DS 180 180CPS/Serial or Par/Tractor 1,400.00
- ★ **DAISYWRITER**
- Daisywriter 2000-48K Buffer/20T040CPS LTR/Par. 1,095.00
- Daisywriter Cable 40.00
- Daisywriter Tractor 140.00
- ★ **DIABLO**
- 620 (25CPS/Serial) 920.00
- 630 (40CPS/Multi-IF) 1,790.00
- 630 ECS/IBM 2,100.00
- ★ **DYNAX**
- Dynax-15 Par-13CPS Daisywheel
- 2 color PTG-3K buff 475.00
- Dynax 15 Serial-13CPS Daisywheel 525.00
- ★ **EPSON**
- FX80 (160 CPS-Par 10") CALL
- FX100 (160 CPS-Par 15") CALL
- ★ **C. ITOH**
- Pro-writer I (8510A) Par 120 CPS 350.00
- Pro-writer I (8510A) Serial 120 CPS 529.00
- Pro-writer II Parallel-15" 669.00
- 8600 (180CPS) Par or Serial 18 PIN 90 CPS LTR. 1,099.00
- F-10 40CPS/Diablo/Par or Serial 1,125.00
- F-10 55CPS/Diablo/Par or Serial 1,425.00

PRINTERS

- ★ **GENERAL ELECTRIC**
- Demand Document Printers
- 3400—400CPS Serial/Tractor to 60 100 CPS Corr. 2,175.00
- 3404—400CPS Serial/Tractor 100CPS Corr. 2,459.00
- ★ **JUKI**
- 6100-18 CPS/Diablo Compatible Par/Daisywheel 569.00
- ★ **MANNESMAN-TALLY**
- Spirit 80CPS Par 10" 330.00
- 160L (160CPC-40CPS LTR 10") 589.00
- 180L (160CPS-40CPS LTR 15") 829.00
- ★ **MPI**
- MPI-Portable Sprinter/160CPS/IBM Port/4K Buff. up to
- 64K 100 CPS CORR. Keyed avlb. CALL
- MPI-99G (9") Par CALL
- MPI 150 BI (15") Par 2K Buff w/Graphics CALL
- MPI 150 AI (15") Par 4K Buff w/Graphics CALL
- MPI 150 AI (15") Par 16K Buff w/Graphics CALL
- ★ **NEC**
- NEC2010 20CPS Serial Daisywheel 950.00
- NEC2015 20CPS Diablo Comp Daisywheel 950.00
- NEC2030 20CPS Par Daisywheel 950.00
- NEC2050 20CPS for IBM Daisywheel 1,050.00
- NEC3510 35CPS Par Daisywheel 1,595.00
- NEC3550 35CPS IBM 1,850.00
- NEC7170 55CPS Serial Daisywheel 1,995.00
- NEC7175 55CPS Diablo Comp Daisywheel 1,995.00
- NEC8023A 100CPS-Par-Graphics-10" 389.00
- NEC8025A 100CPS Par Graphics 15" 699.00
- Serial Card 139.00
- ★ **OLYMPIA**
- Typewriter/Printer Daisywheel 14 CPS 649.00
- ★ **OKI-DATA**
- 2350—350CPS 2 color tractor CALL
- 2410P 350CPS 2 color tractor CALL
- Microline 82A (SER & PAR-120CPS 10") CALL
- Microline 83A (SER & PAR-120CPS 15") CALL
- Microline 92 (PAR-160CPS-LTR-10") CALL
- Microline 93 (PAR-160CPS-LTR-15") CALL
- Microline 84P (PAR-200CPS-LTR-15") CALL
- Microline 84S (SER-200CPS-LTR-15") CALL
- ★ **STAR MICRONICS**
- Gemini 10X NEW VERSION (PAR-120CPS-10") CALL
- Gemini 15X (PAR-120CPS-15") CALL
- Gemini Delta 10 (PAR-160CPS-10" BK buffer serial) CALL
- ★ **SILVER REED**
- EXP 550P-17CPS Daisywheel-PAR 669.00
- EXP 550S-17CPS Daisywheel-Serial 699.00

- ★ **TOSHIBA**
- P-1350 (192CPS-120CPSLTR PAR or Serial) CALL
- ★ **TRANSTAR**
- 120 P 14CPS Par Diablo Comp 479.00
- 315 Color Printer 500CPS Par 489.00

PRINTER ACCESSORIES

- ★ **DIABLO**
- Diablo 620-Uni-Direct Tractor 110.00
- Diablo 620-Sheet Feeder 720.00
- Diablo 630-Bi-Direct Tractor 275.00
- Diablo 630-Tractor Sound Cover 29.00
- Diablo 630-SGL Sheet Feeder 775.00
- Diablo 630-DBL Sheet Feeder 1,395.00
- ★ **JUKI-6100**
- Serial Interface 55.00
- BI-Dir Tractor 120.00
- Uni-Dir Tractor 90.00
- ★ **MANNESMAN-TALLY**
- Factory Quick Tear 230.00
- Auto Front Feed 1,150.00
- ★ **NEC**
- Thimbles 20.00
- Vertical Tractor 219.00
- Horizontal 152.00
- BI-Dir. Tractor 330.00
- Cut Sheet Feeder 1,100.00
- ★ **OKI-DATA**
- 84 Cut Sheet Feeder 515.00
- 82/92 Tractor 55.00
- Serial Intf. w/2K Buffer (For 82A) 125.00
- Serial Intf. w/2K Buffer (For 92 & 93) 110.00
- Okigrah I 82A or 83A Graphics ROM 45.00
- Okigrah II 82A or 83A Disk for Apple 55.00
- ★ **STAR-MICRONICS**
- Serial Intf. Bd 70.00
- Serial Intf. Bd w/2K Buffer 120.00
- Commodore 64 Intf. Bd 72.00
- ★ **TOSHIBA**
- P-1350 Cut Sheet Feeder 800.00
- P-1350 BI-Dir. Tractor 210.00

- ★ **APPLE/FRANKLIN**
- APPLE II E Starter—Includes CPU 1 F.D. Monitor and Stand 1,395.00
- FRANKLIN 1000 w/color 799.00
- FRANKLIN 1200 Starter includes CPU 1 F.D. 80 col 1,625.00
- FRANKLIN 1200 OMS Includes CPU-2 F.D. and bundled software 1,825.00
- ★ **IBM-PC TYPES**
- COLUMBIA (1600-1) 16 bit 128K Ram 2 ea. 320K Disk Drive-2 SER, 1 PAR, Key Bd. 8 slots, Display Cd., bundled software 2,775.00
- IBM P.C. 16 bit 64K Ram 2 ea. 320 K Disk Drive, Princeton HG12X-Color Card 3,395.00
- EAGLE PC-2 16 bit 128K Ram 2 ea. 320K Disk Drive 12" Green (HH-Res) bundled software 2,650.00
- EAGLE PORTABLE 16 bit 128K Ram 1 F.D./10 MG HD/ Green Screen MS-DOS 210 bundled software 4,000.00
- ★ **KAYPRO**
- KAYPRO II w/bundled software 1,475.00
- KAYPRO 4 w/bundled software 1,795.00
- KAYPRO 10 w/bundled software 2,695.00
- ★ **MOLECULAR SYSTEMS**
- MICRO 10-8 CPU 1 ea. 8" F.D.—1 ea. 10 MB HD—64K Ram expands to 256K up to 8 users w/additional application processors— CPM and CPM 86 CALL
- MICRO 15-8 CPU 1 ea. 8" F.D.—1 ea. 15

SYSTEMS

- M8 HD—64K Ram expands to 256K up to 8 users w/additional application processors— CPM and CPM 86 CALL
- AP 8001—ASYNC/9600 BPS Application Processor 589.00
- AP 8003—ASYNC/19,200BPS Application Processor 839.00
- AP8011—SYNC/50K BPS 1,078.00
- ★ **NEC**
- PC8201A-Portable 2.4 MHZ CPU 16K Ram/Expands to 64K-32K RAM LCD Display—Keybd (67 key-5 function) Modern, Serial and Par Port-FD and Cassette Interface—Uses 4 AA Batt—bundled software 660.00
- PC8201A-90—N1 Cad Pak 16.00
- PC8221A—Portable Printer 149.00
- PC8271A-02—AC Adapter 15.00
- ★ **S-100**
- COMPUPRO 816A 4,250.00
- COMPUPRO 816B 5,595.00
- COMPUPRO 816C 7,150.00
- ★ **TELEVIDEO**
- TS-803 4 MHZ CPU-64K 2 ea. 360K F.D.—Graphics 12" green 1,900.00
- TS-1603 5 MHZ CPU-128K 2 ea. 360K F.D.—Graphics 12" Green CPM 2,400.00

TERMINALS

- ★ **ADDS**
- Viewpoint-A1 (White) 509.00
- Viewpoint-A2 (Green) 538.00
- Viewpoint-3A+ (Green) 509.00
- Viewpoint 60-Same as Televideo 925 715.00
- ★ **QUME**
- QVT-102 80 Col. Green (910 comp) 549.00
- QVT-102 80 Col. Amber 560.00
- QVT-103 80/132 Col. Green 865.00
- QVT-103 80/132 Col. Amber 895.00
- QVT-108 80/132 Col. Amber (925 Corp.) 715.00
- ★ **TELEVIDEO**
- TV910 529.00
- TV910 + 565.00
- TV925 w/2nd page memory 715.00
- TV950 w/2nd, 3rd, 4th page memory 925.00
- TV970 1,019.00
- RG1000/TV60 Graphics Upgrade for 925/950 1,100.00
- ★ **WYSE**
- WYSE-100 725.00
- WYSE-300 (Color) 1,125.00

TOLL FREE

1-800-545-2633

CONTINENTAL U.S.

Circle 159 on inquiry card

**The Great Salt Lake
Computer Company, Inc.**

Mail Orders
P.O. Box 3150
Salt Lake City, Utah 84110
Mail Orders
Monday-Friday 8 AM to 6 PM
(sometimes much later)
Saturday 10 AM to 5 PM



Lycy Computer Marketing & Consultants

TO ORDER
CALL US

TOLL FREE 800-233-8760
In PA 1-717-327-1824

PRINTER
INTERFACING

PRINTER PAPER
AVAILABLE

SAVE on these in-stock **PRINTERS**

Available for IBM PC, Apple, Atari, Vic 20 & Vic 64

EPSON

OKIDATA

CITOH

LETTER QUALITY

SMITH CORONATP2...\$449.00

DIABLO 630...\$1719.00

ALPHACOM 42\$89.00
ALPHACOM 81\$129.00
NEC 8023\$369.00
NEC 8025\$699.00
NEC PC-8200
COMPUTER\$CALL

RX-80\$SAVES
RX-80FTON
FX-80In-Stock
FX-100EPSON
MX-80FTPRINTERS
MX-100\$CALL\$5

MANNESMANN TALLY

SPIRIT 80\$CALL
MT 160L\$CALL

80\$SAVES
82ACALL for
83ALOWEST
84PRICES
92on these
93In-Stock
PACEMARK 2350...PRINTERS

ATARI 850 REPLACEMENTS IN-STOCK

GORILLA GX100\$179.00
PROWRITER 8510\$339.00
PROWRITER II\$659.00
8600\$1025.00
STARWRITER\$1099.00
PRINTMASTER\$1499.00

STAR MICRONICS

GEMINI 10X\$269.00
GEMINI 15X\$CALL
DELTA 10\$479.00

MODEMS

ANCHOR MARK I...\$79.00
ANCHOR MARK II...\$79.00
HAYES SMART...\$239.00
HAYES MICRO II \$309.00
Micro Bit
MPP-1000...\$129.75
NOVATION
CAT\$144.00
D-CAT\$155.00
J-CAT\$115.00
APPLE CAT II...\$279.00
212 APPLE CAT \$589.00

MONITORS

Sakata Color\$229.00
Amdek Color I\$275.00
Amdek 300 Green\$149.00
Amdek 300 Amber\$149.00
Gorilla Green\$99.00

HES 64

Sound Box\$9.95
64Forth\$55.75
Hesmon\$25.75
Turtle Graphics\$37.75
Heswriter\$28.75
Gridrunner\$19.75

DUST COVERS

800\$3.99
400\$3.99
1200\$3.99
410\$3.99
810\$3.99
1050\$5.00
PROWRITER\$5.99
GEMINI 10X\$5.99
PERCOM DISK\$5.99

SSI

Battle of Shilo\$26.75
Tigers in the Snow...\$26.75
Cosmic Balance\$26.75



APPLE DUMPING GX\$99.75
APPLE DUMPING 64 (16 Buffer)\$179.75

INFOCOM

Zork I, II, or III\$26.75
Deadline\$33.75

CARDCO

Cardprinter / L01\$499.00
Cardprint DM1\$109.00
5 Slot Expansion 64\$54.00
64 Write NOW\$39.00
64 Mail NOW\$29.00
2J Write NOW\$29.00
64 Keypad\$29.00
Universal Cass. Int.\$29.75
Printer Utility\$19.75
6 Slot Expansion\$79.95
3 Slot Expansion\$24.95
PRINTERINTERFACE\$39.75
PRINTERINTERFACE with
full graphics\$65.75
LIGHT PEN\$29.75

SPINNAKER 64

Kindercomp\$21.75
Story Machine\$23.75
Face Maker\$23.75
Snooper Trooper\$29.75
Delta Drawing\$34.75
Shamus II c/d\$24.95
Pinhead c/d\$22.95

SYNAPSE 64

ZEPPELIN C/D\$24.75
BLUE MAX C/D\$24.75
DIMENSION X C/D\$24.75
EPYX 64
ASPHI R\$28.75
JUMPMAN JR R\$28.75
PIT STOP R\$28.75

commodore

BRODERBUND 64

BANK STREET
WRITER\$49.75
CHOPLIFTER\$24.75
LODE RUNNER\$24.75
DROL\$24.75
KOALA TOUCH TABLET...\$69.75



Computers for people:

Voice Box 2...\$99.75

600XL...\$CALL
800XL.....for
1400XL...Lowest
1450....Prices
1050 DISK DRIVE...\$SAVES
1010 RECORDER...\$74.75

PARKER BROTHERS

Tutankham R.....\$33.75
Super Cobra R...\$33.75
Astro Chase R...\$33.75
Frogger R.....\$33.75
QBert R.....\$33.75
Popeye R.....\$33.75

Monkey Wrench 2 \$52.75

SPINNAKER

Story Machine R...\$26.75
Face Maker R...\$24.75
Kinderomp R...\$20.75
Fraction Fever R...\$24.75
Delta Drawing R...\$26.75

BLANK DISKETTES ELEPHANT

Single Side 5D (10).....\$17.75
Single Side DD (10).....\$21.75
Double Side DD (10).....\$26.75

MAXELL

MD I (10).....\$28.75
MD II (10).....\$38.75

CERTRON CASSETTES

CC-10 12 for\$15.99
CC-20 12 for\$17.99

INNOVATIVE CONCEPTS

Disk Storage (holds 10)....\$4.95
Disk Storage (holds 15)....\$9.95
Disk Storage (holds 50)....\$26.95

TRAK DISK DRIVES

AT-D1\$379.00
AT-D2\$399.00
PRINTER CABLE\$22.95
Software for ATD-2\$22.95

RANA DISK DRIVE

COMPUTER CARE

BIB
5 1/4 DISK DRIVE
CLEANER\$12.75
COMPUTER CARE
KIT\$19.75

HARD DISK DRIVES for

APPLE IBM-PC

5MEG.....\$1349.00
10MEG...\$1599.00
15MEG...\$1999.00
20MEG...\$2359.00

*Add \$10.00 for TRS 80 D.ves

TEXAS INSTRUMENT

Disk Drive...\$245.00



FOR ATARI COMPUTERS

AT88S1...\$299.00
AT88S2...\$535.00
AT**S1PD...\$439.00
RFD40S1...\$399.00
RFD40S2...\$675.00
RFD44S1...\$449.00
AT88 doubler



TO ORDER



CALL TOLL FREE

800-233-8760


Customer Service 1-717-327-1825 Jersey Shore, PA 1774C

or send order to
Lycy Computer
P.O. Box 5088

POLICY

In-stock items shipped within 24 hours of order. Personal checks require four weeks clearance before shipping. No deposit on C.O.D. orders. Free shipping on prepaid cash orders within the continental U.S. PA residents add sales tax. All products subject to availability and price change. Advertised prices show 4% discount offered for cash, add 4% for Master Card or Visa. DEALER INQUIRIES INVITED.

DISPLAYED VIDEO IS DRIVING DOWN PRICES ON DISKS! FREE SHIPPING!

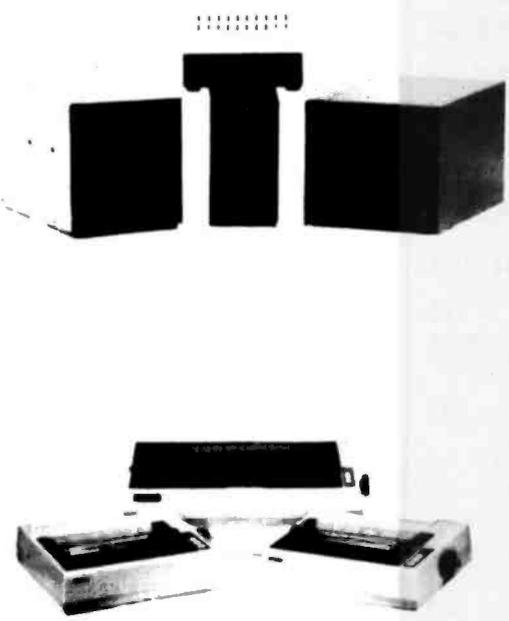


TEC'S NEW HALF-HIGH 40 TRACK DISK DRIVE w/CASE & POWER SUPPLY AT AN INCREDIBLE LOW PRICE! \$195.00!!!!
NEW! TRUE HALF HEIGHT DRIVES! 1 5/8 INCH NOT 2 INCH OR 2 7/16 INCH! DIRECT DRIVE! NO DRIVE BELT! 3MS TRACK TO TRACK!

- TEAC's New Slimline 40 Track w/case & power supply..... **\$235.00**
- Tandon 40 Track TM-100-1 w/case & power supply..... **\$220.00**
(DOUBLE SIDED 40 TRACK DRIVES ADD \$75.00)
- Shugart New Slimline Double Sided 40 Track w/case & P.S..... **\$299.00**
- Shugart New Slimline Double Sided 80 Track w/case & P.S..... **\$379.00**
- Tandon Single Sided Slimline 8" Disk Drive w/dual case & P.S..... **\$545.00**
- Tandon Double Sided Slimline 8" Disk Drive w/dual case & P.S..... **\$625.00**
- Two Drive 5 1/4" Cable (FOR MOST COMPUTERS)..... **\$23.99**
(WITH GOLD PLATED CONNECTORS)
- DV's Color Computer 1st Drive Only..... **\$389.00**
ONE YEAR WARRANTY ON TEAC & SHUGART DRIVES/180 DAYS ON TEC & TANDON
- Hayes Smart Modem 300 Baud..... **\$225.00** 1200 Baud..... **\$525.00**
- Model I Double Density Board..... **\$89.00**
- DV's Line Filter W/Surge Supression..... **\$45.00**
- Diskette File Box "Holds 70 Diskettes"..... **\$29.95**

PRINTER PRICES

- FX80 FT w/Graphtrax Plus. **\$459.00** Gemini 10..... **\$349.00**
- FX100 w/Graphtrax Plus. **\$659.00** Gemini 15..... **\$479.00**
- FX80 w/Graphtrax Plus. **\$389.00** Cihoh Prowriter 8510..... **\$395.00**
- FX80 w/Graphtrax Plus. **\$569.00** Starwriter F10..... **\$1169.00**
- FX100 w/Graphtrax Plus. **\$779.00** Smith Corona TP1..... **\$595.00**
- Printer Cable 10' long w/gold plated connectors starting at..... **\$25.99**

DV'S EXCLUSIVE "YOU CANT LOSE" SIX MONTH WARRANTY!

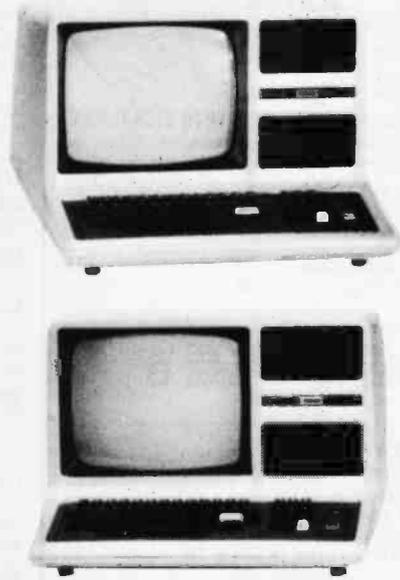

"NO YOU'RE NOT SEEING THINGS, THAT'S FOUR INTERNAL DRIVES IN A MODEL 4, WITH UP TO 4 MEG, DISK STORAGE AVAILABLE NOW!"

DV IS DRIVING DOWN PRICES ON DISK!

- DISPLAYED VIDEO is now offering TRS-80' MODEL 4 with TANDON/TEC/TEAC disk drives, one of the most reliable disk drive systems on the market, for **INCREDIBLY** low prices.
- MODEL 4 with 64K dual 40 track double density disk drives, complete system with TRSDOS 6.0 and 1 BOX OF DISKETTES
PLUG IT IN AND GO..... \$1599.00/128K...\$1679.00
 - MODEL 4 with 64K dual 40/40 track double density disk drives, complete systems with TRSDOS 6.0 and 1 BOX OF DISKETTES
PLUG IT IN AND GO..... \$1899.00/128K...\$1979.00
 - MODEL 4 with 64K dual 80 track double density disk drives, complete systems with TRSDOS 6.0 and 1 BOX OF DISKETTES
PLUG IT IN AND GO..... \$1899.00/128K...\$1979.00
 - MODEL 4 with 64K dual 80/80 track double density disk drives, complete systems with TRSDOS 6.0 and 1 BOX OF DISKETTES
PLUG IT IN AND GO..... \$2199.00/128K...\$2279.00
 - MODEL 4 with 64K four 40 track double density internal disk drives, complete systems with TRSDOS 6.0 and 1 BOX OF DISKETTES
PLUG IT IN AND GO..... \$2299.00/128K...\$2379.00
 - MODEL 4 with 64K four internal drives of any configuration available to achieve up to 4 meg of disk storage..... **CALL**
 - MODEL III/4 Internal Two Drive Kit: Includes controller board, dual drive mounting bracket, dual power supply, all hardware cable; and connectors (gold plated) & TEC Drive..... **\$399.00**
 - 4 DRIVE KIT MINUS DRIVE..... **\$349.00**
 MODEL 100 8K..... **\$679.00** 24K..... **\$839.00**
 - DV'S MODEL I DOUBLE DENSITY BOARDS..... **\$89.00**

WE CARRY TRS-80, IBM, LNW, EPSON & FRANKLIN COMPUTERS

Visit our retail location at:
111 Marshall Street
Litchfield, MI 49252
(313) 426-5086
(313) 482-4424
(517) 542-3280
(517) 542-3939
(517) 542-3947



IMMEDIATE DELIVERY
DV'S SIX MONTH
PARTS AND LABOR WARRANTY

Authorized Dealership at:
111 Marshall Street, Litchfield, Michigan 49252 P142
 To Order: Call (313) 426-5086; (313) 482-4424; (517) 542-3280
 (517) 542-3939; (517) 542-3947
 OR WRITE:

Displayed Video, 111 Marshall St., Litchfield, MI 49252


Circle 112 on inquiry card.

*TRS-80 is a trademark of the Tandy Corporation Prices subject to change without notice.

SPECIALS on INTEGRATED CIRCUITS

6502 @ 4.90 6520 @ 4.00 6522 @ 5.00 4116 @ 1.85
2532 @ 5.90 2716 @ 4.45 6116 @ 6.45 4164 @ 6.90

**Anchor
Automation
Signalman
MODEMS**



FREE SOURCE MEMBERSHIP WITH SIGNALMAN

All Signalman Modems are Direct Connect, and provide the best price-performance values. Dealer/OEM inquiries invited

Volkmodem with computer cable	68
Mark VII Auto Dial/Auto Answer	99
Mark XII Smart Model 1200/300	299
DC HAYES Smartmodem	219
DC Hayes Smartmodem 1200/300	519



PROM QUEEN for VIC	170
Apple Emulator for Commodore 64	Call
STAT Statistics Package for C64	95
Solid Oak 2 Level Stand for C64 or VIC	29
C64/VIC Switch (networking)	129
BACKUP V1.0 tape copier for C64 or VIC	20
CARDBOARD/6 Motherboard - VIC	64
CARDBOARD/5 Motherboard - C64	56
CARD PRINT G Printer Int. with Graphics	72
CARD PRINT B Printer Interface—C64/VIC	40
CARDBOARD/3s Motherboard - VIC	22
CARDCO C64/VIC Calculator Keypad	32
CARDRAM/16 RAM Expansion - VIC	44
Complete CARDCO Line in stock	
CIE and VIE IEEE Interfaces in stock	
MSD SuperDrive for C64 or IEEE	365
MAE Assembler for C64	50
Koala Pad Touch Tablet—C64 or VIC	79
CBC 4/12 Analog to Digital 4 chan/12 bit	199
MULTIPLAN for C64	79
Dust Cover for C64 or VIC	6
Grand Master Chess for C64	24
CDMAL Language for C64	17
with sprites, color graphics, sound, turtle graphics.	
Super BusCard by Batteries Included	159
ULTRA BASIC - 64 with Turtle Graphics	37
Super Disk Utility - C64 - includes backup	19
MicroChess - C64 - 8 levels of play	17
HES MODEM with software	55
Commodore 64 Programmers Reference Guide	16
WordPro 3+/64 with Spellright	85
VICController (also C64) - BSR Controller	50
COM VOICE Synthesizer for C64 or VIC	139
VIC products in stock - call for extra discounts.	
Victory Software for VIC and C64 in stock.	

APPLE—FRANKLIN ITEMS

FRANKLIN—complete line in stock	
QUENTIN Drives for Apple/Franklin	219
Swapper Stopper	26
automatic switch between paddles and joystick	
KRAFT Apple Joystick	40
Kraft Apple Paddle Pair	30
Koala Pad Touch Tablet-Apple/Franklin	90
SPINNAKER Software in stock	
Broderbund Software in stock	
16K RAM Card for Apple	59
Multiplan—Microsoft	185
Solid Oak 2 Level Stand for Apple	29
Serial Card for Apple	89
MCP RAM/80 column card for IIE (AP/TXT)	139
Z80 Softcard and CP/M (Microsoft)	235
RANA Elite I with Controller	389
Parallel Printer Interface/Cable	69
Microtek and MCP Interfaces in stock	
Grappler + Interface	129
DC Hayes Micromodem II	299
PFS: File or PFS: Report or PFS: Graph	95
Videx 80 Column Card	209
Apple Blue Book	19

commodore

See us for Personal, Business, and Educational requirements. Educational Discounts available.

PETSCAN I \$245 base price

Allows you to connect up to 30 CBM/PET Computers to shared disk drives and printers. Completely transparent to the user. Perfect for schools or multiple word processing configurations. Base configuration supports 2 computers. Additional computer hookups \$100 each.

COMPACT/STCP \$115

Intelligent Terminal Package for PET, CBM, C64
Includes ACIA Hardware / STCP Software

SCREENMAKER 80 Column Adapter for C64 139

Provide big screen capability for business applications.

Copy-Writer Word Processor for C64 49

Full-featured package with 800 lines of text in memory. Includes double column printing, graphic capability, full printer support.

Special Screenmaker/Copy-Writer Combo 179

VICTORY Software for VIC and C64

Metamorphosis	16	Creator's Revenge	16
Labyrinth of Creator	16	Galactic Conquest	16
Kongo Kong	16	Annihilator	16
Chomper Man	16	Grave Robbers	13
Bounty Hunter	16	Adventure Pack I or II	16

PAPER CLIP Word Processor - CBM/C64 75

ORACLE Data Base from Batteries Included 109

SPINNAKER Software C64, Apple, IBM, Atari	
Compute's First Book of PET/CBM	11
POWER ROM Utilities for PET/CBM	78
WordPro 4+ - 8032, disk, printer	295
VISICALC for PET, ATARI, or Apple	189
Compute's First Book of 64 Sound & Graphics	10.40
SM-KIT enhanced PET/CBM ROM Utilities	40
PET Spacemaker II ROM Switch	36
Compute's First Book of Games	10.40
Dust Cover for PET, CBM, 4040, or 8050	8
CmC Interfaces (ADA1800, ADA1450, SADI in stock)	
Compute's Reference Guide to 64 Graphics	10.40
Compute's Machine Language for Beginners	11
HES Software and Hardware in stock	
UMI products in stock	

FlexFile for PET/CBM/C64 \$49

DataBase, Report Writer with calculations, Mailing Lists. Easy to use, and can be modified.

FORTH for PET/C64 full FIG model - Cargile/Riley 50

includes all FORTH 79 Standard extensions, structured 6502 assembler with nested decision macros, standard 16x64 screens, agility to read/write BASIC sequential files, sample programs, introductory + reference manual.

Metacompiler for FORTH for independent object code 30

Floating Point for FORTH 20

KMMM PASCAL IV for PET/CBM/C64 99

Virtually full Jensen-Wirth implementation is now suitable for advanced placement courses.

EARL for PET/CBM Disk-based ASSEMBLER 65

SuperGraphics - BASIC Language Extensions 45

Fast graphics, sound, turtle graphics routines for PET/CBM.

RAM/ROM for PET/CBM 4K \$75 8K \$90

CBM Public Domain Software - C64/PET 27 disks 75

STAT for PET/CBM/C64 and Apple 95

Comprehensive Statistical Analysis Routines

Includes complete file handling capabilities, summary statistics, confidence intervals, hypothesis tests, exponential mean tests, multiple and power series regression, analysis of variance, histograms, and non-parametric tests.

PageMate 60 Command Word Processor 40

Full-featured package for all Commodore computers (incl. VIC with 16K). Full screen editing, and supports disk, tape, and all printers.

DISK SPECIALS



Scotch (3M) 5" ss/dd	10/ 2.20	50/ 2.00	100/ 1.95
Scotch (3M) 5" ds/dd	10/ 3.05	50/ 2.80	100/ 2.75
Scotch (3M) 8" ss/sd	10/ 2.30	50/ 2.10	100/ 2.06
Scotch (3M) 8" ss/dd	10/ 2.85	50/ 2.70	100/ 2.65

We stock VERBATIM DISKS

Write for Dealer and OEM prices.

Sentinal 5" ss/dd	10/ 1.90	50/ 1.85	100/ 1.75
Sentinal 5" ds/dd	10/ 2.55	50/ 2.50	100/ 2.35

We stock Dysan disks

Wabash 5" ss/sd	10/ 1.50	50/ 1.45	100/ 1.40
Wabash 5" ss/dd	10/ 1.90	50/ 1.85	100/ 1.75
Wabash 5" ds/dd	10/ 2.60	50/ 2.50	100/ 2.40

We stock MAXELL DISKS

Write for dealer and OEM prices.

Disk Storage Pages	10 for \$4	Hub Rings 50 for \$6
Disk Library Cases	8"—3.00	5"—2.25
Head Disk Cleaning Kits	12	
AMARAY Disk Storage Systems in stock		
Innovative Concepts FLIP 'N' FILES in stock		

CASSETTE TAPES—AGFA PE-611 PREMIUM

C-10	10/ .61	50/ .58	100/ .50
C-30	10/ .85	50/ .82	100/ .70

Hewlett Packard



Write or call for prices.

DATASHIELD BACKUP POWER SOURCE \$265

Battery back up Uninterruptible Power Supply with surge and noise filtering. The answer to your power problems.

MULTIPLAN—IBM or Apple 185

Quadboard for IBM available	
KOALA PAD Touch Tablets—Apple, Atari, IBM, CBM	
Peachtext 5000 Software Package	209
PFS Software for IBM and Apple in stock	
SPINNAKER Software C64/VIC, Apple, IBM, Atari	
VOTRAX Personal Speech System	280
BMC 9191 Color Monitor	229
BMC 12A 12" Green Monitor	79
Dynax (Brother) DX-15 Daisy Wheel Printer	469
Brother HR-25 Daisy Wheel Printer (25 cps)	769
Itoh Prowriter. Parallel Printer	379
Panasonic 1090 Printer with Correspondence Mode	279
Daisywriter 2000 with 48K buffer	1020
Gemini 10X	299
EPSON, Okidata, Star Micronics printers in stock	
USI CompuMOD 4 R F Modulator	29

We Stock AMDEK Monitors

Amdek DXY-100 Plotter	590
A P Products	15% OFF

COMPUTER COVERS IN STOCK

BRDOKS 6 Outlet Surge Suppressor/Noise Filter	54
Surge Suppressor-6 outlet	29
Electrohome 1302-2 13" Hi-res RGB Monitor	335
Panasonic 12" Monitor (20 MHz) with audio	135
Synertek SYM-1 Microcomputer	189

ALL BOOK and SOFTWARE PRICES DISCOUNTED

USI Video Monitors—Green or AMBER 20 MHz hi-res. Dealer and OEM Inquiries invited

ZENITH data systems

ZVM-122A	109	ZVM-123G	95
ZVM-131	300	ZVM-135	490
Z29 Terminal (DEC and ADM compatible)			680
ZT-10 Intel. Terminal with Serial Port			340
Z100 16-bit/8-bit System			CALL

ATARI - WE STOCK ENTIRE LINE
SPINNAKER and Broderbund Software in Stock.

215-822-7727
252 Bethlehem Pike
Colmar, PA 18915

A B Computers

WRITE FOR CATALOG. Add \$1.50 per order for United Parcel. We pay balance of UPS surface shipping charges on all prepaid orders (add extra for mail, APO/FPO, air). Prices include cash discount. Regular prices slightly higher. Prices subject to change.


ORDER WITH CONFIDENCE

from one of the nation's largest consumer electronic parts distributors!

DISK DRIVE

LOWEST PRICE EVER!

Slim disk drive for Apple II® computer. New in a box.



A sturdy cabinet and 3' cable are included. Runs on Apple controller or our optional controller.

ORDER NO. 83-APL-DD-1 **\$229.95**

CONTROLLER CARD

For two disk drives.



ORDER NO. 83-APL-CTL-1 **\$49.95**

IBM COMPATIBLE JOYSTICK

Heavy duty all metal. Featuring ultra linear pots, self centering, dual fine center adjustments. The finest industrial/commercial joystick available.



ORDER NO. 83-IB-XY-23 **\$44.95**

APPLE® COMPATIBLE JOYSTICK

With double trigger feature. (Four total) light weight, linear pots.



ORDER NO. 83-APL-XY-9 **\$24.95**

SELF CENTERING APPLE® COMPATIBLE JOYSTICK

With double trigger feature. (Four total) light weight, linear pots.



ORDER NO. 83-APL-XY-18 **\$29.95**

5 1/4" DISK DRIVE SPECIAL

MPI MODEL B-51

single side, double density BRAND NEW Never used, no cabinet.



ORDER NO. 83-MPI-B51 **\$149.00**

REPLACEMENT KEYBOARD FOR APPLE II®



Heavy duty — error free switches. Switchable N key rollover, last key repeat. Upper/lower case capability. Alpha lock, cable included.

ORDER NO. 83-APL-KB-7 **\$79.95**

APPLE® COMPATIBLE JOYSTICK

Cord terminated with 16 Pin plug. Our most popular joystick.



ORDER NO. 83-APL-XY-10 **\$16.50**

RF MODULATORS



Use your TV as a monitor. Converts video signals into RF. Hooks up to Apple with no modifications. FCC listed. Two versions: With sound and without sound.

ORDER NO. 83-VM-42 Without Sound **\$16.00**

ORDER NO. 83-CRM-320 With Sound **\$21.95**

5A APPLE II® COMPATIBLE REPLACEMENT POWER SUPPLY




Full 2A more than the original power supply. Heavy duty, 110/220V operation. Mounts directly into Apple II case. AC cord included.

ORDER NO. 83-APL-PS-51 **\$79.95**

5A POWER SUPPLY With BUILT-IN COOLING FAN

NEW!




Newly patented Apple II® compatible 5A power supply. Fits completely into Apple II case. Eliminates the need for external cooling fan.

ORDER NO. 83-APL-PS-53 **\$89.95**

DATA SPEC™ SUPER CABLES

Fully shielded — shock proof — low loss. 25 Conductor RS232 cable assembly with 100% alluminex shield. Special underhood molding and shielding. The best cables currently made!



ORDER NO.	LENGTH	PLUG/JACK	PRICE
83-MRS232MM-3	3'	Male/Male	\$24.95
83-MRS232MM-5	5'	Male/Male	27.95
83-MRS232MM-10	10'	Male/Male	29.95
83-MRS232MM-25	25'	Male/Male	37.95
83-MRS232MF-3	3'	Male/Female	25.95
83-MRS232MF-5	5'	Male/Female	28.95
83-MRS232MF-10	10'	Male/Female	30.95
83-MRS232MF-25	25'	Male/Female	38.95

SOLDER TYPE 25 PIN "D" (RS232) CONNECTOR



ORDER NO.	1-11	12-49
83-DB25M	Solder Type Male \$2.25	\$2.00
83-DB25F	Solder Type Female 2.90	2.60
83-DH25H	Hood with hardware 1.30	1.20

RF CABLES



RCA to RCA. Connects computer to monitor, etc.

ORDER NO.	LENGTH	PRICE
83-BRR-3	3'	\$1.95
83-BRR-6	6'	2.50
83-BRR-12	12'	4.50

Please Note: ORA Electronics products are intended to be sold to persons with a working knowledge of electronics and computing. If you do not have such knowledge, please visit your local dealer for products and information.



MINIMUM ORDER \$25.00. VISA, MASTER CARD accepted. No surcharges. Exact UPS charges will be added. PREPAID: Certified checks and money orders, send exact amount. No shipping, handling or insurance charges in the continental USA. PERSONAL CHECKS: add 5% shipping charges, allow 3 weeks to clear. INTERNATIONAL BUYERS: US currency and 20% extra for shipping. CA Residents, add sales tax. OEM / DEALERS: send for special prices on your company letterhead. NO PURCHASE ORDERS OR OPEN ACCOUNTS—NO EXCEPTIONS.



"OUR SERVICE MAKES THE DIFFERENCE"

To order, call TOLL FREE: **(800)423-5336**
 Calif. TOLL FREE: **(800)382-3663**
 Local: **(213)701-5848**
 Telex 181011 ORA PARTS NTGE

18215 PARTHENIA STREET, NORTH RIDGE, CA 91325

HALF-HEIGHT SHUGART DRIVE SYSTEM FOR IBM-PC

Choose 2 or 4 320K byte half heights or 2 half-heights plus a hard disk.

- Powered by energy efficient direct drive DC motor
- Mounting kits available for most popular systems
- Clear and simple instructions
- Full one year warranty

IBM-PC 10 Megabyte Half-Height Hard Disk

Up grade your PC to an XT! Call 609-799-4440 10 Megabyte Half-Height Hard Disk also available for your COMPAQ SA-712 Half-Hgt. 10 Meg Hard Disk Call

SHUGART HALF-HEIGHT DRIVES

Shugart SA465 DS/DD Half-Height 96TPI New! Allows reading and writing in single or double density 5.25 diskettes. Plug compatible with TANDON TM 100-4, SIEMENS FDD-221-5 and similar drives.
1 YEAR WARRANTY \$350 each 2 @ \$295 each
Formatted single density 700K bytes



SHUGART SA860 DS/DD Half-Height 8"

A double sided half height 8" high speed disk drive. DC only operation. Same as used on Zenith Z-100.
1 YEAR WARRANTY \$495 each 2 @ \$475 each
Formatted 1.25 megabyte
Track to track 3ms



SHUGART SA455 DS/DD Half-Height 48TPI

Adouble headed minifloppy disc drive with up to 320K on-line storage capacity. Plug compatible with any standard 5 1/4" drive. Electrically the same as TM-100-2 and FDD-211-5.
1 YEAR WARRANTY \$245 each
Formatted 320K bytes, extended 360K bytes
Track to track 6ms

HEATH ZENITH H88, 89 or 90 TWOET SYSTEMS

Dual internal half-height disk drives
Now you can replace your built-in drive with two double-sided, double or single density, internal half-height drives in either 48 or 96tpi format, with all hardware, cables, power connector adaptors, and documentation included. Our double-sided 48tpi works perfectly as a single sided right out of the box. You can even use this system with your H-17 controller. And we have the software drivers (at additional cost) so you can run out 48 or 96tpi double-sided, single density drives on it!
TWOET 455 TWOET 465
2 SHUGART SA-455 2 SHUGART SA-465
half-height half-height
48tpi double-sided 96tpi double-sided
\$595 \$695

Both models are shipped complete with all hardware, shielded metal mounting plates, data cable with chassis connectors, and complete documentation.

WHAT TO DO WITH YOUR INTERNAL DRIVE: For only \$60 extra plus shipping, we'll send you a single 5 1/4" case with power supply and data cable — ready to receive your SIEMENS internal drive! A regular \$80 value. The external chassis disk I/O connector comes with your TWOET system

W. S. T. DISK DRIVES (formerly Siemens)

W. S. T. FDD-100-5B4 Same model used in Heath computers. Added "Flippy" operation feature. Works with almost any SA-400 compatible system: RS Model 1, North Star, S-100 and more \$235 each C3-\$195 each (with Shugart type Bezel)

W. S. T. FDD-211-5

Dual headed 5 1/4". Records data in single or double density, using hard or soft sector techniques. An exact TM-100-2 replacement. Use in Northstar and IBM, or any system using dual head 48 tpi drives. Same as COMPAQ. \$265 each

NUMBER OF HEADS 2

FORMATTED DATA CAPACITY 320K bytes

extended 360K bytes

W. S. T. FDD-221-5

A double headed, 5 1/4", 96 tpi (80 track) disk drive. Capable of hard or soft sector, single or double density, it's an exact replacement for the TANDON 100-4. \$335 each
2 @ \$295 each

Increase your on-line storage capacity by 2.5 megabytes with Our new 8" double sided half height disk drive. Styling matches IBM-PC. Utilizes Shugart half-height 8" double sided disk drives. Allows reading CP-M data files with optional patch

FD-PCB System \$1270
Maynard Controller \$245
(Allows use of two internal 5 1/4" and the two outdoor 8" system. Add \$70 for parallel)
JFormat \$50
JFormat-2 \$50
We have half-height mounting kits for IBM and COMPAQ computers

APPLE HALF-HEIGHT DISK DRIVES Call for price

ENCLOSURES

MODEL	CONFIGURATION	STACKING	DIMENSIONS	ALSO AVAILABLE	PRICE
DH5A&T	2 standard 5 1/4"	horizontal	17" L x 12" W x 5" H	external chassis connector/blank plates	\$125.00
SV5A&T	1 standard 5 1/4"	vertical	11 1/2" L x 3 1/2" W x 6" H	vertical 5 1/4" case for 2 half-height drives	\$55.00 or \$75.00 for 1/2 height
DV5A&T	2 standard 5 1/4"	vertical	11 1/2" L x 6" W x 7" H	—	\$85.00
D5HHHA&T	2 half-height + space for single board computer	horizontal	17" L x 12" W x 3 1/2" H	blank plates ext. chassis conn.	\$125.00
5SHA&T	1 standard 5 1/4" or 2 half-height drives	horizontal	12" L x 8" W x 4" H	blank plate ext. chassis conn.	\$95.00
5SHDA&T	1 standard or 2 half-height hard disks	horizontal	12" L x 8" W x 4" H	blank plate	\$165.00
8" ENCLOSURES					
All 100% our design, these 8" enclosures feature a front panel power switch designed with 1" clearance over the drive to accommodate a big board computer or a hard disk controller. All 1/8" gauge metal construction with DB 25 cutouts on the rear panel. CP-206 supply mounting holes, which are standard for the 8" drive industry.					
DH8A&T	2 standard 8" (such as SHUGART 800-R series or SIEMENS FDD-100 series)	horizontal	21" L x 17 1/2" W x 6 1/2" H	ext. chassis conn.	\$295.00
SH8A&T	1 standard 8" or 2 half-height drives + space for single board computer	horizontal	16" L x 12 1/2" W x 6 1/2" H	blank plates ext. chassis conn.	\$285.00
DHH8A&T	for SHUGART TANDON 848 or similar 8" half-height designs	horizontal	20.5" L x 17" W x 4" H	blank plates ext. chassis conn.	\$320.00
FDPC8	810-860 matches IBM-PC or Zenith systems	horizontal		blank plates	\$320.00

MULTIDISPLAY

For IBM-PC, contains both mono and color display plus printer port, all on one card \$575

PGS MONITOR

The best RGB monitor going \$475

SANDSTAR MODULES FROM MAYNARD

Sandstar Serial Port Module

Totally compatible with software written for IBM Asynchronous Adaptor. Connects to MODEM, serial printer, or any standard RS232-C interface device. Port may be configured as Serial Port #1 or #2. Can use IBM diagnostics. MSE1301 \$105.00

SandStar Clock Calendar Module
Features clock and calendar with battery backup, which runs when PC power is turned off or plug is disconnected. Correct time and date loaded each time system is powered up. Software included. MCL1303 \$85.00

SandStar Parallel Port Module

A Centronics compatible I/O port. Use as general purpose I/O port or connect to printer. Utilizes same type connector and pins as IBM Parallel Printer Adaptor, and is 100% compatible with its software. Configure as Port #1 or #2. Can use IBM diagnostics. MPA1302 \$75.00

SandStar Memory Module

Use with SandStar Memory Card. Expands memory by 320K bytes for 640K bytes total system memory. Uses only one IBM expansion card. No configuration required before plug in.

Module may be purchased with any 64K increment and easily expanded to 320K. Electronic disc and print spooling software are also available.

MMOD000	0K	\$115.00
MMOD064	64K	\$205.00
MMOD128	128K	\$300.00
MMOD192	192K	\$390.00
MMOD256	256K	\$485.00
MMOD320	320K	\$580.00

SandStar Game Adaptor Module

Attach up to 4 paddles and 2 joysticks to your IBM PC. Can be used for general purpose input, with 4 digital and 4 analog inputs. 100% compatible with IBM PC software. Uses same type 15 pin "D" subminiature I/O connector as the IBM Game Control Adaptor.

Maynard Electronics Multi-Function Memory Expansion Board

Adds from 64K bytes to 256K bytes to your IBM-PC. Expandable with either 1 or 2 optional asynchronous serial (RS232-C) ports. Engineered for total compatibility with IBM I/O specs. Parity generation and detection included. Ready to plug into 64K byte systems. Optionally available with 1 or 2 RS232-C ports with 20mA current loop. 100% compatible with IBM hardware and software, and may be used to connect your computer to a modem serial printer or other devices with computer interface. Board ports may be enabled or disabled and assigned as COM1 and/or COM2.

MMF 1000	0K	\$210.00
MMF 1064	64K	\$305.00
MMF 1128	128K	\$410.00
MMF 1192	192K	\$510.00
MMF 1256	256K	\$615.00
MMF1SER		\$100.00
(with one serial port added)		
MMF2SER		\$160.00
(with two serial ports added)		
(No parallel available)		

Maynard Disk Controllers	Description	RET.
MODFDC (Controller w/mod ports)		\$265
FDC8 (8" Controller)		\$245
FDC 5 1/4" (5 1/4" Controller)		\$195
FDCPARALLEL (Contr. and para ports)		\$275
FDCSERIAL (Contr. and serial ports)		\$285
FDCB PARA (8" Contr. and para ports)		\$315
HDM (hard disk module)		\$495

CONTROLLERS Magnolia Micro-systems for the H-89 & Z-90 Double Density Disc controller including CP/M 2.2

Complete hardware & software support for:
- Four 5 1/4" and Four 8" single or double sided drives
- 48 TPI (40 track) drives
- 96 TPI (80 track) drives
- 3-5 1/4" drives supported by Heath Zenith controller H-17

This package includes:
- double density controller card
- CP/M 2.2 on either 5 1/4" or 8" media
- new I/O decoder and monitor PROMs
Shipping weight 7 lbs.

DATA CONNECTORS

50 pin edge card	609-5015	50 pin inline end connector	
34 pin edge card	609-3415	609-5001M	
50 pin inline chassis		34 pin inline end connector	
609-5016		609-3401M	
34 pin inline chassis			
609-3416			

POWER CONNECTORS

slacking bracket for 5 1/4" or 8" half-height drives	AC socket B, single sided C1120	
SB5 or SB8	5 1/4" DC connector	C1116
SA810/860 DC power	5 1/4" DC socket	C1119
C1115	PCB-B DC	C1122
SA850/851 FDD-200-8-AC	free-standing 8" B" double sided	C1114 DC connector socket
	8" AC connector standard,	8 DC standard
	single sided	C1113

We sell many other disk drive models too numerous to list here. We encourage you to call for our latest pricing and catalog. Due to production deadlines, prices are 60 days old. Please call Dealer inquiries invited. In our 5th year!

Prices and specifications subject to change without notice
MasterCard, VISA accepted. NJ residents, add 6% sales tax.

Shipping charges: \$3.00 first 4 lbs., \$.40 each additional lb.
COD charge \$5.00.

TOLL FREE ORDER LINE: 800-223-0306
In NJ, Call: 609-799-4440 9:00 am-5:30 pm est.


FLOPPY DISK SERVICES INC.

FLOPPY DISK SERVICES, INC.
741 Alexander Road
Princeton, NJ 08540

Freedom - Freed the Prices!

We have met or have beaten most advertised prices.

Buy Direct!



DTC 380 Z
32 CPS
4BK Buffer
Serial and Parallel
1 Year Warranty
380 Z \$ Unbeatable
3BK STARWRITER .. \$ Unbeatable




Mannesmann Tally
• Standard — 7 x 9 160 CPS
• NLO — 40 x 18 40 CPS
• 2K Buffer and Tractor Standard
160 L 80 col. Call **Best Seller**
180 L 132 col. Call **Best Seller**
Spirit Call **Best Seller**



IDS

- Proportional Spacing
- 8 Character Styles
- 200 CPS Bi Directional
- Color Optional
- Sheet Feed • Graphics
- 3.4K Buffer

Prism 80 \$ Call
Prism 132 and Micro Prism \$ Call
Auto Cassette Sheet Feed \$ Call



Star Micronics

Gemini 10X + 15X
120 CPS \$ Call
Delta 10X \$ Call
160 CPS \$ Call
STX 80 \$ Call



EAGLE

OUR PC FLYS
IBM Compatible
Simply a better PC. All models
available for immediate delivery
Call **Lowest \$**



Juki 6100

18 CPS IBM Ribbons
Diablo Compatible 2K Buffer
Best Value Yet \$ Call



It's a Piece of Cake!

High Quality Software
for Personal Computers

- Word Processor
- Mail List
- Spelling Checker
- Telecom
- NEW!**
- Graphics Package
- Financial Planner
- Data Manager

Call for Prices!



Red Hot Special!

Novation J-CAT

• 300 BPS Modem
• Originate/Auto Answer
Sizzling \$89.50

DAISYWRITER
FRANKLIN

U.S. ROBOTICS
OKIDATA

SANYO P.C.
OTRONA

**Everything in
computer related products:**

ALTOS
ZENITH
TELEVIDEO
SANYO
USI
TRANSTAR
PIED PIPER
RANA
STB
QUADRAM
PRINCETON GRAPHICS

HAYES
NOVATION
ANADIX
AXIOM
DATASOUTH
MICROTEK
SWEET-P
EAGLE
RITEMAN

VENTEL
AMDEK
BMC
TAXAN
DIABLO
NEC
EPSON
PRINTEK
MOLECULAR
UDS
SILVER-REED

COMREX
JUKI
STAR
NORTHSTAR
ADDS
KIMTRON
INTERCOLOR
COLUMBIA
CORONA

C. ITOH
DEC
AMPEX
TOSHIBA
VEW
RIXON
HAZELTINE
SEIKOSHA
TTX
WYSE
TEXAS INSTRUMENTS

PRINTACOLOR
OUME
KEYTRONICS
ANCHOR
BROTHER
VISUAL
DAISY

- Computers
- Modems
- Printers
- Software
- Monitors
- Terminals
- Accessories
- Paper
- Ribbons
- Diskettes
- Office Furniture
- In-Store Training

For Price Quotes and Ordering, Call:

1-800-821-4128

For Technical Information and
Order Status, Call:

602-952-1057 or 602-954-6127

**FREEDOM
COMPUTER MART
INC.**

3370 North Hayden Road • Suite 123-314
Scottsdale, Arizona 85251

Prices listed reflect a cash discount and are subject to change without notice. C.O.D.s are shipped with a minimum C.O.D. charge. Allow 3-7 days for personal checks to clear. Product is subject to availability. Equipment is in factory sealed boxes with manufacturer's warranty. There will be a re-stocking charge for returned merchandise. Call first for an RMA number. Software not warranted for suitability. No return of Software which has been opened. Add 2% for shipping & handling charges (minimum \$2.50). All equipment shipped F.O.B. Scottsdale, AZ 85251. Circle 212 on inquiry card.

**BROAD LINE OF
A/D PRODUCTS
FOR APPLE II®**

TIMER/CLOCK - 4-YEAR CALENDAR,
TIMES INTERVALS TO THE
MILLISECOND, INTERRUPTS... \$175
12-BIT A/D - 40,000 SAMPLES/SEC.
0.1% ACCURACY, 8 INPUTS... \$375
8-BIT A/D - 60,000 SAMPLES/SEC.
0.4% ACCURACY, 8 INPUTS... \$165
FULLY DIFFERENTIAL A/D -
1 MILLIVOLT RESOLUTION
12 SAMPLES/SEC, 4 INPUTS... \$195
THERMOCOUPLE THERMOMETER -
2 OR 6 CHANNELS... \$135 or \$155
ALSO: INPUT MULTIPLEXERS,
OUTPUT CONTROLLERS,
AND CUSTOM SYSTEMS

LAWSON LABS, INC.

5700 RAIBE ROAD
COLUMBIA FALLS, MONTANA 59912
406-387-5355

Circle 209 on Inquiry card.

wabash®

**When it comes to
Flexible Disks, nobody
does it better than
Wabash.**

MasterCard, Visa Accepted.
Call Free: (800) 235-4137



**PACIFIC
EXCHANGES**
100 Foothill Blvd
San Luis Obispo, CA
93401 (In Cal call
(805) 543-1037)

Circle 284 on Inquiry card.

**1-2-3
Lotus . . . \$99.00***

VisaCalc . . . \$50.00*

PFS: File . . . \$25.00*

Wizardry . . . \$9.99*

Zaxxon . . . \$8.00*

**Over 1200 Programs
To Choose From**



*two week member rental

Free Catalog:

619-481-0559 San Diego

1-800-221-1031 California

1-800-221-4568 All Others

Circle 333 on Inquiry card.

**1984
3M
SPECIAL**



We're bringing in the New Year with
specials on quality 3M information
processing products. Including:

- DISKETTES • MAG, TAPE
- DATA CARTRIDGES

PLUS! Specials on many other products
in our full-range discount
catalog of computer supplies. Call,
write, or utilize reader service to
obtain your FREE catalog of 1984 3M
Specials.

LYBEN COMPUTER SYSTEMS

1250-E Rankin Dr., Troy, MI 48083
Phone: (313) 589-3440

Simply #1 in Service & Reliability

3M Authorized Distributor
Information Processing Products

Circle 223 on Inquiry card.

5 1/4" DISK DRIVES

- ★ **QUME 142A**
Half Height, Double
Sided, 40 TRK/Side **\$229**
Free Shipping
- ★ **TANDON: TM 100-2**
Double Sided,
40 TRK/Side **\$235**
Free Shipping
- ★ **CDC: 9409**
Double Sided,
40 TRK/Side **\$235**
Free Shipping
- ★ **SHUGART: SA 455**
Half Height, Double Sided,
40 TRK/Side **\$229**
Free Shipping

Order Toll Free:

1-800-531-5475 (Outside Of Texas)

(512) 250-1489 (In Texas)

Texas Residents Add 5% Sales Tax.



13010 Research Blvd., Suite 101
Austin, Texas 78750

Circle 65 on Inquiry card.

**Apple II/IIe®
Industrial Control
Plug-In Boards
(SOFTWARE INCLUDED)**



Opto-Isolated A32 I/O Board

- Individually Configurable
- Compatible with SSR Modules
- Opto-Isolated Interrupt Inputs

\$295

2 Axis Stepper Motor Interface

- Positioning Control
- Pulse Counting/Timing
- Frequency Measurements

\$195

ROGERS LABS (714)751-0442

2710 S. Croddy Way, Santa Ana, CA 92704

Circle 316 on Inquiry card.

IBM PC =

1. DEC VT100?
2. DEC VT125?
3. DASHER D400?

SMARTERM™ DOES IT!

- full emulation
- powerful file transfer
- full printer support
- multiple setups
- "smart" softkeys
- 132 column support available
- online help screens
- 30-day return policy

Available through your local software dealer
or directly from:



**Perisoft
Inc.** 2740 Ski Lane
Madison, WI 53713
(608) 273-6000

Software for Professionals... by Professionals.

SMARTERM is a trademark of Perisoft, Inc. • DEC & VT are trademarks of
Digital Equipment Corp. • Dasher is a trademark of Data General Corp. •
PC is a trademark of International Business Machines, Inc.

Circle 292 on Inquiry card.

300 BAUD **MODEMS** 1200 BAUD
SIGNALMAN..Free hour on 'SOURCE'
300/1200 AUTO DIAL/ANS **\$319**
'Hayes Compatible'
300 BAUD AUTO DIAL/ANS **\$119**
300 BAUD direct connect **\$ 69**
US ROBOTICS...300/1200...MODEMS
'Hayes Compatible'
'Password' with cables, spkr **\$339**
'S100' card **\$339**
'Auto 212' dlxe... **\$419**

DOT MATRIX PRINTERS LETTER QUALITY
GEMINI 10x 120 cps graphics **\$CALL**
PROWRITER 120 cps hi density **\$359**
JUKI daisys wheel 18 cps **\$529**

IBM HARD DISKS CPM
10 Mbyte....\$1295 40 Mbyte....\$2495
23 Mbyte....\$1995 65 Mbyte...\$CALL

IMAGE COMPUTERS
P.O. Box 1164, Cardiff, CA 92007

CALL TO ORDER:
(619) 942-7373 VISA/MC
(619) 436-7669 ADD 3%
(619) 270-3600 *Dealer Inquiries Invited

Circle 178 on Inquiry card.

COMPUTER SUPPLIES

DISKETTES

5 1/4
S/S S/D
MIN. ORDER 50 **\$ 160**

RIBBONS

OKIDATA
MICROLINE 84 **\$377**
EPSON
MX100 **\$784**
MIN. ORDER 6

LABELS • CONTINUOUS FORMS

PeachText 5000 REG 395⁰⁰ 275⁰⁰
complete line of

EDUWARE SOFTWARE
plus other major brands

- Terms: Visa, M.C. or C.O.D.
- Dealer Inquiries Invited

**COMPU-MEDIA
SOFTWARE, INC.**

159 Main St. S.I.N.Y. 10307

CALL TOLL FREE 1-800-248-2418
in N.Y. State 212-967-1700



Circle 390 on Inquiry card.

MEGA-BOARD™

new!

Ideal for

- **COMPUTERISTS**
- **OEM MANUFACTURERS**
- **DEVELOPMENT LABS**
- **UNIVERSITIES**
- **INDUSTRIAL APPLICATIONS**

THE ULTIMATE OEM/PC COMPATIBLE SINGLE BOARD COMPUTER

FULL IBM - PC* COMPATIBILITY!

DEALERS AND OEM MANUFACTURERS QUANTITY DISCOUNTS AVAILABLE

Standard Keyboard Interface
(Full PC compatible)

Hardware Reset
(Overcomes reset flaw in PC)

Eight Compatible I/O Interface Connectors
(Full PC compatible)
(compatible with all IBM-PC* plug-in cards)

Power Connector
(Full IBM* pinout compatible)

Special J1 Interface
(Allows horizontal mounting of compatible expansion cards for easy bus expansion and custom configuring) (Board has 62 pin gold plated compatible connector)

8088 Processor
(Same as PC)

8087 Numeric Processor
(Same as PC)

Peripheral Support Circuits
(Same as PC)

Extended ROM Capability
(Runs all compatible PC ROMS) (Jumper programmable to accommodate all popular 8K, 16K, 32K and 64K ROM chips and NEW EE ROMS! VPP power pin available for EP ROM burning!) (External VPP voltage required)

Configuration Switches
(Same as PC)

Speaker/Audio Port
(Same as PC)

Wire Wrap Area
To facilitate special custom applications!

Board Size
10.5 inch X 13.5 inch

ORDER NOW!!!

Full Mega-Byte Ram Capacity! On board!
(With parity)
 256K Bytes using 64K chips
 1 Mega Bytes using 256K chips

ONLY!
\$99.95
Evaluation Board Kit

MEGA-BOARD™ Evaluation Board Kit!
(Blank board with full assembly instructions and parts list.)

Includes highest quality PC board with gold plating, silk screen, solder mask

- MEGA-BOARD™** with full assembly instructions\$99.95
- USERS MANUAL** with theory of operation, schematics, block diagram, application notes\$19.95
- MEGA-BIOS™** fully compatible MS-DOS/PC-DOS BIOS \$29.95

ORDER NOW!!!

SATISFACTION GUARANTEED!


10-day money back guarantee if not completely satisfied.



4100 SPRING VALLEY ROAD
SUITE 400
DALLAS, TX 75234
(214) 991-1644

TERMS: Shipment made 2 to 5 weeks from receipt of order. VISA, MC, money order, Company check accepted. COD'S require \$25 deposit. Balance UPS COD. Please add \$2.00 shipping and handling per order.

Analog and Power Control I/O..... in a Single Board Computer

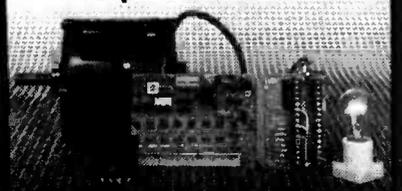

6801 Micro Control System designed for DISTRIBUTED CONTROL or STAND-ALONE use: 6801 or 68701 MPU with 2K ROM or EPROM, 128 RAM, timer. Eight 12-bit analog inputs, 8-bit analog output, 8 AC or DC inputs or outputs, serial I/O, digital I/O, power supply.



Wintek Corp.
4801 South Street
Lafayette, IN 47904
317-742-8428

Circle 388 on Inquiry card.

USED PERSONAL COMPUTER BROKERAGE

- A nationwide database service matching buyers and sellers of used P.C.'s and peripherals.
- UPCB acts as middleman, providing security for both the buyer and the seller.
- All equipment tested and warranted by UPCB
- All makes and models accepted for listing
- Bonded and insured
- Reasonable listing rates and commissions

For more information mail today!
I am interested in Buying Selling

Name _____
Address _____
City, State, Zip _____
Telephone () _____

Mail to: UPCB Fulfillment Dept.
Suite 21 • 1116 A 8th Street
Manhattan Beach, CA 90266

Circle 370 on Inquiry card.

ADD/NET™



INDUSTRIAL/LABORATORY LOCAL AREA NETWORK

ADD/NET provides a modular, low cost, easy to use approach to factory and laboratory networking. ADD/NET modules may be used stand-alone or linked together in an extended network. Features include:

- Up to eight ports per module; interfaces include RS232C, RS422, RS449, IEEE488, and Industrial I/O
- Transparent communication from any port to any other port within the network
- User friendly menu permits easy interactive setup from a terminal
- Command mode permits computer controlled setup for dynamic linking of ports
- Multiple baud rates supported, with automatic baud rate lock-in and baud rate conversion
- Up to 2000 feet between network modules
- Error checking and correction for reliability
- Ideal for linking your factory and lab equipment with your mainframe, P.C. and peripherals

CALL TODAY (305) 293-2002

Adroit Electronics, Inc.
Dept. A, 3790 Silver Star Rd.
Orlando, FL 32808

Circle 12 on Inquiry card.

STOP GAMBLING - 2-B

Use your personal computer for expert handicapping like the experts do - - -

SEND FOR FREE DATA ON USFL SYSTEM

- Predicts game scores
- Situation analysis program
- Trend analysis program
- Unique handicapping guides
- Simple operating manual
- Use with Radio Shack, Apple Commodore 64 and others
- Order today-Win tomorrow

START WINNING WITH

Send \$225. for USFL System includes free money mgmt. program (worth \$50.). Enclose check, money order or Visa/MC card No.

COMPUTER HANDICAPPING SYSTEMS

P.O. Box 33034
Cleveland Ohio
44133-0034



USFL Winners Now-Baseball Next

Circle 113 on Inquiry card.




Solve your disc problems, buy 100% surface tested Dysan diskettes. All orders shipped from stock, within 24 hours. Call toll FREE (800) 235-4137 for prices and information. Visa and Master Card accepted.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call (805) 543-1037)

Circle 284 on Inquiry card.

HARD DISK DRIVE SURPLUS SALE!



Selling fast!
Call Now!

High reliability 8" Shugart SA 1002 5.33 Mbyte drives for \$380. ea., unused in their original factory packed cartons. 1000's of pleased customers. Also available: new Western Digital controller card (\$350.); interfaces for IBM, Apple, S-100, STD, Heath/Zenith, SS-50, SS-30. Shipping for drive, \$12. Call before they're gone — LIQUIDATORS, 803-877-9828, or send check or money order to 105 S. Main St., Greer, S.C. 29651.

A Spooler that will Spoil You

Addmaster Paper Tape Handler with Big New 7 1/2" Reels



Optional serial interfaces for RS232C or TTY or parallel interface/TTL. X-on/X-off capability, bi-directional reading and slew, reads 150 CPS, rewinds 300 CPS. Stops on character, contains power supply and Addmaster Model 601 paper tape reader. Sensibly priced. Addmaster Corporation, 416 Junipero Serra Drive, San Gabriel, CA 91776. (213) 285-1121.

Circle 11 on Inquiry card.

DISK DRIVES (For PC, Mod I, III & IV)

Tandon TM55-2	\$229
Tandon TM100-1	\$175
Tandon TM100-2	\$229
Tandon TM101-4	\$315
CDC 9409	\$239
Case and PS.	\$ 45

PC EXPANSIONS

MAYNARD Disk Controller	\$162
Sandstar Series	call
Internal 10MB Drive Systems	from \$969

QUADRAM Quad board (64K)	\$269
--------------------------	-------

AST Six Pak Plus: 64K SPC	\$269
Mega Plus: 64K & SC	\$269
I/O Plus (SC)	\$114
2nd S or P or Game	\$ 35

64K CHIPS Set of nine	\$ 55
-----------------------	-------

HAYES Smartmodem 1200B	\$435
------------------------	-------

VLM Computer Electronics
10 Park Place • Morristown, NJ 07960
(201) 267-3268 Visa, MC, Check or COD.

Smith-Corona TP-1 Daisy Wheel Printer

only \$369⁰⁰


UNBELIEVABLE!

- fully-formed characters
- serial or parallel interface
- compatible with most micro-computers
- choice of 10 or 12 CPI models

Also for your TP-1 letter quality printer — the Smith-Corona Tractor Feed

\$129⁰⁰

- Adjustable tractor widths
- For continuous forms
- Quick, easy removal



Call Collect (214) 826-6521

FIGURE-LOGIC BUSINESS EQUIPMENT, INC.
6408 Gaston Avenue / Dallas, Texas 75214

Circle 142 on Inquiry card.

7400

7400	19	74125	39
7401	22	74126	44
7402	22	74128	59
7403	22	74132	69
7404	22	74136	75
7405	23	74139	95
7406	2,35	74141	79
7407	2,35	74142	2,95
7408	26	74143	2,95
7409	23	74144	2,95
7410	22	74145	62
7411	29	74147	1,95
7412	29	74148	1,20
7413	39	74150	1,09
7414	59	74151	67
7416	29	74152	67
7417	29	74153	67
7420	22	74154	1,19
7421	35	74155	78
7422	29	74156	78
7423	29	74157	69
7425	29	74158	1,65
7426	29	74159	2,49
7427	25	74160	88
7429	45	74161	88
7430	23	74162	89
7432	29	74163	87
7437	25	74164	87
7438	29	74165	87
7439	29	74166	1,20
7440	19	74167	1,95
7441	79	74170	1,69
7442	57	74172	4,75
7443	95	74173	79
7444	95	74174	89
7445	79	74175	85
7448	79	74176	75
7447	65	74177	75
7448	79	74179	1,34
7450	19	74180	75
7451	19	74181	1,75
7453	19	74182	75
7454	19	74184	2,25
7459	25	74185	2,25
7460	23	74186	9,95
7470	29	74188	3,90
7472	29	74190	1,15
7473	34	74191	1,15
7474	34	74192	85
7475	38	74193	85
7476	34	74194	85
7479	4,60	74195	68
7480	49	74196	85
7482	95	74197	85
7483	55	74198	1,39
7485	65	74199	1,39
7486	35	74221	1,19
7489	1,75	74251	95
7490	39	74273	1,05
7491	57	74276	1,89
7492	45	74279	75
7493	45	74823	1,40
7494	69	74284	3,90
7495	65	74285	3,90
7496	69	74290	1,25
7497	2,90	74298	95
74100	2,90	74365	68
74107	32	74366	68
74109	37	74367	68
74116	1,95	74368	68
74121	29	74390	1,45
74122	39	74393	1,90
74123	59	74490	1,90

74LS00

74LS00	26	74LS162	1,05
74LS01	28	74LS163	1,05
74LS02	28	74LS164	1,19
74LS03	28	74LS165	89
74LS04	35	74LS166	2,48
74LS05	28	74LS168	1,15
74LS06	28	74LS169	1,15
74LS08	35	74LS170	1,99
74LS10	28	74LS173	89
74LS11	39	74LS174	89
74LS12	33	74LS175	89
74LS13	47	74LS181	2,20
74LS14	95	74LS190	1,15
74LS15	33	74LS191	1,15
74LS20	26	74LS192	98
74LS21	33	74LS190	98
74LS22	33	74LS194	1,15
74LS26	33	74LS195	95
74LS27	33	74LS196	89
74LS28	33	74LS197	89
74LS30	26	74LS221	1,15
74LS32	33	74LS240	1,69
74LS33	55	74LS242	1,69
74LS37	45	74LS243	1,69
74LS38	39	74LS244	1,49
74LS40	26	74LS245	2,20
74LS42	79	74LS247	1,10
74LS47	79	74LS248	1,10
74LS48	95	74LS249	1,19
74LS51	26	74LS251	1,40
74LS54	29	74LS253	1,40
74LS55	29	74LS257	85
74LS73	45	74LS258	98
74LS74	1,42	74LS259	2,95
74LS75	59	74LS260	65
74LS76	55	74LS261	2,49
74LS78	45	74LS266	59
74LS83A	79	74LS273	1,75
74LS85	1,19	74LS275	4,40
74LS86	45	74LS279	59
74LS90	57	74LS283	99
74LS92	75	74LS290	99
74LS93	75	74LS293	99
74LS96	88	74LS295	1,10
74LS96	98	74LS298	1,19
74LS107	45	74LS324	1,75
74LS109	45	74LS347	1,95
74LS113	43	74LS348	1,95
74LS114	43	74LS352	1,19
74LS122	55	74LS353	1,19
74LS123	1,19	74LS363	1,49
74LS124	1,35	74LS366	69
74LS125	89	74LS366	69
74LS126	52	74LS367	69
74LS132	79	74LS368	69
74LS136	49	74LS373	1,89
74LS138	85	74LS374	1,89
74LS139	85	74LS375	69
74LS145	1,25	74LS377	1,95
74LS148	1,19	74LS385	1,95
74LS151	79	74LS386	65
74LS153	79	74LS390	1,95
74LS154	1,70	74LS393	1,95
74LS155	1,18	74LS395	1,70
74LS156	99	74LS399	2,35
74LS157	85	74LS424	2,95
74LS158	75	74LS568	1,75
74LS160	1,05	74LS670	2,29
74LS161	1,15	74LS378	1,95
74LS133	65	74LS379	1,95
74LS241	1,69	74LS381	2,95
74LS280	2,90	74LS640	2,95
74LS299	2,00	74LS645	2,95
74LS339	1,95	74LS690	1,50

Tel: 1-(800)-821-3628

74S00

74S00	43
74S02	39
74S03	45
74S04	52
74S05	52
74S08	49
74S09	49
74S10	42
74S11	42
74S15	42
74S20	42
74S22	42
74S30	42
74S32	49
74S38	1,19
74S40	49
74S51	42
74S64	46
74S65	46
74S74	69
74S86	72
74S112	72
74S113	72
74S114	72
74S124	3,69
74S133	54
74S134	66
74S135	1,15
74S136	1,69
74S138	1,29
74S139	1,29
74S140	73
74S151	1,29
74S153	1,29
74S157	1,29
74S158	1,29
74S160	2,79
74S174	1,49
74S175	1,49
74S188	2,69
74S194	1,89
74S195	1,89
74S196	1,89
74S240	2,75
74S241	2,75
74S242	2,99
74S243	2,99
74S244	2,99
74S251	1,35
74S253	1,35
74S257	1,29
74S258	1,29
74S260	75
74S280	2,79
74S287	2,99
74S288	2,55
74S373	3,10
74S374	3,10
74S387	2,75
74S471	7,95
74S472	7,95
74S473	7,95
74S474	9,95
74S475	9,95
74S570	5,75
74S571	5,75
74S572	8,95
74S573	8,95
74S940	2,90
74S941	2,90
74S132	2,15
74S161	2,95
74S163	3,15
74S181	2,15
74S189	2,95
74S225	7,75
74S283	4,15
74S289	3,95

LINEAR

LM301CN	.35
LM304H	1.98
LM305H	1.89
LM306H	3.25
LM307CN	.29
LM308CN	.98
LM309K	1.49
LM310CN	1.25
LM311D/CN	.89
LM312H	1.75
LM317T	1.70
LM318CN	1.49
LM319N/H	1.25
LM320K-XX	1.35
LM320T-XX	1.39
LM320H-XX	1.25
LM323K	4.95
LM324N	.95
LM337K	5.95
LM338K	6.95
LM339N	.95
LM340K-XX	1.75
LM340T-XX	1.25
LM340H-XX	1.25
LM344H	1.95
LM348N	1.20
LM350K	5.60
LM358CN	.98
LM360N	1.49
LM372N	1.95
LM376N	3.75
LM377N	2.75
LM380CN/N	1.25
LM381N	1.79
LM383T	1.95
LM386N	1.25
LM387N	1.40

16 RAM CARD

Compatible with:
DOS 3.3, CP/M,
Visicalc, PASCAL
\$39.95
1 YR. WARRANTY

MULTIFUNCTION BOARD WITH MEMORY, I/O CLOCK

FOR IBM P/C
CALL FOR LOWEST PRICE

SPEEDY EPROM PROGRAMMER FOR APPLE II PROGRAMMING

2716, 2732, 2764, 27128,
2532, 2564

IN 30 SECONDS **\$99.00**

Apple II/IIe Compatible **\$175.00** Disk Drive

CONTROLLER CARD **\$44.95**

IN-LINE
PRINTER BUFFER
FOR ANY COMPUTER
ANY PRINTER
*64K Byte
*Parallel to Parallel
*Parallel to Serial
*Serial to Parallel
*Serial to Serial

Model BF64S '225.00
For single computer
single printer

Model BF64M '395.00
For multi-computer
single printer
Allow up to four
computers

Share one printer

LOGIC PROBE
WITH MEMORY
FUNCTION
\$22.95

CRYSTALS

32 758kHz	1.75
1.0mhz	3.95
1.8432	3.95
20	2.95
2 097152	2.95
24576	2.95
32768	2.95
3579535	2.95
40	2.95
50	2.95
5 0688	2.95
5 185	2.95
5 7143	2.95
60	2.95
6 144	2.95
6 5536	2.95
80	2.95
100	2.95
10 738635	2.95
1200	2.95
14 31818	2.95
150	2.95
160	2.95
17 430	2.95
180	2.95
18 432	2.95
200	2.95
22 1184	2.95
320	2.95

SUPER COOLING FANS FOR APPLE WITH SURG

\$39.50

IBM MEMORY EXPANSION KIT

IBM 64K **\$52.95**
(9Pcs 64K RAM)

High Quality Diskettes

5 1/4" SS/SD 15/Box
5 1/4" SS/DD 17/Box
5 1/4" DS/DD 27/Box

80 Column Dot Matrix Printer

CP-80 by C.T.I.
80 cps parallel interface
graphics printing compatible
with EPSON MX80FT

SALE PRICE **\$299.00**

TERMS: For shipping include \$2 for UPS Ground or \$3 for UPS Blue Label Air. Items over 5 pounds require additional shipping charges. **\$10 minimum order.**

DIP SWITCHES

4 Position	85
5 Position	90
6 Position	90
7 Position	90
8 Position	95

SOUND CHIPS

76477	2.95
76489	8.95
AY3-8910	9.95
AY3-8912	12.95
MC33-40	1.49

MOS PROMS

2708	3.95
2758	5.95
2716	3.95
2716-1	5.95
1MS2516	5.50
1MS2716	7.95
1MS2532	5.95
2732	4.95
2732-250	8.95
2732-200	11.95
2764	8.95
2764-250	10.95
2764-200	16.95
1MS2564	12.95
MC68764	39.95
27128	25.95

AFFORDABLE M-68000 COMPUTER SYSTEM

M68000 6.10 MHz CPU, 20K stat. RAM, 16K EPROM on board, optional two RS-232 serial ports, 16-bit parallel port, 5 timer/counters expansion bus.

M68012K 128-212K static RAM, floppy disk controller & hard disk interface

M6801E Enclosure with power supply fan, 11 or 4 slot cage

M6801AS2M 68000 Macro Cross Assembler for CP/M80, IBM PC, TRS-80 and Apple II computers

UPS shipping & handling
COD orders add
Foreign orders add
California residents add 6.5% tax

EMS Educational Microcomputer Systems
P.O. Box 16115 • Irvine, CA 92713

Circle 125 on inquiry card.

S-100 EPROM PROGRAMMER EPROM-32

- High quality S-100 board meets or exceeds IEEE-696.
- Programs 1K through 32K (byte) EPROMs.
- Textual zero-insertion-force programming socket.
- EPROM is programmed through I/O ports and can be verified through I/O ports or located in memory space for verification.
- Programming voltage generated on-board.
- Personality Modules simplify adaptation of board to different EPROM types:

PM-1 - 2508, 2758	PM-3 - 2732, 2732A	PM-6 - 68764
PM-1 - 2516, 2716	PM-4 - 2564	PM-8 - 27128
PM-2 - 2532	PM-5 - 2764	

- CP/M-compatible control software. Includes commands for programming, verification, disk I/O and editing.

\$269.95*
(A & T)

MicroDynamics Corporation
6363 Poplar Ave • Suite 105
Memphis, TN 38119

ORDER DESK:
1-800-237-8400 ext 440
Technical Inquiries:
1-901-682-4054

*Price includes EPROM-32, documentation and two Personality Modules (specify). Additional Modules - \$7.95. Control software on 8" SSSD diskette - \$9.95, UPS ground - \$2.00, UPS air - \$4.00, COD - \$1.50, foreign add \$15.00, TN add 6% sales tax. VISA and MASTERCARD welcome.

Circle 245 on inquiry card.

ANALOG ↔ DIGITAL DIGITAL ↔ ANALOG CONVERSION MODULES

SOFTWARE GAIN CONTROL

high accuracy - programmable gain instrumentation amplifier - custom board test \$100

conversion time - mixable high and low inputs - gain from 1 to 1024 - 12-bit sample and hold amplifier

8 channel differential - 16 channel - analog to digital high accuracy - programmable gain instrumentation amplifier - custom board test \$100

2 to 15 kHz conversion time - mixable high and low inputs - gain from 1 to 1024 - 12-bit sample and hold amplifier

8 channel differential - 16 channel - analog to digital high accuracy - programmable gain instrumentation amplifier - custom board test \$100

For additional details about the AD-100-4 and other fine California Data Corporation 100% individually tested, high reliability products, circle the reader service card number below or for faster response write or call us.

CALIFORNIA DATA CORPORATION
3475 Old Conejo Road, Suite C-10
Newbury Park, CA 91320
(805) 498-3651

Circle 45 on inquiry card.

PRINTER RIBBONS

	PRICE	PER RIBBON	PER DOZEN
Anadex 9500	13.50	13.50	147.00
Apple DMP	5.95	5.95	68.40
Centronics 150/152	7.00	7.00	81.00
C. Itoh Prowriter	5.95	5.95	68.40
Commodore Pet 8023P	7.00	7.00	81.00
Epson MX-FX 70/80	5.25	5.25	60.00
Epson MX-FX 100	9.95	9.95	108.00
Gemini - 10	2.50	2.50	27.00
NEC 3500 M/S Single Sided	6.95	6.95	80.40
NEC 3500 Nylon	9.75	9.75	114.00
NEC PC 8023A	5.95	5.95	68.40
Okidata 80/82/83/92	2.50	2.50	27.00
Okidata - 84	5.00	5.00	57.00
Radio Shack D.W. II M/S	5.00	5.00	57.00
Radio Shack D.W. II Nylon	6.75	6.75	78.00
Radio Shack DMP - 2103	7.50	7.50	87.00
Radio Shack LP I (I III IV & V	6.00	6.00	69.00
Silver Reed EX55 Single Strike	5.00	5.00	57.00
Toshiba - 1350	7.50	7.50	87.00
Wang Bearclaw	9.00	9.00	105.00
Xerox 610/620 M/S	7.75	7.75	84.00

Add \$2.00 Shipping
To Order Call (313) 569-3218 or
Write for our Catalog
DWIGHT COMPANY, INC.
15565 Northland Drive - West Tower
Southfield, Michigan 48075-6496

Circle 117 on inquiry card.

Radio Shack TRS-80™ Computers

At Guaranteed Savings

from
Pan American Electronics

1117 Conway Ave.
Dept. B
Mission, Texas 78572
Ph. 512/581-2766

Telex 767339
TO ORDER
CALL TOLL FREE
800-531-7466

Full Line Computers, Printers & Peripherals

Circle 286 on inquiry card.

HOFACKER

Books • Software • Hardware Add-Ons • for your ATARI 800XL/800 XL, Commodore 64, VIC-20, Sinclair, Texas, Apple II, Osborne-OSI

BOOKS FOR ATARI 400/800XL/800XL 1200XL

ATARI BASIC - Learning by Using
An excellent book for the beginner. Many short programs and learning exercises all important features of the ATARI computer are described (screen drawings, unusual sounds, keys, paddles, joystick, specialized screen routines, graphics, sound applications, peeks, pokes and special stuff).
Order-No. 104 \$7.95
Small Business Software for all ATARI computers
SUPERMAIL (500 addresses on 1 disk) Completely written in FORTH. Comes on autobook disk. No cartridge, no DOS, no FORTH language required.
Order-No. 7312 \$49.00
SUPERINVENTORY (1000 items) disk Completely written in FORTH. Same as above. (Disk only).
Order-No. 7320 \$49.00
BUSIPACK.1 (written in FORTH). Complete order entry, inventory, mailing and invoicing. (Disk only).
Order-No. 7313 \$99.00
ATCASM Convert your ATARI 800 into a powerful cash register. (Disk only).
Order-No. 7301 \$49.95

INVOICING program in BASIC
Order-No. 7261 (CI) \$29.95
Order-No. 7200 (DI) \$39.95

Mailing List in BASIC
Order-No. 7211 (CI) \$19.95
Order-No. 7213 (DI) \$24.95

Inventory control in BASIC
Order-No. 7214 (CI) \$19.95
Order-No. 7215 (DI) \$24.95

Dealer and Distributor inquiries are invited.
ECCOMP PUBLISHING, INC.
53 Resnick Lane
Pomona, CA 91768
Phone: (714) 623-8314, Telex: 29 81 51

SOFTWARE IN MACHINE LANGUAGE FOR ATARI

ATMONA.2
Machine language monitor. A MUST for those who want to get into 6502 machine language.
Order-No. 7022 (CI) \$19.95

ATMONA.2
This is a tracer (debugger) that lets you explore the ATARI RAM/RDM area. You can stop at (previously selected) address, operate, or operate. Also very valuable in understanding the microprocessor. At each stop, all registers of the CPU may be changed. Includes Atmona-1.
Order-No. 7069 cassette \$49.95
Order-No. 7050 disk \$56.00

ATMAS
Macro-Assembler for ATARI 800/800XL. One of the most powerful editors/asmblers on the market. Versatile editor with scrolling. Up to 128 of source code. Very fast. Translates 5k source code in about 5 seconds. Source code can be saved on disk or cassette (inc. Atmona.1).
Order-No. 7099 disk \$99.00
Order-No. 7095 cartridge \$178.00

ATMAS APPLICATION DISK
All programs and machine language routines from book no. 169 on disk.
Order-No. 7311 \$20.00

ATAS
Same as ATMAS but without macro-assembly (22k and 48k RAM).
Order-No. 7086 \$49.95

PRINTER INTERFACES
Construction prices and software. No 850 needed!
For 8020 printers:
Order-No. 7311 \$10.94
For 8023, 300 Super, SV
Order-No. 7291 \$19.95

ATARI is a registered trademark of ATARI, Inc.
Payable in: Diners, VISA, MC, CA, MasterCard, and B.N. with the Order USA and B.N. with shipping.
In Europe contact: telex RS 22888
In Germany contact: telex 826873

Circle 126 on inquiry card.

maxell®

Floppy Discs

CALL NOW - TOLL FREE
1-800-328-DISC

Dealer inquiries invited. C.O.D.'s and charge cards accepted.

All orders shipped from stock, within 24 hours. Call toll FREE.

North Hills Corporation
3564 Rolling View Dr.
White Bear Lake, MN 55110
1-800-328-DISC
MN Call Collect 1-612-770-0485

PROGRAMMABLE COMMUNICATIONS TRANSLATOR

THE PCT-100 IS A CONFIGURABLE IN-LINE RS-232 PROTOCOL AND DATA TRANSLATOR. THE PCT-100 CAN PROVIDE:

- TERMINAL OR PRINTER EMULATION
- DEC OR IBM SYSTEM COMPATIBILITY
- MACRO-FUNCTION KEYS
- "TYPE-AHEAD" AND DATA BUFFERING
- BAUD RATE CONVERSION
- HANDSHAKE PROTOCOL TRANSLATION (E.G. CTS/RTS, XON/XOFF)

THE PCT-100 IS CONFIGURED USING A BUILT-IN COMMUNICATIONS TRANSLATION LANGUAGE. PROGRAMS CAN BE EASILY ENTERED & EDITED FROM ANY ASCII DEVICE.

PCT-100-PCB (PCB ONLY)	\$ 289
PCT-100-ASM (PCB w/ CASE) . . .	\$ 339
PCT-512-MOD (POWER SUPPLY) . . .	\$ 59

M S I

METHOD SYSTEMS INCORPORATED
19751 SOUTH LAKESHORE BOULEVARD
EUCLID, OHIO 44119
(216) 531-0404

Circle 233 on inquiry card.

Verbatim flexible disks

Call Free (800) 235-4137 for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.


PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA 93401. In Cal. call
(800) 592-5935 or
(805) 543-1037.

Circle 284 on inquiry card.

MICRO SALES

★ MADE IN USA ★ BUY FACTORY DIRECT ★

DISK DRIVE SPECIALS We've Lowered Our Prices

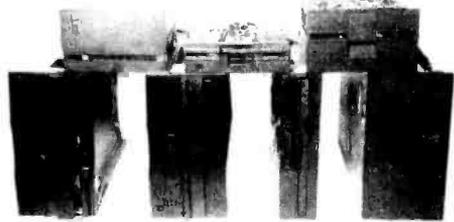

Offering A Complete Selection And... THE LOWEST PRICES IN BYTE!

8" Shugart 801R SS/DD — The Industry Standard	\$355.00
8" Shugart 851R Double Sided 1.2 Meg — The Old Reliable	457.00
8" Qume Datatrak-8 DS/DD "THE BEST" of the floppys	479.00
8" Mitsubishi Full Height Double Sided 1 Year Parts + Labor	445.00
8" Mitsubishi Thinline DS/DD 1 Year P+L Direct Drive	465.00
8" Tandon 848-1 Slimline SS/DD 600K BYTES D.C. Motor	355.00
8" Tandon 848-2 Slimline Double Sided 1.2 Meg. D.C. Motor	475.00
8" Siemens 100-8 SS/DD ON SALE NOW!!! But How Long?	169.00
5 1/4" Mitsubishi Full height 96T.P.I. DS/DD 750K M4852	295.00
5 1/4" Mitsubishi Slimline 96T.P.I. DS/DD 750K M4853	315.00
5 1/4" Qume 142 Slimline DS/DD	375.00
5 1/4" Tandon TM-100-2 I.B.M. PC Add-on! DS/DD 48 T.P.I.	259.00
5 1/4" Tandon TM-100-4 DS/DD 96T.P.I. 750K	369.00

★ WINCHESTER HARD DISKS ★

SPECIALS

5 1/4" Miniscribe Hard Disk

*5 Meg \$589 *10 Meg \$749

8" Quantum 20" Megabyte Winchester — Two Platters	1895.00
8" Quantum 40" Meg Four Platter — Most Popular	2395.00
8" Quantum 85" Megabyte — Special Order on this Monster!	2895.00
8" IOMEGA 10- Meg* Removable Disk Drive with SCSI Controlled Interface Board. Runs up to four drives	1895.00
8" IOMEGA 10 Meg* Cartridge Drive — No Control Interface	895.00
8" 10 Meg* Removable Cartridge Media #M-2000-51	50.00

★LAST MINUTE SPECIAL!!! Buy any Winchester hard disk drive above and get a Western Digital hard disk interface board AT COST! ONLY 295.00!

*Total storage space after formatting.



California
Computer
Systems

YEAR END SALE SAVE \$61.00

New CCS2066 64K Dynamic Memory

• 65,536 bytes of Dynamic RAM • Z-80/8080, S-100 compatible • Port bank/16 levels of 64K = system memory of 1024K • Independently addressed in 16K blocks • 200ns access and data lines • Hysteresis drivers and receivers for high noise immunity and minimal bus loading effects. Part #B-5000-50 ONLY \$299.00

YEAR END SYSTEM SALE

- 2300A Mainframe
- 2066 64K Memory
- 2810 Z-80A CPU
- All AC/DC & Data Cables
- 2422 Disk Controller
- CP/M Operating System
- 2719 2-Port RS-232 Serial
- 8-bit Parallel I/O

A powerful package at ONLY \$1495.00

CCS CALSTAR SYSTEM

Now available and with FREE SOFTWARE: • Perfect Writer • Perfect Calc • Perfect Speller and • Perfect Filer.

This powerful Single box system includes: • Z-80 with 128K of RAM expandable to 256K • A networking interface • SASI hard disk interface to add-on a Winchester • CP/M 3.0 operating system • One parallel and two serial ports • Reads and writes the IBM 3740 format (compatible with XOR) AND • Two double-sided double-density 8" floppy drives for 2.4 Megabytes of formatted storage AND • Will run two or more 8" or 5 1/4" floppys. Part #S-1500-05

ON SALE NOW

Regular ~~\$2295.00~~ — Our Price Only \$2695.00



SPECIAL ONLY
\$450.00

Limit 5 per customer

XOR-500 DAISYWHEEL PRINTER

A letter-quality daisy-wheel printer at an unheard of wholesale price. This 20 cps workhorse features a daisy-wheel compatible with QUME's products. Full 132 column format with 256 character buffer, serial AND parallel interfacing (standard), 8 level automatic impression control — original and 3 copies. The \$450.00 price is not a misprint. High reliability and quality performance sums-up the XOR-500 Daisy-wheel Printer.

XOR-500 TERMINAL



SLASHED!
Cut another \$50
SALE!
Only \$445.00

That's right! A 700.00 terminal for \$445.00, a special deal for our customers.

Features: ★ Screen tilt ★ Detached keyboard ★ 9 cursor control keys ★ 5 function keys ★ 7 screen attributes ★ 25th status line ★ 50-19.2 Kbaud ★ Column plus field tab ★ AND MORE
★ All these features with a full 6 month warranty makes this terminal the best buy on the market.

FANTASTIC SAVINGS!



\$395
HELD OVER

ON THE ORIGINAL S-100 MOD

For engineers, hobbyists, and anyone who wants to save a bundle, the S1-MOD is the answer. Full regulated power to run up to four floppy disks coupled with a mammoth S-100 power supply and 12 slot bus, makes the S1-MOD an exceptional computer base. Single board design means no wiring from the power supply to the motherboard. This eliminates all ground loop problems associated with other brands of mainframes who are forced to use termination. The S1-MOD is being offered this month with a matching S-100-12 cabinet. Fan cooled, fused, with reset and keylock the cabinet is also enamel painted and silk screened. Four A.C. outlets are provided for peripheral hookup and plenty of cutouts available for RS-232, centronics + others. Our regular \$225.00 price for the S1-MOD and 250.00 price for our 12 slot cabinet is being SLASHED!

SPECIFICATIONS:

- Regulated Unregulated
- +5V @ 5A +8V @ 30A
- +24V @ 3A +16V @ 6A
- 5V @ 1A -16V @ 6A



SAVE OVER \$100

Don't settle for those cheap 6 slot imitations you've seen elsewhere in this mag. OWN THE BEST! XOR S-1 MOD and S-100-12 Cabinet \$395.00!

DUAL DRIVE SUBSYSTEMS



HORIZONTAL OR VERTICAL

Fully Assembled and Tested Units

ONE YEAR P+L WARRANTY

On Shugart and Mitsubishi Subsystems

w/2 Mitsubishi DS/DD Assem. + Tested 2.4 Meg	\$1170.00
w/2 Shugart 801R SS/DD Assem. + Tested 1.2 Meg	975.00
w/2 Shugart 851R DS/DD Assem. + Tested 2.4 Meg	1225.00
w/2 Siemens 120-8 SS/DD Assem. + Tested 1.2 Meg	675.00
w/2 Qume DT-8 DS/DD Assem. + Tested 2.4 Meg	1250.00
Cabinet Assem. & Tested w/Power Supply and Accs.	235.00
Cabinet Top and Bottom with Mounting Hardware	Only 69.50
All cabinets A & T and subsystems include all AC/DC wiring and 50 pin data cable except the horizontal model which includes the internal 50 pin cable and requires an external 50 pin cable part #C-6000-01	\$ 25.00

5 1/4" Subsystems — Cabinet — Power Supply — Drives — Cables	
w/2 48TPI SS/DD includes all cables Assem. + Tested	495.00
w/2 48TPI DS/DD includes all cables Assem. + Tested	595.00
w/2 96TPI DS/DD includes all cables Assem. + Tested	695.00

ORDER TOLL FREE ☆ EAST ☆ 800-435-9357 ☆ WEST ☆ 800-854-8174

DO YOU NEED AN IBM-PC 16-BIT COMPUTER TO PROCESS YOUR DATA?

COMPLETE SYSTEM

Model XPC with

MS/DOS features:

- ★MS/DOS standard, CP/M-86 operating system available at only \$65.00
- ★64K memory
- ★Green CRT
- ★2 serial, one parallel port
- ★2 floppy drives for a total of 750K storage
- ★Optional EPROM to 32K
- ★Optional Hard Disk add-on
- ★Optional floppy add-on
- ★Optional 8087 math co-processor
- ★Multi-function keyboard (this is one part of the system that's NOT like IBM's, it's better)
- ★Fully expandable memory On-Board to 256K PLUS 5 expansion slots (all IBM compatible)
- ★All available through U.S. Micro Sales and YES it's all fully IBM compatible

ONLY \$1895



THE XPC

A New Model PC by XOR

So close to the IBM PC you'll have to look twice. Due to the thousands of requests we've been receiving by phone, mail and visitors, we've responded by getting XOR to design this fantastic 16-bit IBM duplicate. We're offering a ONE YEAR warranty (vs. 90 days). Need more information? Order the manual for \$5.00 (plus shipping). This low price includes drives, controllers, monitor, power supply, etc. About the keyboard... If you've ever seen or used the IBM PC keyboard, you'll understand why we HAD to come up with something better — and we did! As a matter of fact, for those of you who own an IBM PC — it's time to take a hammer to that keyboard and call Toll Free to pick-up one of our compatible replacement keyboards at only \$239.00

BASIC COMPUTER

ONLY

\$895

The Features:

- ★64K RAM memory
- ★Expandable to 256K
- ★Full monitor PROM
- ★IBM PC compatibility
- ★Multi-function keyboard and cable
- ★Runs MS/DOS and CP/M-86 (not included) ★Power Supply +5V @ 10 Amp, +12V @ 6 Amp, -12V @ 1 Amp
- ★EPROM expandable on-board to 32K ★5 expansion slots with room for 4 more
- INCLUDES: ★8 level interrupt ★2 serial and one parallel port ★3 timer channels ★4 DMA channels ★Reset port ★Speaker port ★and MORE!



HOOKING IN

1984 EDITION—THE UNDERGROUND
COMPUTER BULLETIN BOARD WORKBOOK AND GUIDE

FIRST TIME BETWEEN TWO COVERS

No matter what type of computer you own, this book will get you on-line TODAY!
Complete information on computer bulletin board systems including:

- What they are (and what's happening).
- Kinds of information available.
- Public domain systems.
- Free software (and how to get yours).
- Blitz course in telecomputing.
- Buyer's guide to modems.

Over 400 verified listings. Periodically Updated.
On-line Logbook. Electronic Mail Address Book.
\$14.95 P.P. Make checks payable to:

Computer Food Press
Div. of Coltrane & Beach
31754 Foxfield Dr.
Westlake Village, CA 91361

Voice Orders—(213) 838-7716 Modem Orders—(213) 559-9033

HOOK IN NOW!!
SPECIAL OFFICE
When ordering, refer to this AD and
receive your FIRST UPDATE FREE!

Circle 73 on inquiry card.

ScreenWiz
FULL SCREEN CONTROL

An assembler subprogram you call from your programs to handle screen input/output as IBM mainframes do.

Define full screen format specifications outside your program, and call ScreenWiz to retrieve the formats, and do all the I/O for you.

- One command input/displays a full screen
- Use all of your CRT video attributes
- Define up to 24 function keys
- Define templates for display and input.
- Validate input while keying. Insert and delete characters to correct fields
- Tab fields forward and backward
- Draw figures using vertical field displays
- Save memory as only one format needs to be in memory at one time. Make the constants to display virtual, and they don't use any memory at all.
- Build help screens. Call them with one function key then return to where you were.

Available now for most popular —

BASIC	IBM PC	\$99
COBOL	CP/M-80	\$99
FORTRAN	Shipping	\$ 6
PASCAL	Source code included	

INTERDATA SYSTEMS INC.

15 Toronto St. Suite 700
Toronto, Ont. Canada M5C 2E7 Visa, M/C
(416) 366-2136 (call collect to order) Am. Express

Circle 185 on inquiry card.

IBM PC COMPATIBLE

Slimline Disk Drive \$215.00 ea.
(Shugart SA 455. DS/DD 320KB)

Slimline Hard Disk \$495.00 ea.
(Shugart SA 706 5MB)

Computer Case Call
Keyboard Call
Power Supply Call
Disk Controller Card Call
Color Graphic/Monochrome/Printer
Interface Card Call
Compatible Bare PCB Call
3M Diskette SS/DD \$20/box
3M Diskette DS/DD \$28/box

Dealer Inquiries Welcome

ELECTRADE CO. (408) 946-2541
780 Trimble Rd., Suite 605
San Jose, CA 95131

Circle 127 on inquiry card.

MEMORY FOR IBM PC-XT



64K — \$159.95
320K — \$319.95
384K — \$359.95
512K — \$439.95

- Uses 64K Drams
- Gold Fingers — Solder Mask
- Addressing On Any 64K Block
- No Parity

Add 6% sales tax in California. Add \$2.00 for shipping. Add \$2.00 for C.O.D.
Send check or money order to:

In Sync
5738 Commerce Blvd.
Rohnert Park, CA 94928
(707) 585-2793

Circle 180 on inquiry card.

Printer Cables

— Parallel —

ALTOS \$35.00*
ATTACHE \$35.00*
ATARI \$35.00*
CENTRONICS \$35.00*
COLUMBIA \$35.00*
EAGLE \$35.00*
IBM-PC \$35.00*
KAYPRO \$35.00*
OSBORNE \$35.00*
SANYO \$35.00*
TI-99 \$35.00*

— SERIAL —

ATTACHE COM.
RS232 (DB25P)
(9 conductor 1-8, 20)

CABLES UNLIMITED
4030 Wabaska Dr.
San Diego, CA 92107
619-222-3366

*CA Residents Add 6% Sales Tax (\$2.14)

Circle 391 on inquiry card.

IBM PC, APPLE, etc. . .

SHARING AND SWITCHING PROBLEMS?
GILTRONIX HAS THE SOLUTION!



Any CPU

Printer 1 (Dot Matrix) Printer 2 (Letter Quality) Modem or Other Peripheral

MANUAL UNITS: 2-6 Ports Selecto-Switch OR AUTOMATIC UNITS: 2-7 Ports Auto-Switch

Serial (RS 232)/Parallel (Centronics)


LOW COST ADD-ONS FROM THE MAIN MANUFACTURER

Giltronix
3780 Fabian Way, Palo Alto, CA 94303
(415) 493-1300

Circle 152 on inquiry card.

Scotch Diskettes

Rely on Scotch® diskettes to keep your valuable data safe. Dependable Scotch diskettes are tested and guaranteed error-free. The low abrasivity saves your read/write heads. They're compatible with most diskette drives.



(800)235-4137

DEALER INQUIRIES INVITED

PACIFIC EXCHANGES
180 Franklin Blvd.
San Luis Obispo, CA 93401
In Cal. call: (805) 942-5915
(805) 941-1117

Circle 284 on inquiry card.

The Statistician

CPM IBM-PC
TRS-DOS XENIX

- Multiple Regression
- Stepwise
- Ridge
- All Subsets
- Backward Elimination
- Time Series Analysis
- Descriptive Statistics
- Transformations
- Survey Research
- Nonparametrics
- XY Plots
- ANOVA
- Random Samples
- Data Base
- Search & sort
- Hypothesis tests

Please call TOLL FREE
1-800-334-0854 (Ext. 814)

Q for more information or write:
Quant Systems
Box 628
Charleston, SC 29402
VISA/M/C Accepted

Circle 308 on inquiry card.

Best Prices On TRS-80 Computers

Our 6th year of discounts
Ed or Joe McManus
Fgt. Prepaid. Save Tax.
Toll Free 800-231-3680

Marymac Industries, Inc.
22511 Katy Fwy., Katy
(Houston) Tx 77450
1-713-392-0747
Telex 774132

See us in the Wall Street Journal every Tues., Wed., Thurs.

Circle 231 on inquiry card.

MICROMAIL™

THE PC SYSTEM SPECIALIST

PRICES AND AVAILABILITY SUBJECT TO CHANGE WITHOUT NOTICE

COMPLETE SYSTEM VERY SPECIAL PRICE

64K, Two Disk Drives, Floppy Disk Controller, Video Card and High Res Monitor

256K RAM, 360KB Disk Drive, FDC, Video Monitor & Adaptor 10MB Hard Disk Sub-System.



PERSONAL
COMPUTER

Special
of the
Month!

IBM PC® COMPLETE LINE

\$2590

\$3990

APPRICOT An IBM PC Compatible Computer W/Two Drives & Monitor **W/\$1250** worth of Software—Complete System. **\$2999**

WE WOULD LIKE TO START THE NEW YEAR BY INTRODUCING THE TAVA PC!

A Superior quality IBM PC Compatible Personal Computer. Runs DOS 1.1, 2.0, 2.1, CP/M86® UCSD p-System®, Runs Lotus 1-2-3® Multiplan®, Word Star® PFS® dBASEII® and many more! Hardware includes 128K CPU, Floppy Controller, Two DS/DD Disk Drives, Video Monitor, Video Adaptor, Parallel & Serial Ports.



ALL FOR \$1995
Suggested List
\$2395

SLIMLINE DISK DRIVE FOR IBM PC

DS/DD 320KB By TAVA CORP. **\$190**

ADD-ON Disk Drive for IBM PCjr® **CALL**

HARD DISKS FOR IBM PC®



10 MB Hard Disk Sub-System by TAVA CORP. includes Software, Cables, etc. Internal. **\$1295**

MEMORY BOARDS

CONOGRAPHIC

High Res. Color Graphics Card **\$995**

QUADRAM

Quad Card. Fully pop. 256K **\$450**

QUADLINK **CALL**

AST SIXPAK 384K **CALL**

HERCULES Graphics Card **\$490**

APPLE IIe

Computer System, Controller, Two Disk Drives, Monitor **\$1590**

DISK DRIVE FOR APPLE

Slimline, or Standard **\$190**

PRINTERS

DAISYWRITER 2000 **CALL**

OKIDATA

82A **\$440** 84A **\$975**

83A **\$690** 92A **\$575**

93A **\$970**

BROTHER

HR-1 **\$750**

DX-15 **\$450**

MONITORS

AMDEK

300A **\$190.00** I **\$340.00**

300G **\$160.00** II **\$690.00**

310A **\$190.00** III **\$390.00**

IV **\$1190.00**

PRINCETON GRAPHICS SYSTEMS

Hi-Res Color **\$490**

ROMAR II Apple Compatible Computer W/Z-Card Controller, Two Disk Drives and a Monitor for **\$1195**

NEC TANDON TAVA IBM APPLE QCS MAYNARD
LNW ROMAR PRODUCTS AVAILABLE

MICROMAIL

631 E. First St., Tustin, CA 92680

(714) 838-9100

*IBM PC is a registered trademark of IBM Corp.
*dBASE II is a registered trademark of ASHTON-TATE, Inc.
LOTUS 1-2-3 is a registered trademark of Lotus Development
Wordstar, Spellstar, Mailmerge are registered trademarks of Micropro International
Visicalc is a registered trademark of Visicorp

Multiplan is a registered trademark of Microsoft Corp.
PFS is a registered trademark of Software Publishing Co.
CP/M86 is a registered trademark of Digital Research, Inc.
MS-DOS is a registered trademark of Microsoft Corp.
UCSDp is a registered trademark of Softech Microsystems

POWER PROTECTION FOR YOUR SYSTEM

The Datasaver™ AC Power Backup fits most desktop and portable microcomputer systems. Call Cuesta Systems, Inc. at (805) 541-4160 for product information and application literature.

VISA/Mastercard orders.

INSTANT POWER

Circle 450 on inquiry card.

DISKETTES

3M Scotch BRAND

AT SUPER LOW PRICES WE WILL SHIP YOUR ORDER WITHIN 24 HOURS AND WE PAY THE SHIPPING CHARGES

COD ACCEPTED
DEALER INQUIRIES INVITED

CALL TOLL FREE 800 922-8193

IN CALIFORNIA
800 468-1068

TAYCO
Tayco Business Forms
Computer Supplies
Post Office Box 605
Newbury Park, CA 91320

Circle 349 on Inquiry card.

ZENITH/Heath Users

Double Your 5 1/4" disk storage capacity without adding a drive.

Get twice as much from your H88 or H89 microcomputer. Our FDC-880H floppy disk controller, in conjunction with your 5 1/4" drives, for example, expands memory capacity from 256 bytes to 512 bytes per sector.

And it handles single and double-sided, single and double-density, 8" and 5 1/4" drives — simultaneously.

C.D.R. Systems Inc.
Controlled Data Recording Systems Inc.
7210 Clairmont Mesa Blvd., San Diego, CA 92111
(619) 560-1272

Circle 47 on inquiry card.

MagiKey★

THE FULL-FEATURED KEYBOARD EXPANDER

Redefine any key to send a string of characters. MagiKey™ does more ...

- ★ automates application software. Integrates function or cursor keys
- ★ "help" menus displayed at any time
- ★ built-in batch processing more powerful than SUBMIT or XSUB
- ★ strings can redefine keys, pause for fill-the-blanks keyboard input, or contain nested key definitions
- ★ invisible to system and software
- ★ for only 8080-8085-Z80-CP/M 2.2. no system or software modifications

\$100

8" 5SSD, Kaypro 5 1/4" - Inquire about other 5 1/4" formats check. VISA MC add 6% tax in CA

PRO microSystems
16609 Sagewood Lane
Poway, California 92064
(619) 693-1022

CP/M (tm) Digital Research

Circle 304 on inquiry card.

The INTELLIGENT GRAPHICS TERMINAL

All of this on a single S-100 board

- Full 512 color mapping palette
- TTL/analog RGB color or 8 level grey
- 680x480 4 color and/or 340x480 16 color
- Transparencies, overlays, multiple pages
- 8086, EPROM, 128K RAM expandable on-card
- Full editing terminal/graphics firmware
- Text throughput is greater than 2000 cps
- 10 windows, individually scrollable
- Programmable terminal formats to 113x40
- 64K x 64K virtual screen graphics with clipping and scale
- Drawn/filled circle, pie, arc, polygon
- Complex fill patterns and line styles

Low introductory prices: Assembled and tested \$895. Partial kit \$295.

Available soon: Fully integrated expansion card adds speech, sound effects, serial and parallel ports, and time-of-day clock.

Advanced Graphics Engineering
P.O. Box 3403, Reston, VA 22090
(703) 435-8110

Circle 14 on inquiry card.

TDK flexible disks

Call Free (800)235-4137 for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.

PACIFIC EXCHANGES
100 Foothill Blvd
San Luis Obispo, CA
93401 (In Cal call
(805) 543-1037)

Circle 284 on inquiry card.

CONVERSE WITH YOUR COMPUTER

AT LAST! A FULL IMPLEMENTATION of the original ELIZA program is now available to run on your microcomputer!

Created at MIT in 1966, ELIZA has become the world's most celebrated artificial intelligence demonstration program. ELIZA is a non-directive psychotherapist who analyzes each statement as you type it in and then responds with her own comment or question—and her remarks are often amazingly appropriate!

Designed to run on a large mainframe, ELIZA has never before been available to personal computer users except in greatly stripped down versions lacking the sophistication which made the original program so fascinating.

Now, our new microcomputer version possessing the FULL power and range of expression of the original is being offered at the introductory price of only \$25. And if you want to find out how she does it for each other to do more, we will include the complete SOURCE PROGRAM for only \$20 additional.

Order your copy of ELIZA today and you'll never again wonder how to respond when you hear someone say "Okay, let's see what this computer of yours can actually do!"

ELIZA IS AVAILABLE IN THE FOLLOWING FORMATS:

- 5 1/4" inch disk for the 48K Apple II, II Plus, IIe or III \$25 for Protected Version—\$45 for AppleSoft Source Version
- 5 1/4" inch disk for the 64K IBM Personal Computer \$25 for Protected Version—\$45 for IBM Disk BASIC Source Version
- 5 1/4" inch disk or tape cassette for the Commodore 64 (specially which) \$25 for Protected Version—\$45 for C-64 BASIC Source Version
- Standard 8 inch single density disk for all CP/M based computers \$25 for ELIZA.COM—\$45 with Microsoft BASIC-80 Source
- 5 1/4" inch disk for most CP/M based computers (specially computer) \$25 for ELIZA.COM—\$45 with Microsoft BASIC-80 Source

Please add \$2.00 shipping and handling to all orders (California residents please add 6% sales tax)

ARTIFICIAL INTELLIGENCE RESEARCH GROUP
921 North La Jolla Avenue, Dept. B
Los Angeles, CA 90046
(213) 656-7368 (213) 654-2214
MC, VISA and checks accepted

Circle 28 on inquiry card.

APPLEWARE, INC.

The Apple Users Group Software Library Bonanza At truly affordable prices!

For the first time enjoy your Apple to its fullest capacity using specially packed disks with over 60 outstanding programs each. (not available from any other source)

Each packed disk includes an extensive variety of interesting, useful and entertaining programs, indispensable to all computerists! Each mixed category packed disk includes:

BUSINESS • EDUCATIONAL • DATA BASE • GAMES • UTILITIES • SCIENCE • MUSIC • GRAPHICS • FINANCE

Library Disks I, II and III are mixed categories. Dedicated disks are:

• GAMES • UTILITIES • GRAPHICS • INTEGER • SCIENCE & TECHNOLOGY. Each packed disk is available for only \$59.95 each.

WHY PAY MORE?

Order direct from this ad and Save up to \$150. Buy Library Disks I, II and III and get a special bonus disk FREE over 260 programs for \$179.95 + \$3 shipping. For the best value, receive all 9 disks featuring over 600 of our best programs for only \$55 each for a package price of only \$389. Postage Paid!

NEW Business • Professional • Executive Package (enabling you to bring your business to its highest level of efficiency) also available. circle Readers Service Card for our complete catalog

For Orders Only Call now
TOLL FREE: 1-800-327-8664
Florida: 1-305-987-8665

Compatible with II, II+, IIe, IIx Emul., and Franklin Ace (For 3.3 DD)

Circle 25 on Inquiry card.

Tektronix 40XX Terminal Emulation

EMU-TEK™ IS NOW AVAILABLE FOR IBM PC, XT, AND MOST COMPATIBLES

- Access powerful mainframe graphics using:
 - PLOT 10 (trademark of TEKTRONIX, Inc.)
 - DISPLA (registered trademark of ISSCO)
 - DARC (available from QUESTEL, Inc.)
 - and most similar packages and services.
- Upgrade with complete software compatibility.
- Increase versatility with options such as:
 - High resolution board support
 - Local pen-plotter support
 - Hard copy on matrix printer
 - Advanced communications program features
 - Other terminal emulations, including:
 - VT100 (trademark Digital Equipment Corp.)
 - RETRO-GRAPHICS (trademark Digital Engineering, Inc.)
- **30 DAY NO-RISK TRIAL PRIVILEGE.**

FTG DATA SYSTEMS
10801 Dale St./P.O. Box 615
Stanton, CA 90680
(714) 995-3900

FTG will soon become PC INNOVATIONS

Circle 139 on inquiry card.

FORMULA INTERNATIONAL INC.

12603 Crenshaw Blvd., Dept. B, Hawthorne, CA 90250

For information (213) 973-1921 • Orders Only (outside Calif.) (800) 672-8758



pinecom™

No Copyright Problems!

Pioneer of Low Cost Apple* Compatible Computer

Compare These Features with Our Competitors:

- Powerful Utility Program (100% Apple Compatible)
- 68-Key Upper & Lower Case Keyboard with Numeric Keypad
- 25 Pre-programmed Function Keys
- 2 Speed Auto Repeat Function
- 64K User Memory—expandable to 192K
- 5A Switching Power Supply (110/220VAC)
- All ICs Are Socketed for Easy Service
- Nation-wide Dealer Network for Convenient Technical Support

And best of all, the price Assembled and Tested is just.



**Now
with New
Improved
Keyboard
and 64K RAM**
\$499⁰⁰



pinecom™ DP-64

- Dual Processor (6502 and Z80A)
- Detached Keyboard
- 64K RAM Expandable to 192K
- 25 Function Key Keyboard
- Auto Repeat Keys w/Upper/lower Case
- 2 Slim Disk Drives (optional)
- 100% Apple II Compatible
- 40/80 Column Display (optional)
- Runs Both Apple Soft and CP/M Software



Model DP-64 Fully Assembled ... **\$650⁰⁰**




AP-II COMPUTER A&T

Apple Look Alike
48K User Memory
Supports Upper & Lower Case
100% Apple II* Compatible

\$455⁰⁰

MICRO-II COMPUTER

100% Apple Compatible • No Copyright Problems!



Model I 48K RAM **\$475⁰⁰**

\$515⁰⁰

Model II 64K RAM **\$555⁰⁰**

Model III 64K RAM w/Dual CPU . . . **\$555⁰⁰**
(6502 for Applesoft & Z80A for CP/M)

Case and Keyboard Only **\$159.95**

All above models are standard with Numeric Keypad, Function Keys, Auto Repeat Keys, Upper/lower Case Function, Fully Assembled and Tested.

AP-II MOTHERBOARD

Apple II+* Compatible
48K Memory Space
8 Expansion Slots

Bare Board **\$69.95 ea.**

Assembled & Tested **\$295.00 ea.**

PRINTER by Super-5

Parallel Interface (Centronics
Compatible) Standard
Microprocessor Electronics
80cps Bidirectional with Logic Seeking
96 Character ASCII
Adjustable Sprocket and Friction Feed

Model CP-80 . . . **\$265⁰⁰**

PERIPHERALS

Autoterm 80-Col. w/Softswitch	\$99.95
80-Column Card	99.95
80-Column for Apple IIe*	49.95
Z80 CP/M Card (no software)	99.95
16K RAM Card w/Cable	47.50
Parallel Printer Interface	85.00
Buffer for Printer Interface (16-64K)	85.00
Serial Printer Interface Card w/Adj. Baud	85.00
Disk Controller	65.00
Disk Controller DOS 3.2/3.3 Auto Select. . .	75.00
EPROM Writer Card (2716/2732/2764) . . .	75.00

3M DISKETTES SALE

Single Sided / Double Density
Soft Sector

10 for **\$24⁵⁰**

SEND ONE DOLLAR
FOR OUR DETAIL CATALOG

Shipping & Handling Charges

Under \$50.00 Over \$50.00

Purchase	10%	Purchase	5%
	15%		10%
	25%		20%

Minimum Order \$10.00/Calif. Residents
add 6.5% Sales Tax. Phone Orders Accepted
on VISA or MC ONLY. NO C.O.D.'s. Prices sub-
ject to change without notice.



STORE HOURS
MON-FRI—10-7
SAT—10-6

*Apple and Apple II are the trademark of APPLE COMPUTERS, INC.

Inside California
Outside Calif. (incl. Mexico & Canada)
Overseas
Circle 146 for Dealer Inquiries. Circle 147 for End-User inquiries.

C LANGUAGE PROGRAMMERS

c-systems C COMPILER c-window™

The complete c language source level program testing and debugging tool.

- Single step by c source line
- Set breakpoints at line numbers.
- Display and alter variables by symbol name, using c expression syntax.
- No more printf or assembler level debugging!

c-window™ is a support package for the **c-systems C COMPILER** for 8086/8088 based systems.

Contact:

c-systems Fullerton, CA 92634
P.O. Box 3253 714-637-5362

TM c-systems



APPLE COMPATIBLE

Disk Drive	\$150.00 ea.
Controller Card	\$35.00 ea.
Computer Case	\$55.00 ea.
Keyboard	\$70.00 ea.
(Numeric and Function Keys)	
Switching Power Supply	\$49.50 ea.
Joystick (Heavy Duty)	\$17.50 ea.
Slim Fan	\$25.00 ea.

Prices for dealers in quantities of 25 or more.
End Users Inquiries welcomed.

ELECTRADE CO. (408) 946-2541
780 Trimble Rd. Suite 605
San Jose, CA 95131

Circle 128 on inquiry card.

SUPER PRICE SAVER

Apple Hardware	CALL
IBM PC System	2550.
Dynax	449.
Gemini 10X	279.
Okidata 92/93	439/799.
NEC 8023	399.
NEC 3550	1850.
Amdex 300/3100	129/167.
Lotus 123	319.
Rana Elites	239.
Tandon TM100-2	239.
Slim Dr. 5 1/4" Apple/IBM	199.
Password	329.
Anchor Mark XII 300-1200	289.
Hayes 1200/1200B	469/429.
Koala Apple/IBM	78/98.
Micromodem IIe	259.
Quadram 64K	269.
Software 30% OFF	CALL

Computer Price Club

16783 Beach Blvd., Huntington Beach, CA 92647

714-841-6160
NO CLUB FEE



Circle 77 on inquiry card.

"CONTROL YOUR WORLD" WITH YOUR VIC-20

With simple circuits using low cost parts and our program supplied on cassette tape, we'll show you how to use your COMMODORE VIC-20 for:

- Digital Thermometers ■ Digital Clock
- Burglar Alarm - 2 Zone, Time Controlled
- Fire Alarm - 2 Zone, Time Controlled
- Dusk to Dawn Lighting with Photo Cell
- Furnace and Air Cond., Clock and Thermostat
- Clock Controlled Appliance Switches

Simple program variations in basic can operate lights, motors, furnaces, machines, heat pumps, radios, sound systems, test equipment, swimming pools, garden watering, and more.

Your video screen will display simultaneously:
• Two Digital Temperatures • Digital Time • Two Analog Inputs • Five Input Ports Status • Eight Output Ports Status.

GET A LOW COST EDUCATION IN COMPUTER CONTROL.
ORDER YOUR CASSETTE AND INSTRUCTION BOOK NOW!
\$39.90 PRICE INCLUDES POSTAGE.

Terms: MASTER CARD/VISA

The Continental Press, Inc., Elizabethtown, PA 17022
Toll free: 800-233-0759 Collect in PA: (717) 367-1836

Circle 89 on inquiry card.

APPLE® -PROM EPROM BURNER CARD



All menu-driven software is provided along with a complete user's manual. All commands are self-prompting, there are no personality modules required and all voltages are on-board card.

BURNS EPROMS	FEATURES
2708 2532 2732	*Auto erase verify
2716 2516 2764	*Auto burn verify
2732A 2564	*Partial burn capacity
only 149⁹⁵	*Low insertion force socket

Now Available APPLE® -PROM Console Unit!
Computer Technology Associates
New Products Division
1704 MOON, N.E.
Albuquerque, N.M. 87112
(505) 298-0942

Specifications subject to change without notice.
Apple is a registered trademark of Apple Computer, Inc.
VISA/MC/AE Accepted

Circle 79 on inquiry card.

LSI C COMPILER for 8080/8085/Z80

New version of the compiler is available now!

The object code is **COMPACT** and is **FASTEST** in current C compilers.

Our "Sieve" program runs in
8.0 seconds (standard)
and 6.2 seconds (optimized)

(See January 1983 BYTE, pp 283-326)
price : \$500 (FOB Japan)

for pamphlet write:
P.O.Box 508 STA. CRUZ
CA. USA 95062

for further information contact:
LSI JAPAN CO., LTD.
2-24-9 YOTOJI SHIBUYAKU TOKYO (151) JAPAN
PHONE(03)379-2427

Circle 221 on inquiry card.



CORONA \$2395

- 2 Dr. 320K ea.
- 128K RAM
- software
- RAM Disk

Your choice of DESKTOP or PORTABLE

- NEC 8201A note book computer \$677
- IBM-PC 64K, 2 Drs, color graphics \$2499
- COLUMBIA 2 Drs, Kybd, software \$2495
- EAGLE-PC 2 Drs, Mon, 128K, software \$2495
- SANYO-550 IBM Compatible, 128K \$899
- FRANKLIN Ace 1200 OMS package \$1699
- FRANKLIN Ace 1000 Pro package \$1199
- SIGMA DESG 10MB expsn chassis \$1799
- DATAMAC 10 MB Internal (IBM-PC) \$1499
- EPSON FX-100 the best of Epson \$739
- EPSON FX 80 \$535
- DYNAX DX-15 letter quality, 16 cps \$429
- SILVER REED EXP-550 20 cps, 16" wide \$599
- OKI 92 160 cps DP, 40 cps correspdn \$445
- OKI 84 200 cps DP, 50 cps correspdn \$948

—Call for other items not listed—
We meet or beat any price

MICROLAND 5223 Beechnut
Add 3% for MC/VISA Houston, TX 77096
COD 15% deposit (713) 668-4695
(ship same day order)
\$2 credit for long distance phone order

Circle 247 on inquiry card.

TeleVideo DEALERS

- Fast Dump/Restore over 600K per disk \$60
- Type Ahead with Print Screen 64 Character Type Ahead Buffer \$60
- 3270 & 2780/3790 Bisync Communications from Phone 1 & Batech \$700 & \$300
- TurboDOS for TeleVideo Start at \$225
- LYNC™ Communications Package \$155
- 8" Disk Drive for 802 Computer Drive & Software \$1,100
- RM Cobol™ for TurboDOS Full System \$525
Run Time \$175
- Standby Power System 200VA-400VA-800VA As low as \$363


RM/COL is a registered trademark of Ryan-McFarland Corp.

CP/M® is registered trademark of Digital Research, Inc.
TurboDOS is a registered trademark of Software 2000, Inc.
PLUS OTHER GOOD TELEVIDEO STUFF!

COGITATE, Inc.

SPECIALISTS IN UNIQUE TELEVIDEO SOFTWARE
24000 Telegraph Road, Southfield, MI 48034
(313) 352-2345
VISA/MASTER CARD Accepted

Circle 57 on inquiry card.



Scotch® DISKETTES

Call Toll-Free
1-800-328-DISC for prices and information. Dealer inquiries invited.
C.O.D. and charge cards accepted.
All orders shipped from stock, within 24 hours. Call toll FREE



North Hills Corporation
3564 Rolling View Dr.
White Bear Lake, MN 55110
1-800-328-DISC
MN Call Collect 1-612-770-0485



COMPUTER DISCOUNT PRODUCTS

CDP guarantees the lowest available price!
You pay our discounted price or
the lowest advertised price in this issue.

Proof of price rests with customer. Excludes typographical errors. Items out of stock & products sold through authorized outlets unless we are also authorized.



MICROSOFT

A.L.D.S.	75.99
APPLESOFT COMPILER	116.99
BASIC COMPILER	239.99
COBOL COMPILER	559.99
FLIGHT SIMULATOR (IBM)	34.99
MOUSE (IBM)	129.99
MULTI-TOOL BUDGET	109.99
MULTI-TOOL FIN. STMT.	69.99
SOFTCARD II	215.99
SOFTCARD PREMIUM (Ile)	359.99
64K IBM SYSTEMCARD	295.99
WORD	SCALL
MULTI-PLAN	165.99

SPINNAKER

ALPHABET ZOO (new)	19.99
DELTA DRAWING	32.99
FACE MAKER	21.99
FRACTION FEVER (new)	21.99
KINDERCOMP	19.99
MOST AMAZING THING	26.99
SMOOPER TROOPS	27.99
STORY MACHINE	21.99

INFOCOM

DEADLINE	32.99
ENCHANTER	32.99
PLANETFALL	32.99
SUSPENDED	32.99
WITNESS	32.99
STARCROSS	ea. 24.99
ZORK I, II, III	

QUADRAM

APIC (APPLE /// PARALLEL)	129.99
ERAM 80 column 64K IIE	SCALL
MICROFAZER	SCALL
QUADBOARD I or II (64K)	269.99
QUADCOLOR I	234.99
QUADCOLOR II	209.99
QUAD 512+(64K)	219.99
QUADCHROME MONITOR	499.99

QUADLINK 479.99

APPLE SOFTWARE

BPI (GL, AP, AR, PAY, INV)	299.99
BRODERBUND Arcade Machine	44.99
Bank Street Writer	44.99
Droid	27.99
Loderunner	26.99
CENTRAL POINT Copy II+	25.99
DATAMOST Aztec	26.99
Kids & Apple, VIC, COMM, ea	14.99
DATASOFT Canyon Climber	17.99
Zaxxon	29.99
DLM Alien Addition	Sch-37.99, H-27.99
Alligator Mix	Sch-37.99, H-27.99
Demolition Division	Sch-37.99, H-27.99
Oragon Mix	Sch-37.99, H-27.99
Meteor Multiplication	Sch-37.99, H-27.99
Minus Mission	Sch-37.99, H-27.99
Verb Viper/Word Invasion	37.99
Word ManyWord Master	37.99
Word Radar/Spelling Wiz	37.99
EPYX Crush Crumble Chomp	22.99
HAYDEN Prewriter	94.99
Sargon II	26.99
L&S Crossword Magic	39.99
LEARNING CO Bumble Games	29.99
Bumble Plot	26.99
Gettrudes Puzzle	29.99
Juggles Rainbow	19.99
Magic Spell	26.99
Moptown Parade	26.99
Rocky's Boots	33.99
LIGHTNING Mastertype	29.99
MICROLAB Data Factory	229.99
Miner 20-49er	27.99
ODESTA CHESS	53.99
Odin	37.99
PENGUIN Graphics Magician	28.99
SIERRA ON LINE Frogger	24.99
Screenwriter II	89.99
Ultima II	44.99
General Manager	169.99
ULTRASOFT Serpents Star	29.99
Mask of the Sun	29.99
VISICORP	Scall
MICROPRO	
Infostar/Wordstar	259.99
Wordstar Pro	389.99

APPLE HARDWARE

CDP 16K RAM CARD	39.99
Printer Card & Cable	39.99
Fan w/surge, 2 outlets	39.99
DAN PAYMAR Lower Case I (rev 1-6)	25.99
Lower Case 2 (rev 7)	19.99
DARK STAR Snapshot II	89.99
EASTSIDE Wildcard	119.99
FOURTH DIMENSION Drive	219.99
HAYES Micromodem Iie	30.99
HOME Repeat Key	19.99
KODAL PAD	89.99
KRAFT Joystick	44.99
KRAFT Paddles	31.99
LEGEND 128K Ram	359.99
MICRO-SCI Drive	219.99
MOUNTAIN CPS Card	159.99
NOVATION Appocal II	259.99
Appical Upgrade 1200 Baud	309.99
ORANGE MICRO Grappler +	119.99
Butterboard	119.99
Butterd Grappler +	179.99
PAADLE ADAPPLE	24.99
SATURN 128K Ram	379.99
Accelerator II	444.99
Neptune 64K	199.99
Neptune 128K	299.99
ALS CP/M 3.0	279.99

ACCESSORIES

3 Ring Disk Sheets (10)	7.99
Flip 'n File (original)	17.99
Flip 'n File w/Locktray (25)	17.99
Flip 'n File w/Locktray (50)	27.99
HAYES 300 Baud Smartmodem	199.99
1200 Baud Smartmodem	474.99
Library Case	1.99
NOVATION J Cat	104.99
NOVATION 103/212 Auto Cat	429.99
NOVATION 103 Smart Cat	169.99
NOVATION Expansion Mod.	29.99
Power Strip w/surge	17.99
Printer Stand Small (plxgls)	24.99
Printer Stand Large (plxgls)	29.99
RIBBONS - Brother	SCALL
MX & FX 80	4.99
MX & FX 100	7.99
OKI 82, 83, 92, 93 & Gem	2.99
USI Compumod RF MOD	34.99

Fingerprint (Epson Enhancer) 44.99

380Z Letter- Quality Printer 999.99

KENSINGTON MICROWARE



SYSTEM SAVER

- Surge Suppression
 - Fits Apple Stand
 - Dual Outlet
 - U.L. Listed
 - Great Gift!
- \$65**

MONITORS

AMDEK	SCALL
PRINCETON RGB HZ-12	489.99
QUADCHROME RGB HX-12	459.99
TAXAN 12" Amber 18 mh	139.99
TAXAN 12" Green 18 mh	134.99
USI Pi 1 9" Green 20 mh	116.99
USI Pi 2 12" Green 20 mh	119.99
USI Pi 3 12" Amber 20 mh	146.99
USI Pi 4 9" Amber 20 mh	136.99
USI 1400C Color Composite	288.99
OSBORNE Monitor Cable	SCALL
Ile to Princeton	139.99

TAXAN 420 RGB (AP, IBM) 499.99

Beagle Bros Micro Software Inc.

ALPHA PLOT	24.99
APPLE MECHANIC	19.99
BEAGLE BASIC	24.99
DOS BOSS	15.99
DOUBLE TAKE	24.99
FLEX TEXT	19.99
FRAME-UP	16.99
FRONTO ODS	19.99
TIP DISK #1	14.99
TYPEFACES	14.99
UTILITY CITY	19.99
ALL OF ABOVE	234.99

Videx

APPLE WRITER PRE-BOOT	14.99
CHARACTER ROMS	24.99
ENHANCER II	99.99
FUNCTION STRIP	34.99
HARDSWITCH	16.99
MICROMODEM CHIP	24.99
PSIO	169.99
SOFTSWITCH	25.99
ULTRATERM	249.99
ULTRATERM PRE-BOOTS	SCALL
VIDEOTERM	199.99
VIDEOTERM W S/S + INV	219.99
VISICALC PRE-BOOT	39.99

Continental

APPLE SOFTWARE 1983 BOOK	9.99
ATARI SOFTWARE 1983 BOOK	9.99
APPLE GRAPHICS BOOK	14.99
CPA (GL, AP, AR, PAY) ea	149.99
FCM/FL 1st CLASS MAIL (AP)	61.99
FCM/FL 1st CLASS MAIL (IBM)	71.99
HOME ACCOUNTANT+ (IBM)	84.99
HOME ACCTNT.+(KAYPRO, OSB)	59.99
HOME ACCTNT.+(TI PRO)	119.99
PROPERTY MANAGEMENT	299.99
TAX ADVANTAGE	39.99
HOME ACCOUNTANT (Ap)	44.99

DISKETTES

DYSAN 5" SS/DD (10)	31.99
DYSAN 5" SS/DD (100)	299.99
MAXELL 5" SS/DD (10)	27.99
MAXELL 5" SS/DD (100)	259.99
MAXELL 5" DS/DD (10)	37.99
MAXELL 5" DS/DD (100)	359.99
VERBATIM 5" SS/DD (10)	24.99
VERBATIM 5" SS/DD (100)	229.99
VERBATIM 5" DS/DD (10)	36.99
VERBATIM 5" DS/DD (100)	349.99

Dysan DS/DD 38.99/box 369.99/case

- No Charge For Credit Cards
- Prices Subject To Change
- Software Sales Are Final
- Min. \$4.00 Shipping Charge
- Purchase Orders Call First



**MAIL or PHONE
YOUR ORDER:**
860 S. Winchester Bl.
San Jose, CA 95128
(408) 985-0400

SAN JOSE
860 S. Winchester Bl., San Jose, CA 95128
(408) 985-0401 Daily 8AM-7PM Sat-Sun-Hol 10AM-5PM

SAN FRANCISCO: 1230 Market St., (415) 626-2244 | **SAN MATEO:** 4228 Olympic Ave., (415) 571-1658
Daily 10AM-7PM Sat-Sun-Hol 10AM-5PM



MS-8 I/O BOARD

AUTOMOTIVE INDUSTRIAL ROBOTIC APPLICATIONS

- 16 CHANNEL CAPACITY
- OPTICALLY ISOLATED I/O's
- LATCHED OUTPUTS
- COMPATIBLE WITH MOST MICROPROCESSORS
- USED IN SYSTEMS WITH 86502, Z8671 AND 86800 CPU's
- CAPABLE OF DRIVING SOLID STATE RELAYS WHEN LARGER A.C. LOAD IS REQUIRED
- HIGH SPEED MACHINE CONTROL
- ALLOWS INTERFACING OF INDUSTRIAL SENSORS OPERATING AT VOLTAGES UP TO 30 VDC TO THE 5 VDC MICRO BUS.

SPECIAL ORDERS FOR I/O BOARDS TO MEET YOUR SYSTEMS NEEDS AVAILABLE UPON REQUEST.

ONLY \$175.00 (D.E.F. DISCOUNTS)


REGISTERED PROFESSIONAL ENGINEERS ON STAFF

josko enterprises, inc.
division of entiation, inc.

290 NEW CHURCHMANS ROAD
NEW CASTLE, DELAWARE 19770
302-322-7666

Circle 196 on inquiry card.

Stepping-Motor Driver Box with on board BASIC in ROM Controls Motion from any CRT or Computer



Robotics 3-D X,Y,Z Motion

HOOKUP AND GO! Provides all required power

Drives 4 motors at up to 5 amps per winding while sensing 8 limit switches

STEPPING-MOTOR TIPS COOKBOOK: \$8

with 3-D software & schematic

BIG STEPPER:

Parallel Version \$495/card only \$195

Smart Version (RS232) \$850/with BASIC \$985

Centre Computer Consultants, (814) 237-4535

P.O. Box 739, State College, PA 16804

Circle 48 on inquiry card.

5 Year Warranty
SAVE 50% ON
Verbatim Datalife
Diskettes

DEALER INQUIRIES INVITED

5 1/4"	Specify Soft	prices/10
	10 or 18 Sectors	
MD525	1 slide/dbl dens	\$24.90
MD550	2 sides/dbl dens	35.00
MD577	1 slide/quad 98tpl	33.75
MD557	2 sides/quad 98tpl	44.50

8"	Specify Soft or 32 Sector	prices/10
FD34-9000	1 slide/sgl dens	28.00
FD34-8000	1 slide/dbl dens	30.00
DD34-4001	2 sides/dbl dens	35.00

Checks-VISA-MC-C.O.D./Add \$2 Shipping
Call or write for our discount catalog.

LYBEN COMPUTER SYSTEMS

1250-E Rankin Dr., Troy, MI 48083
Phone: (313) 589-3440

DATALIFE - THE NAME IS THE PROMISE
THE WARRANTY IS THE PROOF

Circle 222 on inquiry card.

PERIPHERALS FOR APPLE II AND IIe

ONE YEAR WARRANTY ON ALL ITEMS
ALL PRODUCTS BUILT IN U.S.A.

	EACH	P.C.B.
APPLE/SHUGART DRIVE (5 1/4")	\$159	
DISK CONTROLLER (DOS 3.2-3.3)	49	\$ 9
80 COLUMN CARD (VIDEX EQUIVALENT)	129	19
80 COLUMN WITH 64K RAM (FOR IIe ONLY)	129	28
GRAPHIC PRINTER INTERFACE WITH 16K TO 64K BUFFER AND GRAPHICS	179	19
QUAD CARD (4 FUNCTIONS) (PARALLEL SERIAL BSR CLOCK) (PRINTER GRAPHICS ROM)	159	19
Z80 SOFTCARD (MICROSOFT EQUIVALENT)	29	
89	19	
5 1/4" FLOPPY DRIVE ENCLOSURE	9	

COLORADO COMPUTER PERIPHERALS
THE P.C.B. COMPANY
R.R. 6, BOX 7-D GOLDEN, CO 80403
(303) 278-7172

Circle 58 on inquiry card.

DATA ACQUISITION and control for ANY computer



The Model 8232 communicates via RS-232, and has 8 analog inputs (0-5 VDC; 8 bits), 8 digital inputs and outputs, and a 2000 point buffer. Suitable for field data logging or lab use, the 8232 costs only \$540. Direct bus-connect unit for TRS-80/III & 4 is \$295. Detailed manual, \$6. Phone our applications engineer or write:

★★ **STARBUCK** ★★
DATA COMPANY

PO Box 24, Newton, MA 02162 (617) 237-7695

Circle 343 on inquiry card.

ICs PROMPT DELIVERY!!! SAME DAY SHIPPING (USUALLY)

DYNAMIC RAM		
256K	150 ns	\$85.00
64K	200 ns	5.97
64K	150 ns	6.09
64K	120 ns	6.97
16K	200 ns	1.56
EPROM		
27128	300 ns	\$19.20
2764	250 ns	6.30
2732	450 ns	4.25
2716	450 ns	3.60
2532	450 ns	4.75
STATIC RAM		
6264P-15	150 ns	\$35.97
6264LP-15	150 ns	40.00
6116P-3	150 ns	5.75

Prices: 12/14/83
MasterCard VISA or UPS CASH COD
Factory New, Prime Parts
MICROPROCESSORS UNLIMITED
24,000 South Peoria Ave.
BEGGS, OK 74421 (918) 267-4961

Prices subject to change. Please expect higher prices on some parts due to world wide shortages. Call for volume prices. Subject to available quantities. Shipping & Insurance extra. Cash discount prices shown. Federal Express Standard Air - \$5.99. Orders received by 6 PM CST can be delivered to you by the next morning. We try harder.

Circle 250 on inquiry card.

NOW!

Shugart Disk Drives.

Guaranteed to Work,
Used 8 Inch Drives.

SA-800 S/S, D/D \$190.00 *
SA-850 D/S, D/D \$290.00 *

Call or write for information on
our low cost data acquisition,
for Industry or Home.

*Add \$10.00 shipping charge inside
continental U.S.
While Supplies Last.

Call or Write: (513) 435-5440

See Data Corporation,
P.O. Box 773,
Dayton, Ohio 45459

We accept Visa & Mastercard,
Ohio residents add 6% sales tax.

Circle 328 on inquiry card.

Davidge

is now offering their OEM quality high performance Z80 based single board microcomputers at a substantial savings

\$ 495.00 Includes:
• CP/M 2.2
• Davidge Utilities
• Completely assembled,
burned in and tested

These Boards Feature:

- 4 or 6 MHz
- 2 or 4 serial ports
- 5 1/4" and 8" floppy disk controller
- 2K Boot ROM with monitor
- 64K RAM
- Centronics parallel port
- High speed bidirectional parallel port
- DMA Controller
- SASI Interface

*Options

Send Check or Money Order to:

Davidge Corporation
1951 Colony Street, Suite X
Mountain View, California 94043
or Call (415) 964-9497

Circle 108 on inquiry card.

CWE

PERSONAL SERVICE/FRIENDLY ADVICE
DISCOUNT PRICES

MODEMS	Retail	CWE
Hayes Smartmodem 1200 B	\$599	\$439
Smartmodem 1200	\$699	\$484
New: Hayes Micromodem 11e with Smartcom for Apple 11e	\$329	\$239
PRINTERS		
Diablo 630	\$2350	\$1720
Daisywriter 48K with Buffer	\$1495	\$999
Panasonic 1090 & 1160		Call
TERMINALS		
Televideo 925	\$995	\$695
950	\$1195	\$899
970	\$1495	\$985
MONITORS		
Panasonic (New) D1300 composite color, compatible with IBM-PC.		25% Off

Inquire about other Panasonic Monitors.
Please...call for our surprising low prices. We carry an
extensive line of all computer related products and
brands not mentioned above.

Circuits World Electronics, Corp.
156 Depot Rd., Huntington Station, N.Y. 11746
CALL COLLECT (516) 423-9100
MasterCharge, Visa, Personal Checks Accepted.
Prices subject to change without notice.




Circle 52 on inquiry card.

DIGITAL RESEARCH COMPUTERS

(214) 271-3538

32K S-100 EPROM CARD PRICE CUT!

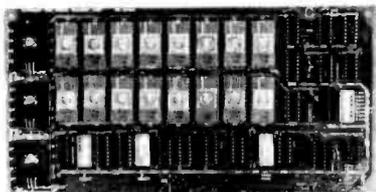

\$59.95


USES 2716's
Blank PC Board - \$34
ASSEMBLED & TESTED
ADD \$30

SPECIAL: 2716 EPROM's (450 NS) Are \$4.95 Ea. With Above Kit.

KIT FEATURES:

1. Uses +5V only 2716 (2Kx8) EPROM's
2. Allows up to 32K of software on line!
3. IEEE S-100 Compatible.
4. Addressable as two independent 16K blocks.
5. Cromemco extended or Northstar bank select.
6. On board wait state circuitry if needed.
7. Any or all EPROM locations can be disabled
8. Double sided PC board, solder-masked, silk-screened
9. Gold plated contact fingers
10. Unselected EPROM's automatically powered down for low power
11. Fully buffered and bypassed
12. Easy and quick to assemble

256K S-100 SOLID STATE DISK SIMULATOR! WE CALL THIS BOARD THE "LIGHT-SPEED-100" BECAUSE IT OFFERS AN ASTOUNDING INCREASE IN YOUR COMPUTER'S PERFORMANCE WHEN COMPARED TO A MECHANICAL FLOPPY DISK DRIVE.



BLANK PCB
(WITH CP/M* 2.2
PATCHES AND INSTALL
PROGRAM ON DISKETTE)

\$69.95

FEATURES:

- * 256K on board, using + 5V 64K DRAMS.
- * Uses new Intel 8203-1 LSI Memory Controller.
- * Requires only 4 Dip Switch Selectable I/O Ports.
- * Runs on 8080 or Z80 S100 machines.
- * Up to 8 LS-100 boards can be run together for 2 Meg. of On Line Solid State Disk Storage.
- * Provisions for Battery back-up.
- * Software to mate the LS-100 to your CP/M* 2.2 DOS is supplied.
- * The LS-100 provides an Increase in speed of up to 7 to 10 times on Disk Intensive Software.
- * Compare our price! You could pay up to 3 times as much for similar boards.

\$399.00


#LS-100 (FULL 256K KIT)

THE NEW ZRT-80 CRT TERMINAL BOARD!

A LOW COST Z-80 BASED SINGLE BOARD THAT ONLY NEEDS AN ASCII KEYBOARD, POWER SUPPLY, AND VIDEO MONITOR TO MAKE A COMPLETE CRT TERMINAL. USE AS A COMPUTER CONSOLE, OR WITH A MODEM FOR USE WITH ANY OF THE PHONE-LINE COMPUTER SERVICES.

FEATURES:

- * Uses a Z80A and 6845 CRT Controller for powerful video capabilities.
- * RS232 at 16 BAUD Rates from 75 to 19,200.
- * 24 x 80 standard format (60 Hz).
- * Optional formats from 24 x 80 (50 Hz) to 64 lines x 96 characters (60 Hz).
- * Higher density formats require up to 3 additional 2K x 8 6116 RAMS.
- * Uses N.S. INS 8250 BAUD Rate Gen. and USART combo IC.
- * 3 Terminal Emulation Modes which are Dip Switch selectable. These include the LSI-ADM3A, the Heath H-19, and the Beehive.
- * Composite or Split Video.
- * Any polarity of video or sync.
- * Inverse Video Capability.
- * Small Size: 6.5 x 9 inches.
- * Upper & lower case with descenders.
- * 7 x 9 Character Matrix.
- * Requires Par. ASCII keyboard.



BLANK PCB WITH 2716
CHAR. ROM, 2732 MON. ROM

\$59.95

SOURCE DISKETTE - ADD \$10
SET OF 2 CRYSTALS - ADD \$7.50

WITH 8 IN.
SOURCE DISKI
(CP/M COMPATIBLE)

\$129.95

ZRT-80

(COMPLETE KIT,
2K VIDEO RAM)

Digital Research Computers

P.O. BOX 461565 • GARLAND, TEXAS 75046 • (214) 271-3538

64K S100 STATIC RAM

\$199.00
KIT

NEW!

LOW POWER!
RAM OR EPROM!

BLANK PC BOARD
WITH DOCUMENTATION
\$55

SUPPORT IC's + CAPS
\$17.50

FULL SOCKET SET
\$14.50

FULLY SUPPORTS THE
NEW IEEE 696 S100
STANDARD
(AS PROPOSED)

FOR 56K KIT \$185

ASSEMBLED AND
TESTED ADD \$50



FEATURES:

- * Uses new 2K x 8 (TMM 2016 or HM 6116) RAMs.
- * Fully supports IEEE 696 24 BIT Extended Addressing.
- * 64K draws only approximately 500 MA.
- * 200 NS RAMs are standard. (TOSHIBA makes TMM 2016s as fast as 100 NS. FOR YOUR HIGH SPEED APPLICATIONS.)
- * SUPPORTS PHANTOM (BOTH LOWER 32K AND ENTIRE BOARD).
- * 2716 EPROMs may be installed in any of top 48K.
- * Any of the top 8K (E000 H AND ABOVE) may be disabled to provide windows to eliminate any possible conflicts with your system monitor, disk controller, etc.
- * Perfect for small systems since BOTH RAM and EPROM may co-exist on the same board.
- * BOARD may be partially populated as 56K.

64K SS-50 STATIC RAM

\$179.00
(48K KIT)

NEW!

LOW POWER!
RAM OR EPROM!

BLANK PC BOARD
WITH
DOCUMENTATION
\$52


SUPPORT IC's + CAPS
\$18.00

FULL SOCKET SET
\$15.00

56K Kit \$219

64K Kit \$249

ASSEMBLED AND
TESTED ADD \$50



FEATURES:

- * Uses new 2K x 8 (TMM 2016 or HM 6116) RAMs.
- * Fully supports Extended Addressing.
- * 64K draws only approximately 500 MA.
- * 200 NS RAMs are standard. (TOSHIBA makes TMM 2016s as fast as 100 NS. FOR YOUR HIGH SPEED APPLICATIONS.)
- * Board is configured as 3-16K blocks and 8-2K blocks (within any 64K block) for maximum flexibility.
- * 2716 EPROMs may be installed anywhere on board.
- * Top 16K may be disabled in 2K blocks to avoid any I/O conflicts.
- * One Board supports both RAM and EPROM.
- * RAM supports 2MHZ operation at no extra charge!
- * Board may be partially populated in 16K increments.

32K S100 EPROM/STATIC RAM


NEW!

FOUR FUNCTION BOARD!

NEW!

EPROM II
FULL
EPROM KIT
\$80.00

A&T EPROM
ADD \$35.00



BLANK
PC BOARD
WITH DATA
\$39.95

SUPPORT
IC'S
PLUS CAPS
\$23.00

FULL
SOCKET SET
\$18

We took our very popular 32K S100 EPROM Card and added additional logic to create a more versatile EPROM/RAM Board.

FEATURES:

- * This one board can be used in any one of four ways:
 - A. As a 32K 2716 EPROM Board
 - B. As a 32K 2732 EPROM Board (Using Every Other Socket)
 - C. As a mixed 32K 2716 EPROM/2K x 8 RAM Board
 - D. As a 32K Static RAM Board
- * Uses New 2K x 8 (TMM2016 or HM6116) RAM's
- * Fully Supports IEEE 696 Buss Standard (As Proposed)
- * Supports 24 Bit Extended Addressing
- * 200 NS (FAST!) RAM'S are standard on the RAM Kit
- * Supports both Cromemco and North Star Bank Select
- * Supports Phantom
- * On Board wait State Generator
- * Every 2K Block may be disabled
- * Addressed as two separate 16K Blocks on any 64K Boundary
- * Perfect for MP/M* Systems
- * RAM Kit is very low power (300 MA typical)

32K STATIC RAM KIT — \$129.95

For RAM Kit A&T - Add \$40

TERMS: Add \$3.00 postage. We pay balance. Orders under \$15 add 75¢ handling. No C.O.D. We accept Visa and MasterCard. Tex Res. add 5% Tax. Foreign orders (except Canada) add 20% P & H. Orders over \$50, add 85¢ for insurance.

TYPED

of looking for reliable Source of Supply?

RUNDOWN

from Looking???

NERVOUS

about QUALITY???


RIBBONS + ALL PRINTERS SUPER SALE DISCOUNTS

Call Bob Kelly Now...
Kelly Computer Supplies
1811 Carl St. • St. Paul, MN 55113
Toll Free... 800-447-2929
MN Res. Call Collect... 612/644-9030



3M/MAXELL DISKS

Circle 200 on inquiry card.



CONTROL THE WORLD!

The SYS-3A is a low cost, powerful microcontroller card with a Tiny BASIC language. Used in robotics, energy management, process control, science and education. Contains everything needed to write, debug, and permanently store programs that auto run on powerup. The 46 input/output lines include A/D, D/A, TTL I/O, and high current drivers. Multiple input ranges and drive capabilities. 4K RAM, 4K EPROM space, 2K software, & Tiny Basic included. I/O and memory expandable. Programs both EPROM's and EEPROM's. RS-232C port connects to CRT terminals, printers, or personal computers. Software, hardware, peripheral cards available. 4.5" x 6.5". 5V operation.

OCTAGON SYSTEMS CORPORATION
6501 W. 91st Ave., Westminster, CO 80030
(303) 426-8540

Circle 273 on inquiry card.

Dysan DISKETTES

5 1/4"	Specify Soft. 10 or 16 Sectors	\$10	\$50	\$100
104-10	SSSD	33.00	160.00	310.00
104-10	SSDD	35.00	172.00	340.00
104-20	DSDD	41.00	200.00	395.00
204-10	SSDD	41.00	200.00	395.00
204-20	DSDD	48.50	240.00	475.00

8"	Unformatted	\$10	\$50	\$100
3740-1	SSSD	34.00	167.50	330.00
3740-10	SSDD	42.50	210.00	415.00
3740-20	DSDD	50.00	247.50	490.00

CALL TOLL FREE

800-824-7888
OPERATOR 906
(VISA, M.C., C.O.D. ORDERS ONLY)
7 Days a Week, 24 Hours a Day

(408) 252-4210

M-F, 8:00 AM - 5:00 PM
FOR NEXT DAY SHIPMENT
Inquiries Also

Creativity Unlimited

• Add \$2.00 Shipping Per Order
• CA Residents Add Sales Tax
1741 Saratoga Avenue, Suite #201
San Jose, California 95129

Send for Our Free Catalogue • Dealer Inquiries Invited

Circle 96 on inquiry card.

WHOLESALE

MODEMS

U. S. Robotics 1200/300 Baud

Password	359. ⁰⁰
IBM PC Modem Card	359. ⁰⁰
with 64K Ram	559. ⁰⁰
with 256K Ram	925. ⁰⁰
S100 Modem Card	359. ⁰⁰
Auto Dial	469. ⁰⁰

PRINTERS

Sliver Reed

EXP 500P (16 CPS Daisy Wheel 10" PAR) ..	489. ⁰⁰
EXP 500S (16 CPS Daisy Wheel 10" SER) ..	539. ⁰⁰

Daisy Writer

2000-48K Buffer (20-40 CPS/PAR)	1099. ⁰⁰
--------------------------------------	---------------------

OKI-DATA

Microline 82A (Ser/Par 120 CPS 10") ..	349. ⁰⁰
Microline 92 (Par 160 CPS 10")	489. ⁰⁰

(Free shipping & handling in Continental USA)

Order Toll Free 1-(800) 821-5339
or Call 1-(801) 298-0872
or Rush Check or Money Order To:
C. R. E. Wholesale Products
P. O. Box 361 N.S.L., Ut. 84054

Circle 94 on inquiry card.

SAVE MORE THAN EVER ON 3M Scotch® DISKETTES

\$1.95 ea. 5 1/4" SSDD (744) Qty. 20
\$2.70 ea. 5 1/4" DSDD (745) Qty. 20

SPECIAL!

Save even more!
Order 50 or more 3M diskettes before March 15, 1984 and save an extra ten cents per diskette.

5 1/4" SSDD—96TPI (746)	\$2.89 ea.
5 1/4" DSDD—96TPI (747)	\$3.95 ea.
8" SSDD (740)	\$2.07 ea.
8" SSDD (741)	\$2.54 ea.
8" DSDD (743)	\$3.30 ea.

Shipping: 5 1/4" Diskettes Only: \$1.75 Handling + 20 per 10 diskettes ordered. 8" Diskettes Only: \$2.00 Handling + 30 per 10 diskettes ordered. Payment: VISA, MASTERCARD. C.O.D. (\$3.00 extra charge) or check. Taxes: Illinois customers only add 8%.

For fast service call
Nationwide: 1-800-621-6827
In Illinois: 312-944-2788

DISK WORLD!

Suite 4806 • 30 East Huron Street • Chicago, Illinois 60611

Authorized Distributor
Information Processing Products **3M**

Circle 53 on inquiry card.

EPROM PROGRAMMERS + UV ERASERS FROM \$49.95

LOGICAL DEVICES INC.

Where Reliability and Customer Support is of Outmost Importance

SEE OUR AD ON PAGE 18

LOGICAL

305-974-0967

Circle 217 on inquiry card.

WHOLESALE

DISKETTES

5 1/4" Soft Sector Bulk/10	Bulk/100
SS/SD	17.50 15.95/10
SS/DD	18.50 16.95/10
DS/DD	23.95 19.95/10

7 Year Gaurantee!

\$3.00 Shipping & Handling in Continental USA

RIBBONS

Ribbon Type	3	6	12
Apple DMP	5.9 ^{ea.}	5.9 ^{ea.}	4.9 ^{ea.}
C. Itoh Prowler (all models) ..	5.9 ^{ea.}	5.9 ^{ea.}	4.9 ^{ea.}
C. Itoh F10 40/55 Multi-Strike ..	5.9 ^{ea.}	4.9 ^{ea.}	3.9 ^{ea.}
Diablo Hyltype II Multi-Strike ..	5.9 ^{ea.}	4.9 ^{ea.}	3.9 ^{ea.}
Epson/IBM FX/RX/MX-80	5.9 ^{ea.}	4.9 ^{ea.}	4.9 ^{ea.}
Epson/IBM FX/RX/MX-100	9.9 ^{ea.}	8.9 ^{ea.}	6.9 ^{ea.}
Gemini 10/10X/15/15X	2.9 ^{ea.}	2.9 ^{ea.}	2.9 ^{ea.}
NEC 3500 Multi-Strike	7.9 ^{ea.}	6.9 ^{ea.}	5.9 ^{ea.}
Okidata 80/82/83/92/93	2.9 ^{ea.}	2.9 ^{ea.}	2.9 ^{ea.}
Other Ribbons	—	—	CALL

Shp. + Hand. in Cont. USA .. 3.⁰⁰ Free Free

Order Toll Free 1-(800) 821-5339
or Call 1-(801) 298-0872
or Rush Check or Money Order To:
C. R. E. Wholesale Products
P. O. Box 361 N.S.L., Ut. 84054

Circle 95 on inquiry card.

CWE

PERSONAL SERVICE/FRIENDLY ADVICE
DISCOUNT PRICES

	Retail	CWE
SuperCalc III	\$395	\$259
SuperCalc I&II	Call	
Lotus 1-2-3	\$495	\$325
PFS: File		
IBM.....	\$140	\$105
Apple..	\$125	\$95

We sell a complete line of software and games; specializing in Educational and Business Programs.

Circuits World Electronics, Corp.
158 Depot Rd. Huntington Station, N.Y. 11746
CALL COLLECT (516) 423-9100
MasterCharge, Visa, Personal Checks Accepted.
Prices subject to change without notice.



Circle 53 on inquiry card.

APPLE USERS: REGAIN CONTROL! APPLE STOP CARD

- *FREEZES THE ACTION OF ANY PROGRAM OR GAME WITH THE FLIP OF A SWITCH
- *HANDLE INTERRUPTIONS WITHOUT ABORTING YOUR PROGRAM
- *GREAT FOR GETTING HIGHER GAME SCORES AND FOR DEBUGGING
- *INSTALLS THROUGH SIDE VENT SLOTS
- *NO TOOLS REQUIRED
- *USEABLE IN APPLE II AND COMPATIBLE COMPUTERS
- *90 DAY LIMITED WARRANTY
- *\$29.95 PLUS \$2 SHIPPING, CHECK, M.O., MASTERCARD OR VISA

ANTELOPE COMMUNICATIONS
P.O. Box 4116
Madison, WI 53711

Apple is a trademark of Apple Computers, Inc.
WISC residents add 5% sales tax.

Circle 23 on inquiry card.

**TOLL-FREE
ORDERING:
800-222-8686**

**FOR TECHNICAL SUPPORT/
SERVICE / IN ARIZONA:
602-282-6299**

CCT CUSTOM COMPUTER TECHNOLOGY

1 CRAFTSMAN COURT — BOX 4160 — SEDONA, ARIZONA 86340

Purchase your Hardware and Software directly from an OEM/Systems Integrator. Take advantage of our buying power! We stock a full line of Board Level Components, Software, and Peripherals. Call for your needs. We'll give you the Lowest Prices, and the Technical Support and Know-How we are quickly becoming well-known for. Satisfied Customers Nationwide! The Nations's Custom Systems House for Business, Education and Science. Call for a system quote.

• FOREMOST QUALITY • ADVANCED SUPPORT • REASONABLE COST •

OF PRIME INTEREST

Our prime interest at CCT is **service and support**. We build and sell hundreds of systems per year to the serious computer market. We rigidly adhere to our strict policy of reliable machines, and reliable people behind them. We feel the CompuPro product line to be the state-of-the-art of the computer industry.

THE CCT EXCLUSIVE WARRANTY

With any system we build, we provide, in writing, an unconditional 12 month **direct** warranty on the entire system, including mainframe, boards, drives, power supplies, cabling and peripherals! We offer guaranteed 24 hour in-house repair and/or replacement with just a toll-free phone call. We can offer this, since we are so sure of our level of quality and reliability. It's great to know that in the event of a problem, you're not out of business waiting on service turnaround. We deliver!

Our various OEM contracts with all the manufacturers of the components we integrate, allow us this unprecedented flexibility. No factory O.K.'s necessary — just get it running — **NOW!**

Wyse 100 terminal - 14" Green . . . \$699
WS Prom Option - Installed . . . \$50
Mitsubishi 8" DSDD drives, full or half height. Set-up FREE OF CHARGE . . . \$449
Okidata 82 . . . \$389 / 83 . . . \$619
84 . . . \$1029 / 92 . . . \$469 / 93 . . . \$779
Ashton-Tate dBASE II 8" or MD . . . \$299
Supercalc 86 - for CP/M 86 & MP/M . . . \$99
Visual Terminals in stock . . . Call
Lear Siegler ADM 20 . . . \$499
Freedom 50 . . . \$499 / 100-\$549
Hays Modem-\$259 • Diablo 620-\$1029

We carry a full line of software in all available formats at discount prices.

TECH TIP CORNER

dBASE II USERS - CUSTOM TERMINAL KEYS! Implement your arrow keys; emulate Wordstar edit commands - send an SASE with \$2.00 - (ATTN: TTC). Tell us your arrow key codes. We'll return easy, detailed instructions to change almost anything. It's beautiful — Pat...



**PROFESSIONAL LEVEL BUSINESS SYSTEMS
STATE-OF-THE-ART QUALITY, PERFORMANCE, RELIABILITY**

CCT ANNOUNCES: OUR OWN IN-HOUSE ENGINEERED CUSTOM COMPUPRO SYSTEMS

CCT-1 — ENTRY LEVEL S-100 BUSINESS SYSTEM

- Enclosure 2-Desk-20 Slot Mainframe •
- CPU 8085/88 - 6Mhz 8085/8Mhz 8088 •
- Disk 1 - DMA Floppy Disk Controller •
- RAM 16 - 64K Static RAM - 12 Mhz •
- Interfacer 4 - 3 Serial/2 Parallel I/O •
- CCT 2.4 Dual 8" Mitsubishi
- DSDD Drive System - 2.4 Megabytes •
- CP/M 80 - 2.2 LD/M - CCT Modified •
- All Cabling, Complete CCT Assembly, Testing, and Minimum 20 Hour Burn-in •

**INTRODUCTORY PRICE:
\$3,399**

RUNS ALL STANDARD 8" CP/M SOFTWARE - INCLUDES OUR EXCLUSIVE 12 MONTH DIRECT WARRANTY

CP/M MP/M NOTE: Each copy we furnish is CCT modified for the target system. M-Drive/H and hard disk drivers are furnished, and the BIOS optimized for the fastest disk step rate, as well as terminal and printer compatibility.

★ ★ CCT-2 — THE FASTEST MICROCOMPUTER IN THE WORLD!! ★ ★

- Enclosure 2-Desk •
- CPU 8086 - 10Mhz •
- 128K - 16 Bit Memory •
- Interfacer 3-8 •
- SS1 •
- All Cabling, Complete CCT Assembly, Testing, & Minimum 20 Hour Burn-in
- 90K Baud Parallel Terminal Board •
- Disk 1 •
- CP/M 86 - CCT Modified •
- All Cabling, Complete CCT Assembly, Testing, & Minimum 20 Hour Burn-in
- 78 Key Professional Ergonomic Keyboard •
- High Resolution Amber Monitor •
- CCT 2.4 Dual DSDD Drive System

**INTRODUCTORY PRICE:
\$6,799**

RUNS ALL CP/M 86 SOFTWARE - ULTRA FAST - INCLUDES 12 MONTH DIRECT WARRANTY

★ ★ CCT-3 — 10Mhz 68K System similar to above, with 128K RAM \$6,699 ★ ★

We are the largest in the custom configuration of complete state-of-the-art S-100 systems, at package pricing, with integration, burn-in and programming. We custom build CompuPro systems / hard disk systems for business applications. Call for CompuPro literature, CCT system configuration data and technical information. We can save you money!

★ SUPER PRICES ★ COMPUPRO COMPONENTS ★ IN STOCK ★

SYSTEM SPECIALS — ALL CCT A&T, BURNED IN:

M-Drive CP/M - Blowout-\$39	Disk 1w/CP/M-\$449	M-Drive/H-512K-\$1149
CPU 8085/88-\$319	CPU 8086/87-\$579/10Mhz-\$659	CPU 68K-\$519/10Mhz-\$639
CPU 286-\$1249/10Mhz-\$1359	Disk 1-\$369	Disk 2-\$599
RAM 17 (12Mhz)-\$329	RAM 16 (12Mhz)-\$359	RAM 21 (128K)-\$779
RAM 22 (256K)-\$1399	Interfacer 1-\$229	Interfacer 2-\$249
Interfacer 3-5-\$399/3-8-\$459	Interfacer 4-\$349	System Support 1-\$299
Enclosure 2-Desk-\$599/Rack-\$649	20 Slot Motherboard-\$210	CP/M 80-\$99
CP/M 86-\$150	MP/M 8-16-\$699	CP/M 68K-\$279
UNIX - SOON	86 Upgrade Kit: Consists of CP/M 86, 64K Ram, System Support 1, Cable - \$749	

Call for CSC Boards — New Releases — Operating System Mods/Updates

★ PRICE BREAKTHROUGH ★

Hard Disk Subsystems

CCT/Fujitsu 5 1/4" subsystem, includes Disk 3, custom enclosure & power supply, all cabling, A&T, formatted, burned-in. Ready for any CompuPro or similar S-100 system:
CCT-5 (5.5 Meg)-\$1599
CCT-10 (11 Meg)-\$1899 / CCT-20 (22 Meg)-\$2299

? ? HARD DISK DECISIONS ? ?

Hard/Floppy Combinations

An exclusive CCT innovation. CCT/Fujitsu/Mitsubishi ultra-system: 5 1/4" hard disk next to a 1.2 Meg. DSDD 8" floppy. Includes Disk 3, custom horizontal enclosure and power supply, all cabling, A&T, formatted, burned-in. Will stand alone in any CompuPro system:
CCT-5/1-\$2099 CCT-10/1-\$2399 CCT-20/1-\$2799

★ NEW DISK 3/5 1/4" HD SYSTEMS ★

2.4 Megabyte Floppy Systems

CCT/Mitsubishi 2.4 Megabyte Dual DSDD 8" system. Includes custom horizontal enclosure, all cabling, A&T, burned-in. This is the fastest system available:
With stacked half-height drives: \$1175

All Systems Carry Our Exclusive 12 Month Warranty.

Prices & availability subject to change. All products new, and carry full manufacturer's warranties. Call for catalog. Free technical help to anyone. We can configure boards & software for your system. Plug-in and go. Arizona Residents add sales tax. CompuPro® Trademark — W.J. Godbout; CP/M® MP/M® Trademarks — Digital Research

WE LOVE TO PASS THE BUCK!

We will do our best to beat any competitor's price.



WE WANT YOUR BUSINESS!

DYNAMIC RAM	4164	200ns	\$5.30
	4164	150ns	5.50
	4116	150ns	1.75
STATIC RAM	8116P-3	150ns	\$5.10
	8116LP-3	150ns	5.80
	8204P-15	150ns	35.00
	56725	150ns	5.00
EPROM	2784	300ns	\$5.80
	2784	250ns	5.80
	2732	450ns	4.10
	2732	350ns	4.85
	2716	450ns	3.50
	2716-1	350ns	4.70
Z80 FAMILY	280A	CPU, CTC, PIO	\$10.00
		DART	8.00
		DMA, SIO/IO2	13.00
	280B	CPU, CTC, PIO	11.00

NORTHWEST MICROCHIPS DISTRIBUTORS
8730 View Drive S.E. Port Orchard, WA 98310
(206) 878-8200 (call anytime)

TERMS: \$10.00 Minimum Order. Money Order, Cashiers Check, UPS COO, Washington Residents add 7.8% tax. Shipping and Insurance extra. Quantity discounts available. Ask for our catalog. PRICES SUBJECT TO CHANGE.

Circle 271 on inquiry card.

RTL

Relocatable Threaded Language \$150

RTL is a new language which retains the speed and extensibility of FortH but adds many additional advantages as a result of its more structured dictionary. Names, code, and variables are all stored in separate areas for easy generation of headerless, romable code. All code is relocatable. RTL supports local variables, multitasking, redirected I/O, and even allows definitions to be changed retroactively. All source code is included. Versions are currently available or under development for 68000, 6809, 8080, 280, 8086, 8088, and 6502.

RTL Programming Aids
10844 Deerwood SE
Lowell, MI 49331
(616) 897-5672


Circle 318 on inquiry card.

Maxell Floppy Disks

The Mini-Disks with maximum quality.



Dealer inquiries invited. C.O.D.'s accepted. Call FREE (800) 235-4137.



PACIFIC EXCHANGES
100 Foothill Blvd., San Luis
San Luis Obispo, CA 93401.
In Cal. call (800) 592-5935 or
(805)543-1037.

Circle 284 on inquiry card.

(6502 & Z-80 dual processor) 64K COMPUTERS (Apple compatible) in super modern styles. US\$420



*(Above prices exclude drives, monitor) & keyboard
*Add 5% as shipping charge US\$450
(Detail brochure forwarded on request)
*We also sell cases, keyboards, power supplies, motherboards, components separately and interfaces.
*Full repair & guarantee available
*Assembled in Canada with C.S.A. (Shipment from WA, U.S.A.)
ABC COMPUTERS LTD. (6 stores in B.C. Canada)
683 E. HASTING ST., VANCOUVER, B.C. CANADA V6A 2Z8
PH: (604) 254-2834 & 254-1062 Dealer Inquiries welcome
Apple is a registered trademark of Apple Computer Inc.

Circle 8 on inquiry card.



INDUSTRIAL CONTROL MICROCOMPUTERS

We have six single board computers, two video boards and 20 other control products. You can use our products for security systems, heat control, light control, automated slide show, traffic lights, irrigation systems, home computer systems, automated process control, and robot control just to name a few. OEM prices available. For catalog call or write to:

JOHN BELL ENGINEERING, INC.
1014 CENTER STREET
SAN CARLOS, CA. 94070
(415) 592-8411

Circle 35 on inquiry card.

CHIPS & DALE

THE INFLATION FIGHTERS!

4116	200ns	8/8	12.00
4116	150ns	8/8	13.75
2114L	300ns	8/8	12.00
2114L	200ns	8/8	13.00
4164	200ns		\$5.50 each
4164	150ns		\$5.95 each
6116	150ns		\$5.20 each
6116	200ns		\$4.85 each
6116LP	150ns		\$5.85 each
1791	Disk Controller		\$20.00 each
1771	Disk Controller		\$16.75 each
Z80A,Z80ACTC			\$3.50 each
Z80A PIO			\$4.00 each
8251A			\$4.00 each
8255			\$4.25 each
2716-1	5V 350ns	8/8	\$4.25 \$5.00 each
2716	5V 450ns		\$3.35 each
2732	5V 450ns		\$3.25 each
2532	5V 450ns	8/8	\$4.25 \$5.00 each
2764	5V 300ns 28 pin		\$5.95 each
2564	5V		CALL
8087			CALL
68000			CALL

Allow up to 3 wks. for personal checks to clear. Please include phone number. Prices subject to change without notice. Shipping & Handling for Chips \$3.50. FOB Bellevue, WA. for all else. Washington state residents add 7.9% Sales Tax.

CHIPS & DALE 1-206-451-9770
10655 N.E. 4th St., Suite 400
Bellevue, WA 98004

Circle 51 on inquiry card.

LIFETIME WARRANTY

GENERIC SERIAL COMMUNICATION CARD

For Apple II+ and Apple IIe

The Generic Serial Communication Card (GSCC) is an asynchronous device that supports all protocol needed for full handshake communication (Hardware DTR, CTS, RTS and Software XON, XOFF). The board features 3 selectable options: Baud Rate from 110 to 9600, Full or Half Duplex and Auto Linefeed On or Off that are software selectable. And the 3 options can be controlled without burning a new EPROM.

Special Introductory Price **79⁹⁵** plus shipping and handling. Dealer Pricing Available.

Computer Technology Associates

CTA New Products Division
1704 Moon, N.E.
Albuquerque, N.M. 87112
(505) 298-0942

Specifications subject to change without notice. Apple is a registered trademark of Apple Computer, Inc. VISA/MC/AE Accepted

Circle 80 on inquiry card.

Serial Parallel



Convert What You Have To What You Want!

- * RS232 Serial
- * 8 Baud Rates
- * Latched Outputs
- * Centronics Parallel
- * Handshake Signals
- * Compact 3 1/2" x 4 1/2" x 1 1/2"

No longer will your peripheral choices be limited by the type of port you have available! Our new High Performance 700 Series Converters provide the missing link. Based on the latest in CMOS technology, these units feature full baud rate selection to 19.2K, with handshake signals to maximize transfer efficiency. Detailed documentation allows simplified installation. Order the Model 770 (Ser/Par) or Model 775 (Par/Ser) Today!

Buffer Products Coming Soon! only \$89.⁹⁵
Connector Option \$10.00
CA Residents 6% tax
UPS Shipping \$3.00
1501-B Pine Street
Post Office Box 2233
Orange, California 92666
CALL (805) 487-1665 or 487-1666
For FAST Delivery

Circle 132 on inquiry card.

SMITH-CORONA Memory Correct III Messenger PRINTER & TYPEWRITER



- RS232 Serial or Centronics Parallel
- Multiple Pitch 10, 12, 15

UNBELIEVABLE!
\$539.00

CALL COLLECT: 214/826-6521

FIGURE LOGIC BUSINESS EQUIPMENT, INC.
6408 Gaston Ave. • Dallas, Texas 75214

Circle 143 on inquiry card.

ACCESSORIES

for your IBM PC

JADE

Computer Products

SIX PAK PLUS—AST

Up to 384K RAM. Clock calendar with battery back-up. Serial port. Parallel printer port, optional game port. Super drive and super spool software included FREE!

64K, C.S.P. (List Price 395.00) _____ \$269.95
256K, C.S.P. (List Price 665.00) _____ \$489.95
For Game Port Option Add (List Price 50.00) _____ \$39.95

MEGA PLUS—AST

Up to 512K RAM, clock calendar with battery back-up. 2 serial ports, parallel printer port, game port. Super drive and superspool software included FREE!

64K, C.S. (List Price 395.00) _____ \$269.95
256K, C, 1 serial (List Price 665.00) _____ \$429.95
512K, C, 1 serial (List Price 1059.00) _____ \$795.00
Second serial port option (List Price 50.00) _____ \$39.95
Printer port option (List Price 50.00) _____ \$39.95
Game port option (List Price 50.00) _____ \$39.95
Each additional 64K, Add (List Price 89.95) _____ \$44.95

COMBO PLUS—AST

Up to 256K RAM. Clock with battery back-up. Serial port, Parallel port, superspool software included FREE!

64K, C.S.P. (List Price 395.00) _____ \$269.95
256K, C.S.P. (List Price 695.00) _____ \$419.95

I/O PLUS—AST

Up to 2 serial ports, parallel printer port, clock calendar with battery back-up. Superdrive and superspool software included FREE!

Clock & 1 serial port (List Price 165.00) _____ \$129.95
Printer port option (List Price 50.00) _____ \$39.95
Second serial port option (List Price 50.00) _____ \$39.95
Game port option (List Price 50.00) _____ \$39.95

QUADBOARD I—QUADRAM

Up to 256K RAM, serial port, parallel port, clock calendar, RAM disk, and printer spooler software

Quadboard w/o RAM (List Price 295.00) _____ \$214.95
64K Quadboard (List Price 395.00) _____ \$275.00
256K Quadboard (List Price 595.00) _____ \$399.95

QUADBOARD II—QUADRAM

Two serial ports, clock/calendar, memory expansion, and Quadmaster software

Quadboard II, 64K (List Price 395.00) _____ \$275.00
Quadboard, 256K (List Price 595.00) _____ \$399.00

QUADLINK—QUADRAM

Allows IBM PC to run Apple software, includes interface card and software to allow your IBM PC to run both Apple DOS and PC DOS

Quadlink (List Price 680.00) _____ \$485.00

SYSTEM CARD—MICROSOFT

From the authors of PC-DOS—up to 256K RAM, serial port, parallel printer port, clock calendar, plus RAM drive disk emulation software, print spooler, time utilities, and terminal emulation software. DOS 1.1 or 2.0 compatible

64K system card (List Price 395.00) _____ \$279.95
256K system card (List Price 625.00) _____ \$429.95

HI-RES COLOR MONITORS

Only the best: Quadchrome or Princeton HX-12, 690 x 480 resolution, 16 brilliant colors, special .31mm dot pitch tube, includes FREE! cable

Quadram Quadchrome (List Price 795.00) _____ \$549.95
Princeton Graphics HX-12 (List Price 695.00) _____ \$529.95

AMDEK MONITORS

Full line of high quality monochrome and color video monitors

Video 310 Amber (IBM) (List Price 230.00) _____ \$159.95
Color II (RGB) (List Price 529.00) _____ \$429.95
Color III (RGB) (List Price 449.00) _____ \$399.95
Color IV (Analog RGB) (List Price 995.00) _____ \$775.00

HERCULES GRAPHIC CARD

Two pages of ultra-high resolution text and graphics 720 x 348, compatible with Lotus 123, Visicalc, dBASE II, etc. Includes parallel printer port

Hercules graphic card (List Price 499.00) _____ \$359.95

PLANTRONICS COLOR PLUS

Up to 16 colors, 80 characters, bi-planar technology, includes parallel printer port

Plantronics Color Plus (List Price 559.00) _____ \$429.95

QUADCOLOR I & QUADCOLOR II

Quadcolor I delivers standard IBM PC color and graphics, add Quadcolor II and hi-resolution (640 x 200) color graphics are possible

Quadcolor I basic board (List Price 295.00) _____ \$234.95
Quadcolor II add on (List Price 275.00) _____ \$229.95

64K RAM UPGRADE For IBM PC

High speed RAM upgrade kit with parity (error detection) and one year warranty

64K kit for IBM PC (List Price 89.95) _____ \$49.95

THE BEST SOFTWARE For IBM PC

We have taken the top rated programs and reduced the price for a super value!

LOTUS 1 2 3 Best spreadsheet
Lotus 1 2 3 (1A) (List Price 495.00) _____ \$329.95
dBASE II Best Data base
Ashton-Tate dBASE II (List Price 700.00) _____ \$429.95
CROSSTALK Best communications package
MicroStuff Crosstalk (List Price 195.00) _____ \$129.95

DISKETTES For IBM PC

High quality double-sided, double-density diskettes, certified to be absolutely error free. Box of ten, warranted for one year

Box of 10 w/FREE! plastic case (List Price 39.95) _____ \$24.95
Verbatim Datalife (List Price 49.95) _____ \$34.95

JADE IS AN AUTHORIZED DEALER FOR EPSON, OKIDATA, TOSHIBA, MANNESMAN-TALLY, C.ITOH, etc. CALL FOR BEST PRICE!

NEC 3550 LETTER QUALITY

Only fully IBM PC compatible letter quality printer available—why settle for less? (35 CPS)

NEC 3550 printer (List Price 2350.00) _____ \$1799.95

HARD DISK For IBM PC

Hard disk with controller, software, and P/S

5MB system (List Price 1995.00) _____ \$1395.00
10MB system (List Price 2495.00) _____ \$1699.00
15MB system (List Price 2995.00) _____ \$2199.00

KEYTRONICS KEYBOARD

Similar to the IBM PC keyboard, but with all the keys in the right places!

Keytronics/IBM (List Price 299.95) _____ \$199.95

320K DISK DRIVES

Tandon TM-100-2 double-sided, double-density 320K disk drive. Original equipment drive on IBM PC

Full size Tandon (List Price 395.00) _____ \$224.95
Half-height 320K drive (List Price 395.00) _____ \$199.95
Teac Half-height (List Price 395.00) _____ \$239.95

BEST MONITORS AVAILABLE!

Ultra-high resolution, up to 22 MHz, 1000 lines per inch, amber or green phosphor. FREE! tilt and swivel base. US manufacturer

12 inch green, 22 MHz List Price 249.00 _____ \$149.95
12 inch amber, 22 MHz List Price 249.00 _____ \$149.95
9 inch green, 18 MHz List Price 239.00 _____ \$139.95
9 inch amber, 18 MHz List Price 239.00 _____ \$139.95

12-inch GREEN MONITOR—Zenith

15 MHz, 40 or 80 column
12 inch Green List Price 149.00 _____ \$94.95

AMDEK MONITORS

Full line of high quality monochrome and color video monitors

Video 310 Amber (IBM) List Price 230.00 _____ \$159.00
Video 300 Green List Price 179.00 _____ \$135.95
Video 300 Amber List Price 199.00 _____ \$149.95
Color-I (composite) List Price 379.00 _____ \$289.95
Color-II (RGB) List Price 529.00 _____ \$429.95
Color-II plus (analog RGB) List Price 559.00 _____ \$439.95
Color-III (RGB) List Price 449.00 _____ \$399.95
Color-IV (analog RGB) List Price 995.00 _____ \$775.95
DVM-2 (Apple II/III+) List Price 179.00 _____ \$129.95
DVM-80E (Apple IIe) List Price 195.00 _____ \$139.95

PLACE ORDERS TOLL FREE!

Continental USA
(800) 421-5500

Inside California
(800) 262-1710

Los Angeles Area
(213) 973-7707

We accept cash, checks, credit cards, or purchase orders from qualified firms and institutions. Prices quoted are for prepaid orders only and are subject to change without notice. **Minimum prepaid order \$15.00** California residents add 6½% tax. Export customers outside the U.S. or Canada please add 10% to all prices. Shipping and handling charges via UPS Ground 50¢/lb UPS Air \$1.00/lb minimum charge \$3.00

Circle 190 on inquiry card.

4901 West Rosecrans Ave.
Hawthorne, California 90250

EPSON PRINTER \$299⁹⁵

OKIDATA PRINTER \$349⁹⁵

EPSON PRINTERS SAVE At Least \$150.00!

CALL US FOR THE BEST DEAL ON THE WORLD'S
BEST SELLING LINE OF PRINTERS!

- EPSON RX-80 100 CPS w/tractor, graphics
PRM-29082 A 499.00 Value, Save 200.00 — \$299.95
- EPSON RX-80FT 100 CPS with FREE graphics
PRM-29084 Friction & tractor feed — SAVE \$150.00
- EPSON MX-80FT 80 CPS with FREE graphics
PRM-28082 Friction & tractor feed — SAVE \$150.00
- EPSON MX-100 100 CPS 15" platten
PRM-28100 Friction & tractor — SAVE \$150.00
- EPSON FX-80 160 CPS with FREE graphics
PRM-29080 Friction & tractor feed — SAVE \$150.00
- EPSON FX-100 160 CPS 15" platten
PRM-29100 Friction & tractor feed — SAVE \$150.00

OKIDATA—Microline 92 & 93

160 CPS, true corependence quality printing, full graphics, IBM PC compatible (optional), handles single sheet as well as fan-fold paper, professional design construction and quality

- Oki 92 parallel List Price 599.00 — \$479.95
- Oki 93 parallel List Price 999.00 — \$795.00
- 2K serial board List Price 120.00 — \$99.95
- IBM PC ROMs for 92 List Price 59.95 — \$49.95
- IBM PC ROMs for 93 List Price 59.95 — \$49.95
- Extra Ribbon (2) List Price 19.95 — \$9.95
- Tractor for Oki 92 List Price 89.95 — \$54.95

MICROLINE 82, 83, & 84

120 CPS (82, 83) 200 CPS (84), industry standard printers, serial and parallel interfaces, true lower case descenders, handles single-sheet as well as fan fold

- Oki 82 List Price 499.00 — \$349.95
- Oki 83 w/FREE tractor List Price 749.00 — \$629.95
- Oki 84 parallel List Price 1399.00 — \$925.00
- Oki 84 serial List Price 1499.00 — \$995.00
- 2K serial board List Price 190.00 — \$159.95
- Extra ribbons 82/92, 83/93 List Price 19.95 — \$9.95
- Tractor for Oki 82 List Price 89.95 — \$54.95
- Ribbons for 84 List Price 19.95 — \$9.95

MICROFAZER—Quadram

The microfazer stand-alone printer buffers are available in any configuration of serial or parallel input, with serial or parallel output. All are expandable up to 64K of memory (about 30 pages of 8 1/2 x 11 text); the parallel-to-parallel version is expandable to 512K copy and pause feature included

- Parallel/Parallel**
- 8K List Price 169.00 — \$139.95
- 32K List Price 225.00 — \$164.95
- 128K List Price 445.00 — \$269.95

- Serial/Parallel**
- 8K List Price 199.00 — \$169.95
- 32K List Price 260.00 — \$199.95

- Parallel/Serial**
- 8K List Price 199.00 — \$169.95
- 32K List Price 260.00 — \$199.95

- Serial/Serial**
- 8K List Price 199.00 — \$169.95
- 32K List Price 260.00 — \$199.95

GEMINI 10X & 15X

Star Micronics—up to 120 CPS, full graphics, friction and tractor feed, Epson FX-80 compatible

- Gemini 10X — SAVE \$150.00
- Gemini 15X — SAVE \$150.00
- Serial board, G-10, G-15 List Price 129.00 — \$69.00
- Serial board, G-10X, G-15X List Price 59.95 — \$55.00
- 10X, 15X 4K serial List Price 119.00 — \$99.95

LETTER QUALITY PRINTER \$289.95

True letter quality printing at 12 CPS, Wordstar compatible, handles 8 1/2" x 11 paper, friction/single sheet feed, compact and portable, standard Centronics parallel interface

SAVE! Hundreds of Dollars!! — \$289.95

NEW! DELTA 10

160 CPS, up to 16K buffer, serial and parallel interfaces, graphics friction and tractor, FX-80 compatible

Delta 10 — SAVE \$150.00

COMREX CR-II

Best buy in letter quality printers. NEW! from Comrex! full featured letter quality printer. FREE! 5K buffer, logic seeking bi-directional printing, boldface proportional spacing, double-strike, backspace, underline, true super-script and sub-script, drop-in daisy wheel cartridge

- CR-II parallel List Price 599.00 — \$495.00
- CR-II serial List Price 644.00 — \$589.95
- Tractor option List Price 120.00 — \$99.95
- Cut sheet feeder List Price 259.00 — \$199.95
- Keyboard option List Price 199.00 — \$179.95

STARWRITER F10

High speed letter quality printer, 40 or 55 CPS daisy-wheel. Extensive built-in word processing functions, up to 15 inch paper width. Uses standard Diablo style print wheels

- 40 CPS, F10/parallel List Price 1895.00 — \$1125.00
- 55 CPS, F10/parallel List Price 1995.00 — \$1599.00

MANNESMAN-TALLY

- Spirit, 80 CPS 10 inch parallel List Price 399.00 — \$329.00
- 160L, 160 CPS 10 inch List Price 798.00 — \$588.00
- 180L, 160 CPS 15 inch List Price 1098.00 — \$828.00

MICROBUFFER

Practical Peripherals, Inc

Stand-alone Microbuffers

- Parallel, 32K List Price 299.00 — \$229.95
- Parallel, 64K List Price 349.00 — \$269.95
- Serial, 32K List Price 299.00 — \$229.95
- Serial, 64K List Price 349.00 — \$269.95
- 64K add-on board List Price 179.00 — \$149.00

Microbuffers for Apple II

- Parallel, 16K List Price 259.95 — \$189.95
- Parallel, 32K List Price 299.95 — \$229.95
- Serial, 16K List Price 259.95 — \$189.95
- Serial, 32K List Price 299.95 — \$229.95

Microbuffers for Epson Printers

- Parallel, 16K List Price 159.95 — \$129.95
- Serial, 8K List Price 159.95 — \$129.95

5 1/4 inch DISK DRIVES

- TANDON TM 100-1 SS DD 48 TPI
List 349.00 — \$225 ea 2 for \$195.00 ea
- SHUGART SA 400L SS DD 48 TPI
List 299.00 — \$209.00 ea 2 for \$199.95 ea
- TANDON TM 100-2 DS DD 48 TPI
List 399.00 — \$229.00 ea 2 for \$225.00 ea

5 1/4" CABINETS/POWER SUPPLY

- Single cab w/power supply List Price 99.00 — \$69.95
- Dual Cab w/power supply List Price 129.00 — \$85.00

8 inch DISK DRIVES

- SIEMENS FDD 100-B Single sided, double density
List 399.00 — \$179.00 ea 2 for \$175.00 ea
- SHUGART SA 801R Single sided, double density
List 502.00 — \$355.00 ea 2 for \$349.00 ea
- SHUGART SA-851R Double sided, double density
List 605.00 — \$459.00 ea 2 for \$455.00 ea
- QUME DT-8 Double sided, double density
List 599.00 — \$479.00 ea 2 for \$459.00 ea
- TANDON TM 848-1 SS DD thin-line
List 499.00 — \$369.00 ea 2 for \$359.00 ea
- TANDON TM 848-2 DS DD thin-line
List 599.00 — \$439.00 ea 2 for \$435.00 ea
- NEC FD1165 DS DD thin-line
List 599.00 — \$450.0 ea 2 for \$440.00 ea
- NEC FD1164 SS DD thin-line
List 499.00 — \$360.00 ea 2 for \$350.00 ea

DISK SUB-SYSTEMS—Jade

Handsome metal cabinet with proportionally balanced air flow system, rugged dual drive power supply, cable klt, power switch, line cord, fuse holder, cooling fan, nevermar rubber feet, all necessary hardware to mount two 8 inch disk drives, power supply, and fan. Does not include signal cable

Dual 8" Sub-Assembly Cabinet

- Bare cabinet List Price 75.00 — \$49.95
- Cabinet kit List Price 299.00 — \$199.95
- A & T List Price 349.00 — \$249.95

8" Sub-System—Single sided, Double Density

- Kit w/2 Siemens FD100-8Ds List Price 950.00 — \$579.00
- A & T w/2 Siemens FD100-8Ds List Price 995.00 — \$595.00
- Kit w/2 Shugart SA-801 Rs List Price 1195.00 — \$939.00
- A & T w/2 Shugart SA-801 Rs List Price 1295.00 — \$969.00

8" Sub-Systems—Double Sided, Double Density

- Kit w/2 Qume DT-8s List Price 1495.00 — \$1229.00
- A & T w/2 Qume DT-8s List Price 1595.00 — \$1249.00
- Kit w/2 Shugart SA-851 Rs List Price 1495.00 — \$1199.00
- A & T w/2 Shugart SA-851 Rs List Price 1595.00 — \$1219.00

DUAL SLIMLINE SUB-SYSTEMS

Dual 8" Slimline Cabinet

- Bare cabinet List Price 75.00 — \$59.95
- A & T w/o drives List Price 249.00 — \$164.95

Dual 8" Slimline Sub-Systems

- Kit w/2 SS DD drives List Price 1195.00 — \$869.00
- A & T w/2 SS DD drives List Price 1295.00 — \$879.00
- Kit w/2 DS DD drives List Price 1395.00 — \$1060.00
- A & T w/2 DS DD drives List Price 1495.00 — \$1099.00

DISK DRIVE POWER SUPPLY


Sufficient current to power up to three 8 inch drives
Power supply List Price 149.00 — \$89.95

PLACE ORDERS TOLL FREE!

Continental USA (800) 421-5500 Inside California (800) 262-1710 Los Angeles Area (213) 973-7707

We accept cash, checks, credit cards, or purchase orders from qualified firms and institutions. Prices quoted are for prepaid orders only and are subject to change without notice. Minimum prepaid order \$15.00 California residents add 6 1/2% tax. Export customers outside the U.S. or Canada please add 10% to all prices. Shipping and handling charges via UPS Ground 50¢/lb UPS Air \$1.00/lb minimum charge \$3.00

for your **APPLE**

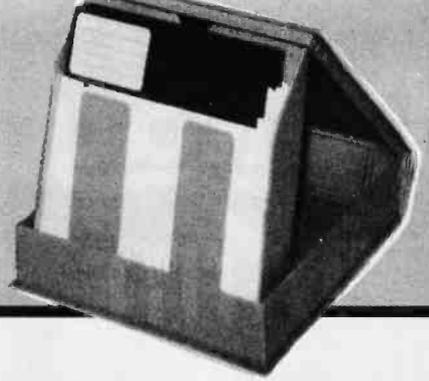

SUPER DISKETTE SPECIAL!

We bought out a major manufacturer's overstock, and we are passing the savings on to you! Single sided double density, package of ten with FREE plastic case
 Box of 10 w/FREE plastic box *List Price* 34.95 **\$18.95**

DISK DRIVE For APPLE

Totally Apple compatible. 143,360 bytes per drive on DOS 3.3 full one year warranty, half-track capability, reads all Apple software, plugs right into Apple controller as second drive. DOS 3.3, 3.2.1 Pascal, & CP/M compatible

Standard Disk II size *List Price* 299.00 **\$199.95**
 Controller only *List Price* 99.00 **\$60.00**

HALF-HEIGHT DRIVE For APPLE

Totally Apple compatible. Works with all Apple software and controllers. Faster and quieter than most other drives, yet only half the size!

Half-height drive *List Price* 249.00 **\$199.95**

DUAL 8-inch DISK DRIVE SYSTEM

Up to 2 Megabytes for your Apple. Two double density 8 inch slimline disk drives, cabinet, power supply, cable, controller, and software. Compatible with DOS, CP/M, Pascal and IBM 3740 formats

1 Megabyte Sub-system *List Price* 1995.00 **\$1195.00**
 2 Megabyte Sub-system *List Price* 2495.00 **\$1395.00**

PRINTER CARD AND CABLE

For Apple, standard centronics parallel interface for Epson, Okidata, C. Itoh, Gemini, NEC, Comrex, etc. Includes printer cable and support graphics

Printer card & cable *List Price* 119.95 **\$49.95**

CP/M 3.0 CARD For APPLE—ALS

The most powerful card available for your Apple! 6 MHz, Z-80B, additional 64K RAM, CP/M 3.0 plus, 100% CP/M 2.2 compatibility, C Basic, CP/M graphics, 300% faster than any other CP/M for Apple
ALS CP/M 3.0 card *List Price* 399.00 **\$299.00**

BUFFERED GRAPPLER PLUS

Combines the flexibility of the Grappler+ with the convenience of the Bufferboard, all on a single board
Buffered Grappler+ w/64K *List Price* 245.00 **\$175.00**

FAN/POWER CENTER For APPLE

Cooling fan for your overheated Apple II, II+, or IIe; also includes power switch and two switched outlets with voltage protection circuitry

Apple fan *List Price* 99.95 **\$59.95**

NEW! MICROMODEM IIe—Hayes

The standard in direct-connect, plug-in-modem cards for Apple. 110-300 baud. Includes FREE Smartcom I

Micromodem IIe *List Price* 299.95 **\$239.95**

KOALA PAD—Koala Tech.

A touch sensitive pad that functions like a joystick or mouse, allowing you to move the cursor around the screen with the touch of a finger. Complete with software

Koala Pad *List Price* 124.95 **\$99.95**

16K RAM CARD For APPLE II

Expand your Apple II to 64K, use as language card, full one year warranty. Why spend \$175.00?

16K RAM Card *List Price* 99.00 **\$49.95**

Z CARD For APPLE—ALS

Two computers in one. Z-80 and 6502, more than doubles the power and potential of your Apple. Includes Z-80 CPU card, CP/M 2.2 and complete manual set. Pascal compatible. One year warranty

Z Card with CP/M 2.2 *List Price* 169.00 **\$139.95**

GRAPPLER PLUS—Orange Micro

The ultimate parallel printer graphics interface card with many new features, now at a new low price!

Grappler Plus *List Price* 175.00 **\$119.95**

80 COLUMN CARD

80 column x 24 line video card for Apple II addressable 25th status line, normal/inverse or high/low video, 128 ASCII characters, upper and lower case, 7 x 9 dot matrix with true descenders, CP/M, Pascal and Fortran compatible, 40/80 column selection from keyboard, 2 year warranty. Best 80 column card!

Viewmax 80 *List Price* 219.00 **\$139.95**
 Visicalc/Easywriter Preboot *List Price* 30.00 **\$24.95**

64K STATIC RAM—Jade

Uses new 2K x 8 static RAMs, fully supports IEEE 696

Bare board *List Price* 69.00 **\$49.95**
 Kit less RAM *List Price* 149.00 **\$89.95**
 32K kit *List Price* 229.00 **\$169.95**
 56K kit *List Price* 299.00 **\$225.95**
 64K kit *List Price* 399.00 **\$265.95**
 Assembled & Tested *List Price* 50.00 **add \$30.00**

EXPANDORAM III

High density memory board, 64K, 128K, or 256K

64K *List Price* 475.00 **\$398.95**
 128K *List Price* 595.00 **\$464.95**
 192K *List Price* 709.00 **\$524.95**
 256K *List Price* 825.00 **\$589.95**

I/O-4 SSM MICROCOMPUTER

Two serial I/O ports plus two parallel I/O ports

I/O-4 A & T *List Price* 290.00 **\$245.95**

ISO BUS—Jade Computer

Silent, simple and on SALE! A better motherboard

6 Slot (5 1/4" x 8 1/2") 19 MHz

6 Slot Bare board *List Price* 40.00 **\$22.95**
 6 Slot Kit *List Price* 60.00 **\$39.95**
 6 Slot A & T *List Price* 75.00 **\$49.95**

12 Slot (9 1/4" x 8 1/2") 10 MHz

12 Slot Bare board *List Price* 54.00 **\$34.95**
 12 Slot kit *List Price* 110.00 **\$69.95**
 12 Slot A & T *List Price* 140.00 **\$89.95**

18 Slot (14 1/2" x 8 1/2") 6MHz

18 Slot Bare board *List Price* 70.00 **\$54.95**
 18 Slot Kit *List Price* 150.00 **\$99.95**
 18 Slot A & T *List Price* 200.00 **\$139.95**

SBC-200 SD Systems

4 MHz Z-80A CPU with serial and parallel I/O

A & T *List Price* 350.00 **\$299.95**

ISOBAR

The ISOBAR looks like a standard multi-outlet power strip, but contains surge suppression circuitry and built-in noise filters, plus 15amp circuit breaker

4 receptacle *List Price* 89.95 **\$59.95**
 8 receptacle *List Price* 99.95 **\$69.95**

DOUBLE D—Jade Computer

High reliability, double density disk controller

Bare board & h/wr man *List Price* 75.00 **\$59.95**
 Kit w/h/wr & st/wr man *List Price* 399.00 **\$299.95**
 A & T w/h/wr & st/wr man *List Price* 449.00 **\$325.95**
 CP/M 2.2 with Double D *List Price* 200.00 **\$99.95**

THE BUS PROBE

Best setting inexpensive S-100 diagnostic analyzer

Bare board *List Price* 89.00 **\$59.95**
 Kit *List Price* 249.00 **\$179.95**
 A & T *List Price* 299.00 **\$199.95**

VERSAFLOPPY II—SD Systems

Double density disk controller for 5 1/4" and 8"

Versafloppy II with PROM *List Price* 400.00 **\$344.95**
 Versafloppy II/696 A & T *List Price* 400.00 **\$349.95**
 CP/M 3.0 with VF-II *List Price* 200.00 **\$80.00**

THE BIG Z—Jade

2 or 4 MHz switchable Z-80 CPU board with serial I/O

Bare board w/manual *List Price* 50.00 **\$35.00**
 Kit w/manual *List Price* 249.00 **\$179.95**
 A & T *List Price* 299.00 **\$199.00**

ULTRA-VIOLET EPROM ERASERS

Inexpensive erasers for industry or home

Spectronics w/o timer *List Price* 99.00 **\$69.95**
 Spectronics with timer *List Price* 139.00 **\$94.95**
 Logical Devices *List Price* 89.00 **\$49.95**



SMARTMODEM—Hayes

Sophisticated direct-connect auto-answer/auto/dial modem, touch tone or pulse dialing, RS232C interface programmable

Smartmodem 1200 *List Price* 699.00 **\$475.00**
 1200B for IBM PC *List Price* 599.00 **\$399.95**
 Smartmodem 300 *List Price* 289.00 **\$199.00**
 Hayes Cronograph *List Price* 249.00 **\$199.95**
 Micromodem 100 *List Price* 399.00 **\$299.95**
 Micromodem IIe *List Price* 299.00 **\$239.95**

1200 BAUD SMART CAT Novation

103/212 Smart Cat and 103 Smart Cat, 1200 and 300 baud, built-in dialer, auto re-dial if busy, auto answer/disconnect, direct connect, LED readout displays mode analog/digital loopback self tests, usable with multi-line phones

300 Baud 103 Smart Cat *List Price* 249.00 **\$199.95**
 1200 Baud 212/103 Smart Cat *List Price* 595.00 **\$449.95**

J-CAT MODEM—Novation

1/5 the size of ordinary modems, Bell 103, manual or auto-answer, automatic answer/originate, direct connect, built-in self-test, two LEDs and audio beeps provide status information

Novation J-Cat *List Price* 149.00 **\$114.95**

JADE

Computer Products

Circle 191 on inquiry card.

4901 West Rosecrans Avenue, Hawthorne, California 90250

Do Kay

COMPUTER PRODUCTS, Inc.

ORDER TOLL FREE

(800)
538-8800

(CALIFORNIA RESIDENTS)

(800)
848-8008



TERMS: For shipping include \$2.00 for UPS Ground or \$3.00 for UPS Blue Air. \$10.00 minimum order. Bay Area and Los Angeles Counties add 6½% Sales Tax, other California residents add 6% Sales Tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice.

VISIT OUR RETAIL STORE

2100 De La Cruz Blvd.
Santa Clara, CA 95050
(408) 988-0697

Do Kay

STATIC RAMS

2101	256 x 4 (450ns)	1.90
5101	256 x 4 (450ns) (cmos)	3.90
2102-1	1024 x 1 (450ns)	.88
2102L-4	1024 x 1 (450ns) (LP)	.98
2102L-2	1024 x 1 (250ns) (LP)	1.45
2111	256 x 4 (450ns)	2.45
2112	256 x 4 (450ns)	2.95
2114	1024 x 4 (450ns)	8/9.90
2114-25	1024 x 4 (250ns)	8/9.95
2114L-4	1024 x 4 (450ns) (LP)	8/11.95
2114L-3	1024 x 4 (300ns) (LP)	8/12.45
2114L-2	1024 x 4 (200ns) (LP)	8/12.95
2147	4096 x 1 (55ns)	4.90
TMS4044-4	4096 x 1 (450ns)	3.45
TMS4044-3	4096 x 1 (300ns)	3.95
TMS4044-2	4096 x 1 (200ns)	4.45
MK4118	1024 x 8 (250ns)	9.90
TMM2016-200	2048 x 8 (200ns)	4.10
TMM2016-150	2048 x 8 (150ns)	4.90
TMM2016-100	2048 x 8 (100ns)	6.10
HM6116-4	2048 x 8 (200ns) (cmos)	4.70
HM6116-3	2048 x 8 (150ns) (cmos)	4.90
HM6116-2	2048 x 8 (120ns) (cmos)	8.90
HM6116LP-4	2048 x 8 (200ns) (cmos) (LP)	5.90
HM6116LP-3	2048 x 8 (150ns) (cmos) (LP)	6.90
HM6116LP-2	2048 x 8 (120ns) (cmos) (LP)	9.95
Z-6132	4096 x 8 (300ns) (Qstat)	33.95

LP = Low Power Qstat = Quasi-Static

DYNAMIC RAMS

TMS4027	4096 x 1 (250ns)	1.95
UPD411	4096 x 1 (300ns)	2.95
MMS280	4096 x 1 (300ns)	2.95
MK4108	8192 x 1 (200ns)	1.90
MMS298	8192 x 1 (250ns)	1.60
4116-300	16384 x 1 (300ns)	8/10.75
4116-250	16384 x 1 (250ns)	8/10.95
4116-200	16384 x 1 (200ns)	8/11.95
4116-150	16384 x 1 (150ns)	8/13.95
4116-120	16384 x 1 (120ns)	8/28.95
2118	16384 x 1 (150ns) (5v)	4.90
4164-200	65536 x 1 (200ns) (5v)	CALL
4164-150	65536 x 1 (150ns) (5v)	CALL

5V = single 5 volt supply

EPROMS

1702	256 x 8 (1us)	4.45
2708	1024 x 8 (450ns)	3.90
2758	1024 x 8 (450ns) (5v)	5.90
2716	2048 x 8 (450ns) (5v)	3.90
2716-1	2048 x 8 (350ns) (5v)	5.90
TMS2516	2048 x 8 (450ns) (5v)	5.45
TMS2716	2048 x 8 (450ns)	7.90
TMS2532	4096 x 8 (450ns) (5v)	5.90
2732	4096 x 8 (450ns) (5v)	4.90
2732-250	4096 x 8 (250ns) (5v)	8.90
2732-200	4096 x 8 (200ns) (5v)	10.95
2764	8192 x 8 (450ns) (5v)	9.90
2764-250	8192 x 8 (250ns) (5v)	13.95
2764-200	8192 x 8 (200ns) (5v)	23.95
TMS2564	8192 x 8 (450ns) (5v)	16.95
MC68764	8192 x 8 (450ns) (5v) (24 pin)	38.95
27128	16384 x 8Call	Call

5v = Single 5 Volt Supply

74LS00

74LS00	.23	74LS92	.54
74LS01	.24	74LS93	.54
74LS02	.24	74LS95	.74
74LS03	.24	74LS96	.88
74LS04	.23	74LS107	.38
74LS05	.24	74LS109	.38
74LS08	.27	74LS112	.38
74LS09	.26	74LS113	.38
74LS10	.24	74LS114	.38
74LS11	.34	74LS122	.44
74LS12	.34	74LS123	.78
74LS13	.44	74LS124	2.85
74LS14	.58	74LS125	.48
74LS15	.34	74LS126	.48
74LS20	.24	74LS132	.58
74LS21	.28	74LS133	.58
74LS22	.24	74LS136	.38
74LS26	.28	74LS137	.98
74LS27	.28	74LS138	.54
74LS28	.34	74LS139	.54
74LS30	.24	74LS145	1.15
74LS32	.28	74LS147	2.45
74LS33	.54	74LS148	1.30
74LS37	.34	74LS151	.54
74LS38	.34	74LS153	.54
74LS40	.24	74LS154	1.85
74LS42	.48	74LS155	.88
74LS47	.74	74LS156	.88
74LS48	.74	74LS157	.84
74LS51	.24	74LS158	.58
74LS54	.28	74LS160	.68
74LS55	.28	74LS161	.68
74LS63	1.20	74LS162	.68
74LS73	.38	74LS163	.68
74LS74	.34	74LS184	.68
74LS75	.38	74LS165	.94
74LS76	.38	74LS166	1.90
74LS78	.48	74LS168	1.70
74LS83	.59	74LS169	1.70
74LS85	.68	74LS170	1.45
74LS86	.38	74LS173	.68
74LS90	.54	74LS174	.54
74LS91	.88	74LS175	.54
		74LS181	2.10

74LS189	8.90	74LS363	1.30
74LS190	.88	74LS364	1.90
74LS191	.88	74LS385	.48
74LS192	.78	74LS386	.48
74LS193	.78	74LS367	.44
74LS194	.68	74LS368	.44
74LS195	.68	74LS373	1.35
74LS196	.78	74LS374	1.35
74LS197	.78	74LS377	1.35
74LS221	.88	74LS378	1.13
74LS240	.94	74LS379	1.30
74LS241	.98	74LS385	1.85
74LS242	.98	74LS386	.44
74LS243	.98	74LS390	1.15
74LS244	1.25	74LS393	1.15
74LS245	1.45	74LS395	1.15
74LS247	.74	74LS399	1.45
74LS248	.98	74LS424	2.90
74LS249	.98	74LS447	.38
74LS251	.58	74LS490	1.90
74LS253	.58	74LS624	3.95
74LS257	.58	74LS640	2.15
74LS258	.58	74LS645	2.15
74LS259	2.70	74LS668	1.85
74LS260	.58	74LS669	1.85
74LS266	.54	74LS670	1.45
74LS273	1.45	74LS674	9.60
74LS275	3.30	74LS882	3.15
74LS279	.48	74LS683	3.15
74LS280	1.95	74LS684	3.15
74LS283	.68	74LS685	3.15
74LS290	.88	74LS688	2.35
74LS293	.88	74LS689	3.15
74LS295	.98	74LS783	23.95
74LS298	.88	81LS95	1.45
74LS299	1.70	81LS96	1.45
74LS323	3.45	81LS97	1.45
74LS324	1.70	81LS98	1.45
74LS352	1.25	25LS2521	2.75
74LS353	1.25	25LS2569	4.20

6500 1MHZ

6502	4.90
6504	6.90
6505	8.90
6507	9.90
6520	4.30
6522	7.90
6532	9.90
6545	21.50
6551	10.85

2 MHZ

6502A	6.90
6522A	9.90
6532A	10.95
6545A	26.95
6551A	10.95

3 MHZ

6502B	13.95
-------	-------

6800

68000	58.95
6800	3.90
6802	7.90
6808	12.90
6809E	18.95
6809	10.95
6810	2.90
6820	4.30
6821	3.20
6828	13.95
6840	11.95
6843	33.95
6844	24.95
6845	13.95
6847	10.95
6850	3.20
6852	15.70
6860	9.90
6862	10.95
6875	6.90
6880	2.20
6883	21.95
68047	23.95
68488	18.95

6800 1MHZ

68B00	9.95
68B02	21.25
68B09E	28.95
68B09	28.95
68B10	6.90
68B21	6.90
68B45	18.95
68B50	5.90

8000

8035	5.90
8039	6.90
INS-8060	16.95
INS-8073	49.95
8080	3.90
8085	5.90
8085A-2	10.95
8086	28.95
8087	CALL
8088	38.95
8089	88.95
8155	6.90
8155-2	7.90
8156	6.90
8185	6.90
8185-2	28.95
8741	38.95
8748	38.95
8755	49.95
	23.95

8200

8202	23.95
8203	38.95
8205	3.45
8212	1.75
8214	3.80
8216	1.70
8224	2.20
8226	1.75
8228	3.45
8237	18.95
8237-5	20.95
8238	4.45
8243	4.40
8250	9.95
8251	4.45
8253	6.90
8253-5	7.90
8255	14.95
8255-5	18.95
8257	7.90
8257-5	8.90
8259	6.85
8259-5	7.45
8271	38.95
8272	38.95
8275	28.95
8279	8.90
8279-5	9.00
8283	6.45
8284	14.95
8286	6.45
8287	6.45
8288	24.00
8289	48.95

Z-80

2.5 Mhz

Z80-CPU	3.90
Z80-CTC	4.45
Z80-DART	9.95
Z80-DMA	13.95
Z80-PIO	4.45
Z80-SIO/0	15.95
Z80-SIO/1	15.95
Z80-SIO/2	15.95
Z80-SIO/9	15.95

4.0 Mhz

Z80A-CPU	4.90
Z80A-CTC	4.90
Z80A-DART	10.95
Z80A-DMA	15.95
Z80A-PIO	4.90
Z80A-SIO/0	15.95
Z80A-SIO/1	15.95
Z80A-SIO/2	15.95
Z80A-SIO/9	15.95

6.0 Mhz

Z80B-CPU	12.95
Z80B-CTC	12.95
Z80B-PIO	12.95
Z80B-DART	18.95

ZILOG

Z8132	33.95
Z8671	38.95

DISC CONTROLLERS

1771	15.95
1791	23.95
1793	25.95
1795	48.95
1797	48.95
2791	53.95
2793	53.95
2795	58.95
2797	58.95
6843	33.95
8272	38.95
UPD765	38.95
MB8876	28.95
MB8877	33.95
1691	16.95
2143	17.95

UARTS

AY3-1014	6.90
AY5-1013	3.90
AY3-1015	6.90
PT-1472	9.90
TR1002	3.90
2350	9.90
2651	8.90
TMS8011	5.90
IM6402	7.90
IM8403	8.90
INS8250	9.95

INTERFACE

8T28	1.54
8T28	1.84
8T95	.88
8T96	.88
8T97	.88
8T98	.88
DM8131	2.90
DP8304	2.24
DS8835	1.94
DS8838	.98

VOLTAGE REGULATORS

7805T	.74	7905T	.84
78M05C	.34	7908T	.84
7808T	.74	7912T	.84
7812T	.74	7915T	.84
7815T	.74	7924T	.84
7824T	.74	7905K	1.44
7805K	1.34	7912K	1.44
7812K	1.34	7915K	1.44
7815K	1.34	7924K	1.44
7824K	1.34	79L05	.78
78L05	.68	79L12	.78
78L12	.68	79L15	.78
78L15	.68	LM323K	4.90
78H05K	9.90	UA78S40	1.90
78H12K	9.90		

C,T = TO-220 K = TO-3 L = TO-92

DIP SWITCHES

4 POSITION	.84
5 POSITION	.89
6 POSITION	.89
7 POSITION	.94
8 POSITION	.94

IC SOCKETS

	1-99	100
8 pin ST	.12	.10
14 pin ST	.14	.11
16 pin ST	.16	.12
18 pin ST	.19	.17
20 pin ST	.28	.26
22 pin ST	.29	.26
24 pin ST	.29	.26
28 pin ST	.39	.31
40 pin ST	.48	.38
64 pin ST	4.20	call

ST = SOLDERTAIL

8 pin WW	.58	.48
14 pin WW	.68	.51
16 pin WW	.68	.57
18 pin WW	.98	.89
20 pin WW	1.04	.97
22 pin WW	1.34	1.23
24 pin WW	1.44	1.30
28 pin WW	1.64	1.44
40 pin WW	1.94	1.75

WW = WIREWRAP

16 pin ZIF	6.70	call
24 pin ZIF	9.90	call
28 pin ZIF	9.95	call

ZIF = TEXTTOOL (Zero Insertion Force)

CRYSTALS

32.768khz	1.90
1.0 mhz	4.90
1.8432	4.90
2.0	3.90
2.097152	3.90
2.4576	3.90
3.2768	3.90
3.579535	3.90
4.0	3.90
5.0	3.90
5.0688	3.90
5.185	3.90
5.7143	3.90
6.0	3.90
6.144	3.90
6.5536	3.90
8.0	3.90
10.0	3.90
10.738635	3.90
14.31818	3.90
15.0	3.90
16.0	3.90
17.430	3.90
18.0	3.90
18.432	3.90
20.0	3.90
22.1184	3.90
32.0	3.90

RESISTORS

1/4 WATT 5% CARBON FILM ALL STANDARD VALUES FROM 1 OHM TO 10 MEG OHM

50 PCS.	1.25
100 PCS.	2.00
1000 PCS.	15.00

BULK DISKETTES 5 1/4" DISKETTES ATHANA OR NASHUA

SSDD	18.95
SSDD	22.95
DSDD	27.95

5 1/4" DISKETTES NO LABEL

SINGLE SIDED DOUBLE DENSITY
(WITH JACKETS AND HUB RING)


Pack of Ten	\$ 16.95
Pack of 100	\$149.00

APPLE ACCESSORIES


80 Column Card	129.95
16 K Card	42.50
Fan	38.95
Power Supply	84.95
RF Mod	24.95
Joy Stick (Apple II)	29.95
Paddles Apple	9.95
Z80 Card	129.95
SCRG Switch-A-Slot	19.95
Paddle Adapple	24.95
Extend-A Slot	195.95
Disk Drive	224.95
Controller Card	69.95




Joy Stick

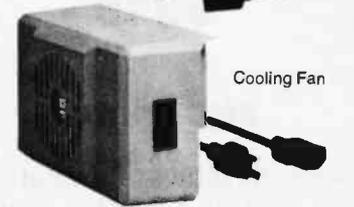

Cooling Fan

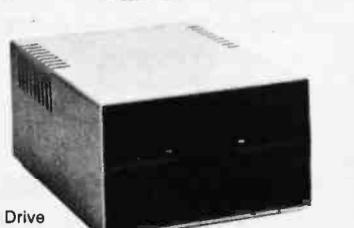

Disk Drive

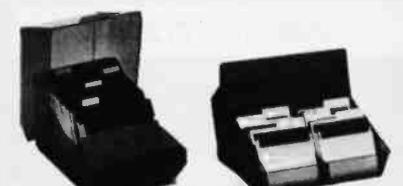

The Flip Sort Plus™

The Flip Sort Plus™ adds new dimensions to storage. Designed with similar elegant lines as the original Flip Sort™, in a transparent smoked acrylic. The Flip Sort Plus™ has a storage capacity of over 100 diskettes and has all the outstanding features you have come to expect from the flip sort Family. 24.95 each

Do Kay

2100 De La Cruz Blvd.
Santa Clara, CA 95050

STOP!
Compare Our Low
Washington & Lincoln's
Birthday Prices!

CALL TOLL FREE FOR LOWEST POSSIBLE

Specials from your Largest Computer Dealer

Quadram

- Color Card for PC
- Fully PC Compatible

\$219

BMC Printer

- BX-80
- Epson MX80FT Compatible
- Friction & Tractor Feed
- Centronic Par. Interface

\$239

Franklin 1200 OMS

- 2 Disk Drives
- Wordstar & Ace Calc & Mail merge
- CPM & Apple Compatible

\$1699

Sanyo PC (MBC 550)

- IBM Compatible
- 16 Bits, 8088 cpu
- 128K Ram, Hi-Res. Capabilities
- Centronic Printer Port
- Detachable Keyboard
- Free Software
- Much, Much More

\$849

Apple IIE

- Starter System

\$1326

USI

- 12" Amber
- 20 MHz Monitor

\$119

ALS

- Cpm 3.0
- 6 MHz — Z80B
- 64K Ram

\$269

NEC 8023A Better than C.Itoh

- Top Quality
- Better Than a 8510AP
- Full Graphics, Friction & Tractor Feed

\$339

Diskettes for IBM PC

- 5 year Guarantee
- Dbl. Side/Dbl. Density
- Reinforced Hub

\$22

100 for \$210

COMPUTER SYSTEMS

Sanyo

MBC-550, PC Compatible	\$ 849
MBC-555, 2 Drives, More Software	1249

IBM

PC 64K, 1 Drive	\$1995
PC 64K, 2 Drives	2265
XT Hard Disk Drive, 128K	4795

Tava

We Will Beat All Competitors
 on this PC Compatible

Apple

IIE Starter System	\$1326
CPU Only	929

Franklin

Ace 1000, 64K	\$ 799
Ace 1200 OMS	1699

Kaypro

Kaypro II	\$1495
Kaypro 4	1695
Kaypro 10	2495

Compaq

Portable (PC Compatible)	\$2795
--------------------------	--------

DISKETTES HI-QUALITY

5 1/4"

Sgl Side/Dbl Density	\$17
Dbl Side/Dbl Density	22

8"

Sgl Side/Sgl Density	\$19
Dbl Side/Dbl Density	39 / box of 10

All Diskettes come with 5 year warranty & Reinforced Hub. 100% error free.

Head Cleaning Kits	\$ 9
5 1/4 Flip tubs (holds 70)	19

VIDEO MONITORS

Amdek

Color I +	\$ 299
Color II +	419
300C, 12" Green	139
300A, 12" Amber	149
310A, Monochrome Amber	179

BMC

BMC 12 AUW	\$ 79
BMC 12 EUN Hi-Res	109
BMC 12" Amber	109
BMC 9191 Color Composite	219

Princeton Graphics

PGS HX12, HI-Res Color	\$ 499
PGS SR-12, HI-Res Color	499
PGS MAX-12, Monochrome	199

USI

PI 3, 12" Amber	\$ 119
-----------------	--------

Zenith

ZVM122, HI-Res Green	\$ 109
ZVM123, HI-Res Amber	109

We accept all P.O.'s from Universities
CALL 800-847-1718

We Offer More Than ^{JUST} Low Prices!!!



800-847-1718

PRICES IN THIS MAGAZINE

**SAVE
20% to 40%
Off List**

PRINTERS Dot Matrix & Letter Quality

BMC	
BX80 (Epson Compatible)	\$ 239
Daisywriter	
2000 w / 48K Buffer	\$1099
Dynax	
DX15, Letter Quality	\$ 469
DX25	Call
NEC	
8023A (100 cps)	\$ 339
8025 (15" Carriage)	699
Okidata	
82A (80 cps)	\$ 329
83A (15" Carriage)	569
84P (in Stock)	999
New Series Okidata	
92P (160 cps)	\$ 429
93P (15" Carriage)	739
C. Itoh	
See NEC for Better Products	
Epson	
RX-80 (120 cps)	Call
MX-80FT (80 cps)	Call
FX-80 (160 cps)	Call
FX-100 (15" Carriage)	Call
Star Micronics	
Gemini 10X (120 cps)	\$ 299
Gemini 15X	399
Power type (18 cps)	479

PRINTER INTERFACES

Orange Micro	
Grappler +	\$ 119
Grappler + w/16K	179
Microtek	
Dumpling GX (Grappler Compatible)	\$ 99
Dumpling w/16K	159
Wesper Micro	
Wizard Full Graphics Interface	\$ 79
Apple Par Card & Cable	
Card & Cable	\$ 49
Cables	
IBM to Printer	\$ 25
Kaypro to Printer	25
RS232 Cables	19
Okidata Options	
Tractor for 82 & 92	\$ 59
Serial Interface	99
Star or Epson	
Serial Interface	\$ 119

APPLE ADD ON'S

Micro Tek	
Bam 16, 16K Memory	\$ 59
Serial Interface	99
Micro Soft	
16K Card	\$ 69
Premium Soft Card IIE	379
MultiPlan	189
Soft Card (Z 80)	239
Micro Max	
Viewmax 80 (80 col)	\$ 149
Viewmax 80E (For IIE) 64K	139
ALS	
Z Card	\$ 119
CPM 3.0 Card	269
Kraft	
Joystick	\$ 49
Koala	
Graphics Tablet	\$ 99
Astar	
RF Modulator	\$ 18
Fan w/Surge	39
Apple	
Disk II	\$ 269
Monitor II	99

IBM ADD ON'S

Ast Research	
Six Pack +	\$ 279
Mega +	279
Call for All AST Accessories	
Quadram	
Quad Color Card	\$ 219
Quad Link	479
Quad Chrome Monitor	469
IBM	
Monochrome Adaptor	\$ 319
Monochrome Monitor	319
Color Card	265
Plantronics	
URI Display	\$ 389
Paradise Systems	
Multi Display Card	\$ 399
64K Upgrade	
64K Memory	\$ 54
Centronics Cable	
PCCable	\$ 25
Tandon	
TM100-2	\$ 225
Panasonic	
1/2 Height, 320K	\$ 209

APPLE DRIVES

Micro Sci	
A-2 Controller	\$ 209
	75
Quentin Research	
Appimate Controller	\$ 209
	75
Rana Systems	
Elite I	\$ 269
Elite II	399
Elite III (Quad Density)	499
Controller	85
Super 5	
Slimline Controller	\$ 199
	75

5 1/4" & 8" DISK DRIVES

5 1/4"	
Tandon	
TM100-1, 160K	\$ 179
TM100-2, 320K	229
TM101-4 (Quad.)	279
CDC	
CDC 9409T	\$ 229
8"	
Shugart	
801R Sgl / Dbl	\$ 369
851R Dbl / Dbl	499
Mitsubishi	
2894 Dbl / Dbl	\$ 429
Qume	
DT-8	\$ 449
Panasonic	
1/2 Height, 320K	\$ 209
Tandon	
848-1 Slimline Sgl / Dbl	\$ 299
848-2 Slimline Dbl / Dbl	399
Siemens	
FDD 100-8, Sgl / Dbl	\$ 159

DISK DRIVE CABINETS

5 1/4" Cabinets	
Single Cab. w / power supply	\$ 59
Dual Cab. w / power supply	85
8" Cabinets	
Single Cab. w / fan & power supply	\$ 209
Dual Cab. w / fan & power supply	259

Sales Desk

(800) 847-1718 (213) 643-5188
Outside California Inside California

**Customer Service & Technical
(213) 643-5188**

**Mon.—Fri. 7 a.m. to 6 p.m.
Sat. & Sun. 10 a.m. to 5 p.m.**

**This Ad Supersedes All Others
No Surcharge for Credit Cards**

Circle 61 on inquiry card.

RETAIL STORE & MAIL ORDER:

11976 Aviation Blvd.
Inglewood, CA 90304

All merchandise new. We accept MC, Visa, Wire Transfer, COD Call, Certified Check, P.O. \$ from qualified firms, APO accepted. Shipping: Minimum \$4.50 first 5 pounds. Tax: California Res. Only add 6 1/2% sales tax.

Prices Subject to Change

www.americanradiohistory.com

Computer Components Unlimited

California Digital

Post Office Box 3097 B • Torrance, California 90503

FREE

Plastic library case supplied with all diskettes purchased from California Digital.

DISKETTES AS LOW AS \$16.50

FIVE INCH SINGLE SIDED DOUBLE DENSITY

	Each box	10 Boxes	100 Boxes
CAL DIGITAL	19.95	18.50	16.50
SCOTCH	26.50	24.50	21.75
VERBATIM	26.50	25.25	23.50
MEMOREX	26.50	22.25	18.75
MAXELL	26.50	24.50	23.25
DYSAN	35.00	33.00	30.50

FIVE INCH DOUBLE SIDED DOUBLE DENSITY

CAL DIGITAL	24.95	22.75	20.50
SCOTCH	39.95	37.95	31.25
VERBATIM	39.95	37.95	32.75
MEMOREX	35.00	31.25	26.25
MAXELL	39.95	37.95	34.75
MAXELL / 96	45.00	43.00	41.25
DYSAN	42.50	40.50	35.50
DYSAN / 96	49.95	47.95	45.75

EIGHT INCH SINGLE SIDED SINGLE DENSITY

SCOTCH	29.50	27.50	23.80
MEMOREX	27.75	26.60	22.25
VERBATIM	31.50	29.50	25.60
DYSAN	35.75	32.75	29.75


EIGHT INCH SINGLE SIDED DOUBLE DENSITY

SCOTCH	37.75	35.15	29.15
MEMOREX	35.50	33.50	27.15
VERBATIM	35.25	33.25	28.75
DYSAN	40.75	38.75	32.25
MAXELL	45.50	39.75	35.15

EIGHT INCH DOUBLE SIDED DOUBLE DENSITY

SCOTCH	47.50	44.25	37.50
MEMOREX	39.25	36.75	31.50
VERBATIM	41.75	37.50	32.25
DYSAN	54.65	49.75	40.50
MAXELL	52.50	48.75	40.45

23" COMPOSITE MONITOR \$159



Easy by gathering a classmate of computer, you'll find a 23" monitor. Here is your opportunity to purchase a 23" high resolution monitor at a special price. These units, except standard vertical models, are generated by most personal computers including the Apple and IBM PC. Attach to your computer and see for yourself. You are shopping down 10% in price when you order. (MSRP \$179.95, \$159.00). Monitor is open frame and for safety should be enclosed. Word processing, graphics, and other applications are available. CAL. ENG'G 11/88.



SPECIAL

Shugart 410

\$129



These Shugart 410 5 1/4" disk drives are all factory fresh 1983 production, recently purchased from the Four Phase Division of the Motorola Corporation. These disk drives are single sided 80 track (96 TPI) suitable for use with the Radio Shack Model 1 and Model 3. Or any other application that can support an 80 track second drive such as the IBM PC. The 410 is full height and functionally the same as the Tandem TM 100-1. Complete with power connector and installation manual. When these Shugart 410's are liquidated the price will revert to our regular price of \$219. SHU-SA-110

MEMORY

16K DYNAMIC	2732 EPROM
1.95	4.95
4116 150ns.	450ns.
64K DYNAMIC	16K STATIC
5.95	4.95
4164 150ns.	6116 200ns.

2764 EPROM SALE \$5.95


DYNAMIC MEMORY		STATIC MEMORY	
1027 4K dynamic 250ns	ICM-4027250	1-31	37 + 100 +
4116 150ns 16K	ICM-4116150	1.99	1.65 1.75
4116 200ns 16K	ICM-4116200	1.75	1.35 1.45
4164 150ns 64K 128 refresh	ICM-4164150	1.75	1.65 1.45
41256 150ns 256K	ICM-41256150	5.95	5.55 5.19
2716 200ns 1K x 8	IC1-8479	Available	Mar 84
2716 200ns 1K x 8	ICM-2716200	39.00	35.00 29.00
2716 200ns 1K static	ICM-2716200	1.49	1.29 1.15
2716 200ns 1K static	ICM-2716200	1.29	1.15 99
2716 200ns 2K static	ICM-2716200	2.99	2.85 2.75
2716 200ns 1K x 8	ICM-4044450	1.95	1.85 1.75
4044TMS 450ns 4K x 1	ICM-4044450	3.49	3.25 2.99
5257 300ns 4K x 1	ICM-5257300	2.50	2.25 1.99
6116 P3 200ns 2K x 8	ICM-6116200	4.65	4.50 4.25
6116 P3 150ns 2K x 8	ICM-6116150	4.75	4.55 4.35
6167 P3 167 100ns 8K x 1 F320 pin	ICM-6167100	7.95	7.50 7.90
2716 450ns 1K x 8	ICE-2716	4.95	4.75 4.55
2716 450ns 2K x 8	ICE-2716	4.50	4.25 3.97
2716TMS 450ns 1K voltage	ICE-2716TMS	7.95	7.65 7.25
2732 450ns 4K x 8	ICE-2732	4.50	4.25 3.95
2732 450ns 4K x 8	ICE-2732	8.50	8.00 7.60
2732 450ns 4K x 8	ICE-2732	10.50	9.90 9.50
2732 450ns 4K x 8	ICE-2732	9.95	8.65 8.35
2732 450ns 4K x 8	ICE-2732	18.95	18.25 17.75
2732 450ns 4K x 8	ICE-2732	45.00	39.00 36.50

CONNECTORS

GOLD-S-100 EDGE CARD CONNECTORS		D TYPE	
16 pin edge	CNE-115	2.95	2.50 2.19
20 pin edge	CNE-110	4.19	3.86 3.47
20 pin edge	CNE-110	3.95	3.50 3.10
20 pin edge	CNE-100A	4.95	4.50 4.19
.156" CENTER EDGE CARD CONNECTORS			
23/44 Ejector	CNE-44E	2.50	2.15 1.95
53/72 Metal shell	CNE-72S	6.60	6.15 5.75
36/72 G shell	CNE-72S	5.95	5.50 5.19
Other connectors available upon request.			
RIBBON CONNECTORS		AMPHENOL / CENTRIC TYPE	
DB25P male	CND-25P	5.65	5.25 4.15
DB25S female	CND-25S	5.95	5.50 4.50
37 30/60 male	CND-37P	7.95	6.75 5.90
37 30/60 female	CND-37S	7.95	6.75 5.90
20 pin edge	CNI-DE20	4.35	3.30 2.50
20 pin edge	CNI-DE20	2.75	2.15 1.75
26 pin edge	CNI-DE26	4.95	3.50 2.70
26 pin edge	CNI-DE26	3.50	2.40 2.15
34 pin edge	CNI-DE34	6.50	4.50 3.90
34 pin socket	CNI-DE34	4.50	3.95 3.10
50 pin edge	CNI-DE50	9.95	8.60 7.90
50 pin socket	CNI-DE50	4.95	4.60 3.80
DB25P male	CND-25P	5.65	5.25 4.15
DB25S female	CND-25S	5.95	5.50 4.50
37 30/60 male	CND-37P	7.95	6.75 5.90
37 30/60 female	CND-37S	7.95	6.75 5.90
20 pin edge	CNI-DE20	4.35	3.30 2.50
20 pin edge	CNI-DE20	2.75	2.15 1.75
26 pin edge	CNI-DE26	4.95	3.50 2.70
26 pin edge	CNI-DE26	3.50	2.40 2.15
34 pin edge	CNI-DE34	6.50	4.50 3.90
34 pin socket	CNI-DE34	4.50	3.95 3.10
50 pin edge	CNI-DE50	9.95	8.60 7.90
50 pin socket	CNI-DE50	4.95	4.60 3.80

BLOWOUT SALE

\$169



California Digital has recently participated in the purchase of several thousand Siemens FDD 100-8 floppy disk drives. These units are electronically and physically similar to that of the Shugart 801R. All units are new and shipped in factory sealed boxes. Manual and power connectors supplied free upon request. Your choice: 115 Volt, 50 Hz. or 230 Volt, 50Hz.

NOTE: European customers, we have a large quantity of 230 volt 50 Hz. units warehoused in Frankfurt Germany. Arrangements can be made to ship call these drives in quantities of 50 or more in Frankfurt reducing import duty and freight charges.

REMEX DOUBLE SIDED \$219

California Digital has just purchased a large quantity of Remex RFD-4000 Eight Inch double sided disk drives. Remex is the only double sided disk drive that has an double gimbal mounted head assembly that guarantees lower head tracking. This drive is mechanically solid. Remex has always been known for producing premiere products for the floppy disk market. The Remex company is a subsidiary of the Ex-cell-o Corporation, a Fortune 500 Company.

Eight Inch Single Sided Drives

	One	Two	Ten
SHUGART 801R	385	375	365
SHUGART 810 Half Height	385	375	365
SIEMENS FDD 100-8	169	169	159
TANDON 848E-1 Half Height	369	359	349

Eight Inch Double Sided Drives

SHUGART SA851R	495	485	475
SHUGART 860 Half Height	485	475	459
QUME 842 "QUME TRACK 8"	459	459	449
TANDON 848E-2 Half Height	459	447	465
REMEX RFD-4000	219	219	209
MITSUBISHI M2894-63	379	375	369
MITSUBISHI M2896-63 Half Ht.	459	449	409

Five Inch Single Sided Drives

SHUGART SA400L	235	229	225
SHUGART SA410 96TPI/80 Trk.	129	119	call
SHUGART SA200 3/4 Height	159	149	139
TANDON TM100-1	189	179	175

Five Inch Double Sided Drives

REMEX RFD400 IBM compatible	199	189	175
SHUGART SA450	319	309	299
SHUGART SA455 Half Height	259	249	239
SHUGART SA465 Half Ht. 96TPI	289	279	269
TANDON TM50-2 Half Height	215	209	199
TANDON TM55-4 Half Ht. 96TPI	329	319	309
TANDON 100-2	279	269	259
TANDON 101-4 96TPI 80 Track	369	355	350
MITSUBISHI 4851 Half Height	259	249	245
MITSUBISHI 4853 1/2 Ht. 96TPI	339	329	319
MITSUBISHI 4854 1/2 Ht. 8" elec.	465	449	439
QUME 142 Half Height	239	229	219
TEAC FD-55B Half Height	299	389	275

Three Inch Disk Drives

SHUGART SA300 with diskette	229	219	209
-----------------------------	-----	-----	-----

Five Inch Winchester Hard Disk Drives

SHUGART 612	13 M/Bytes	895	865	825
SHUGART 706	6 M/Byte, Half Ht	795	775	755
SHUGART 712	13 M/Byte, 1/2 Ht.	895	865	825
SEAGATE 506	6 M/Byte	465	445	425
TANDON 503	19 M/Byte	895	875	855

Upon request, all drives are supplied with power connectors and manual

ENCLOSURES

California Digital manufactures an assortment of stock and custom disk drive enclosures. If the volume is justified we will custom design an enclosure for your application. The following stock disk drive enclosures are available. All include power supplies the 8" enclosures are supplied with exhaust fans

Horizontal mount two 8" full height drives	\$279.00
Horizontal mount one full height or two half height 8" disk drives	\$239.00
Vertical mount two full height 5 1/4" disk drives	\$139.00

TOLL FREE ORDER LINE

(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 643-9001

Shipping: First five pounds \$3.00, each additional pound \$.50.
Foreign orders: 10% shipping, excess will be refunded.
California residents add 6 1/2% sales tax. • COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a strong "Dun & Bradstreet" rating.
Retail location: 15608 Inglewood Avenue, Lawndale 90260.

CALIFORNIA DIGITAL

Post Office Box 3097 B • Torrance, California 90503

\$35 WESTERN UNION EasyLink

California Digital has recently contracted with the Western Union Telegraph Company for the privilege of offering subscriptions to Western Union's new EasyLink data communications network.

Subscribers are able to transmit and receive domestic and international communications from a network of over 1.5 million Worldwide Telex subscribers. EasyLink also allows access to other Western Union services that till recently have been available only to dedicated Telex installations.

Send telegrams, mailgrams and computer letters as easy as telephoning Western Union's toll free access line. Your personal computer and modem become your link to the World. One time \$35.00 installation fee includes EasyLink self teaching user manual, Telex directory and your EasyLink access password.

FREE
Your Choice

Second Drive or Monitor

SANYO
IBM COMPATIBLE

\$995



Sanyo Electronics has just released the first of a new generation of IBM/PC look-a-like, the MBC-550. This is a complete microcomputer that includes 128K/byte of memory, a 5 1/4" 160K/byte disk upgradeable to 320K/byte drives. Also includes both color composite and RGB graphics interface, low profile keyboard, and parallel printer port. Extensive software such as Sanyo Basic, disk utilities, Wordstar word processing software, Calcstar spreadsheet & Easy Writer I. MS-DOS is supplied with the Sanyo computer. Most programs written for the IBM/PC will operate on the MBC-550. Along with all this California Digital offers "FREE" your choice of either a second disk drive, or a high resolution green or amber screen monitor. All at the super low price of only \$995. We are currently experiencing an initial shortage of this computer. Please place your orders early. The MBC-550 will be shipped on a first-come basis.

PRINTERS
\$289
Star Gemini

MATRIX PRINTERS

Star Gemini 110 120 char/sec	STR-G10X	289.00
Star Gemini 150 120 char/sec	STR-G15X	419.00
Star Gemini Delta 10 160 char/sec	STR-D10	299.00
Star Gemini Delta 15 160 char/sec	STR-D15	329.00
Tundra P1350 192 char/sec, letter quality	TOS-1350	1495.00
On data 9.24 serial & parallel	OH-82A	379.00
On data 9.24 parallel interface 160 char/sec	OH-82A	479.00
On data 9.24 parallel 150 char/sec	OH-83A	619.00
On data 9.24 parallel 150 char/sec	OH-84A	1019.00
On data 9.24 parallel 150 char/sec	OH-85A	1995.00
Epson FX80 10 160 char/sec with graphics	EPS-FX80	529.00
Epson FX80 with graphics 15 paper	EPS-FX100	589.00
Epson FX80 parallel 15 paper	EPS-FX100P	589.00
Epson FX80 parallel 9 paper	EPS-8023A	389.00
Anadex 9501A high speed with graphics	ANX-9501A	1099.00
Anadex 9501A 200 char/sec, parallel serial	ANX-9501A	1199.00
Quantum 70 120 correspondence quality 180 char/sec	QTX-7033	1599.00
Genital low cost dot matrix printer	PRO-35-2P	689.00
Praxair 810 parallel 9 paper	PRO-35-2P	689.00
Praxair 810 parallel 15 paper graphics	DPS-8600	6995.00
Dalaproducts B 800 30 30 and printer 600 LPI	PTX-8000	4250.00
Praxair 810 high speed printer 200 lines per minute	PTX-8000	5795.00
Praxair 810 high speed printer 600 lines per minute	PTX-8000	629.00
Transfer 1300 full IBM PC compatible	TNS-130P	629.00

TERMINALS
\$795

The Wyse 100 features die cast aluminum case, 102 key keyboard and non-glare 26 line green phosphor video display. Split screen, both horizontal and vertical, makes the WY-100 unusually user friendly. This unique terminal is perfect to enhance any business system.

Freedom 90 split screen, detachable keyboard	LIB-F90	475.00
Visual 50 detachable keyboard selectable settings	VSL-500	619.00
Visual 50 Green screen	VSL-500G	650.00
Visual 330 emulator 15 inch green phosphor	VSL-330-4G	925.00
Ampex Dialogue 125 amber screen, two page, func. keys	APX-D1250	675.00
Ampex Dialogue 125 amber screen, two page, func. keys	APX-D1250	685.00
Wyse 50 14 green phosphor	WYS-50	599.00
Wyse 300 Split color display, split screen	WYS-300	795.00
Televideo 910 Plus block mode	TVS-910P	1159.00
Televideo 910S controllable keyboard, 27 function keys	TVS-910S	1259.00
Televideo 930 graphic char. split screen 22 line	TVI-930	950.00
Televideo 970 14 green screen, 132 column, European	TVI-970	1099.00
Televideo 970 terminal, VT52 compatible, detachable keyboard	TVI-970	165.00

256 KILOBYTE MEMORY BOARD
\$495

- 256 Kilobytes of memory using 64K dynamic RAM
- Over one megabyte of memory using the new 256K dynamic RAM chips.
- Error detection-trap capability.
- Individual 16K block can be relocated to any location within a megabyte of RAM.
- 24 bit addressing and phantom mode capability.

The California Digital 256K RAM board represents an outstanding value in S-100 memory technology. Priced slightly above earlier generation 64K dynamic ram boards it gives you these additional features: 256K of memory with parity. Parity error feature can be jumpered to any of the memory lines a status port. ERRORLED or IEEE 696 ERROR signal. 24 or 16 bit addressing with memory management. Proper operation with front panel equipped systems, DMA disk controllers, and IEEE-488 compatible bus systems assured with an on-board RAM generator for memory refresh timing. CAS and RAS timing is controlled with latched digital delay lines for proper operation over the entire operating temperature range. The board is very recent in design using the National Semiconductor DM-6109 RAM Controller chip. Signal termination networks are used on all address lines, CAS line, and RAS lines eliminating the task of wiring. The board uses two separate voltage regulators. One for the DRAMs and one for the rest of the logic, accessing the good immunity of the ram array. Typical power dissipation is 1.8 watts. Documentation includes theory of operation, configuration guide, a schematic, and application notes on the use of the memory management options. CAL-256K - 2 1/2 hrs.

WORD PROCESSING PRINTERS

HEC-7710 5 pin dot matrix second serial interface	HEC-7710	1979.00
HEC-7730 5 pin dot matrix serial interface	HEC-7730	1979.00
HEC-3550 5 pin dot matrix printer designed for the IBM PC	HEC-3550	1799.00
NEC-C6500 6 pin dot matrix printer 20 char/sec, parallel	NEC-C6500	995.00
Super Ricoh EXP-560 14 char/sec, dot matrix interface	SRI-EXP560	659.00
Dalaproducts EXP-560 17 char/sec, serial interface	DAL-560	1765.00
Quasar 630 40 char/sec, serial	QUS-630	879.00
Quasar 630 40 char/sec, serial & parallel 20 cps	JUK-6100	539.00
Brother HX10 40 char/sec, serial	BTH-HR10	699.00
Brother HX10 40 char/sec, serial & parallel interface	BTH-HR10	779.00
Shawmuter 10 40 char/sec, serial	PROF-10P	1125.00
Shawmuter 10 40 char/sec, serial	PROF-10P	1125.00
Comma 20 40 char/sec, serial	CRK-20P	396.00
Comma 20 40 char/sec, serial & parallel	CRK-20P	396.00

APPLE
\$929

Apple IIe 64K computer only
Apple IIe starter kit, monitor, disk, 80 col. card
Advanced Business Tech. 13 Key Pad
Cali. Computer 7710A Async. Serial Interface
Cali. Computer 7710B same but for module
Cali. Computer 7711A 12K PRN module
Cali. Computer 7720A parallel interface
Cali. Computer 7724A Centronics/clock module
Cali. Computer 7729A Centronics interface
Cali. Computer 7740A programmable timer
California Digital 16K card for standard Apple II
Hayes MicroModem II for Apple II
Kensington Micro. System server for
Microsoft Softcard with CP/M, 2.80
Mountain Computer The Clock
Mountain Computer ROM Plus 16 input, 8bit
Mountain Computer ROM writer/socket socket
Mountain Computer ROM Plus with keyboard filter
Orange Micro GRAPPLER parallel interface
Sorrento Valley 8" controller double size D/D
TEAC 5 1/4" disk drive for Apple II
Vista Vision 80, 80 column card for std Apple II
Vista B" disk controller double size D/D

S-100 BOARDS

16 BIT MICROPROCESSORS

Octagon CPU 8088/280 & controller	OCT-88/280	795.00
Godbout 8088/8082 microproc. 16 bit	GBT-8687	495.00
Godbout dual processor 8085/8388 16 bit	GBT-6588	359.00

SINGLE BOARD COMPUTERS

Insight G-4 128K 4 serial, multi-S-100	INS-E04	595.00
Advanced Digital Propdy & 61K	AMD-280	750.00
Teletek System master 165 floppy disk	TEL-SM4	695.00
Teletek FDC1 Single board no memory	TEL-FDC1	675.00

8 BIT MICROPROCESSORS

Godbout 280 24 bit extended add	GBT-280	250.00
California Computer 280 microprocessor	CCS-2810	275.00
Farwell 280 with two 8K256 chips	FAR-280	339.00

FLOPPY DISK CONTROLLERS

Godbout Disk 1 double density	GBT-DISK1	395.00
California Computer 2428 with CP/M	CCS-2428	339.00
Morrow Disk Jockey II with CP/M 2.2	MDS-DJ2	350.00
Morrow Disk Jockey I with CP/M, 3rd Den	MDS-DJ1	225.00
Tarbell Electronics double density	TAR-DC02	419.00
Tarbell Electronics single density	TAR-DC01	279.00
Fulcrum DMA 000 controller I/O to hard disk	FCA-001	389.00

CPM OPERATING SYSTEM

Digital Research CP/M 2.2 1.1 96 gen	DRG-CPM2	249.00
Godbout CPM 2.2 for Disk 1	GBT-CPM22	199.00
Godbout CPM/MS for 8085 and 8086	GBT-CPM85	265.00
Tarbell Electronics CPM 2.2	TAR-CPM22	279.00

HARD DISK CONTROLLERS

Octagon hard disk controller with EIC	OCT-HD1	475.00
Godbout Disk 2 8 & 14 hard disk	GBT-DISK2	469.00
California Computer Hard Disk	GBT-DISK3	469.00
Morrow Design Controller for 5 1/4" Drives	MDS-HD506	495.00
Vista Digital Controller for 5 1/4" Drives	VDT-1001	495.00

EPROM BOARDS

Inner Access EPROM Bus programs 27128 IAC	IGD-P37	465.00
Digital Research PROM board .32"	DIG-P37	119.00

SYSTEM MEMORY BOARDS

Godbout Ram 16 64K 16 bit data trans	GBT-R16	359.00
Godbout Ram 17 64K 8 bit 24 buffers	GBT-R17	359.00
Godbout Ram 21 128K byte B/B transfer	GBT-R21	859.00
Fulcrum Dm-Ram B/B transfer bank	FCA-R16	395.00
California Computer 280 4 bit	CCS-R16	295.00

DYNAMIC MEMORY BOARDS

California Digital 256K expand to 1 Meg	CAL-DM26	495.00
California Corp. 206K 64K bank select	CCS-DM26	795.00

INTERFACE BOARDS

Godbout Interface I 2 serial ports	GBT-I33A	239.00
Godbout Interface II 1 serial 3 port	GBT-I36A	269.00
Godbout Interface III with 8 serial ports	GBT-I38A	589.00
Godbout Interface IV 3 serial 2 parallel	GBT-I47A	339.00
California Computer 2710 4 serial ports	CCS-2710	379.00
California Computer 2720 4 serial 2 parallel	CCS-2720	219.00
California Computer 2830 6 port serial	CCS-2830	429.00
Morrow Designs Multibus 3 2 port	MS-D-MTL1	319.00

SPECIAL FUNCTION BOARDS

Hayes S-100 Microform 300 board	HYS-M100	129.00
DI Computer clock/calendar/battery	DIC-CC100	139.00
Godbout System support board 4K EPROM	GBT-SSB1	350.00
Godbout System support board 9511 main	GBT-SSB1	539.00
Dual Systems 4 channel 12 bit D/A conv	DSC-AM12	619.00
Dual System 12 bit resolution 32 ch A/D	DSC-AM12	679.00
Malins Data Transfer controller 8 ch	MLT-16A	129.00
Malins Transfer board with 6 probe	MLT-16A	79.00
Artex Technology wire wrap prototype	ART-WR100	49.00
Artex Electronics wire wrap prototype	ART-WR100	25.00

MAINFRAMES & MOTHER BOARDS

Espece Data Systems 22 slot	EOP-100	695.00
Godbout Enclosure 2 20 slots	GBT-EM20	675.00
California Computer 2000 12 slot	CCS-2000	419.00
California Digital 18 slot mother board	CAL-MB18	35.00
Godbout 12 slot mother board assembled	GBT-MB12	149.00

MONITORS

BKAC 12A green phosphor 15 MHz composite video	BKAC-12A	79.00
BKAC 12A high resolution 20MHz	BKAC-12HA	124.00
Zenith ZVM1122 Amper Phosphor 12" 40:80 column switch	ZVM-1122	119.00
Zenith ZVM1223 green phosphor 12" 40:80 column switch	ZVM-1223	105.00
NEC JB1201 green phosphor 16 MHz composite video	NEC-JB1201	159.00
NEC JB1201 green phosphor 16 MHz composite video	NEC-JB1201	159.00
USI Amber screen 12" composite monitor	USI-12A	169.00
Moscora 21" open frame 12" white composite video	MOS-21	159.00
Moscora 12" open frame requires horiz sync and power	MOS-12	89.00
Comarc 9" open frame requires horiz sync & 12v supply	COM-9	59.00

COLOR

BKAC 41919110 Color composite video with sound	BKAC-4191	249.00
BKAC 9119M RGB designed for use with the IBM computer	BKAC-9119M	499.00
NEC JC1201M RGB color monitor	NEC-JC1201M	499.00
NEC JC1201 color monitor	NEC-JC1201	339.00
Zenith ZVM134 14GB color available for IBM PC	ZVM-134	379.00
Comarc color composite video	COM-670	329.00
Ampex F200 1 composite video	AMP-F200	329.00

ASCII KEYBOARD \$49

California Digital has purchased over 3000 of these Microswitch keyboards from the General Dynamics Corporation. 93 ASCII encoded Mail effect switches includes 8 function keys and 14 key numeric cluster. Make this keyboard an excellent value all available. M-83CDS 1 bit.

We also have only a matching General Dynamics steel trim panel. \$10.

Non-encoded Hayes 56 key metal contact keyboard. M-83C 56 keys. Matching 15 key numeric cluster \$9.95. M-83C 15. Both for only \$29.95. M-83B 15.

Not pictured, 49 key eighth modified keyboard in coded Microswitch Mail effect keyboard. REMOVED from punch card equipment. \$14.95. DIF-KB49 ASCII encoder available.

CP/M SOFTWARE

AdaSoft CP/M	ADA-445C	395.00
D-Base II	ASH-015C	429.00
Wordstar	MPP-187C	309.00
Mailmerge	MPP-392C	169.00
Spellstar	MPP-429C	169.00
Mulliplan	MSF-483C	189.00
Macro 80	MSF-187C	139.00

Supersoft

MAC	MGR-309C	149.00
CP/M 3.0	DGR-401C	85.00
Despool	DGR-367C	249.00
Pascal Plus	DGR-004C	429.00
CP/M 86	DGR-186C	239.00
MP/M II	DGR-208C	379.00

MODEMS

DIRECT CONNECT 569

Hayes Smart Modem 1200 baud auto answer auto dial	HYS-2140	475.95
Hayes 1200 baud auto answer auto dial	HYS-2120B	419.00
Hayes Smartmodem 300 baud only auto answer auto dial	HYS-103AD	229.00
Hayes Smartmodem 1103 Apple direct connect	HYS-MMC	279.00
Hayes MicroModem 100 & 1800 auto answer auto dial	HYS-100	319.00
Hayes Chronograph time & date	HYS-CHR322	199.00
US Robotics 212A 300 1200 baud auto answer auto dial	USR-212A	439.00
Universal Data 1031P auto answer	UDS-1031P	219.00
Universal Data 1031P auto answer	UDS-1031P	219.00
Universal Data 212L 300 1200 baud auto answer auto dial	UDS-212L	319.00
Navigation 212L direct connect auto answer	NOV-212L	319.00
Navigation 212L direct connect auto answer	NOV-212L	319.00
Navigation SmartCat 103 auto answer auto dial	NOV-CAT	119.00
Navigation SmartCat 103 212 1200 baud auto dial	NOV-SC212	529.00
Sigamodem 569 direct connect with terminal cable	SGI-569	69.00

Shipping: First five shipments \$3.00, each additional pound \$1.50. Foreign orders: 10% shipping, excess will be refunded. California residents add 6 1/2% sales tax. • COD's discouraged. Open accounts extended to state supported educational institutions and companies with a strong "Dun & Bradstreet" rating. Retail location: 15608 Inglewood Avenue, Lawndale 90260.

Additional Software available for Apple, IBM/PC and Atari. Please telephone for price and availability.

VISA
master charge

TOLL FREE ORDER LINE
(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 643-9001

www.americanradiohistory.com

UNBEATABLE SANYO COMPUTER



12" 80 x 24 18MHz MONITORS

Part Number	Description	List Price	SALE PRICE
BBSYODM0012CX	Black & White Display	\$240.00	\$149
BBSYODM0012CX	B & W w/audio	\$260.00	\$165
BBSYODM0112CX	Green P31 Display	\$240.00	\$149
BBSYODM0112CX	Green P31 w/audio	\$260.00	\$165
BBSYODM0212CX	Amber Display	\$240.00	\$149
BBSYODM0212CX	Amber w/audio	\$260.00	\$165

13" RGB COLOR MONITORS w/AUDIO

BBSYODM0500	Medium Res. 350 x 350 lines	\$495.00	\$349
BBSYODM7500	High Res. H480 x U240 dots	\$725.00	\$499
BBSYODM8500	Ultra High H690 x V240 dots	\$1085.00	\$799

Shipping weights on above monitors 12" 24 lbs ea. 13" color 30 lbs ea



GEMINI 10X & 15X 120 CPS DOT MATRIX PRINTER

BBSTRGEM10X	80 column (20 lbs.)	\$399.00	\$289
BBSTRGEM15X	132 column (26 lbs.)	\$649.00	\$419
BBSTRSERINTX	Serial Interface for 10X and 15X		\$ 59
BBSTRSERINTXK	w/4K print buffer for 10X and 15X		\$119


DELTA 10 & 15 160 CPS DOT MATRIX PRINTERS WITH 8K PRINT DUFFER

BBSTRDELTA10	80 column (20 lbs.)	\$649.00	\$469
BBSTRDELTA15	132 column (20 lbs.)	\$799.00	\$699

PRINTER CABLES

BBPGC30P72CP	Centronics Male to Male 6'	\$24.95
BBPGC25P72CP	IBM PC™ to Centronics Parallel 6'	\$34.95
BBPGC251P6P	6' 9 conductor shielded RS-232	\$19.95

MANNESMANN TALLY

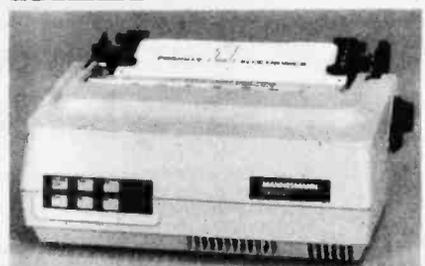

Letter Quality Dot Matrix Printer

For Complete Specifications, see page 41 of our new '83/'84 Engineering Selection Guide

BBTALMT180L	80 column/160 cps (21 lbs.)	\$589
BBTALMT180L	132 column/160 cps (28 lbs.)	\$829
BBTALMT180L	Replacement Ribbon for MT160L	\$15.75
BBTALMT180L	Replacement Ribbon for MT180L	\$17.80

Order Interface Cables at Left

PIXY 3 PLOTTER

High Quality, economical 3 color plotter. See page 37 of our '83/'84 Engineering Selection for details.

BBTALPIX3P	w/parallel interface (sh. wt. 16 lbs.)	\$699
BBTALPIX3S	w/serial interface (sh. wt. 16 lbs.)	\$769

CompuPro The World's Largest Supplier of S-100 Boards!



CPU BOARDS

		List Price	SALE Price
BBG8T51066	CPU 68K A&T 8MHz	\$ 695.00	\$ 595.00
BBG8T51566	CPU 68K CSC 10MHz	\$ 850.00	\$ 765.00
BBG8T51066	Co-Processor w/8086 only A&T's	\$ 750.00	\$ 675.00
BBG8T51566	Co-Processor w/8086 only CSC's	\$ 850.00	\$ 765.00
BBG8T51067	CPU 8086/8087 A&T	\$1050.00	\$ 939.00
BBG8T51567	CPU 8086/8087 CSC	\$1150.00	\$1065.00
BBG8T51080	CPU 8085/88 A&T	\$ 495.00	\$ 389.00
BBG8T51560	CPU 8085/88 CSC	\$ 595.00	\$ 497.87
BBG8T51080	3/6MHz CPU-Z A&T	\$ 325.00	\$ 279.00
BBG8T51580	3/6MHz CPU-Z CSC	\$ 425.00	\$ 347.87

		List Price	SALE Price
BBSDS38095	SBC-300 4MHz Z80A CPU A&T's	\$ 741.00	\$ 619.00
BBSDS38092	SBC-300 6MHz Z80B CPU A&T's	\$ 825.00	\$ 699.00
BBSDS38007	Z80 Starter System A&T	\$ 450.00	\$ 399.00
BBSDS38088	ExpandoRAM IV 256K A&T	\$1145.00	\$ 975.00
BBSDS38089	ExpandoRAM IV 256K w/EDC A&T	\$1990.00	\$1875.00
BBSDS38097	ExpandoRAM IIV696 256K	\$ 825.00	\$ 749.00
BBSDS38078	PROM-100 w/software A&T	\$ 285.00	\$ 219.00
BBSDS38082	RAM Disk 256K A&T	\$ 875.00	\$ 775.00
BBSDS38081	ROM Disc 128K A&T	\$ 350.00	\$ 319.00
BBSDS38096	I/O-8 4-Port Async Ser. A&T	\$ 600.00	\$ 549.00
BBSDS38098	I/O-8 8-Port Async Ser. A&T	\$ 695.00	\$ 589.00
BBSDS38094	I/O-8 4 Sync. 4 Async. 8-Port Serial I/O A&T	\$ 795.00	\$ 699.00
BBSDS38093	Versal floppy III Floppy & ST-506 S Hard Disk Controller	\$ 895.00	\$ 759.00

BBPDBVF339145*	w/5 1/4" unbanked CP/M™ 3.0	\$1083.00	\$ 888.00
BBPDBVF339146*	w/8" unbanked CP/M™ 3.0	\$1083.00	\$ 888.00
BBPDBVF339147*	w/5 1/4" banked CP/M™ 3.0	\$1083.00	\$ 888.00
BBPDBVF339148*	w/8" banked CP/M™ 3.0	\$1083.00	\$ 888.00
BBSDS38093	Versal floppy IIV696 (A&T)	\$ 400.00	\$ 344.00
BBPDBVF239141*	w/5 1/4" unbanked CP/M™ 3.0	\$ 588.00	\$ 424.00
BBPDBVF239142*	w/8" unbanked CP/M™ 3.0	\$ 588.00	\$ 424.00
BBPDBVF239143*	w/5 1/4" banked CP/M™ 3.0	\$ 588.00	\$ 424.00
BBPDBVF239144*	w/8" banked CP/M™ 3.0	\$ 588.00	\$ 424.00

See Complete Specifications on Pages 12-25 Of Our '83/'84 Engineering Selection Guide



BOARD LEVEL PRODUCT

BBDOCTPUB16	8/16 Bit SBC (A&T)	\$ 895.00	\$ 795.00
BBDOCTB087NDP	8087 for CPU 8/16		\$ 300.00
BBDOCTPMB8	CP/M-86™		\$ 150.00
BBDOCTCONCPMB8	Concurrent CP/M-86™		\$ 195.00
BBDOCTMPMB8	MP/M-86™		\$ 495.00
BBDOCTHDC	ST-506 Hard Disc Controller	\$ 595.00	\$ 525.00
BBDOCTHDSUB19	19.2Mb Hard Disc Subsystem	\$2295.00	\$1995.00
BBDOCTS256T00	256K Static RAM (A&T)	\$1850.00	\$1719.00
BBDOCTD512K	512K Dynamic RAM (A&T)	\$1450.00	\$1345.00

See Specifications on Pages 12-27 Of Our '83/'84 Engineering Selection Guide

COMPLETE OCTAGON 8/16™ SYSTEMS

BBDOCT16SMPM	w/256K Static RAM & MP/M-86™	\$7350.00
BBDOCT16SCCPM	w/256K Static RAM & Concurrent CP/M-86	\$7350.00
BBDOCT16DMPM	w/512K Dynamic RAM & MP/M-86	\$7350.00
BBDOCT16DCCPM	w/512K Dynamic RAM & Concurrent CP/M-86	\$7350.00

See Complete Specifications on Page 5 Of Our New '83/'84 Engineering Selection Guide

Z80 SINGLE BOARD COMPUTERS



Part Number	Description	List Price	SALE Price
BBADCSUP6128	Super Six 6MHz 128K Master w/1 ADC PS1 RS232 Serial Adapter	\$995.00	\$849.00
BBADCSPLW6128	Super Slave 6MHz 128K	\$695.00	\$595.00
BBADCSBC15	Super Quad for 5 1/4" drives	\$750.00	\$695.00
BBADCSBC18	Super Quad for 8" drives	\$750.00	\$695.00

SOFTWARE & I/O PORT ADAPTERS

BBACPCP1	PS/Net1 RS232 Serial Adapter	\$ 35.00
BBADCCPSP	Centronics Parallel Port Adapter	\$ 35.00
BBADCCPM22†	Advanced Digital CP/M™ 2.2	\$150.00
BBADCCPM30†	Advanced Digital CP/M™ Plus™ (3.0)	\$350.00
BBADCTD0S4U*†	TurboDos™ 1.2, or 4 Multi-user	\$550.00

*Replace * with 0 to specify Super Quad. † for Super Six † Replace † with 8 for 8" IBM™ 3740 format. † for 5 1/4" 48 TPI format or 96 for 5 1/4" 96 TPI format.

ST506/SA1000 HARD DISK CONTROLLER

BBADCHDC10015	ST506 5 1/4" Winchester Cont.	\$500.00	\$450.00
BBADCHDC10018	8" Winchester Cont.	\$500.00	\$450.00
BBADCHDCINSTL	Install program for use with non-ADC CP/M board (Supplied on 8" CP/M™ compatible disk)	\$ 10.00	

See Complete Specifications on Pages 14 - 27 of our '83/'84 Engineering Selection Guide

MACROTECH International Corp.

MAX: 1 S-100 SLOT 1 MEGADYTE



The MACROTECH MAX is a 256K to 1 Megabyte S-100 IEEE/696 dynamic memory board that's right up to 1 Megabyte on a single standard size S-100 board. The first 384K is on the Host card that plugs into your motherboard. The remaining 640K is located on a unique "piggy-back" card that attaches to the host. The MAX family is ideally suited to applications where density, speed, and software flexibility are essential.

See Page 16 Of Our New '83/'84 Engineering Selection Guide for Complete Specifications

Ordering Information: The 256K and 384K versions include the fully socketed host card. The 512K and larger versions also include the fully socketed "piggy-back" card.

	List Price	SALE Price	
BBMACMAX256	256K Dynamic RAM (A&T)	\$1125.00	\$1185.00
BBMACMAX384	384 Dynamic RAM (A&T)	\$1467.00	\$1395.00
BBMACMAX512	512K Dynamic RAM (A&T)	\$1880.00	\$1795.00
BBMACMAX1M	1 MEG Dynamic RAM (A&T)	\$2449.00	\$2325.00
BBMACMAXTM	MAX Technical Manual		\$ 15.00
BBMACMAXVOSK	MAX Virtual Disk Software supplies on 8" S/D Disk		\$ 25.00
BBMACM3	Memory Mapping Option		\$ 91.00
Attention CompuPro CPU 8085/88 Users:	You must order the CPU modification hardware to insure complete compatibility		
BBMACGMTMOD	Hardware modification for CompuPro CPU 8085/88		\$ 10.00

I/O BOARDS

BBG8T56010	System Support 1 Multifunction I/O (A&T)	\$450.00	\$375.00
BBG8T56010/56531	SS1 w/8231 Math Chip A&T	\$645.00	\$570.00
BBG8T56010/56320	SS1 w/8232 Math Chip A&T	\$645.00	\$570.00
BBG8T53030	Interface: 3 - 8 par serial (A&T)	\$699.00	\$599.00
BBG8T53040	Interface: 4 - 3 Serial, 1 Centronics Parallel, 1 Parallel (A&T)	\$450.00	\$389.00

8/16 BIT MEMORY BOARDS

BBG8T52016	RAM 16 12MHz 32K Static A&T's	\$550.00	\$ 495.00
BBG8T52021	RAM 21 12 MHz 128K Static A&T's	\$995.00	\$ 895.00
BBG8T52022	RAM 22 12MHz 256K Static A&T's	\$1750.00	\$1549.00
BBG8T52012	M-Drive/H 512K RAM Disk A&T's	\$1475.00	\$1195.00

MAINFRAMES

BBG8T51200	20 Slot Desk Top (A&T)	\$925.00	\$795.00
BBG8T51250	20 Slot Rack Mount (A&T)	\$975.00	\$850.00

For more CompuPro Specifications see pages 2-33 of our New Catalog



Manufactured by Vector Electronic Co. under license from CompuPro

BBVCT8800GF8	Interface 1 2-Serial (A&T)	\$295.00	\$219.00
BBVCT8800GF28	Interface 2 3-Par. 1-Ser (A&T)	\$325.00	\$239.00
BBVCT8800GR178	RAM 17 64K 10MHz Static RAM (A&T)	\$450.00	\$389.00

DEAL PAGES 392 & 393

DISK DRIVES & CABINETS ON SALE!!

5 1/4" FLOPPY DISK DRIVES

BBMP151*	MPI Full Height SS 48TPI (5 lbs.)	\$200.00
BBMP152*	MPI Full Height DS 48TPI (5 lbs.)	\$270.00
BBMP191*	MPI Full Height SS 96TPI (5 lbs.)	\$275.00
BBMP192*	MPI Full Height DS 96TPI (5 lbs.)	\$400.00
BBMP150*	MPI 1/2-Height SS 48TPI (4 lbs.)	\$260.00
BBMP150Z	MPI 1/2-Height DS 48TPI (4 lbs.)	\$300.00
BBTNTM1001	Tandon Full Height SS 48TPI	\$199.00
BBTNTM1002	Tandon Full Height DS 48TPI	\$249.00
BBTNTM1014	Tandon Full Height DS 96TPI	\$339.00

*Replace with **M** for MPI Door, or **S** for Shugart SA400 Type Door

5 1/4" Disk Drive Cabinets

BBJMR1C5	Single Drive Cabinet (5 lbs)	\$ 79.00
BBJMR2C5	Dual Drive Cabinet (9 lbs)	\$ 99.00
BBJMR2C5C	Dual w/Internal Data Cable (9 lbs.)	\$115.00

8" Floppy Disk Drives

BBSHU801R	Shugart Full Height SS (18 lbs.)	\$349.00
BBSHU81R	Shugart Full Height DS (18 lbs.)	\$479.00
BBSEFD0100B	Siemens Full Height SS (18 lbs.)	\$169.00
BBQMETRAK842	Qume Full Height DS (18 lbs.)	\$459.00
BBBITM29463B	Mitsubishi Full Height DS (18 lbs.)	\$375.00
BBMP141S	MPI Full Height SS (11 lbs.)	\$380.00
BBMP142S	MPI Full Height DS (11 lbs.)	\$460.00
BBMP141D	MPI Dual 1/2-Height SS (22 lbs.)	\$780.00
BBMP142D	MPI Dual 1/2-Height DS (22 lbs.)	\$830.00
BBMP141M	MPI 1/2-Height SS (9 lbs.)	\$380.00
BBMP142M	MPI 1/2-Height DS (9 lbs.)	\$460.00
BBTNTM8481	Tandon 1/2-Height SS (9 lbs.)	\$359.00
BBTNTM8482	Tandon 1/2-Height DS (9 lbs.)	\$435.00

Dual 8" Disk Enclosures

All of these rugged enclosures feature forced, filtered air cooling, hefty power supply, with the heat producing elements mounted to outside for cool reliable operation. The rear panels are punched for the appropriate data cables.

FDE002. Economical design for two standard size 8" floppies. Hinged lid for easy drive access. Power supply: 5V@4A, -5V@.8A, +24@3A
DTL002. Cabinet for two 1/2-height 8" drives or 1 full height 8" floppy or Winchester. Includes Shugart type AC power cable

Part Number	Description	List Price	SALE Price
BBIIIFDE002	FDE002 Dual Enc. (35 lbs.)	\$359.95	\$325.00
BBIIHDL002SHU	DTL002 Dual Thin Line (12 lbs.)	\$225.00	\$175.00
BBIIHDLMP1KIT	MPI 1/2-Height DTL adapter kit	\$ 24.95	
BBIIHDL3Q304FM	Shugart to Qume AC Cable	\$ 4.95	

BUY CABINETS WITH DRIVES AND SAVE!


Combinations with FDE002

BBPOBIIIFDE2S2	w/2 SHU801R Drives	\$ 999.00
BBPOBIIIFDE2M2	w/2 MFM289463BS Drives	\$1049.00
BBPOBIIIFDE2O2	w/2 QMETRAK842 Drives	\$1199.00
BBPOBIIIFDE2B51	w/2 SHU81R Drives	\$1239.00
BBPOBIIISIE	w/2FDD1008 Drives	\$ 595.00

Combinations with DTL002

BBPOBIIITND1	w/2 TNDTM8481 Drives	\$ 879.00
BBPOBIIITND2	w/2 TNDTM8482 Drives	\$1039.00
BBPOBIIIMP11	w/2 MP141M Drives	\$ 879.00
BBPOBIIIMP12	w/2 MP142M Drives	\$1039.00

Due to UPS Regulations, drives and cabinets will be shipped separately. Please include shipping for each disk drive and cabinet.

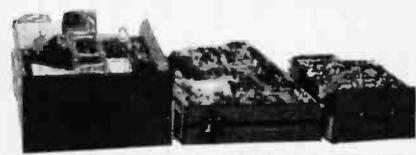

5 1/4" Hard Disk

BBMCP1302	Micropolis 20.4/25.9 Mb (12 lbs.)	\$1465.00
BBMCP1303	Micropolis 33.9/43.2 Mb (12 lbs.)	\$1875.00
BBMCP1304	Micropolis 40.8/51.9 Mb (12 lbs.)	\$2195.00
BBTNDTM501	Tandon 6 Mb (9 lbs.)	\$ 899.00
BBTNDTM502	Tandon 12 Mb (9 lbs.)	\$ 849.00
BBTNDTM503	Tandon 19 Mb (9 lbs.)	\$ 995.00

DUAL 5 1/4" HARD DISK DRIVE CABINET

All of the necessary power for two TANDON TM500 series or equivalent hard disk drives. Just imagine, you can have 100Mbytes of storage using two of the Micropolis 5 1/4" Winchester disk drives and this cabinet! Power supply: +5V@6A and +12V@6A. The rear panel is punched for two 20, two 34, and one 50 pin header connector. Fan cooled.

BBIIHDS002	Dual Hard Disk Enclosure	\$399.00
------------	--------------------------	----------

DUY CABINET WITH DRIVES AND SAVE!

BBPOB501HD5	w/2 TM501 Drives	\$1599.00
BBPOB502HD5	w/2 TM502 Drives	\$1899.00
BBPOB503HD5	w/2 TM503 Drives	\$2149.00
BBPOB1302HD5	w/2 MCP1302 Drives	\$2999.00
BBPOB1303HD5	w/2 MCP1303 Drives	\$3799.00
BBPOB1304HD5	w/2 MCP1304 Drives	\$4399.00

Due to UPS Regulations, disk drives will be shipped separately from cabinets. Don't forget to include shipping for each disk drive cabinet.

maxell

IT'S WORTH IT!



5 1/4" DOUBLE DENSITY DISKETTES

Part Number	Sectors	Tracks	Sides/ Heads	Price Per Box of 10	
				1	2 or more
BBMXLMD1M	Soft	40	1	\$28.00	\$25.00
BBMXLMD10M	10 Hard	40	1	\$28.00	\$25.00
BBMXLMD116M	16 Hard	40	1	\$28.00	\$25.00
BBMXLMD20M	Soft	40	2	\$42.00	\$38.00
BBMXLMD2100M	10 Hard	40	2	\$42.00	\$38.00
BBMXLMD2160M	16 Hard	40	2	\$42.00	\$38.00
BBMXLMD10DM	Soft	80	1	\$36.00	\$33.00
BBMXLMD20DM	Soft	80	2	\$44.00	\$40.00
BBMXLMD216DDM	16 Hard	80	2	\$44.00	\$40.00

All min disks with exception of MD1DDM, MD2HD, & MD2DDM are with hub ring

8" DOUBLE DENSITY DISKETTES

BBMXLFD0126M1200	Soft	1	\$36.00	\$33.00
BBMXLFD132M1200	Hard	1	\$36.00	\$33.00
BBMXLFD0230M1200	Soft	2	\$45.00	\$40.00
BBMXLFD2320M1200	Hard	2	\$45.00	\$40.00

Go on The Gold Standard!



BBADDCOLOR Viewport/Color Terminal (40 lbs) List. \$1295.00
ON SALE NOW FOR ONLY: \$1129.00

1200 BAUD MODEM SALE

For more details on Modems, see pages 38 & 39 of our New Catalog



U.S. ROBOTICS AUTO DIAL/AUTO ANSWER

D.C. HAYES

FREE SOFTWARE!

Part Number	Description	List Price	SALE
BBPOBPASSTEL8	Password Modem w/Communication Software 8" CP/M™	\$528.00	\$379.00
BBPOBPASSTEL5	Password Modem w/Communication Software 5 1/4" Apple	\$528.00	\$379.00
BBPOBADIALTEL8	Auto Dial 212A Modem w/Communication Software 8" CP/M™	\$678.00	\$495.00
BBPOBADIALTEL5	Auto Dial 212A Modem w/Communication software 5 1/4" Apple	\$678.00	\$495.00
BBPOBS100TEL8	S-100 Modem Card w/operating software on 8" CP/M™ diskette	\$528.00	\$379.00

Part Number	Description	List Price	Our Price
BBDCMO400P	1200 Baud Smartmodem	\$695.00	\$514.95
BBDCMO200P	300 Baud Smartmodem	\$279.00	\$229.00
BBDCMO300P	Chronograph	\$249.00	\$199.00
BBDCMO100P	MicroModem 100	\$399.00	\$349.00
BBDCMO000P	MicroModem II	\$379.00	\$299.00
BBDCM1200B	IBM-PC™ Modem card	\$599.00	\$499.00

RIXON

1200 Baud Direct Connect w/10 Number Memory

BBRIXR212A	1200 Baud Stand Alone unit	\$495.00	\$449.00
BBRIXPC212A	1200 IBM PC™ modem (2 lbs.)	\$495.00	\$449.00
BBRIXPCCOM1	IBM PC™ Modem Software (1 lb.)	\$ 89.00	
BBPDBRIX18M	IBM Modem & Software Together (3 lbs.)	\$539.00	

HITACHI DUAL TRACE SCOPES

NOW WITH A 5 YEAR WARRANTY!!

NEW LOWER PRICES!

FOR COMPLETE SPECIFICATIONS ON HITACHI OSCILLOSCOPES, SEE PAGES 82 & 83 IN OUR '83/'84 ENGINEERING SELECTION GUIDE

40MHz with Delay Line BBHITV422 List Price: \$895.00 SALE PRICE: \$749.00 (Shipping Weight 17 lbs)	60MHz with Trigger View BBHITV650F List Price: \$1195.00 SALE PRICE: \$995.00 (Shipping Weight 31 lbs)	100MHz Delayed Sweep/Quad Trace BBHITV1050F List Price: \$1595.00 SALE PRICE: \$1395.00 (Shipping Weight 31 lbs)
--	--	--

Phone Today and Get On Our Priority Interrupt Mailing List!



PRIORITY ONE ELECTRONICS
9161 Deering Ave., Chatsworth, CA 91311-5887

Circle 303 on inquiry card.



ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (818) 709-5111
Terms: U.S. VISA, MC, BAC, Check, Money Order, U.S. Funds Only. Ca residents add 6 1/2% Sales Tax. MINIMUM PREPAID ORDER \$15.00. Include MINIMUM SHIPPING & HANDLING of \$3.00 for the first 3 lbs. plus 40¢ for each additional pound. Orders over 50 lbs. sent freight collect. Just in case, include your phone number. Prices subject to change without notice. We will do our best to maintain prices through February, 1984. Many quantities are limited. Some items are for sale only. No refunds or exchanges on sale merchandise. Credit card orders will be charged appropriate freight. Sale prices for prepaid orders only. We are not responsible for typographical errors.

HOME COMPUTER ACCESSORIES

KEYBOARDS - POWER SUPPLIES

DISK DRIVES AND CABLE

VOICE SYNTHESIZER FOR APPLE AND COMMODORE



Over 250 word vocabulary affixes allow the formation of more than 500 words • Built-in amplifier, speaker, volume control, and audio jack • Recreates a clear, natural male voice • Plug-In user ready with documentation and sample software • Case size: 7 1/4" L x 3 1/4" W x 1-3/8" H

APPLICATIONS: • Security Warning • Telecommunication • Teaching • Handicap Aid • Instrumentation • Games

The JE520 VOICE SYNTHESIZER will plug right into your computer and allow you to enhance almost any application. Utilizing National Semiconductor's DIGITALKER™ Speech Processor IC (with four custom memory chips), the JE520 compresses natural speech into digital memory, including the original inflections and emphases. The result is an extremely clear, natural vocalization.

Case Size: VOCABULARY EXPANSION MODULE

- Expands to over 1000 basic words
- Allows selection of up to 6 additional word sets

Part No.	Description	Price
JE520CM	For Commodore 64 & VIC-20	\$114.95
JE520AP	For Apple II, II+, and IIe	\$149.95



JE664 EPROM PROGRAMMER

8K to 64K EPROMS - 24 & 28 Pin Packages
Completely Self-Contained - Requires No Additional Systems for Operation
• Programs and validates EPROMs • Checks for properly erased EPROMs • Emulates PROMs or EPROMs • RS232C Computer Interface for editing and program loading • Loads data into RAM by keyboard • Changes data in RAM by keyboard • Loads RAM from an EPROM • Compares EPROMs for content differences • Copies EPROMs • Power Input: 115VAC, 60Hz, less than 10W power consumption • Enclosure: Color-coordinated, light tan panels with molded end pieces in mocha brown • Size: 15 1/4" L x 8 1/4" D x 3 3/4" H • Weight: 5 1/2 lbs.

The JE664 EPROM Programmer emulates and programs various 8-Bit EPROMs from 8K to 64K. Bit memory capacity. Data can be entered into the JE664's internal 8K 8-Bit RAM in three ways: (1) from a ROM or EPROM; (2) from an external computer via the optional JE664 RS232C (5); (3) from a panel keyboard. The JE664's RAMs may be accessed for emulation purposes from the panel's test socket to an external microprocessor. In programming and emulation, the JE664 allows for examination, change and validation of program content. The JE664's RAMs can be programmed quickly to bit "1"s for any reason, allowing unused addresses in the EPROM to be programmed later without necessity of "UV" erasing. The JE664 displays DATA and ADDRESS in convenient hexadecimal (alphanumeric) format. A "DISPLAY EPROM DATA" button changes the data readout from RAM word to EPROM word and is displayed in both hexadecimal and binary code. The front panel features a convenient operating guide. The JE664 Programmer includes one JE664 Junior Module (not tested).

JE664-A EPROM Programmer... \$995.00
Assembled & Tested (includes JM16A Module)

JE665 - RS232C INTERFACE OPTION - The RS232C Interface Option implements computer access to the JE664's RAM. This allows the computer to manipulate, store and transfer EPROM data to and from the JE664's sample program using its supplied JE665 RS232C CPM command. Documentation is provided to adapt the software to other computers with an RS232 port (9600 Baud, 8-bit word, odd parity and 2 stop bits).

FOR A LIMITED TIME A SAMPLE OF SOFTWARE WRITTEN IN BASIC FOR THE TRS-80 MODEL I, LEVEL II COMPUTER WILL ALSO BE PROVIDED.

JE664-ARS EPROM Prog. w/JE665 Option... \$1195.00
Assembled & Tested (includes JM16A Module)

EPROM JUMPER MODULES - The JE664's JUMPER MODULE (Personality Module) is a plug-in Module that pre-sets the JE664 for the program modules (pulses) to the JE664 and configures the EPROM socket connections for that particular EPROM.

Area	EPROM	Program	EPROM Manufacturer	Price
AREA 1	2708	25V	AMD, Motorola, Intel, TI	\$14.95
AREA 2	2716, 2732, 2750 (H)	25V	AMD, Motorola, NEC, TI, AMD, Hitachi, Matsushita	\$16.95
AREA 3	27C015, 27C015A	5V - 5V ₁ - 12V	Motorola, TI	\$14.95
AREA 4	27C020	25V	Motorola, TI, Matsushita, Intel	\$14.95
AREA 5	2732	25V	AMD,富士通, Hitachi, Intel, Matsushita, National	\$14.95
AREA 6	2732A	21V	Furuta, Intel	\$16.95
AREA 7	27C010	21V	Motorola	\$14.95
AREA 8	27C010A	21V	Motorola	\$14.95
AREA 9	2764	21V	Intel, Fairchild, AMD	\$14.95
AREA 10	27C010A	21V	Motorola	\$14.95

4-Digit Fluorescent Alarm Clock Kit



Bright 4-digit 0.5" high display - 10 minute snooze alarm • AM/FM indicator • Auto-mute display dimmer

The JE750 Clock Kit is a versatile 12-hour digital clock with 24-hour alarm. The clock has a bright 0.5" high blue-green fluorescent display. The display will automatically dim with changing light conditions. The 24-hour alarm allows the user to disable the alarm and immediately re-enable the alarm to activate 24 hours later. The kit includes all documentation, components, case and wall transformer. Size: 6 1/2" L x 3 1/4" W x 1 3/4" D.

JE750 Alarm Clock Kit... \$29.95




21 1/2" L x 9 8/16" W x 3 1/4" H



19 1/2" L x 7 1/2" W x 1 1/2" H



19 1/2" L x 6 1/2" W x 1 1/4" H



EMA5/6B



EMA5/6C



DBB-105W



Part No. FCS-604A

106-Key 8-Bit Serial ASCII Keyboard
• Numeric and cursor keypad • 10 user definable keys • 7 LED function displays • Security lock • N-key rollover • Color: white with black panel • Documentation Included • Weight: 6 1/2 lbs.
KB139... \$59.95

Micro-Switch 106-Key Keyboard
8-Bit Serial ASCII
• Numeric and cursor keypad • 8 user definable keys • Japanese/English characters • 8 LED function displays • Documentation Incl. • Fits DTE-22 enclosure • Wt: 3 1/2 lbs.
KB106SD29-4... \$29.95

SMK 103-Key Unenclosed Keyboard
• Numeric and cursor keypad • SPST mechanical keyswitches • 40-pin header connection • Fits DTE-22 enclosure • Weight: 3 1/2 lbs.
KB9000... \$19.95

Power/Mate Corporation REGULATED POWER SUPPLY
• Input: 105-125/210-250VAC at 47-63 Hz • Output: 5VDC @ 3.0 Amps/6VDC @ 2.5 Amps • Size: 4 1/2" L x 4" W x 2 1/4" H • Weight: 2 lbs.
EMA5/6B... \$29.95

Power/Mate Corporation REGULATED POWER SUPPLY
• Input: 105-125/210-250VAC at 47-63 Hz • Output: 5V @ 6 amps/6V @ 5 amps • Size: 5 1/4" L x 4 1/2" W x 2 1/4" H • Weight: 4 lbs.
EMA5/6C... \$39.95

Power-One's REGULATED POWER SUPPLY
• Input: 105-125VAC, 47-60 Hz • Output: +5V @ 12 amp; +12V @ 1.7 amp; -12V @ 1.7 amp • Size: 14.25" L x 4.87" W x 2.75" H • Weight: 11 lbs.
DBB-105W... \$59.95

POWER SUPPLY 4-Channel Switching - Apple Compatible
Microprocessor, mini-computer, terminal, medical equipment and process control applications. Input: 90-130VAC, 47-60Hz. Output: +5VDC @ 3A, -5VDC @ 1A, +12VDC @ 1A, -12VDC @ 1A. Line reg. ± 8.2%. Ripple: 30mV p-p. Load reg. ± 1%. Overcurrent protection. Adj. 5V main output: 10%, 6.2V/L, 1.7-7.8" W x 4.15-11.6" H. Wt. 1 1/2 lbs.
Part No. FCS-604A... \$69.95 each

DISKETTES AND ACCESSORIES

Part No.	Description	Based Price	PRICE
UM11403	5 1/4" 5DD Soft Sector with Hub Ring and Envelope	10	\$24.95
UM10096	5 1/4" 5DD Soft Sector with Hub Ring (Bulk)	100	\$89.95
UM12221	5 1/4" 5DD Soft Sector with Hub Ring and Envelope	10	\$29.95
UM10140	5 1/4" 5DD Soft Sector with Hub Ring (Bulk)	100	\$239.95
UM10101	5 1/4" 5DD Soft Sector with Envelope (96178)	10	\$4.95
UM10214	5 1/4" 5DD Soft Sector (with Hub)	100	\$69.95
UM12201	5 1/4" 5DD Soft Sector with Envelope (M174)	10	\$4.95
UM10317	5 1/4" 5DD Soft Sector with Hub (Bulk)	100	\$299.95
SK10	5 1/4" 5DD Soft Sector with Hub Ring and Envelope	10	\$6.95
SK100	5 1/4" 5DD Soft Sector with Hub Ring (Bulk)	100	\$49.95
SK101	5 1/4" 5DD Soft Sector with Hub Ring and Envelope	10	\$6.95
SK1000	5 1/4" 5DD Soft Sector with Hub Ring (Bulk)	100	\$99.95
UM11278	5 1/4" 5DD IBM Compatible (128 Bk, 72 Sectors) and Envelope	10	\$4.95
UM10023	5 1/4" 5DD IBM Compatible (128 Bk, 72 Sectors) Bulk	100	\$29.95
UM10178	5 1/4" 5DD Soft Sector (unformatted) with Envelope	10	\$6.95
UM10042	5 1/4" 5DD Soft Sector (unformatted) Bulk	100	\$69.95

All diskettes listed above are self-sectored and have hub rings with the exception of the Quad Density and the SK series.

DISKETTE ACCESSORIES

Part No.	Description	Price
MP200	10 White 5 1/4" Envelopes	10 for \$1.49
MP201	100 White 5 1/4" Envelopes	100 for \$10.95
MP202	10 White 8" Envelopes	10 for \$1.95
MP203	100 White 8" Envelopes	100 for \$17.95
MP204	2 Pocket 5 1/4" Vinyl Pages	10 for \$1.95
PC001-2	2 Pocket 5 1/4" Vinyl Pages	10 for \$1.95
PC014	1 Pocket 8" Vinyl Page	10 for \$7.95
PC014-2	2 Pocket 8" Vinyl Page	10 for \$8.95
MP05	Holds 3 ea. 5 1/4" Diskettes	\$2.49 each
MP-08	Holds 3 ea. 8" Diskettes	\$3.95 each
DM75	Stores 75 (5 1/4") Diskettes	\$19.95 each
DM50	Stores 50 (8") Diskettes	\$29.95 each
MP-10	Stores 10 (5 1/4") Diskettes	\$2.95 each

\$10.00 Minimum Order - U.S. Funds Only
California Residents Add 6 1/2% Sales Tax
Shipping - Add 5% plus \$1.50 Insurance
Send S.A.S.E. for Monthly Sales Flyer!

Mail Order Electronics - Worldwide

ameco ELECTRONICS

1355 SHOREWAY ROAD, BELMONT, CA 94002

2/84 PHONE ORDERS WELCOME - (415) 592-8097 Telex: 176043

MasterCard VISA

PANASONIC JA551-2
Double-Sided Half-Height 5 1/4" DRIVE
Shugart SA455 Equivalent
• Single or double density • 48 TPI • 40 tracks • 6ms track to track • 327KB/byte formatted storage • One year warranty parts and labor
The JA551 is perfect for word processors, personal and portable computers, small business computers and terminal aid. Includes operating manual. Requires: +5VDC @ .9A and +12VDC @ 1A. Size: 5.88" W x 1.63" H x 8" D. Wt: 3.3 lbs.
JA551-2... \$299.95

TEAC FD55A
Single-Sided Half-Height 5 1/4" Drive
• Single or double density • 48 TPI • 40 tracks • 6ms track to track • 5W power consumption • Brushless DC direct-drive motor • 160KB/byte formatted storage • One year warranty parts and labor
Double your work space with the TEAC 5 1/4" FLOPPY DISK DRIVE. Because the TEAC FD55A Drive is half the height of conventional drives, you can fit up to four TEAC drives in the same space where two conventional drives fit. O.K. have room for two floppy disk drives and a hard disk drive. Includes operating manual. Requires: +5VDC @ .55A and +12VDC @ .3A. Size: 5 1/4" W x 1 1/4" H x 8" D. Wt: 3.3 lbs.
FD55A... \$249.95

SHUGART SA455
Double-Sided Half-Height 5 1/4" Drive
• Single or double density • 48 TPI • 40 tracks • 409KB/byte formatted storage • 6ms track to track • Brushless DC direct-drive motor • One year warranty parts and labor • Media and interface compatible with the SA450
Backed by the industry's largest and most experienced engineering sales and service organization, the SA455 is the smart solution for a wide range of desktop applications. Includes operating manual. Requires: +5VDC @ .7A and +12VDC @ .75A. Size: 5.88" W x 1.63" H x 8" D. Wt: 3.3 lbs.
SA455... \$259.95

UV-EPROM Eraser



8 Chips - 51 Minutes
1 Chip - 37 Minutes
Erases 2708, 2716, 2732, 2764, 2516, 2532, 2564. Erases up to 8 chips within 51 minutes (1 chip in 37 minutes). Maintains constant exposure distance of one inch. Special conductive foam liner eliminates static buildup. Built-in safety lock to prevent UV exposure. Compact - only 9.00" x 3.70" x 2.60". Complete with holding tray for 8 chips.

DE-4 UV-EPROM Eraser... \$79.95
UVS-11EL Replacement Bulb... \$16.95

5 1/4" APPLE™ COMPATIBLE DISK DRIVE
• Uses Shugart SA330 mechanics • 143K formatted storage • 35 tracks - compatible with Apple controller • Complete with connector cable - just plug into your disk controller. Size: 5 1/4" L x 3 1/4" W x 8 1/8" D. Weight: 4 1/4 lbs.
Part No. ADD-514 \$195.95

8" FLOPPY DISK DRIVE
• Single-Sided • 77 Tracks • 400/800K Bytes Capacity • Industry Standard

The FDD100-8" Floppy Disk Drive (Industry Standard) features single or double density Recording mode; FM single, MFM double density. Transfer rate: 250K bits/sec, single density; 500K bits/sec, double density. The FDD100-8" is designed to work with the single-sided soft sector IBM Diskette I, or disk cartridge. Power: 115VAC @ 50-60Hz, ±24VDC @ 1.7 amps max., ±5VDC @ 1.2 amps max. Unit as pictured above. Complete with Power Supply, of manual. Size: 8.55" W x 14" L x 4.5" H. Weight: 12 lbs. Incl. 86 pg. cabinet.

FDD100-8... \$169.95 ea.

SIGNAL CABLES

5 1/4" DRIVES USE 34-PIN ASSEMBLIES
8" DRIVES USE 50-PIN ASSEMBLIES
*S = SOCKET CONNECTOR
*C = CARD-EDGE CONNECTOR

SINGLE DRIVE CABLE

Drive	Style	Part No.	1-4	5+
5 1/4"	M	S34-36-C	7.95	7.25
5 1/4"	N	S34-60-C	8.95	8.39
8"	M	S50-36-C	10.95	9.95
8"	N	S50-60-C	12.49	10.95

DUAL DRIVE CABLES

Drive	Style	Part No.	1-4	5+
5 1/4"	O	S34-36C-18C	12.59	11.19
5 1/4"	P	S34-60C-24C	14.29	12.69
8"	O	S50-36C-18C	16.49	14.49
8"	P	S50-60C-24C	18.95	16.95

Power Cable Kits

Kits include: Connector shells, connector pins, and power cables.
Power Cable Kit for 5 1/4" Drive
Part No. PCK-5... \$2.95
Power Cable Kit for Full-Sized 8" Drive
Part No. PCK-8... \$3.95
Power Cable Kit for Dume Full-Sized 8" Drive
Part No. PCK-Q... \$4.95

ADVANCED COMPUTER PRODUCTS



SEND \$2.00 for 1983 CATALOG

IBM PC COMBO CARD MEMORY PLUS AT LOW PRICES!

Now! "Multicard" expandable from 64-256K with

- (1) PARALLEL (1) SERIAL
- (1) CLOCK/CALENDAR

COEX 64 SPC with 64K **\$229⁰⁰**
 COEX 256 SPC with 256K **\$399⁰⁰**

S-100 64K "CMOS" RAMCARD



Unbelievable Price!
\$299⁰⁰
Assembled and Tested

- ACP has sold over 1000 of these IEEE compatible, low-priced, high-reliability 64K Static RAM Cards.
- Single 5-Volt operation.

SIEMEN'S SALE



You can now purchase Shugart compatible 8" Disk Drives below your existing factory direct pricing! These Prices are the lowest ever published. *Siemens' SSDS FDD100-B... \$169.00. Also, with purchase of Disk Drives you can buy the Vista V-1000 Dual Case with Power Supply and Cable for only \$375.00... Regular Price \$495.00. Offer Limited! Factory Warranty 90 Days! Shipped immediately from Stock! OEM Quantities.

8" Disk Drives **\$169⁰⁰**

DOT MATRIX PRINTER

COEX 80-FT

- ✓ 9x7 Dot Matrix, 80 CPS, Bi-Directional Printing
- ✓ 2K Buffered Memory
- ✓ 80, 96, 132 Columns, Graphics and Block Printing
- ✓ Selectable Char Pitch, Line Spacing and Feed



\$199⁰⁰

COEX Interface Card to Apple... **\$49.95**

ACP HAS DISK DRIVES

APPLE II™ COMPATIBLE

Thin Line Drive

\$249⁰⁰



TANDON 100-2
PC Compatible • Double Sided

\$289⁰⁰

TOSHIBA Half-High
PC Compatible • Double Sided

\$249⁰⁰



OTHER DRIVES WE STOCK

TANDON 848-2 ThinLine	\$479.00	SHUGART 801R	\$399.00
TEAC F055B	299.00	SHUGART 860 ThinLine	479.00
PANASONIC C155 (PC Comp)	259.00	SHUGART SA400	210.00
MPI 852	279.00	SEAGATE ST506 (6MB Win.)	599.00

HARDWARE

AST Megaplus™ Card P/N MG064 (64K, S, C)	395	ACP
Combioplus™ Card P/N MC-064SPC (64K, S, P, C)	395	279
PC I/O Plus II™ Card P/N IO (C, S)	165	115
SIX PACK™ P/N SP064SPC (64K, S, P, C)	299	
COEX Extender Card Prototype Card	40	29
HERCULES Hercules Graphic Card	379	
MOUSE SYSTEMS Mouse for IBM	269	
MICROSOFT Mouse plus Multifoot Word	Call	
M&R 6 Slot Expansion Chassis for IBMPC/XT or Eagle etc	439	
ORCHID Hi-Res Graphics Adaptor	395	335
PERSYST Spectrum (64-256K) P/N SP64, (64K, Ck, S, P)	319	
PLANTRONICS Color plus™ Card	469	
QUADRAM Quadboard (64-256K) P/N Q64, 64K w/4 functions	395	279
QuadLink Apple Card	680	
Quadboard 64K	279	
Microfazer Print Buffer MP-64	190	
Quadchrome (Hires RGB)	488	
SSM PC212A Modem I/O	596	449
SSM Transmodem 1200	479	
USI Multidisplay Card	299	
VISTA "Multicard"™ (exp. 64-256K) P/N V-064 (64K, Ck, S, P)	395	220
P/N V-256 (256K, Ck, S, P)	695	399
Maxicard™™™ (up to 576K)	249	
P/N V-576-64K	729	
P/N V-576-576K	729	
PC Master™™™ (10 I/O)	495	320
PC Extender™™™ (up to 10 I/O)	249	199
Diskmaster™™™	299	199
ThinLine Dual Floppy	Call	
V1200 8.2Mb Cartridge Drive	999	

PRINTERS

COEX 80FT/ 80cps	\$299	\$199
DYNAX Daisywheel		525
SILVER REED EXP500 132 Column		649
STAR MICRONICS - NEW!		
Geman 10X 120cps	399	319
Gemin 15 15"	599	399
EPSON FX80	699	549
FX100	895	749
BROTHER HR-1/BMC	1195	895
DAISYWHEEL	1495	1295
TKX Daisywheel		1875
NEC Spewriter 3550		309
IBM PC to Parallel Cable	60	35

MONITORS

AMEK CORP 300 Green 12"	\$199	\$155
310 Amber 12"	210	175
Color I Composite-Hitachi	399	339
Color II RGB Hi-Res	899	695
BMC 12" Green	129	89
PRINCETON GRAPHICS RGB IBM Lookalike	700	545

DISKETTES

DYSAN 5 1/4" SS SD	10-\$55	\$38
DYSAN 5 1/4" DS SD	10-\$65	48
IBM 5 1/4" SS SD	10-\$60	43
IBM 5 1/4" SS DD	10-\$65	47
VERBATIM 525-01 SS	10-\$45	23
VERBATIM 550-01 DS	10-\$56	34
MAXELL MD1 SS	10-\$50	29
MAXELL MD2 DS	10-\$60	39
Flip Storage Box 5 1/4" (80 disks)		19
BULK SPECIAL SS	10-\$25	19
With Sleeve and Box	100-\$195	149

MORE IBM GOODIES

COMPUCABLE Keyboard & Drive Covers (set)	\$19
CURTIS PC Pedestal	\$80 64
PGS or Quadchrome Adaptor	10 20
Vertical PC System Stand	10 10
IBM Mono Extension Cable	50 44
Keyboard Ext. Cable (3-9")	150 34
EPD PROTECTION DEVICES The Lemon (Surge Protector)	63 68
The Peach (Surge Protector)	48 48
The Orange (with EM/RFI)	122 122
The Lime	78 78
INTEL 8087 IC	199 199
KOALA PAD	70 40
KRAFT Joystick IBM	
RAM EXPANSION 16K Motherboard (16 IC's)	19 19
64K Memory Exp. (9 IC's)	50 50

TIME SHARE SERVICES

COMPUSERVE Subscription	\$40
SOURCE Subscription	75

MODEMS

HAYES Smartmodem 300	\$210
PC Modem Software 1.3 (above)	49
Smartmodem 1200	525
PC Software 1.4C (above)	79
Smartmodem 1200B	79
Smartcom II	445
Smartmodem to IBM Cable	25

TOLL FREE

800-854-8230
TWX 910-595-1565

APPLE™ COMPATIBLE

DISK CONTROLLER
Only **\$49⁹⁵**

Apple Printer Interface
w/Apple to Epson Cable
\$49⁹⁵

Apple IIe Compatible
80 Column Card w/64K
\$99⁹⁵

APPLE COOLING FAN
with Surge Suppression
\$49⁹⁵

APPLE COMPATIBLE POWER SUPPLY
+ 5V @ 5A
+ 12V @ 3A
- 12V @ 25A
- 5V @ 25A
\$79⁹⁵

APPLE COMPATIBLE JOY STICK
only **\$15⁹⁵**

Vista Computer Company

VISTA V1200
6.2 Cartridge Drive w/Controller
Apple or IBM Compatible
Please Specify with Order
\$999⁹⁵

VISTA "SOLO"
Apple II/IIe Compatible Disk Drive
Totally compatible to Apple Drives.
Only **\$199⁹⁵**
Controller... **\$49.95**
Just plug in and run.

Apple II 16K RAM CARD
Compatible with
Z80 Softcard™, PASCAL CP/M™
Full 1 year Warranty. Top Quality by COEX
NEW LOW ACP PRICE **\$49⁹⁵**
Also from COEX, NEW EPSON Parallel Interface for Apple.
With cable... **\$49.95**

VISTA A800
8" Disk Controller
for Apple **\$299⁹⁵**

VISTA "DISKMASTER"
IBM Compatible
3", 5", 8" and V1200 Compatible... **\$199⁹⁵**

Mail Order: P.O. Box 17329 Irvine, CA 92713
Retail: 1310B E. Edinger, Santa Ana, CA 92705 (714) 558-8813
542 W. Trimble, San Jose, CA 95131 (408) 946-7010

apple computer Authorized Dealer

Apple IIe w/64K	\$1395.00	\$1195.00
Apple IIe System	1995.00	1695.00
Apple Sys w/Ext Text	2195.00	1895.00
Disk II w/Controller	545.00	440.00
Disk II w/O Controller	395.00	350.00
Monitor III Green	249.00	189.00
Super Serial Card	195.00	169.00
Parallel Interface Card	165.00	139.00
80 Column Text Card	125.00	
Extended 80 Column Text	295.00	249.00
Dot Matrix Printer	695.00	529.00

*Apple Products Available In-Store Only!

MORE HARDWARE

MICROSOFT Z80 Softcard	\$395.00	\$249.00
16K Ramcard	195.00	89.00
SSM Pal-III 4 Function Serial	225.00	179.00
EASTSIDE Wildcard Apple II	149.00	115.00
KENSINGTON System Saver	89.95	89.00
KEYBOARD COMPANY Numeral Keypunch	149.95	124.95
Apple II Joystick	49.95	44.50
Apple II Hand Controllers	29.95	25.85
KRAFT Joystick		49.00
Hand Controller		40.00
MPC 128K Bubble Memory	875.00	699.00
PROMETHEUS VERSAcard Four-in-1	199.00	186.00
VISTA COMPUTER CO. A800 8" Disk Control	379.95	299.00
Quantum Disk Drive 5 1/4"	848.00	799.00
Solo Disk Drive w/Contr	299.00	249.00
Solo Drive w/Contr	249.00	199.00
Vista 5 1/4" Disk Contr	92.00	49.00
Head Buffer	49.95	35.00
VIDEX VideoTerm 80x24 Card	345.00	279.00
Keyboard Enhancer II	149.00	129.00
Soft Switch	35.00	30.00
Function Strip Keys	79.00	69.00
PRACTICAL PERIPHERALS 16K Microbuffer	259.00	220.00
32K Microbuffer	299.00	253.00
Snapshot Option	149.00	109.00
VOTRAX Type nTalk Speech	249.00	219.00
Personal System	395.00	339.00
VYNET Apple II Voice Syn.	395.00	349.00
Apple II Telephone I/O	295.00	249.00
SCOTT INSTRUMENTS Voice Recogn'n VET80	799.00	675.00
COEX 16K RAM Card	99.00	49.95
Parallel Card w/Cable	99.00	49.95
Apple Protocol Card	29.00	19.95
Apple Extendercard	29.00	19.95
Apple IIe Ext RAM Card	199.00	99.95
CORVUS The Macro I/O (Plus)	175.00	139.00
The Bufferboard	175.00	139.00
SATURAN SYSTEMS 32K RAM Card	219.00	179.00
128K RAM Card	499.00	439.00
STREET ECHO II	149.00	129.00
LEGEN 64KC Title	327.00	269.00
128KC Title	599.00	499.00
18SRC 18K Static	149.00	135.00
MICROPRO Wordstar w/CPM	499	415
MOUNTAIN COMPUTER CPS Multifunction	239.00	169.00
Music System	395.00	335.00
A/D plus DIA	350.00	299.00
ROM Plus	155.00	129.00
M&R ENTERPRISES Sup Mem 80x24 Card	395.00	269.00
Sup Mod II	69.00	49.00
Sup Mod V (IBM)	69.00	49.00
ALS The CP/M Plus Z80 Card	399.00	329.00
Smarterm 80x24 Card	349.00	279.00
The Synergizer Package	699.00	549.00

Apple Compatible Software

SAVE UP TO 40%	
BUSINESS Screen Writer	\$129
BOBBY BD Master	99
Zoom Graphics	32
Visical™ 3.3	185
Utility City	20
Visploit	159
Locksmith 4.0	90
PFS, File II	115
Nibbles Away II	49
PFS, File III	155
GAMES	
Vastrend/Visploit	25
ChopFret	26
PFS, Graph II	115
Frigger	24
PFS, Graph III	155
Wizardry	39
Multiplan	199
Snack Attack	24
Versaform	279
Cannonball Blitz	26
Wordstar	299
Knight Diamonds	26
dBASE	438
Zork I	29
Supercalc	169
Zork II	29
PFS, Report II	95
Starcross	29
PFS, Report III	115
Serpentine	25
Acct Plus G/L	299
Star Blazer	29
G/L, A/R, A/R	599
Deadline	35
Above & Inventory	799
Tubeway	25
Magic Window	115
Fight Simulator	45
HOME Space Vikings	23
Home Accountant	59
Sargon II	29
Transend I	76
Spiffie Simulator	29
Transend II	119
Apple Panic	22
Visthem	89
Olympic Decath	22

Apple™ Apple Trademark of Apple Computer
IBM™ IBM Trademark of International Business Machines

TERMS: M.O. Cashier's Check. Bank Wire. Personal checks allow 2 wks for processing. Includes Drivers License and credit card # via AMEX. CB add 3% service charge. Add 3% shipping & handling or \$2.90, whichever is greater. Add 10% for foreign orders or US Parcel Post. Include Telephone number. NO CODs. Prices subject to change without notice. Some items subject to prior sale. We reserve the right to substitute manufacturer. Retail prices may vary.

ADVANCED COMPUTER PRODUCTS

Serving Computer Professionals Since 1976

HOOKED ON IBM PC



If You're Thinking IBM PC™,
READ THIS!

MULTI CARD II Plus

(The optimum PC Expansion Card)

- ★ 0K to 384K RAM
- ★ ASYNC Serial Port
- ★ Clock/Calendar w/NiCad Backup
- ★ Parallel Printer Port
- ★ Joy Stick/Game Port
- ★ RAMDisk Software
- ★ Spooler Software

64K only **\$229⁰⁰**

384K only **\$499⁰⁰**

Zero "K" Version Available Only \$199.00
PLUS! . . .with Purchase of either
Memory card above

SUPERCALC™only \$89.00 (195.00 value)
Disk Emulator **FREE**
Print Spooler **FREE**

ACP PC "FEATURE OF THE MONTH"


1. **DISKMASTER™** . . . Disk Controller for IBM PC or XT adds both 5 1/4" and 8" floppy drives. Complete with Software. Same card can also handle List ACP the Amlyn 6.2 Mb Cartridge Add-on Subsystem \$299 \$199
2. **VISTA 1200 with DISKMASTER™** \$999
3. **M&R "SUPR EXTENDER™"** IBM PC & XT Expansion Chassis with (6) Slots, Power Supply and Fan. Your price!!! only \$439.00. You cannot afford to live without one.

DISK DRIVES

TANDON 100-2

PC Compatible • Double Sided
\$289⁰⁰

TOSHIBA 1/2 High
PC Compatible • Double Sided
\$249⁰⁰



HARDWARE

	List	ACP
AST Megaplus™ Card	395	\$279
P/N MC064 (64K, S, C)		
•Combolus™ Card	395	279
P/N MC-064SPC (64K, S, P, C)		
•PC I/O Plus II™ Card	165	115
P/N IO (C, S)		
•"SIX PACK"		
P/N SP064SPC (64K, S, P, C)	299	
COEX Extender Card	40	29
Prototype Card	69	35
HERCULES		
Hercules Graphic Card	359	
MOUSE SYSTEMS Mouse for IBM	269	
MICROSOFT		
Mouse plus Multitool Word	Call	
ORCHID		
Hi-Res Graphics Adaptor	395	339
PERSYST Spectrum (64-256K)		
P/N SP64, (64K, Ck, S, P)	319	
PLANTRONICS Color plus™ Card	399	
QUADRAM Quadboard (64-256K)		
P/N Q64, 64K w/4 functions	395	279
QuadLink Apple Card	680	525
Quadboard 64K		279
MicroLazer Print Buffer MP-64		190
Quadchrome (HiRes RGB)		488
RIXON PC212A Modem I/O	596	449
SSM Transmodem 1200		479
USI Multidisplay Card		299
VISTA "Multicard™" (exp. 64-256K)		
P/N V-064 (64K, Ck, S, P)	395	229
P/N V-256 (256K, Ck, S, P)	695	399
•"Maxicard™" (up to 576K)		
P/N V-576-64K	249	729
P/N V-576-576K		
•"PC Master™" (10 I/O)	495	329
•"PC Extender™" (up to 10 I/O)	249	199
•"Diskmaster™"	299	199
•8" Thinline Dual Floppy	Call	
•v1200 6.2Mb Cartridge Drive	999	

PRINTERS

COEX 80F/T 80cps	\$299	\$199
DYNAX Daisywheel		525
SILVER REED		
EXP500 132 Column		649
STAR MICROICS - NEW!		
Gemini 10X 120cps	399	319
Gemini 15 15"		599
EPSON FX80	699	549
FX100	895	749
BROTHER HR-1/BMC	1195	895
DAISYWRITER	1495	1295
TX Daisywheel		549
NEC Spooler 3550		1875
IBM PC to Parallel Cable	60	39

MONITORS

AMDEK CORP		
300 Green 12"	\$199	\$155
310 Amber 12"		210
Color I Composite/Hitachi	399	339
Color II RGB Hi-Res	899	695
BMC		
12" Green	129	89
PRINCETON GRAPHICS		
RGB IBM Lookalike	700	545

DISKETTES

DYSAN 5 1/4" SS SD	10/\$55	538
DYSAN 5 1/4" DS SD	10/65	48
IBM 5 1/4" SS SD	10/60	43
IBM 5 1/4" SS DD	10/65	47
VERBATIM 525-01 SS	10/45	23
VERBATIM 550-01 DS	10/55	34
MAXELL MD1 SS	10/50	29
MAXELL MD2 DS	10/60	39
Filip Storage Box 5 1/4" (80 disks)		19
BULK SPECIAL SS	10/25	19
With Sleeve and Box	100/195	149

MORE IBM GOODIES

COMPUCABLE		
Keyboard & Drive Covers (set)	\$19	
CURTIS		
PC Pedestal	\$80	64
PGS or Quadchrome Adaptor		10
Vertical PC System Stand		20
IBM Mono Extension Cable	50	44
Keyboard Ext. Cable (3-9')		34
EPIC PROTECTION DEVICES		
The Lemon (Surge Protector)		43
The Peach (Surge Protector)		68
The Orange (with EMI/RFI)		122
The Lime		76
INTEL 8087 IC		199
KOALA PAD		99
KRAFT Joystick IBM	70	40
RAM EXPANSION		
16K Motherboard (16 IC's)		19
64K Memory Exp. (9 IC's)		50

TIME SHARE SERVICES

COMPUSERVE Subscription	\$40
SOURCE Subscription	75

MODEMS

HAYES		
Smartmodem 300	\$210	
PC Modem Software 1.3 (above)		49
Smartmodem 1200		525
PC Software 1.4C (above)		79
Smartmodem 1200B		445
Smartcom II		79
Smartmodem to IBM Cable		25

SOFTWARE

dBASE II
\$399⁰⁰

Condor
\$389⁰⁰

SuperCalc
\$99⁰⁰

SuperCalc 2
\$179⁰⁰

Multiplan
\$189⁰⁰

Wordstar
\$299⁰⁰

Lotus 1-2-3
Call!

T. K. Solver!
Call!

Flight Simulator
\$45⁰⁰

Context MBA
Call!

Computer
Inovations
C86C Compiler
\$369⁰⁰

Copy II Plus
\$32⁰⁰

Visiword
\$289⁰⁰

Digital Research

Pascal MT + 86 \$295.00
Concurrent CP/M 86 260.00
CBASIC 86 149.00

Plus More Great
Software Values
In Our
1983 Catalog!
Send For
Your Copy NOW.

Circle 13 on Inquiry card.

TERMS: MO, Cashier's Check Bank Wire. Personal checks allow 2 weeks for processing. Include Drivers License and credit card #s Visa, AMEX, CB add 3% service charge. Add 3% shipping & handling or \$2.50, whichever is greater. Add 10% for foreign orders or US Parcel Post. Include Telephone number, NO CODs. Prices subject to change without notice. Some items subject to prior sale. We reserve the right to substitute manufacturer. Retail prices may vary. We are not an authorized IBM dealer. IBM™ trademark of International Business Machines.

MAIL ORDER: P.O. Box 17329 Irvine, CA 92713

Retail: 1310 E. Edinger, Santa Ana, CA 92705
(714) 558-8813

542 W. Trimble, San Jose, CA 95131
(408) 946-7010

TOLL FREE

800-854-8230

TWX
910-595-1565

64K MEMORY + P.S.C. \$229.00

www.americanradiohistory.com

LOW COST MEMORY - AVAILABLE NOW!

SEND FOR YOUR FREE 1983 CATALOG!

STATIC RAMS

2101	256 x 4 (450ns)	1.95
5101	256 x 4 (450ns) (cmos)	3.95
2102-1	1024 x 1 (450ns)	.89
2102L-4	1024 x 1 (450ns) (LP)	.99
2102L-2	1024 x 1 (250ns) (LP)	1.49
2111	256 x 4 (450ns)	2.49
2112	256 x 4 (450ns)	2.99
2114	1024 x 4 (450ns)	8/9.95
2114-25	1024 x 4 (250ns)	8/10.95
2114L-4	1024 x 4 (450ns) (LP)	8/12.95
2114L-3	1024 x 4 (300ns) (LP)	8/13.45
2114L-2	1024 x 4 (200ns) (LP)	8/13.95
TC5514	1024 x 4 (650ns) (cmos)	2.49
TC5516	2048 x 8 (250ns) (cmos)	9.95
2147	4096 x 1 (55ns)	4.95
TMS4044-4	4096 x 1 (450ns)	3.49
TMS4044-3	4096 x 1 (300ns)	3.99
TMS4044-2	4096 x 1 (200ns)	4.49
MK4118	1024 x 8 (250ns)	9.95
TMM2016-200	2048 x 8 (200ns)	4.15
TMM2016-150	2048 x 8 (150ns)	4.95
TMM2016-100	2048 x 8 (100ns)	6.15
HM6116-4	2048 x 8 (200ns) (cmos)	4.75
HM6116-3	2048 x 8 (150ns) (cmos)	4.95
HM6116-2	2048 x 8 (120ns) (cmos)	8.95
HM6116LP-4	2048 x 8 (200ns) (cmos)(LP)	5.95
HM6116LP-3	2048 x 8 (150ns) (cmos)(LP)	6.95
HM6116LP-2	2048 x 8 (120ns) (cmos)(LP)	10.95
Z-6132	4096 x 8 (300ns) (Qstat)	34.95
HM6264	8192 x 8 (150ns) (cmos)	49.95

LP = Low Power Qstat = Quasi-Static

DYNAMIC RAMS

TMS4027	4096 x 1 (250ns)	1.99
UPD411	4096 x 1 (300ns)	3.00
MM5280	4096 x 1 (300ns)	3.00
MK4108	8192 x 1 (200ns)	1.95
MM5298	8192 x 1 (250ns)	1.85
4116-300	16384 x 1 (300ns)	8/11.75
4116-250	16384 x 1 (250ns)	8/7.95
4116-200	16384 x 1 (200ns)	8/12.95
4116-150	16384 x 1 (150ns)	8/14.95
4116-120	16384 x 1 (120ns)	8/29.95
2118	16384 x 1 (150ns) (5v)	4.95
MK4332	32768 x 1 (200ns)	9.95
4164-200	65536 x 1 (200ns) (5v)	5.95
4164-150	65536 x 1 (150ns) (5v)	6.95
MCM6665	65536 x 1 (200ns) (5v)	8.95
TMS4164-15	65536 x 1 (150ns) (5v)	8.95

5V = single 5 volt supply

EPROMS

1702	256 x 8 (1us)	4.50
2708	1024 x 8 (450ns)	3.95
2758	1024 x 8 (450ns) (5v)	5.95
2716	2048 x 8 (450ns) (5v)	3.95
2716-1	2048 x 8 (350ns) (5v)	5.95
TMS2516	2048 x 8 (450ns) (5v)	5.50
TMS2716	2048 x 8 (450ns)	7.95
TMS2532	4096 x 8 (450ns) (5v)	5.95
2732	4096 x 8 (450ns) (5v)	4.95
2732-250	4096 x 8 (250ns) (5v)	8.95
2732-200	4096 x 8 (200ns) (5v)	11.95
2732A-4	4096 x 8 (450ns) (5v) (21vPGM)	6.95
2732A-2	4096 x 8 (250ns) (5v) (21vPGM)	9.95
2764	8192 x 8 (450ns) (5v)	6.95
2764-250	8192 x 8 (250ns) (5v)	7.95
2764-200	8192 x 8 (200ns) (5v)	19.95
TMS2564	8192 x 8 (450ns) (5v)	14.95
MCM68764	8192 x 8 (450ns) (5v) (24 pin)	39.95
MCM68766	8192 x 8 (350ns) (5v) (24 pin)(pwr dn.)	42.95
27128	16384 x 8 (5v)	29.95

5v = Single 5 Volt Supply 21vPGM = Program at 21 Volts

EPROM ERASERS
SPECTRONICS CORPORATION

	Capacity Timer	Chip	Intensity (uW/Cm ²)	
PE-14	9	9	8,000	83.00
PE-14T	X	9	8,000	119.00
PE-24T	X	12	9,600	175.00
PL-265T	X	30	9,600	255.00
PR-125T	X	25	17,000	349.00
PR-320T	X	42	17,000	595.00

- ★ Computer managed inventory — virtually no back orders!
- ★ Very competitive prices!
- ★ Friendly staff!
- ★ Fast service — most orders shipped within 24 hours!

CRYSTALS

32.768 khz	1.95
1.0 mhz	3.95
1.8432	3.95
2.0	2.95
2.097152	2.95
2.4576	2.95
3.2768	2.95
3.579545	2.95
4.0	2.95
5.0	2.95
5.0688	2.95
5.185	2.95
5.7143	2.95
6.0	2.95
6.144	2.95
6.5536	2.95
8.0	2.95
10.0	2.95
10.738635	2.95
14.31818	2.95
15.0	2.95
16.0	2.95
17.430	2.95
18.0	2.95
18.432	2.95
20.0	2.95
22.1184	2.95
32.0	2.95

CMOS

4000	.29	4528	1.19
4001	.25	4531	.95
4002	.25	4532	1.95
4006	.89	4538	1.95
4007	.29	4539	1.95
4008	.95	4541	2.64
4009	.39	4543	1.19
4010	.45	4553	5.79
4011	.25	4555	.95
4012	.25	4556	.95
4013	.38	4581	1.95
4014	.79	4582	1.95
4015	.39	4584	.75
4016	.39	4585	.75
4017	.69	4702	12.95
4018	.79	74C00	.35
4019	.39	74C02	.35
4020	.75	74C04	.35
4021	.79	74C08	.35
4022	.79	74C10	.35
4023	.29	74C14	.59
4024	.65	74C20	.35
4025	.29	74C30	.35
4026	1.65	74C32	.39
4027	.45	74C42	1.29
4028	.69	74C48	1.99
4029	.79	74C73	.65
4030	.39	74C74	.65
4034	1.95	74C76	.80
4035	.85	74C83	1.95
4040	.75	74C85	1.95
4041	.75	74C86	.39
4042	.69	74C89	4.50
4043	.85	74C90	1.19
4044	.79	74C93	1.75
4046	.85	74C95	.99
INS8250	10.95	4047	.95
4049	.35	74C107	.89
4051	.35	74C150	5.75
4050	.35	74C151	2.25
4051	.79	74C154	3.25
4053	.79	74C157	1.75
4060	.89	74C160	1.19
4066	.39	74C161	1.19
4068	.39	74C162	1.19
4069	.29	74C163	1.19
4070	.35	74C164	1.39
4071	.29	74C165	2.00
4072	.29	74C173	.79
4073	.29	74C174	1.19
4075	.29	74C175	1.19
4076	.79	74C192	1.49
4078	.29	74C193	1.49
4081	.29	74C195	1.39
4082	.29	74C200	5.75
4085	.95	74C221	1.75
4086	.95	74C244	2.25
4093	.49	74C373	2.45
4098	2.49	74C374	2.45
4099	1.95	74C901	.39
14409	12.95	74C902	.85
14410	12.95	74C903	.85
14411	11.95	74C905	10.95
14412	12.95	74C906	.95
14419	7.95	74C907	1.00
14433	14.95	74C908	2.00
4502	.95	74C909	2.75
4503	.65	74C910	9.95
4508	1.95	74C911	8.95
4510	.85	74C912	8.95
4511	.85	74C914	1.95
4512	.85	74C915	1.19
4514	1.25	74C918	2.75
4515	1.79	74C920	17.95
4516	1.55	74C921	15.95
4518	.89	74C922	4.49
4519	.39	74C923	4.95
4520	.79	74C925	5.95
4522	1.25	74C926	7.95
4526	1.25	74C928	7.95
4527	1.95	74C929	19.95

UARTS

AY3-1014	6.95
AY5-1013	3.95
AY3-1015	6.95
PT1472	9.95
TR1602	3.95
2350	9.95
2651	8.95
IM6402	7.95
IM6403	8.95
INS8250	10.95

GENERATORS

MC14411	11.95
BR1941	11.95
4702	12.95
COM5016	16.95
COM8116	10.95
MM5307	10.95

FUNCTION

MC4024	3.95
LM566	1.49
XR2206	3.75
8038	3.95

MISC.

UPD7201	29.95
TMS99532	29.95
ULN2003	2.49
3242	7.95
3341	4.95
MC3470	4.95
MC3480	9.00
11C90	13.95
95H90	7.95
2513-001 UP	9.95
2513-002 LOW	9.95

CLOCK CIRCUITS

MM5314	4.95
MM5369	3.95
MM5375	4.95
MM58167	12.95
MM58174	11.95
MSM5832	3.95

KEYBOARD CHIPS

AY5-2376	11.95
AY5-3600	11.95
AY5-3600 PRO	11.95

6800

68000	49.95
6800	2.95
6802	7.95
6803	19.95
6808	13.90
6809E	14.95
6809	11.95
6810	2.95
6820	4.35
6821	2.95
6828	14.95
6840	12.95
6843	34.95
6844	25.95
6845	14.95
6847	11.95
6850	3.25
6852	5.75
6860	7.95
6875	6.95
6880	2.25
6883	22.95
68047	24.95
68488	19.95

6800 = 1MHZ

68B00	10.95
68B02	22.25
68B09E	29.95
68B09	29.95
68B10	6.95
68B21	6.95
68B40	19.95
68B45	19.95
68B50	5.95
68B00 = 2MHZ	

6500

6502	4.95
6504	6.95
6505	8.95
6507	9.95
6520	4.35
6522	6.95
6532	9.95
6545	22.50
6551	11.85
6502A	6.95
6522A	9.95
6532A	11.95
6545A	27.95
6551A	11.95
6502B	9.95

DISC CONTROLLERS

1771	16.95
1791	24.95
1793	26.95
1795	29.95
1797	49.95
2791	54.95
2793	54.95
2795	59.95
2797	59.95
6843	34.95
6272	39.95
UPD765	39.95
M88876	29.95
M88877	34.95
1691	17.95
2143	18.95

8000

8035	5.95
8039	5.95
INS-8060	17.95
INS-8073	49.95
8080	3.95
8085	4.95
8085A-2	11.95
8086	24.95
8087	CALL
8088	29.95
8089	89.95
8155	6.95
8155-2	7.95
8156	6.95
8185	29.95
8185-2	39.95
8741	29.95
8748	24.95
8755	24.95

CRT CONTROLLERS

6845	14.95
68B45	19.95
HD46505SP	15.95
6847	11.95
MC1372	6.95
68047	24.95
8	

2114

450 NS

8/\$995

2114

250 NS

8/\$1095

74LS00

Table listing 74LS00 components with prices. Includes items like 74LS00, 74LS01, 74LS02, etc.

74S00

Table listing 74S00 components with prices. Includes items like 74S00, 74S01, 74S02, etc.

VOLTAGE REGULATORS

Table listing Voltage Regulators with prices. Includes items like 7805T, 7805TC, 7808T, etc.

7400

Table listing 7400 components with prices. Includes items like 7400, 7401, 7402, etc.

INTERFACE

Table listing Interface components with prices. Includes items like 8T26, 8T28, 8T95, etc.

ORDER TOLL FREE
800-538-5000
800-662-6279
(CALIFORNIA RESIDENTS)

DATA ACQUISITION

Table listing Data Acquisition components with prices. Includes items like ADC0800, DAC0808, etc.



CONNECTORS

Table listing Connectors with prices. Includes items like RS232 Male, RS232 Female, etc.

EXAR

Table listing EXAR components with prices. Includes items like XR 2206, XR 2207, etc.

INTERSIL

Table listing Intersil components with prices. Includes items like ICL7106, ICL7107, etc.

9000

Table listing 9000 components with prices. Includes items like 9316, 9334, 9368, etc.

LINEAR

Table listing Linear components with prices. Includes items like LM301, LM301H, LM307, etc.

RCA

Table listing RCA components with prices. Includes items like CA 3023, CA 3039, CA 3046, etc.

TI

Table listing TI components with prices. Includes items like TL494, TL496, TL497, etc.

BI FET

Table listing BI FET components with prices. Includes items like TL071, TL072, TL074, etc.

MICRODEVICES AT MICROPRICES

ALL MERCHANDISE 100% GUARANTEED

2716 16K EPROMS

\$395 EA

4116 250 NS

8/\$795

RF MODULATOR

(ASTEC UM1082) QUANTITIES LIMITED

- * PRESET TO CHANNEL 3
- * USE TO BUILD TV-COMPUTER INTERFACE
- * +5 VOLT OPERATION

NOW ONLY \$695

POWER SUPPLIES

IDEAL FOR HOBBYIST, BENCHWORK & DO-IT-YOURSELFERS! 90-DAY WARRANTY! NEW & UNUSED! QUANTITIES LIMITED!

ASTEC AA11190

- * QUAD OUTPUT SWITCHING DESIGN AS USED IN APPLE III
- * +5 @ 4A; -5 @ .25A
- * +12 @ 2.5A; -12 @ .30A; 15.5"x4.5"x2"

NOW ONLY \$5990

SIGMA INSTRUMENTS

Model 2PC2241

- * DESIGNED FOR DEC EQUIPMENT
- * FUSE PROTECTED * LINEAR DESIGN
- * AUXILIARY AC OUTLET
- * +5 @ 4A; -15V @ 1.5A; 12.25"x4"x4.75"

NOW ONLY \$1995

OUR BUYER BLEW IT... & BOUGHT TOO MANY OF THESE!

4116 250NS 8/7.95

CAPACITORS

TANTALUM

	6V	10V	15V	20V	25V	35V
.22uf						.40
.27						.40
.33						.40
.47			.35			.50
.68						.45
1.0		.40	.40	.45	.45	
1.5			.45		.50	
1.8					.75	
2.2		.35	.40	.45	.65	
2.7		.40	.45		.90	
3.3		.45	.50	.55	.60	.65
3.9		.45				
4.7	.45	.55		.60	.65	.85
6.8			.70		.75	
8.2					1.00	
10	.55	.65	.80	.85	.90	1.00
12	.65		.85	.90		
15	.75	.85	.90			
18			1.25			
22		1.00	1.35			
27			2.25			
39		1.50				
47	1.35					
56	1.75					
100		3.25				
270	3.75					

DISC

10pf	50V	.05	470	50V	.05
22	50V	.05	560	50V	.05
25	50V	.05	680	50V	.05
27	50V	.05	820	50V	.05
33	50V	.05	.001uf	50V	.05
47	50V	.05	.0015	50V	.05
56	50V	.05	.0022	50V	.05
68	50V	.05	.005	50V	.05
82	50V	.05	.01	50V	.07
100	50V	.05	.02	50V	.07
220	50V	.05	.05	50V	.07
330	50V	.05	.1	12V	.10
			.1	50V	.12

MONOLITHIC

.1uf-mono	50V	.18	.47uf-mono	50V	.25
.047uf-mono	50V	.15	.01uf-mono	50V	.14

ELECTROLYTIC

RADIAL		AXIAL			
.47uf	50V	.14	1uf	50V	.14
1	25V	.14	4.7	16V	.14
2.2	35V	.15	10	16V	.14
4.7	50V	.15	10	50V	.16
10	50V	.15	22	16V	.14
47	35V	.18	47	50V	.20
100	16V	.18	100	15V	.20
220	35V	.20	100	35V	.25
470	25V	.30	150	25V	.25
2200	16V	.60	220	25V	.30
			330	16V	.40
			500	16V	.42
			1000	16V	.60
			1500	16V	.70
			6000	16V	.85

COMPUTER GRADE

26,000uf 30V 3.95

OPTO-ISOLATORS

4N26	1.00	MCA-7	4.25
4N27	1.10	MCA-255	1.75
4N28	.69	IL-1	1.25
4N33	1.75	ILA-30	1.25
4N35	1.25	ILQ-74	2.75
4N37	1.25	H11C5	1.25
MCT-2	1.00	TIL-111	1.00
MCT-6	1.50	TIL-113	1.75

DIODES

1N751	5.1 volt zener	.25
1N759	12.0 volt zener	.25
1N4148	(1N914) switching	25/1.00
1N4004	400PIV rectifier	10/1.00
KBP02	200PIV 1.5amp bridge	.45
KBP04	400PIV 1.5amp bridge	.55
VM48	Dip-Bridge	.35

NEW UN-USED MUFFIN FANS

4.68" Square	14.95
3.125" Square	14.95

HEAT SINKS

TO-3 style	.95
TO-220 style	.35

SWITCHES

SPDT mini-toggle	1.25
DPDT mini-toggle	1.50
SPST mini-pushbutton	.39

MICRODEVICES AT MICROPRICES

TRANSISTORS

2N918	.50	MPS3706	.15
MPS918	.25	2N3772	1.85
2N2102	.75	2N3903	.25
2N2219	.50	2N3904	.10
2N2218A	.50	2N3906	.10
2N2219	.50	2N4122	.25
2N2219A	.50	2N4123	.25
2N2222	.25	2N4249	.25
PN2222	.10	2N4304	.75
MPS2369	.25	2N4401	.25
2N2484	.25	2N4402	.25
2N2905	.50	2N4403	.25
2N2907	.25	2N4857	1.00
PN2907	.125	PN4916	.25
2N3055	.79	2N5086	.25
3055T	.69	PN5129	.25
2N3393	.30	PN5139	.25
2N3414	.25	2N5209	.25
2N3563	.40	2N6028	.35
2N3565	.40	2N6043	1.75
PN3565	.25	2N6045	1.75
MPS3638	.25	MPS-A05	.25
MPS3640	.25	MPS-A06	.25
PN3643	.25	MPS-A55	.25
PN3644	.25	TIP29	.65
MPS3704	.15	TIP31	.75
		TIP32	.79

BYPASS CAPS

.01 UF DISC	100/6.00
.01 UF MONOLITHIC	100/12.00
.1 UF DISC	100/8.00
.1 UF MONOLITHIC	100/15.00

LED LAMPS

	1-99	100-up
JUMBO RED	.10	.09
JUMBO GREEN	.18	.15
JUMBO YELLOW	.18	.15
LED MOUNTING HARDWARE	.10	.09

LED DISPLAYS

HP 5082-7760	.43"	CC	1.29
MAN 72	.3"	CA	.99
MAN 74	.3"	CC	.99
FND-357 (359)	.375"	CC	1.25
FND-500 (503)	.5"	CC	1.49
FND-507 (510)	.5"	CA	1.49
TIL-311 4x7	.270"	HEX W/LOGIC	9.95

RESISTORS


1/4 WATT 5% CARBON FILM ALL STANDARD VALUES FROM 1 OHM TO 10 MEG OHM	
50 PCS. SAME VALUE	.025
100 PCS. SAME VALUE	.02
1000 PCS. SAME VALUE	.015

IC SOCKETS

1-99	100
8 pin ST	.13 .11
14 pin ST	.15 .12
16 pin ST	.17 .13
18 pin ST	.20 .18
20 pin ST	.29 .27
22 pin ST	.30 .27
24 pin ST	.30 .27
28 pin ST	.40 .32
40 pin ST	.49 .39
64 pin ST	4.25 call
ST = SOLDER TAIL	
8 pin WW	.59 .49
14 pin WW	.69 .52
16 pin WW	.69 .58
18 pin WW	.99 .90
20 pin WW	1.09 .98
22 pin WW	1.39 1.28
24 pin WW	1.49 1.35
28 pin WW	1.69 1.49
40 pin WW	1.99 1.80
WW = WIREWRAP	
16 pin ZIF	5.95 call
24 pin ZIF	7.95 call
28 pin ZIF	8.95 call
ZIF = TEXT TOOL (Zero Insertion Force)	

DIP SWITCHES

4 POSITION	.85
5 POSITION	.90
6 POSITION	.90
7 POSITION	.95
8 POSITION	.95



JDR Microdevices

1224 S. Bascom Avenue, San Jose, CA 95128
800-538-5000 • 800-662-6279 (CA)
(408) 995-5430 • Telex 171-110

VISIT OUR RETAIL STORE

HOURS: M-W-F, 9-5 T-Th., 9-9 Sat. 10-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: Minimum order \$10. For shipping and handling include \$2.50 for UPS Ground and \$3.50 for UPS Air. Orders over 1 lb. and foreign orders may require additional shipping charges — please contact our sales department for the amount. CA residents must include 6% sales tax, Bay Area and LA residents include 6 1/2%. Prices subject to change without notice. We are not responsible for typographical errors. We reserve the right to limit quantities and to substitute manufacturer. All merchandise subject to prior sale.

© Copyright 1984 JDR Microdevices

2732 32K EPROM

\$495

2764 64K EPROM

\$695

**MICROCOMPUTER
HARDWARE HANDBOOK
FROM ELCOMP — \$14.95**


Over 800 pages of manufacturers data sheets on most commonly used IC's.

- Includes:
- ★ TTL — 74/74LS and 74F
 - ★ CMOS
 - ★ Voltage Regulators
 - ★ Memory — RAM, ROM, EPROM
 - ★ CPU's — 6800, 6500, Z80, 8080, 8085, 8086/8
 - ★ MPU support & interface — 6800, 6500, Z80, 8200, etc.

**DISK DRIVES
TANDON**

- TM100-1 5 1/4" (FOR IBM) SS/DD 229.00
- TM100-2 5 1/4" (FOR IBM) DS/DD 259.00
- SHUGART**
- SA 400L 5 1/4" (40 TRACK) SS/DD 199.95
- SA 400 5 1/4" (35 TRACK) SS/DD 189.95
- PERTEC**
- FD-200 5 1/4" SS/DD 179.95
- FD-250 5 1/4" DS/DD 199.95
- MPI**
- MP-52 5 1/4" (FOR IBM) DS/DD 249.00

NOTE: Please include sufficient amount for shipping on above items.



**8-INCH
DISK DRIVE
SALE**

- FD 100-8 SHUGART 801 EQUIV. SS/DD — 10/\$175 EA.
- FD 200-8 SHUGART 851 EQUIV. DS/DD — 10/\$220 EA.

\$18900

\$23900

**BEST SELLING
BOOKS**

OSBORNE/MC GRAW-HILL

- Apple II User's Guide 16.95
- CRT Controller's Handbook 9.95
- 68000 Assembly Language Programming 16.99
- CBASIC User Guide 15.00

SYBEX

- Your First Computer 8.95
- The CP/M Handbook 14.95
- The PASCAL Handbook 18.95
- Microprocessor Interfacing Techniques 17.95

**EDGE-CARD
CONNECTORS**

- S-100 ST 3.95
- S-100 WW 4.95
- 72 pin ST 6.95
- 72 pin WW 7.95
- 50 pin ST 4.95
- 44 pin ST 2.95
- 44 pin WW 4.95



CABINETS FOR 5 1/4" DISK DRIVES

CABINET #1 \$29.95

- ★ DIMENSIONS 8 1/2 x 5 1/2 x 3 1/2"
- ★ COLOR MATCHES APPLE
- ★ FITS STANDARD 5 1/4" DRIVES, INCL. SHUGART
- ★ INCLUDES MOUNTING HARDWARE AND FEET

CABINET #2 \$79.00

- ★ COMPLETE WITH POWER SUPPLY, SWITCH, LINE CORD, FUSE & STANDARD POWER CONNECTOR
- ★ DIMENSIONS: 11 1/2 x 5 1/2 x 3 1/2"
- ★ +5V @ 1 AMP, +12V @ 1.5 AMP
- ★ FITS STANDARD 5 1/4" DRIVES
- ★ PLEASE SPECIFY GRAY OR TAN

NOTE: Please include sufficient amount for shipping on above items.

**TRANSFORMERS
FRAME STYLE**

- 12.6VAC 2amp 4.95
- 12.6VAC CT 2amp 5.95
- 12.6VAC CT 4amp 7.95
- 12.6VAC CT 8amp 10.95
- 25.2VAC CT 2amp 7.95

PLUG CASE STYLE

- 12VAC 250ma 3.95
- 12VAC 500ma 4.95
- 12VAC 1amp 5.95
- 12VAC 2amp 6.95

DC ADAPTER

6, 9, 12 VDC selectable with universal adapter 8.95

NOTE: Please include sufficient amount for shipping on above items.

**VISIT DURING
OUR EXPANDED
RETAIL STORE HOURS
SATURDAY 10 to 3**

CENTRONICS

- IDCEN36 Ribbon Cable 36 Pin Male 8.95
- IDCEN36/F Ribbon Cable 36 Pin Female 8.95
- CEN36 Solder Cup 36 Pin Male 7.95

DIP CONNECTORS

DESCRIPTION	HIGH RELIABILITY TOOLED ST IC SOCKETS	COMPONENT CARRIERS (DIP HEADERS)	RIBBON CABLE PLUGS (IDC)
ORDER BY	AUGATxx-ST	ICCxx	IDPxx
CONTACTS 8	.99	.65	
14	.99	.75	1.45
16	.99	.85	1.65
18	1.69	1.00	
20	1.89	1.25	
22	1.89	1.25	
24	1.99	1.35	2.50
28	2.49	1.50	
40	2.99	2.10	4.15

For order instructions see "IDC Connectors" below.

RIBBON CABLE

CONTACTS	SINGLE COLOR		COLOR CODED	
	1'	10'	1'	10'
10	.50	4.40	.83	7.30
16	.55	4.80	1.00	8.80
20	.65	5.70	1.25	11.00
25	.75	6.60	1.32	11.60
26	.75	6.60	1.32	11.60
34	.98	8.60	1.65	14.50
40	1.32	11.60	1.92	16.80
50	1.38	12.10	2.50	22.00

D-SUBMINIATURE

DESCRIPTION	SOLDER CUP		RIGHT ANGLE PC SOLDER		IDC RIBBON CABLE		HOODS	
	MALE	FEMALE	MALE	FEMALE	MALE	FEMALE	BLACK	GREY
ORDER BY	DBxxP	DBxxS	DBxxPR	DBxxSR	IDBxxP	IDBxxS	HOOD-B	HOOD
CONTACTS 9	2.08	2.66	1.65	2.18	3.37	3.69	—	1.60
15	2.69	3.63	2.20	3.03	4.70	5.13	—	1.60
25	2.50	3.25	3.00	4.42	6.23	6.84	1.25	1.25
37	4.80	7.11	4.83	6.19	9.22	10.08	—	2.95
50	6.06	9.24	—	—	—	—	—	3.50

For order instructions see "IDC Connectors" below.


MOUNTING HARDWARE 1.00

IDC CONNECTORS

DESCRIPTION	SOLDER HEADER	RIGHT ANGLE SOLDER HEADER	WW HEADER	RIGHT ANGLE WW HEADER	RIBBON HEADER SOCKET	RIBBON HEADER	RIBBON EDGE CARD
ORDER BY	IDHxxS	IDHxxSR	IDHxxW	IDHxxWR	IDSxx	IDMxx	IDExx
CONTACTS 10	.82	.85	1.86	2.05	1.15	—	2.25
20	1.29	1.35	2.98	3.28	1.86	5.50	2.36
26	1.68	1.76	3.84	4.22	2.43	6.25	2.65
34	2.20	2.31	4.50	4.45	3.15	7.00	3.25
40	2.58	2.72	5.28	4.80	3.73	7.50	3.80
50	3.24	3.39	6.63	7.30	4.65	8.50	4.74

ORDERING INSTRUCTIONS: Insert the number of contacts in the position marked "xx" of the "order by" part number listed. Example: A 10 pin right angle solder style header would be IDH10SR.

FOR APPLE COMPUTER USERS



JDR Microdevices

THOUSANDS SOLD!

JDR 16K RAM CARD FOR APPLE II+


- ★ Expand your 48K Apple to 64K
 - ★ Fully compatible with Apple Language System — Use in place of Apple Language card
 - ★ Highest quality card features: gold edge connector, sockets for all IC's.
 - ★ 2 YEAR WARRANTY
- Kit with Instructions \$40.95
Bare PC Card \$14.95

\$44.95

GET SLIM IN 1984!


JDR HALF-HEIGHT DISK DRIVE

- ★ 35 Track if used with Apple Controller
- ★ 40 Track Controller and DOS Available (Call for Price)



\$209.95

MA SYSTEMS FD-35 DISK DRIVE



\$199.95

- ★ Shugart Mechanism — Made in U.S.A.
- ★ Direct Replacement for Apple Disk II
- ★ Compatible with Apple Controller or other Apple compatible controllers
- ★ Specially designed electronics with low power consumption
- ★ DOS 3.3 and 3.2 compatible
- ★ One Year Warranty

CONTROLLER CARD

\$69.95



APPLE COMPATIBLE POWER SUPPLY

- ★ Use To Power Apple-Type Systems
- ★ +5V @ 5A +12V @ 3A
- ★ -5V @ .5A -12V @ .5A
- ★ Instructions Included

\$79.95

BMC BMX-80 PRINTER

- ★ 80 CPS Dot Matrix Printer
- ★ Prints Bi-Directional in 40, 80, 71 or 142 Columns in Normal, Double Width or Compressed Text.
- ★ Print Superscript As Well As Superb Graphics in Character or Bit Image



\$279

micromax

VIEWMAX-80

NOW ONLY \$159.95

- ★ 80 Column Card for Apple II+
- ★ Video Soft Switch
- ★ Inverse Video
- ★ 2 Year Warranty

VIEWMAX-80e

NEW \$129.95

- ★ 80 Column Card for Apple IIe
- ★ 64K RAM Expandable to 128K
- ★ 64K RAM Upgrade **\$47.60**

GRAPHMAX \$129.95

- ★ Hi Resolution Graphics
- ★ Printer Card
- ★ Centronics Parallel Interface

Graphmax with Color & Zoom Options... **\$149.95**

NASHUA DISKETTES

5 1/4" WITH HUB RING

MD1 SOFT SECTOR, SS/SD	19.95
MD1D SOFT SECTOR, SS/DD	26.25
MD2D SOFT SECTOR, DS/DD	30.75
MD2F SOFT SECTOR, DS/QUAD DENSITY	45.00
MD110 10 SECTOR HARD, SS/SD	19.95
MD210D 10 SECTOR HARD, DS/DD	30.75

8" WITHOUT HUB RING

FD1 SOFT SECTOR, SS/SD	24.75
FD1D SOFT SECTOR, SS/DD	30.00
FD2D SOFT SECTOR, DS/DD	36.75

OTHER ACCESSORIES FOR APPLE II

THUNDERCLOCK \$129.95

- ★ Real-Time Clock Calendar
- ★ Software Included
- ★ Mountain Software Compatible
- ★ BSR Control Options Available

KRAFT JOYSTICK \$39.95

VERBATIM DATALIFE DISKETTES

SS/DD SOFT SECTOR

\$29.95


SS/DD 10 HARD SECTOR

\$29.95

5 1/4" DISKETTE FILE

- ★ ATTRACTIVE, FUNCTIONAL DISK STORAGE SYSTEM
- ★ 75 DISK STORAGE CAPACITY
- ★ MOLDED FROM DURABLE SMOKED PLASTIC WITH FRONT CARRYING HANDLE

\$16.99



MONITORS

BMC MONITOR STAND MODEL PA-900

Your Display Will
Tilt & Swivel **\$29.95**


MONOCHROME

BMC BM 12AUW GREEN 12"	\$89.95
BMC BM 12EUY 18 MHZ AMBER	\$139.95
BMC BM 12EUN 18 MHZ HIGH RES GREEN	\$115.00
NEC JB1201M - 20 MHZ GREEN	\$169.00
ZENITH ZVM-121 - 15 MHZ GREEN	\$99.00

COLOR

BMC BM-AU9191U COMPOSITE 13" **\$279.00**

NO C.O.D. ORDERS PLEASE



JDR Microdevices

1224 S. Bascom Avenue, San Jose, CA 95128

800-538-5000 • 800-662-6279 (CA)

(408) 995-5430 • Telex 171-110

Apple is a trademark of Apple Computer Corporation

VISIT OUR RETAIL STORE

HOURS: M-W-F, 9-5 T-Th., 9-9 Sat. 10-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: Minimum order \$10. For shipping and handling include \$2.50 for UPS Ground and \$3.50 for UPS Air. Orders over 1 lb. and foreign orders may require additional shipping charges — please contact our sales department for the amount. CA residents must include 6% sales tax, Bay Area and LA residents include 6.5%. Prices subject to change without notice. We are not responsible for typographical errors. We reserve the right to limit quantities and to substitute manufacturer. All merchandise subject to prior sale.

© Copyright 1984 JDR Microdevices

Unclassified Ads

WANTED: IBM 5100-5120 with APL, 64K, RS-232C serial I/O option. I am developing an adaptive pharmacokinetic system for medical applications. Also looking for prospective associates and programmers versed in C, APL, or Z80/8086 assembly language. Peter A. Orner, MD, PhD, Suite A-204, 3737 Moraga Ave., San Diego, CA 92117. (619) 272-6781.

WANTED: Tax-exempt, not-for-profit organization seeks computer donation for compilation of reference information on AIDS. Will be used in a network to provide up-to-date information to local AIDS groups. Certified receipts. Paul Piroski Jr., MD, National Gay Health Education Foundation Inc., 114 Willoughby Ave., Brooklyn, NY 11205. (212) 622-3000.

WANTED: Tax-deductible donation of Apple computer, disk drive, monitor, and/or printer to be used for financial records, membership drives, state and federal yearly reports, updating animal-care sheets, etc. References and IRS information on request. We pay shipping and give receipt. Carol Odell, Wildlife Rescue Team Inc., Route 2, Lincoln, NE 68505.

FOR SALE: Lot 1: BYTE: July, November, December, 1977; 1978 to 1981, complete; 1982 and 1983, less two issues. Lot 2: Keyboard Microcomputing: June, September to December, 1977; 1978 to 1980, complete; 1981, less December; 12 issues scattered thru 1982-1983. Lot 3: Creative Computing numbers 2, 4, 5, and 6 of 1978, 1979 to 1981, complete; numbers 2, 3, 4, and 12 of 1982; 1983, complete. Will accept best offer FOB for each lot. Duncan Bailey, 609 Echo Glen, River Vale, NJ 07675. (201) 666-3992.

NEEDED: Physically disabled Vietnam veteran needs Smart-modem for access to college computer from home. Used OK Irving J. Goldfarb, 116 Court St., Plattsburgh, NY 12901.

FOR SALE: Multiuser CP/M computer, one 60-megabyte Winchester disk drive, one tape backup, expandable to 32 users, floppy and tape backup, demo unit with new guarantee; lists for \$32,000, sell for \$16,000. Allen Cohen, American Bar Code Systems, Suite 376, 5757 West Century Blvd., Los Angeles, CA (213) 642-1101.

FOR SALE: Morrow Designs MD-3 microcomputer with CP/M, 64K RAM, and two double-sided disk drives. Includes standard software plus lots of extra programs. Used only 4 months; \$1300 or best offer. Heath H-29 terminal; \$695 firm. Richard Haendel, POB 22152, Oklahoma City, OK 73123. (405) 721-9215.

FOR SALE: ELF computer, not completed with regulated power supply and heavy-duty transformer, enclosure cabinet for computer boards, ASCII keyboard, and monitor. Giant board and I/O board have been tested. Documentation included. Tom Acuff, 3109 15th St., Moline, IL 61265. (309) 764-5977.

FOR SALE: ELF II computer with 4K RAM, giant board, expansion power supply, UHF and VHF video modulators, light pen, various programs, and complete manuals; \$250. John Choriton, 2316 View Ridge Dr., Bellingham, WA 98226. (206) 733-5122.

FOR SALE: DEC computer system. Includes a MINC-11 processor, an RX02 dual 8-inch DSDD floppy-disk drive, a DECwriter III 180-cps printing terminal, and a VT105 video terminal with graphics capability. System comes complete with the MINC BASIC and RT-11 operating systems and includes both FORTRAN and assembly language compilers. May be willing to sell terminals separately. Excellent condition; price negotiable. Herbert Wendell, 405 Northfield Ave., West Orange, NJ 07052. (201) 736-8259.

WANTED: Atari 800 games and other programs on disk. Send name, address, and disk; I'll return a disk with different programs. Sen Can, 3717 Diamondhead Dr., St. Louis, MO 63125.

FOR SALE: OSI-C3-A, 56K w/lt dual 8-inch SSSD drives, CP/M package, printer interface, and cable. Lifeboat XBASIC, COBOL, FORTRAN, OS-65D 3.0, OS-65U 1.1, OS-DMSA nucleus, OS-65D extended editor, and Wordstar 3.0. All disks and documentation; \$1800. FOB Wilton, Wm. E. Ritchie; RD 2, Wilton, NH 03086. (603) 654-6157.

FOR SALE: Memorex 651 hard-sector 8-inch floppy-disk drive. Used but in good condition. Make offer or will trade for S-100 boards, etc. Kevin Cardon, 1500 North 1220 East, Lehi, UT 84043. (801) 768-9567.

FOR SALE: Four Shugart SA800 8-Inch floppy-disk drives in excellent shape; \$150 each. Two Memorex 552 8-inch floppy-disk drives, double-sided; \$175 each. Roger Wilson, 922 Dunbarton Dr., Richardson, TX 75081. (214) 690-1895 after 6 p.m.

FOR SALE: OSI system consisting of Superboard (mounted in cast-aluminum cover) and Lexeed 12-inch monitor, cassette, and ASR 33 teletype. In very good condition with good system documentation. Will sell for best offer or trade for dot-matrix printer. Edward Crovelia, (716) 839-3468 after 6 p.m.

FOR SALE: Working S-100 boards, 16K static RAMs; \$65 each. 8K static RAMs; \$30 each. Bytesaver II with 10 2708s; \$75. Processor Tech 1200 bps cassette interface; \$35. OP-80 optical paper-tape reader; \$20. Two partial SOL-20s; \$15 each. Mostly Processor Technology software. Martin Eberhard, 307 East Healey #10, Champaign, IL 61820. (217) 398-0077 evenings.

FOR SALE: Vector Graphics MZ with S-100, Z80, 4MHz, 56K, dual 300K disks, Centronics and RS-232C ports, SOROC 120 terminal, Selectric printer/typewriter, CP/M, Pascal-Z, and other goodies; \$2500 or offer. Also, PDP-8M CPU, 8K core, autostart, and I/O interface; \$500 as is. TI-59 Calculator with printer-base, all accessories and software, like new; \$250. PROM-Blaster Apparatus for Apple II; \$75. Mike Hughes, POB 393, Rapid City, SD 57709. (605) 341-6755.

FOR SALE: Microtek MT80P printer; \$250. Microterm ACT-1 terminal; \$100. SwTPC 6800 computer with 44K. Two serial and one parallel I/O boards; \$425. SwTPC AC30 cassette interface; \$50. Send for complete list. Jim Hall, 2063 108th Ave., Oscego, MI 49078. (616) 694-9760.

WANTED: Information on the IBM printer Model 3284-2; serial-interface location on the logic control unit, it's pin definition and location. Would like to interface it to a Z80 microprocessor. Also, would welcome and answer all correspondence related to computers, programming, etc. Tony-Adamse Veerk, 41F The Hague, Holland.

FOR SALE: H-14 printer with RS-232C serial cable; excellent condition, checked by factory. Extra ribbons and all manuals included; \$125. Will pay shipping. Tom Dorsett, E 2726 Golden Rd., Spokane, WA 99208. (509) 466-0585.

WANTED: Apple software to swap. Will trade for games, utilities, or whatever. Send typed list of programs and I'll send mine. Wade Tsai, 1309 South Port Blvd., New Iberia, LA 70560. (318) 367-8860.

FOR SALE: Epson MX-100 printer, Epson interface board for Apple, and Graphicwriter; all \$600 or best offer. Apple Disk II Drive; \$299. Rana Disk Elite One; \$250. Versawriter; \$199. DOS Toolkit; \$40. Gorgon; \$27. ABM; \$15. Swashbuckler; \$20. Other software at varying prices. Peter Su, 14 Devonshire Dr., Barrington, RI 02806.

WANTED: Computer and electronics enthusiasts who want to correspond with a 22-year-old male electronics engineer. I am interested in the exchange of ideas, programs, and circuit designs. I use an S-100, Z80-based system. Also, anybody who wants to communicate about the electronics and computing scene in India. Kim Agrawal, Sri Aurobindo Ashram, Pondicherry 605 002, India.

FOR SALE: Heavy-duty power-supply system. Metal case (12 by 6 by 30), two Lambda power supplies; (LGS-EE-5-OV-R; 5 V @ 110 amps) and (LND-X-152; ±12 V @ 2.5 amps) with AC-power fail-detection board. Package price; \$1400; asking \$700. Jim Kitchner, (713) 644-2841 days. 251-0723 nights.

FOR SALE: 48K Atari 400 with BASIC cartridge, manual, dust cover, and various cassettes; all for \$250. Also, an Atari 16K memory board that I will swap for back issues of BYTE, Creative Computing, or Compute. Best offer, send your list. Jim W. Prickett, 2142 Cross Rd., El Centro, CA 92243.

FOR SALE: Base II dot-matrix printer in top condition with RS-232C serial, Centronics parallel, 20-mA-current loop, and IEEE-488 interfaces. Also, has tractor feed, graphics, and extended buffer options. Asking \$450. Will consider trading for 1200-bps computer, external modem, or item of equal value. Walter Vose Jeffries, H81630 Dartmouth, Hanover, NH 03755.

FOR SALE: LNW 80 computer board with gold connectors, most capacitors, resistors, and sockets. All manuals and the BYTE construction article; \$125 or offer. Also, three S-100 Vector Graphics boards (1977 Rev. 1 & 2) including the hires board, 8K RAM board, and the Flash-writer board; all three for \$200 or best offer. James E. Shephard, 15634 Northeast 107th Court, Redmond, WA 98052. (206) 883-6052.

WANTED: Schematics and operational information on the Seals Electronics 32KSC, a 32K-byte S-100 static RAM board. Also, for sale: five new, unused boards needing some logic parts and new, prime RAM chips: TI TMS 4044, 4116, 21L02; and 801R-compatible disk drive. Prices negotiable. Steve Fritts, POB 13057, St. Paul, MN 55113. (612) 771-8264.

WANTED: Student would appreciate the donation of an Apple II with disk drive and 64K to be used in the development of educational programs for schools and to further my knowledge of computer languages. Mark Zwich, 1821 Woodfield Dr., Richfield, WI 53076.

FOR SALE: North Star Horizon II, S-100 bus, 32K, dual 5 1/4-inch drives, RTC, two serial and one parallel ports, oak cabinet, manuals, etc. Lots of software. Offers? Also, two IBM 7441/1980 Selectric ball-communicating printers, financial keyboards, and RS-232C interface. Will include Z80 and/or 6502 software drivers, and documentation; \$230 each or \$420 for both. FOB Also, TTY model 43 KSR with modem; \$475. Rich Adamson, 7310 Adams, Lincoln, NE 68507. (402) 464-0718.

FOR SALE: Apple II 48K computer (has full uppercase and lowercase keyboard), 16K language card, disk drive with controller and green monitor; \$1000 or best offer. Also, MX-80 friction-feed kit; \$70. Lester Bartel, 1907 Barham, Dodge City, KS 67801. (316) 227-7536.

WANTED: I am interested in corresponding with other Cromemco C-10 owners, users, and groups to share and swap programs and information. Steven E. Martin, 7751 Gamid Dr., Springfield, VA 22153. (703) 664-4251 days and 451-2992 evenings.

FOR SALE: Okidata Microline 80; \$195. IDS 440G; \$345. Okidata Slimline 160; \$1195. Decis Data 6540; \$995. Mountain Apple Clock; \$145. Apple Parallel Card; \$70. Apple Communicate Card; \$115. Visual V200 CRT; \$545. Microfinesse Fin Model (new); \$290. Panasonic NV8200 VCR; \$550. All clear, in working condition, manuals included. Dave Drucker, 5 Norbert, Hawthorn Woods, IL 60047. (312) 541-2122.

FOR SALE: Tektronix 60-MHz dual trace, delayed-alternate time-base oscilloscope, Model 2215 with accessory pouch, like new; \$1000 or best offer. Stephen Rao, 9001 Watertown Plank Rd., Milwaukee, WI 53226. (414) 257-8567.

FOR SALE: OSI C4F, MF, 48K RAM, two 5-inch disk drives, battery backup clock/calendar, four joysticks, programmable tone generator, DAC, 32 by 64 redefinable character or graphic in 16 colors. OS-65D with Microsoft BASIC, assembler and debugger with all manuals and lots of software. Over \$3500; asking \$2500 in Canadian funds. Daniel Fiteau, 1471 Bourgeois, Longueuil, Quebec J4M 1Z5, Canada. (514) 468-3820.

FOR SALE: Tektronix 4054 graphics terminal, 300 hours total time used. Less than 50 hours on CRT tube. Options: #01—Data Communication Interface; #24—64K-byte total memory; #30—Dynamic Graphics. Also, Trans-Era A/D converter unit and Trans-Era BCD-Binary I/O unit. Walt Hedges, 4635 West Euclid, Laveen, AZ 85339. (602) 237-4080.

WANTED: S-100 boards, Three Compupro RAM 20 32K static; \$125 each. Two Terbell DD controllers with CP/M 2.2; \$200 each. Compupro I/O; \$100. Compupro CPU-Z; \$200. All boards perfect with manuals. Jim Blair, (318) 367-8455.

WANTED: Student would appreciate an unwanted, new, or used copy of Beneath Apple DOS (Worth & Lechner, for Apple DOS 3.3) and/or Bag of Tricks. Willing to pay, or trade software or a copy of 6502 Assembly Language Programming (L. Leventhal) in new condition. Darryl Dueck, 59 Pinecrest Bay, Winnipeg, Manitoba R2G 1W2, Canada. (204) 668-5176.

WANTED: Used Olivetti Praxls 30 electronic typewriter. Long Kha, 7322 Mesa College Dr., Apt. 18, San Diego, CA 92111. (619) 277-4277.

WANTED: TRS-80 software to swap. Also, need help in repairing a TRS-80 logic board Model I G version; need two ROMs set. I have some TRS-80 upgrade plans for trade. Looking for 80-column TRS-80 Model I upgrade plans. Send SASE for replies. Tim Cochrane, POB 176, University, PA 15052.

FOR SALE: Apple software: Wizard and the Princess for SIB or best offer and Ultima for \$25 or best offer. Both in original packaging. Also, will buy or borrow used adventures and games. Darrin Rothe, 310 North Main, Deer Park, WI 54007. (715) 269-5313 after 5 p.m. and weekends.

WANTED: Percom Doubler A (the one discarded when you upgraded to Doubler II) for TRS-80 Model I; Level II ROM chips for newer Alps keyboard (the set that mounts directly on main board), and aircraft navigation software on disk. H. Sherwin, 609 South Main St., Clearfield, UT 84015. (801) 773-8005.

FOR SALE: Perci 270 dual 8-inch SSSD floppy-disk drive and power supply. Very fast and factory maintained; \$395. Alan Westhagen, 6814-20th NE, Seattle, WA 98115. (206) 524-7335.

WANTED: Anyone who wants to exchange programs & software for a Processor Tech SOL-20, T, and N. Eliasson, Gosgatan 15 S-72348 Vasteras, Sweden.

WANTED: VIC-20 books, tapes, cartridges, or other new or used equipment. Please send list when corresponding. Bart Kreuser, 1695 Blermet, Green Bay, WI 54304.

FOR SALE: Two Calcomp #142 SSSD 8-inch drives, one Calcomp #142M SSSD 8-inch drive; both need repair. Also, Terbell SD FDC, Calcomp jumpered, Shugart adaptor, IA Z80 2-MHz CPU with CP/M boot PROM; Cromemco Z80 monitor PROM; 16K Godbout Economor IV static RAM, 16K WMC MEM-2 static RAM; and four 8K Godbout Economor II static RAM. Complete documentation on each item. Make an offer. Dave Raibert, (201) 444-4600 and 529-3595.

WANTED: Young robotics A.I. experimenter would like contact with others with same interests. Peter J. Skelley, 16121 59th Ave. SE, Snohomish, WA 98290.

FOR SALE: Altos 16-bit multiuser computer with hard disk. The system has Horizon WP Accounting, and Mutiplan running under the Xenix operating system. New; \$16,700, asking \$7200. Mike Hughes, 1245 West Huntington Dr., #207, Arcadia, CA 91006. (213) 287-7385.

UNCLASSIFIED POLICY: Readers who have computer equipment to buy, sell, or trade or who are requesting or giving advice may send a notice to BYTE for inclusion in the Unclassified Ads section. To be considered for publication, an advertisement must be noncommercial (individuals or bona fide computer clubs only), typed double-spaced on plain white paper, contain 75 words or fewer, and include complete name and address. This service is free of charge; notices are printed once only as space permits. Your confirmation of placement is appearance in an issue of BYTE as we engage in no correspondence. Please allow at least three months for your ad to appear. Send your notices to Unclassified Ads, BYTE/McGraw-Hill, POB 372, HancocK, NH 03449.

Unclassified Ads

FOR SALE: Fortune 3216 computer with hard disk. Unix operating system, WP, Multiplan, and accounting software. Asking half of what the system costs. Russ Sharer, POB 3535, Arcadia, CA 91006. [213] 445-8720.

WANTED: To trade a one-month-old Radio Shack TRS-80 (MC10) with some money for a used Jupiter Ace with some software and documentation. William V. Petro Jr., 30047 Regent, Wickliffe, OH 44092. [216] 944-5903.

FOR SALE: Radio Shack TRS-80 Model I with Level II BASIC. Comes with functioning keyboard, monitor, cassette recorder, several games, and complete documentation. Will trade for IBM PC software/hardware or best offer. Michael Beauchamp, 313 Old Post Rd., Waterloo, Ontario N2L 5P3, Canada. [519] 885-0891.

WANTED: People who are interested in or use the Logo language. I would like to exchange programs, ideas, and information. Keith Robison, 113 Morris Rd., Exton, PA 19341.

WANTED: TDL Assembler, Chess, and Statistics software in source listing and on 5 1/4-inch disk for Osborne 1 in single density. Will give you other software in exchange. Hermann Locarek, Fuggerstr. 4, 8901 Stadbergen, West Germany.

FOR SALE: Xerox 820 computer with two 5 1/4-inch DS/DD drives or two 8-inch SS/DD drives. Also, Xerox/Diablo 630 letter-quality printer. James Long, Rt. 3 No. 6 Autumnwood, Holts Summit, MO 65043. [314] 896-5989 after 7 p.m.

FOR SALE: Back issues of BYTE, vol. 1, no. 1 [1975] through 1982, complete except for vol. 1, no. 2, 3, 5, and 9. Mint condition. \$250 includes U.S. shipment. Bill Schweber, POB 543, Sharon, MA 02067.

FOR SALE: Netronics Explorer-85 system. Complete with keyboard, 64K memory, two 8-inch disk drives, and CP/M. All in perfect working order, will sell for best offer. Larry Katz, 854 North Krome Ave., Homestead, FL 33030. [305] 248-7561 days.

FOR SALE: TRS-80 Model I 48K, RS-232C, modem, DEC printer, software, manuals: \$975. CCTV Security System with two cameras, monitor, more: \$500. 3M 257 desk copier: \$175. Also, TRS-80 Model 16 256K, two drives, real-time clock, Xenix/Unix software, modem, printer, terminal, hard disk, more: \$7950. Jim Thomas, POB R, Pine Lake, GA 30072. [404] 498-1401.

FOR SALE: BYTE January 1981 through December 1982 [24 issues] and Microcomputing January 1977 through October 1982 [70 issues]: \$170, prepaid. Will consider VIC-20, TI 99, etc. as partial trade. Paul Schmidtke, 4308 East Little Creek Rd., Tucson, AZ 85712. [602] 326-0442.

FOR SALE: BYTE, 7/76 thru 10/76 and 1/77 thru 12/82, missing one issue: \$200. Interface Age, 1/77 thru 12/82, missing 7/78: \$150. KiloBaud, 10/77 thru 12/82, missing 3 issues: \$125. Creative Computing, 3/77 thru 6/81, missing two issues: \$100. Personal Computing, 7/78 thru 12/81, missing 1 issue: \$75. All plus shipping. Also dr. doobs, etc. George Lang, 306 East 96th St., NY, NY 10128. [212] 348-3610.

WANTED: Texas Instruments Model 1 computer. D. Jones, POB 778, Daly City, CA 94017. [415] 877-8676.

FOR SALE: Hardware maintenance and service library package for IBM Personal Computer XT. #6936809, never opened, sealed: US\$80. I pay shipping. Luis Baez, 7922 East Drive, North Bay Village, FL 33141. [305] 756-5687 evenings.

WANTED: Byte Nybble document #112 ("An M6800 LISP Interpreter," 1979); MIT Artificial Intelligence Lab "HakMem" Memo #239 (on Collatz' problem, 1972); and a textbook, "Computer Approaches to Mathematical Problems" by J. Nievergelt (Prentice-Hall, 1974). Will pay copy costs and postage or will buy your original at your price. Barry Knapp, 4695 Osage Dr., Boulder, CO 80303. [303] 494-8390.

FOR SALE: 2708 EPROMs. 200 EPROMs were removed when equipment was upgraded to 2716. All were working when removed; perfect for the hobbyist. 1 to 25: \$1.25 each; 25 or more at \$1 each. Rich Matthews, POB 80685, Baton Rouge, LA 70898. [504] 291-0832 evenings and weekends.

FOR SALE: Codata CTW 300/20/18 8-user Unix computer, 20-megabyte fixed disk, 386K floppy, 256K RAM, C. Pascal, FORTRAN 77, excellent condition: \$11,950. Tom Cole, 1207 Cedarwood Dr., Joliet, IL 60435. [815] 729-0300.

WANTED: Atari 810 disk drives, used but in good working order. Also, 1200-bps modem with software for Atari 800, 80-column board, 48K RAM plug-in board, and business-oriented software. Offers of game programs given consideration. Stephen A. Risk, 10224 Windsor View Dr., Potomac, MD 20854.

WANTED: Technical and service information for a G.E. TN-1200 Impact [chain] printer. Also, nonworking printer for parts. Russell Hill, c/o Industrial Counseling Services, POB 278, Ashland, OR 97520. [503] 488-0220.

BOMB BYTE's Ongoing Monitor Box

Article #	Page	Article	Author(s)
1	30	The Apple Macintosh Computer	Williams
2	58	An Interview: The Macintosh Design Team	Lemmons
3	84	Apple Announces the Lisa 2	Williams
4	88	Build the Circuit Cellar Term-Mite ST Smart Terminal, Part 2: Programming and Use	Ciarcia
5	113	User's Column: Chaos Manor Gets Its Long-Awaited IBM PC	Pournelle
6	147	BYTE West Coast: A Business Computer, A Business Program, and More on Voice Recognition	Shapiro
7	160	Don't Bench Me In	Houston
8	168	Beyond MIPS: Performance Is Not Quality	Carroll, Rosson, Boyle
9	175	Software Performance Evaluation	Mello-Grand
10	193	The Art of Benchmarking Printers	Tetewsky
11	218	Benchmarking FORTRAN Compilers	Marvlt
12	227	Benchmark Confessions	Lewis
13	235	The Word-Processing Maze	Naiman
14	243	Evaluating Word-Processing Programs	Moore
15	252	ProDOS	Walker
16	267	Knowledgeman	Clune
17	278	The IBM CS-9000 Lab Computer	Weger
18	292	The Rixon R212A Intelligent Modem	Callamaras
19	303	Savvy	Purpura
20	308	The Micro-Sci Gameport III for the Apple III	Purpura, Callamaras
21	310	The Videx Ultratrem	Gilbert
22	318	Apple Disk Emulators: Axlon, Legend, Pion, and Syntex	Jones
23	331	IBM/Apple Communication	Blagg
24	342	A Low-Cost, Low Write-Voltage EEPROM	Pfister
25	346	Foot Control	
26	349	Inside a Compiler: Notes on Optimization and Code Generation	Christian
27	370	Writing Device Drivers for MS-DOS 2.0 Using Tandon TM100-4 Drives	Roskov
28	383	Deciphering Word Games	Worley
29	388	Five Original Graphics	Sussman
30	395	Bubbles on the S-100 Bus, Part 2: The Software	Sussman
31	416	Calculating Overhead Costs by Computer	Wheeler Hunter

BOMB Cites Chaos Manor

Jerry Pournelle's User's Column, "The Latest from Chaos Manor," won top spot in the November BOMB. Dr. Pournelle wins \$100. The five authors of "Technical Aspects of IBM PC Compatibility," Charlie Montague, Dave Howse, Bob Mikkelsen, Don Rein, and Dick Mathews, will divvy up the \$50 prize for second place. "Concurrent CP/M" by Joe Guzaitis grabbed third place. Lawrence J. Curran and Richard S. Shuford's interview with "IBM's Estridge" was a close fourth. And Bobbi Bullard's "Comparing the IBM PC and the TI PC" placed fifth. Heartiest congratulations to these authors.

Correspondence

Address all editorial correspondence to the editor at BYTE, POB 372, Hancock, NH 03449. Unacceptable manuscripts will be returned if accompanied by sufficient first-class postage. Not responsible for lost manuscripts or photos. Opinions expressed by the authors are not necessarily those of BYTE. Entire contents copyright © 1983 by BYTE Publications Inc. All rights reserved. Where necessary, permission is granted by the copyright owner for libraries and others registered with the Copyright Clearance Center (CCC) to photocopy any article herein for the flat fee of \$1.50 per copy of the article or any part thereof. Correspondence and payment should be sent directly to the CCC, 21 Congress St., Salem, MA 01970. Specify ISSN 0360-5280/83. \$1.50. Copying done for other than personal or internal reference use without the permission of McGraw-Hill is prohibited. Requests for special permission or bulk orders should be addressed to the publisher. BYTE® is available in microform from University Microfilms International, 300 North Zeeb Rd., Dept. PR, Ann Arbor, MI 48106 USA or 18 Bedford Row, Dept. PR, London WC1R 4EJ England.

Reader Service

Inquiry No.	Page No.	Inquiry No.	Page No.	Inquiry No.	Page No.	Inquiry No.	Page No.
1	1 SUPER WAREHOUSE 400	79	COMPUTER TECHNOLOGY 514	160	GTEK INC. 53	251	MICROSTUF, INC. 281
3	1ST PLACE SYSTEMS 336	80	COMPUTER TECHNOLOGY 520	*	H&E COMPUTRONICS 138	252	MICROTECH EXPORTS 366
5	800 SOFTWARE 134	*	COMPUTER WAREHOUSE 333	161	H&M DISK DRIVE SERVICES 376	253	MICROWARE 188
6	A.S.T. RESEARCH 239	81	COMPUTERS AND MORE 180	162	H.E.I. INC. 26	254	MID-AMERICA WHOLESALERS 410
7	AB COMPUTERS 500	82	COMPUTERS AND MORE 120	163	HANDWELL CORP. 394	255	MILLER, J.W. 340
8	ABC COMPUTER LTD 520	83	COMPUTERS WHOLESALE 379	164	HANDWELL CORP. 507	256	MINI MICRO MART 403
9	ABC DATA PRODUCTS 423	84	COMPUVIEW PROD. INC. 263	*	HAYES MICROCOMP. PROD. 94	257	MOORE BUSN. CENTERS 56, 57
10	ACL INC. 460	390	COMPU-MEDIA, INC. 504	166	HAYES MICROCOMP. PROD. 95	258	MOUNTAIN VIEW PRESS 275
11	ADDMASTER CORP. 506	85	CONCURRENT CORP. 126	167	HAYES MICROCOMP. PROD. 397	259	MPI 297
12	ADROIT ELECTRONICS, INC. 506	86	CONROY-LAPOINTE 156, 157	168	HEATH COMPANY 129	260	MTI SYSTEMS CORP. 164
13	ADV. COMP. PROD. 534, 535	87	CONROY-LAPOINTE 156, 157	169	HITACHI 69	*	MUSYS CORP. 271
14	ADV. GRAPHIC ENGINEERING 512	88	CONROY-LAPOINTE 156, 157	414	HUMAN DESIGNED SYS. 375	261	MYTEK 442
*	ALF PRODUCTS, INC. 306	89	CONTINENTAL PRESS INC. THE 514	157	HYPERGRAPHICS 225	262	NATIONAL COMPUTER LTD. 124
298	ALPHA BYTE 314	90	CONTROL DATA CORP. 305	170	I.B.C. 19	263	NAVAL UNDERWATER SYS. CTR. 409
15	ALPHA NUMERIC INT'L. 273	92	CORONA DATA SYS. 67	172	I.T.M. 226	264	NEBS COMPUTER FORMS 364
16	ALPHA OMEGA COMPUTER 14	93	COSMOS 75	173	JO TECHNOLOGIES 351	265	NEC INFORMATION SYS. 353
19	AMDEK CORP. 55	94	CRE WHOLESALE PROD. 518	174	IBM CORP. 232, 233	266	NESTAR SYSTEMS INC. 105
20	AMER. BUYING & EXPORT 426	95	CRE WHOLESALE PROD. 518	176	IBM SYSTEMS SUPPLY DIV. 435	267	NETWORK CONSULTING, INC. 250
21	AMER. SQUARE COMP. 357	96	CREATIVITY UNLTD. 518	177	IDEA WARE 259	268	NETWORK CONSULTING, INC. 461
22	ANADEX 429	97	CROMEMCO 5	178	IMAGE COMP. PROD. 504	269	NEVADA COMPUTER 434
23	ANTELOPE COMMUNICATIONS 518	98	CRYPTRONICS INC. 72	180	IN SYNC 510	*	NORTH HILLS CORP. 508
244	ANTEX DATA SYS. 116	450	CUESTA SYSTEMS 512	181	INCOMM 456	*	NORTH HILLS CORP. 514
*	APPLE COMPUTER INC. CII, 1	101	CUSTOM COMP. TECH. 519	182	INFOCOM 240, 241	270	NORTHWEST DIGITAL SYS. 64
*	APPLE COUNTRY LTD. 491	208	DANA COMPUTER DISCOUNT 467	457	INMAC 426	271	NORTHWEST MICROCHIPS DIST. 520
25	APPLEWARE, INC. 512	102	DATA MANAGEMENT ASSOC. 261	183	INTEGRAND 66	*	NRI SCHOOLS ELECTR. DIV. 417
26	APPLIED DIGITAL DATA SYS. 192	208	DATA STORAGE SOLUTIONS 93	184	INTERACTIVE STRUCT. 295	144	NWS 434
27	APPLIED SOFTWARE TECH. 437	411	DATA STORAGE SOLUTIONS 93	185	INTERDATA SYSTEMS, INC. 510	272	O'HANLON COMP. SYS. 197
28	ARTIFICIAL INT'L. RESEARCH 512	104	DATA TECH INDUSTRIES 163	452	INTERFACE, INC. 135	273	OCTAGON SYSTEMS CORP 518
29	ASHTON-TATE 73	105	DATA TRANSLATION INC. 453	453	INTERFACE, INC. 135	274	OMNISOFT 82
30	ASHTON-TATE 345	106	DATASOUTH COMP. CORP. 335	187	INTERTEC DATA SYS. 13	275	OMNISOFT 83
31	ATARI/SMART 115	107	DATASOUTH COMP. CORP. 470	455	INTEC MICRO SYS. 462	276	OPEN SYSTEMS, INC. 266
4	AVATAR 339	395	DATA SPEC 471	460	IQ TECHNOLOGY 202		ORA ELECTRONICS 501
32	AVOCET 445	396	DATA SPEC 471	400	J.M.I. SOFTW. CONS 182	279	ORYX SYSTEMS 190, 191
459	BASF SYSTEMS 287	108	DAVIDGE CORP. 516	190	JADE COMP. PROD. 521	281	OSBORNE/MCGRAW-HILL 327, 328, 329
34	BAY TECHNICAL ASSOC. 98	*	DELUXE COMP. FORMS 398	191	JADE COMP. PROD. 522, 523	283	P.C. NETWORK 325
*	BECK MFG 78	109	DIAMOND SOFTW. SUPPLY 205	192	JAMECO ELECTR. 532, 533	284	PACIFIC EXCHANGES 340, 378, 434, 504, 506, 508, 510, 512, 520
35	BELL, JOHN ENGR. 520	454	DIGITAL RESEARCH 216, 217	*	JANUS 136, 137		PACIFIC INFOTECH CORP. 126
36	BHRT 283	*	DIGITAL RESEARCH COMP. 517	193	JDR MICRODEVICES, INC. 536, 537	285	PAN AMERICAN ELEC. INC. 508
37	BIBLE RESEARCH SYSTEMS 139	*	DIRECT SOFTWARE 195	194	JDR MICRODEVICES, INC. 538, 539	286	PC PIPELINE 300
38	BOEING MILITARY AIRPLANE 411	110	DISCOUNT SOFTWARE 352	195	JDR MICRODEVICES, INC. 540	408	PC WARE, INC. 316, 317
*	BORLAND INT'L. 99	*	DISKWORLD 290	196	JOSKO ENTERPRISES 516	413	PEGASUS DATA SYS. 459
39	BOTTOM LINE, THE 189	*	DISKWORLD 518	197	JUKI INDUSTRY OF AMERICA 209	290	PEOPLE & TECHNOLOGY 172
40	BROWN DISC MANUFACTURING 234	111	DISPLAY TELECOMMUNIC. 505	198	KADAK PRODUCTS 154	*	PERCOM DATA 9
*	BYTE PUBL. INC. 368, 369	112	DISPLAYED VIDEO 499	199	KAYPRO SOFTWARE DIR. 431	291	PERSOFT 118
*	BYTE PUBL. INC. 463	114	DOKAY COMP. PROD. INC. 524, 525	200	KELLY COMP. SUPPLIES 518	292	PERSOFT 504
*	BYTE PUBL. INC. 490	115	DOW JONES SOFTWARE 101	203	KEYTRONICS CORP. 299	293	PERSONALIZED COMP. PAPER 154
41	BYTEK COMP. SYS. CORP. 246	116	DOW JONES SOFTWARE 315	205	KNOWLEDGE SYS. 45	294	PHONE I, INC. 321
42	BYTEWRITER 20	117	OWIGHT CO., INC. 508	206	LABORATORY MICROSYS. 122	295	PIKA-BOX, DIV. APPLIED COMP. 490
*	C WARE 262	118	OYNAX, INC. 103	215	LANGLEY-ST. CLAIR 405	296	POP/COMP/PRENTICE CORP. 248, 249
*	C-SYSTEMS 514	403	DYSAN CORP. 47	207	LASER MICRO 380	297	PRACTICAL PERIPH. 260
43	C.S.D. INC. 476	119	DYSAN CORP. 231	209	LAWSON LABS 504	319	PRACTICAL PERIPH. 269
391	CABLES UNLTD.-DIV. WORSWICK IND. 510	120	EAGLE SOFTWARE 152	210	LEADING EDGE PROD. CIII	300	PRACTICAL PERIPH. 363
44	CADMUS COMPUTER 110, 111	121	EASTERN ENTERPRISES 213	211	LIBERTY GROUP INC. 382	300	PRIMAGES, INC. 419
*	CALIF. DIGITAL 528, 529	122	EASTMAN KODAK CO. 170	389	LOGIC PROGRAMMING 340	301	PRINCETON GRAPHIC SYS. 313
45	CALIF. DATA CORP. 508	123	EASTMAN KODAK CO. 171	216	LOGICAL DEVICES 18	302	PRINTER STORE, THE 52
*	CALIF. MICRO COMP. 124	124	ECOSOFT 404	217	LOGICAL DEVICES 518	175	PRIORITY ONE 392, 393
46	CAPITAL EQUIPMENT 334	125	EDUCATIONAL MICROCOMP. 508	218	LOGITECH, INC. 132	303	PRIORITY ONE 530, 531
47	CDR SYSTEMS 512	126	ELCOMP 508	219	LOMAS DATA PRODUCTS 165	304	PRO MICROSYSTEMS 512
48	CENTRE COMP. CONSULTANTS 516	127	ELECTRADE CO. 510	220	LOTUS DEVELOPMENT 242	305	PROMETHEUS PRODUCTS 359
50	CHANNEL CONNECTION 493	128	ELECTRADE CO. 514	221	LSI JAPAN CO. 514	306	PURCHASING AGENT, THE 70
51	CHIPS & DALE 520	129	ELECTRONIC SPECIALISTS 360	222	LYBEN COMP. SYS. 516	307	QUADRAM CORP. 22, 23
52	CIRCUITS WORLD ELECTR. 516	130	ELEK-TEK 184	223	LYBEN COMP. SYS. 504	308	QUANT SYSTEMS 510
53	CIRCUITS WORLD ELECTR. 518	131	ELLIS COMPUTING INC. 187	224	LYCO COMPUTER 498	309	QUARK INCORPORATED 41
55	CLEO 448, 449	*	EMPIRICAL RESEARCH GROUP 130	226	MA SYSTEMS 301	310	QUBIE DISTRIBUTING 307
56	COGITATE 514	132	ENGINEERING SPECIALTIES 520	227	MACROTECH INT'L. 173	311	QUELO 215
57	COLORADO COMP. PERIPH. 516	405	ENGLISH I COMP. TUTORIALS 378	229	MANNESMANN TALLY 177	312	RADIO SHACK CIV
59	COLUMBIA DATA PROD. 385	135	EPSON AMERICA 86, 87	230	MANX SOFTWARE SYS. 24	313	RANA SYSTEMS 27
404	COMMAND SERVICES CORP. 378	136	EXCEL 128	402	MARK OF THE UNICORN 433	314	RELS 424
60	COMMERCIAL BUSINESS SYS. 492	137	EXCEL 140, 141	231	MARYMAC INDUSTRIES 510	315	RHINO ROBOTS, INC. 237
61	COMP. COMPNTS. UNLTD. 526, 527	412	EXECUTIVE MGMT. SYS. 127	232	MAYNARD ELECTRONICS 71	401	RIXON 277
62	COMP. WHLSLRS. OF FREDERICK 364	78	EXPERT COMPUTERS 480	*	MC-P APPLICATIONS 381	316	ROCKY MTN. SOFTWARE 133, 139
406	COMPANION COMP. 300	138	EXPOTEK 270	*	MCGRAW-HILL BOOK CO. 465	316	ROGERS LABS 504
*	COMPAQ COMPUTER CORP. 10, 11	139	F.T.G. DATA SYS. 512	*	MCGRAW-HILL BOOK STORE 407	318	RTL PROGRAMMING AIDS 520
63	COMPETITIVE EDGE 174	140	FALCON SAFETY PROD. 85	*	MCGRAW-HILL RECRUITMENT 422	320	S C DIGITAL 276
64	COMPLEX SYSTEMS, INC. 149	142	FIGURE-LOGIC BUS. EQUIP. 506	233	METHOD SYS. INC. 508	321	S-100 DIV. 696 CORP. 477
65	COMPUADD 504	143	FIGURE-LOGIC BUS. EQUIP. 520	234	METRO SOFTWARE, INC. 203	322	S.E.I. INC. 462
66	COMPUPRO 25	458	FLAGSTAFF ENGINEERING 155	235	MFJ ENTERPRISES, INC. 186	323	SAFAWARE 152
67	COMPUPRO 401	145	FLOPPY DISK SERV. INC. 502	236	MICRO AGE COMP. STORES 425	324	SAGE COMP. TECH. 361
*	COMPUPRO 439	146	FORMULA INT'L. 513	237	MICRO CONTROL SYS. 16, 17	325	SAKATA 125
68	COMPUSERVE 330	147	FORMULA INT'L. 513	398	MICRO CRAFT CORP 81	326	SCOTT FORESMAN 312
69	COMPUSHACK 447	212	FREEDOM COMP. MART 503	238	MICRO DATA BASE SYS. 185	*	SCOTTSDALE SYSTEMS 131
70	COMPUTER CHANNEL 204	148	FUJITSU PROFESS. MICROSYS. 291	240	MICRO MANAGEMENT SYS. 454	461	SD SYSTEMS 65
71	COMPUTER CLASSIFIEDS 354	149	FUTECH INT'L. CORP. 104	241	MICRO MART 340	327	SEATTLE COMP. PRODS. 44
72	COMPUTER DISCOUNT PROD. 515	150	GENERAL TECHNOLOGY 355	242	MICRO MINT 455	328	SEE-DATA CORP. 516
73	COMPUTER FOOD PRESS 510	151	GIFFORD COMP. SYS. 399	243	MICRO-TAX 183	329	SEEQUA COMP. CORP. 6
113	COMPUTER HANDICAPPING 506	152	GILTRONIX, INC. 510	245	MICRODYNAMICS 508	331	SEMI DISK SYSTEM 77
74	COMPUTER HUT OF N.E. 341	154	GMS SYSTEMS 387	246	MICROHOUSE 337	*	SILICON SPECIALTIES 76
75	COMPUTER INNOVATIONS 120	155	GOULD, INC. 181	247	MICROLAND 514	*	SOFTCON 342
76	COMPUTER MAIL ORDER 166, 167	156	GRAY MARKET 494	248	MICROMAIL 511	333	SOFTRENT 504
*	COMPUTER PLUS 459	158	GREAT SALT LAKE COMP. 495	249	MICROMATION 360	334	SOFTWARE AUTOMATION 79
77	COMPUTER PRICE CLUB 514	159	GREAT SALT LAKE COMP. 496, 497	250	MICROPROCESSORS UNLTD. 516	335	SOFTWARE BANC 221

To get further information on the products advertised in BYTE, fill out the reader service card with your name and address. Then circle the appropriate numbers for the advertisers you select from the list. Add a 20-cent stamp to the card, then drop it in the mail. Not only do you gain information, but our advertisers are encouraged to use the marketplace provided by BYTE. This helps us bring you a bigger BYTE. The index is provided as an additional service by the publisher, who assumes no liability for errors or omissions. *Correspond directly with company.

Reader Service

Inquiry No.	Page No.	Inquiry No.	Page No.	Inquiry No.	Page No.	Inquiry No.	Page No.
351	TDK ELECTRONICS 150, 151	360	TRANSACTION STORAGE SYS. 257	374	VIDEX 15	388	WINTEK CORP. 506
352	TEKTRONIX, INC. 112	361	TRANSTAR 121	375	VISUAL TECH, INC. 28, 29	392	WRITING CONSULTANTS 354
353	TELETEK ENTERPRISES, INC. 49	362	TRANSTAR 451	376	VISUAL TECH, INC. 119	393	WYSE TECHNOLOGY 367
399	TERMINALS TERRIFIC 464	363	TRISTAR DATA SYS. 164		VLM COMPUTER ELECTR. 506	394	XOR CORP. 123
353	TEXAS COMPUTER SYS. 408	364	TSK ELECTR.CORP. 247	381	WADSWORTH ELECTR.PUB.CO. 348		
	TEXAS INSTRUMENTS 144, 145, 202	365	U.S. ROBOTICS 377	382	WANG ELECTR.PUB.INC. 80		
299	THIRDWARE COMP.PROD. 201	366	U.S. MICRO SALES 509		WANG LABS, INC. 323		
354	THREE M COMPANY 223	368	UNIPRESS SOFTWARE, INC. 284	383	WAREHOUSE SOFTWARE 102		
355	TINNEY, ROBERT GRAPHICS 54	369	UNIVERSAL DATA SYS 21	384	WASHINGTON COMP.SYS. 215		
356	TITAN TECHNOLOGIES 206	370	USED PERSONAL COMP.BRKGRG 506	456	WESTERN AUTOMATION 376		
357	TOPAZ, INC. 107	407	VANTEC 300	385	WESTERN TELEMATIC 352		
358	TOSHIBA AMERICA, INC. 420	372	VAULT CORP. 285	386	WHITESMITHS LTD 146		
359	TOSHIBA AMERICA, INC. 421	373	VERBATIM CORP. 153	387	WILLIAMS. MARK CO. 443		

*Correspond directly with company.

INTERNATIONAL ADVERTISING SECTION

501 ABTEX COMP. SYS. LTD. 320 B
500 ULTRA SPECIALTY, INC. 320A
NO DOMESTIC INQUIRIES, PLEASE

BYTE ADVERTISING SALES STAFF:

J. Peter Huestls, Advertising Sales Manager, 70 Main Street, Peterborough, N.H. 03458 Tel (603) 924-9281

NEW ENGLAND

ME, NH, VT, MA, RI
Paul McPherson, Jr. (617) 262-1160
McGraw-Hill Publications
607 Boylston Street
Boston, MA 02116

ATLANTIC

NJ (NORTH), NY, NYC, CT
Eugene Duncan (212) 512-2096
McGraw-Hill Publications
1221 Avenue of the Americas—39th Floor
New York, NY 10020

Dick McGurk (212) 512-3588

McGraw-Hill Publications
1221 Avenue of the Americas—39th Floor
New York, NY 10020

EAST

PA (EAST), NJ (SOUTH), MD, VA, W.VA.,
DE, D.C.
Daniel Ferro (215) 496-3833
McGraw-Hill Publications
Three Parkway
Philadelphia, PA 19102

SOUTHEAST

NC, SC, GA, FL, AL, TN
Maggie McClelland (404) 252-0626
McGraw-Hill Publications
4170 Ashford Dunwoody Road—Suite 420
Atlanta, GA 30319

MIDWEST

IL, MO, KS, IA, ND, SD, MN, WI, NB
Jack Anderson (312) 751-3740
McGraw-Hill Publications
Blair Building
645 N. Michigan Ave.
Chicago, IL 60611

GREAT LAKES, OHIO REGION MI, OH, PA (ALLEGHENY), KY, IN, EASTERN CANADA

Dennis Riley (313) 352-9760
McGraw-Hill Publications
4000 Town Center—Suite 770
Southfield, MI 48075

SOUTHWEST, ROCKY MOUNTAIN

UT, CO, WY, OK, TX, AR, MS, LA
Alan Morris (214) 458-2400
McGraw-Hill Publications
Prestonwood Tower—Suite 907
5151 Beltline
Dallas, TX 75240

SOUTH PACIFIC

Southern CA, AZ, NM, LAS VEGAS
Page Goodrich (714) 557-6292
McGraw-Hill Publications
3301 Red Hill Ave
Building #1, Suite 222
Costa Mesa, CA 92626

Karen Niles (213) 480-5243, 487-1160

McGraw-Hill Publications
3333 Wilshire Boulevard #407
Los Angeles, CA 90010

NORTH PACIFIC

HI, WA, OR, ID, MT, NORTHERN
CALIF, NV (EXCEPT LAS VEGAS),
W. CANADA
David Jern (415) 362-4600
McGraw-Hill Publications
425 Battery St.
San Francisco, CA 94111

Bill McAfee (415) 964-0624

McGraw-Hill Publications
1000 Elwell Court—Suite 225
Palo Alto, CA 94303

WEST COAST SURPLUS AND RETAIL ACCOUNTS

Tom Harvey (805) 964-8577
3463 State St.—Suite 256
Santa Barbara, CA 93105

Post Card Mailings

National
Bradley Browne (603) 924-6166
BYTE Publications
70 Main Street
Peterborough, NH 03458

International Advertising Sales Representatives:

Mr. Hans Csokor
Publmedia
Relsnerstrasse 61
A-1037 Vienna, Austria

Mrs. Gurit Gepner
McGraw-Hill Publishing Co.
115 Yosephthal St.
Bat Yam, Israel
866 561 321 39

Mr. Fritz Krusebecker
McGraw-Hill Publishing Co.
Liebigstrasse 27C
D-6000 Frankfurt/Main 1
West Germany
72 01 81

Mrs. Marla Sarmento
Pedro Telxela 8, Off. 320
Iberia Mart 1
Madrid 4, Spain
45 52 891

Mr. Andrew Karnig
Andrew Karnig & Associates
Kungsholsgatan 10
112 27 Stockholm, Sweden
08 51 68 70

Mr. Michael Sales
McGraw-Hill Publishing Co.
17 rue Georges Bizet
F 75116 Paris
France
720 33 42

Mr. Arthur Scheffer
McGraw-Hill Publishing Co.
34 Dover St.
London W1X 3RA
England
01 493 1451

Mr. Emilio Zerboni
McGraw-Hill Publishing Co.
Via Flavio Baracchini 1
20123 Milan, Italy
86 90 656

Seavex Ltd.
05-49/50 Tanglin Shopping Center
19 Tanglin Rd. Singapore 1024
Republic of Singapore

Seavex, Ltd.
Room 102, Yu Yuet Lal Bldg.
43-55 Wyndham St. Central
Hong Kong

Hiro Morita
McGraw-Hill Publications
Overseas Corp.
Room 1528
Kasumigaseki Bldg.
3-2-5 Kasumigaseki,
Chiyoda-Ku
Tokyo 100, Japan

▲ THE DAY THE IBM® PERSONAL COMPUTER BECAME OBSOLETE.



It was a Monday in the autumn of '83.

The day they announced the Leading Edge® PC—a personal computer that's just plain better than the IBM® PC, at just about half the price.

The Leading Edge PC is faster (by more than 50%), more powerful, more flexible and more dependable (for example, our disk drives have a "mean time between failures" of 20,000 hours, versus an 8,000-hour MTBF for theirs). It's compatible with just about all the software and peripherals that the IBM is.

And unlike IBM's, ours comes complete with a high-resolution monitor, controller, seven expansion slots, serial port, parallel port, a time-of-day clock, double the standard memory (128K vs. 64K), plus hundreds of dollars worth of software to get you up and running immediately including MS® -DOS version 1.25, GW Basic, and Leading Edge Word Processing (the most powerful w.p. program ever created to run on an IBM-type personal computer). In short, the basic package comes to you complete and ready to work.

With IBM, on the other hand, you get charged extra for everything. Even for the PC DOS disk that makes

it run (an extra \$40) ... and \$170 just for the time of day (a calendar/clock that's standard with Leading Edge). In short, the basic package comes to you as a very expensive paperweight.

It's this simple. The Leading Edge Personal Computer is the first and only serious alternative to the IBM PC ... and at only \$2895 for the Leading Edge PC ...

Get serious.

In the age of the personal computer, Leading Edge, means what it says.



LEADING EDGE PRODUCTS, INC., 225 TURNPIKE STREET, CANTON, MA 02021. 1-800-343-6833. IN MASSACHUSETTS, (617) 828-8150

IBM is a registered trademark of International Business Machines Corporation.

Circle 210 on inquiry card.

The dawn of a new era in microcomputer technology

NEW TANDY TRS-80[®] MODEL 2000

High Performance MS-DOS Computer That Operates at Twice the Speed of the IBM PC

Our Tandy[®] 2000 delivers much more than other 16-bit MS-DOS based computers. More speed. More disk storage. More expansion. Higher resolution graphics. And a modular design that advances the science of ergonomics.

Use the Hottest Names In Software

Like dBase II, a powerful relational data base management program. Microsoft-Multiplan, the "second-generation" electronic worksheet. PFS:File, a simple way to organize information. MultiMate, the highly-acclaimed word processing program. And many more already acclaimed by the entire microcomputer industry. Still more programs are coming, including Microsoft's state-of-the-art MS-Windows operating environment. You can view several "windows" at once—files, letters, graphs and more—and exchange information between them.

More Speed, Storage and Expansion

A "next-generation" 16-bit CPU makes the Tandy 2000 dramatically faster than the IBM PC and other MS-DOS systems. The vast storage capacity lets you set up massive data bases. You can add more memory, high-resolution color and monochrome graphics, our new Digi[™]-Mouse and much more. And you can install most of these options yourself.


Complete Service and Support

The Tandy 2000 is backed with the quality and support that have kept Tandy Corporation in the forefront of the microcomputer industry. See the Tandy 2000 today at over 1000 Radio Shack Computer Centers and participating Radio Shack stores and dealers nationwide.

Compare the Tandy 2000 to the IBM Personal Computer

Price Comparison ¹	Tandy 2000	IBM Personal Computer
Base Unit	\$2750	\$2104
2nd Drive	Included (720K)	\$529 (320K)
Monochrome Monitor	\$249	\$345
Display/Printer Adapter	Included	\$335
128K RAM (Total)	Included	\$165
RS-232	Included	\$120
MS-DOS 2.0	Included	\$60
Total Cost*	\$2999	\$3658
Feature Description	Tandy 2000	IBM Personal Computer
Internal Memory	128K Standard	64K Standard
Disk Capacity Per Drive	720K	160K or 320K (optional)
Microprocessor Clock Speed	8 MHz	4.7 MHz
True 16-Bit Microprocessor	Yes (80186) 16-bit/16-bit data path	No (8088) 16-bit/8-bit data path
User-Available Expansion Slots*	4	2
Graphics Options	Tandy 2000	IBM Personal Computer
Color Resolution	640 x 400	320 x 200
Number of Colors	8	4
Monochrome Resolution	640 x 400	640 x 200

¹Comparable IBM configuration with monochrome adapter and display, communications adapter, two 320K disk drives and 128K RAM. Manufacturer's pricing as of 9/1/83.

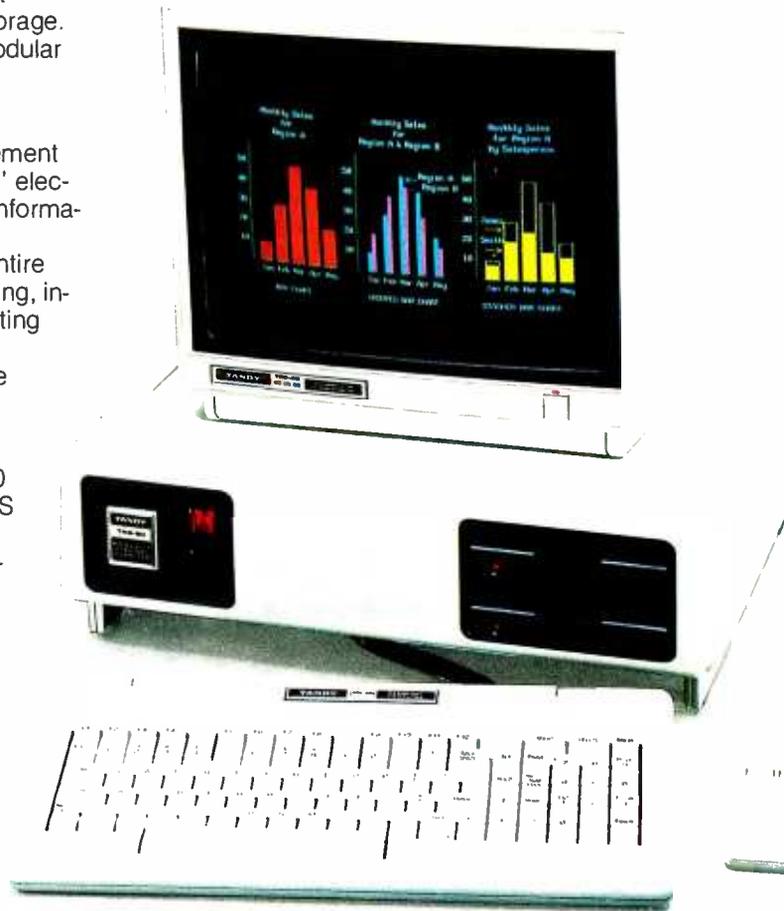

Tandy 2000 With
Two Disk Drives

2750⁰⁰
26-5103

Commercial Lease Available
For Only \$95 Per Month
(Plus Applicable Use/Sales Tax)

Tandy 2000 HD With
Built-in 10-Megabyte Hard Disk

4250⁰⁰
26-5104

Commercial Lease Available
For Only \$150 Per Month
(Plus Applicable Use/Sales Tax)

Non-interlaced monitor, graphics and Digi-Mouse not included

**Now Available! See the
Tandy 2000 Today!**

Radio Shack[®]
The biggest name in little computers[®]

A DIVISION OF TANDY CORPORATION

Circle 312 on inquiry card.

Prices apply at participating Radio Shack stores and dealers. IBM is a registered trademark of International Business Machines Corp. PFS is a registered trademark of Software Publishing. MS and Multiplan are trademarks of Microsoft Corp. MultiMate is a trademark of Software Systems Inc. dBase II is a trademark of Ashton-Tate.